
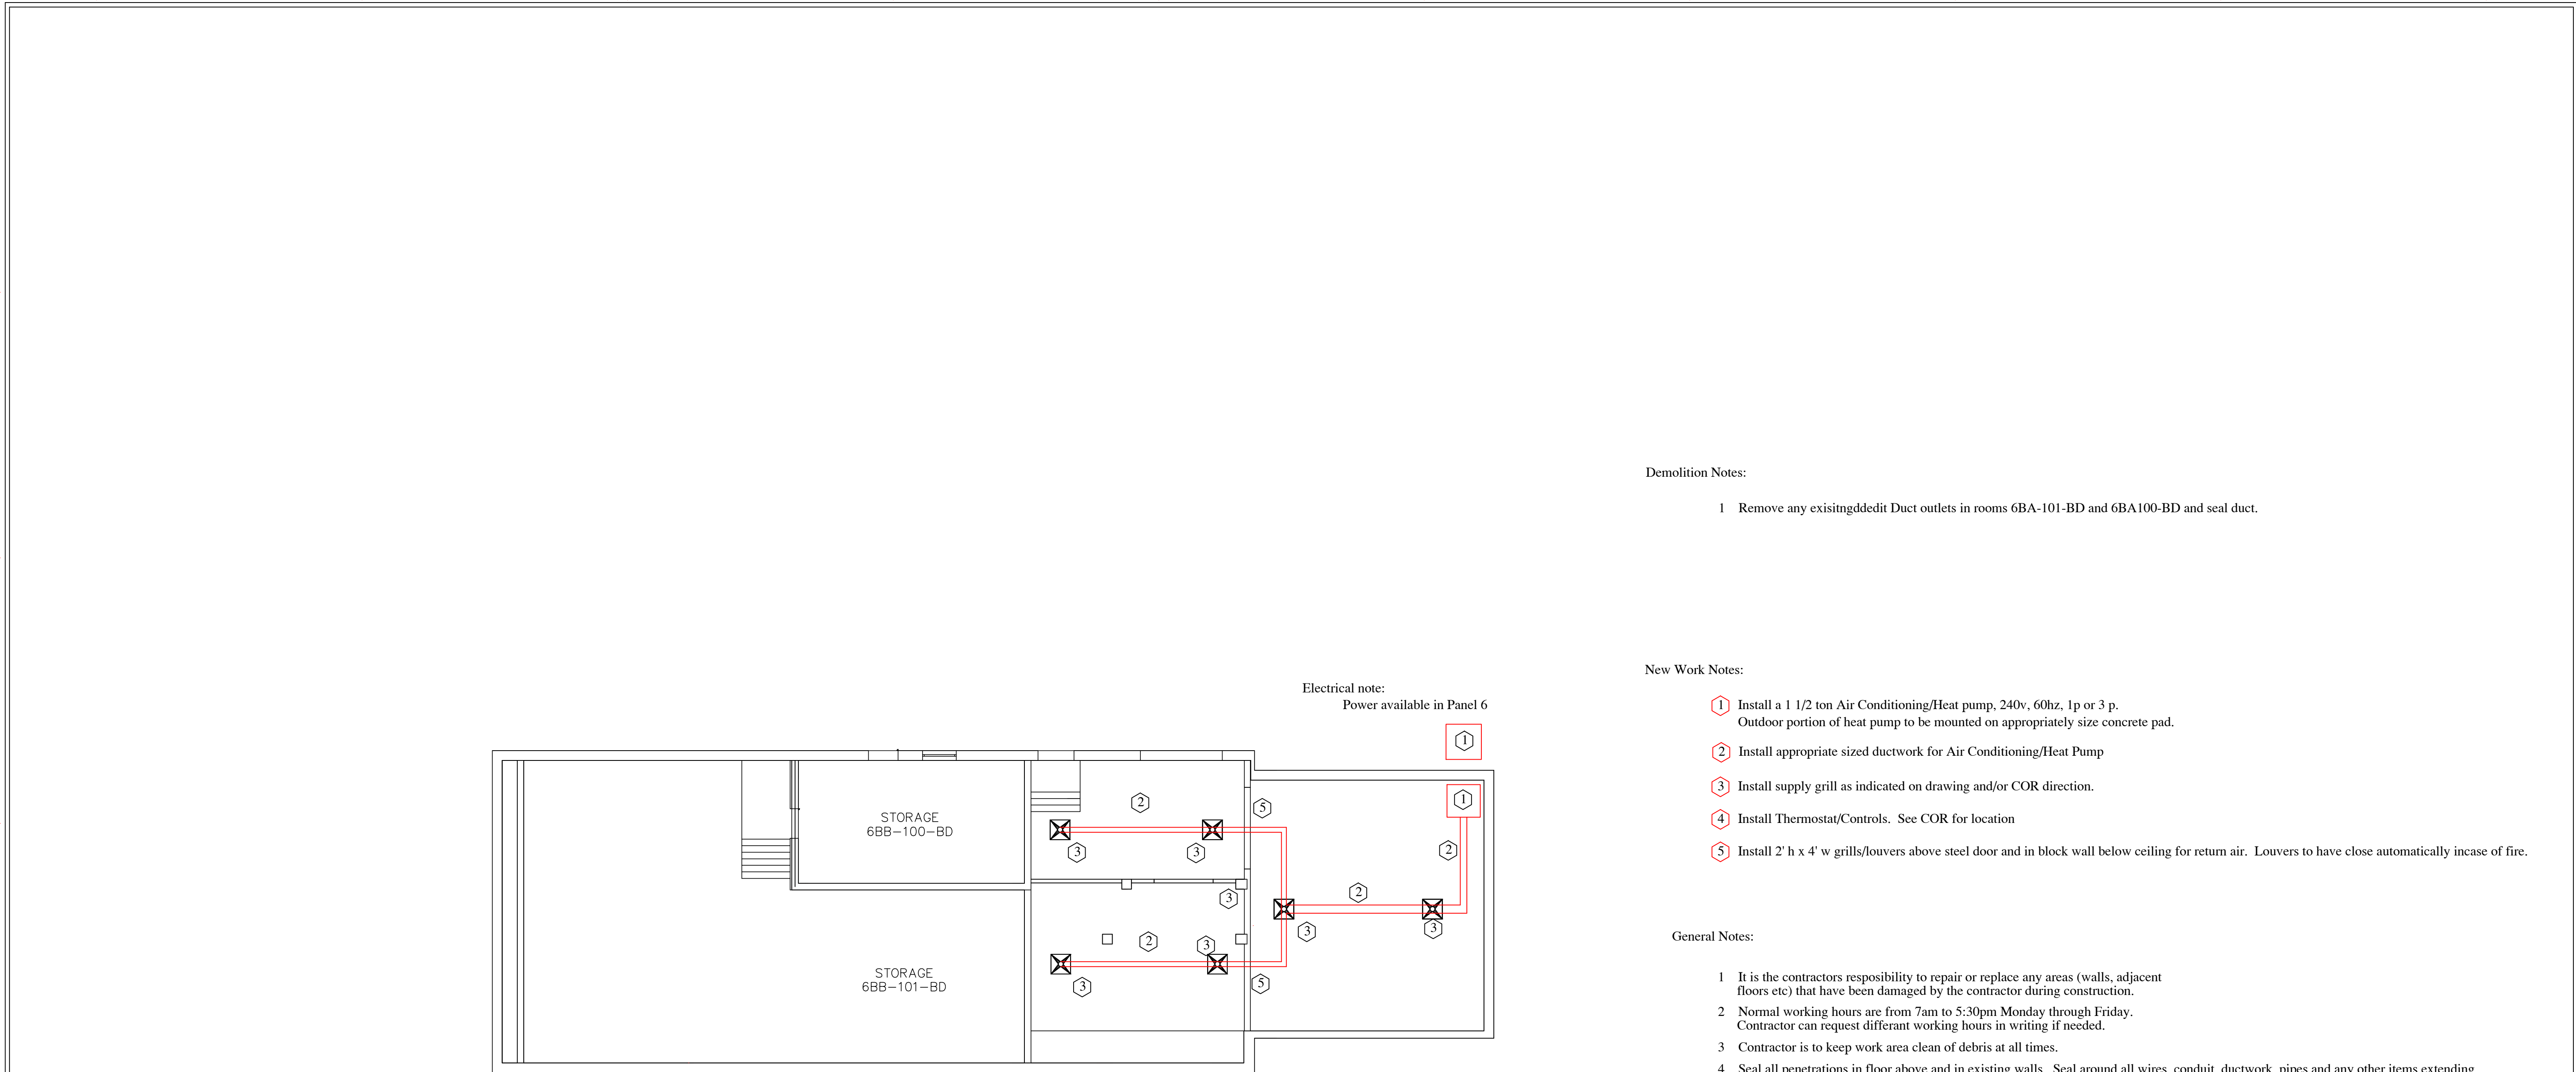


one-eighth inch = one foot
one-quarter inch = one foot
three-eighths inch = one foot
one-half inch = one foot
three-quarters inch = one foot
one-half inch = one foot
one and one-half inch = one foot
three inches = one foot



Building 6, Basement, B-Side
New Work

Demolition Notes:

- 1 Remove any existing duct outlets in rooms 6BA-101-BD and 6BA100-BD and seal duct.


New Work Notes:

- 1 Install a 1 1/2 ton Air Conditioning/Heat pump, 240v, 60hz, 1p or 3 p. Outdoor portion of heat pump to be mounted on appropriately size concrete pad.
- 2 Install appropriate sized ductwork for Air Conditioning/Heat Pump
- 3 Install supply grill as indicated on drawing and/or COR direction.
- 4 Install Thermostat/Controls. See COR for location
- 5 Install 2' h x 4' w grills/louvers above steel door and in block wall below ceiling for return air. Louvers to have close automatically incase of fire.

General Notes:

- 1 It is the contractors responsibility to repair or replace any areas (walls, adjacent floors etc) that have been damaged by the contractor during construction.
- 2 Normal working hours are from 7am to 5:30pm Monday through Friday. Contractor can request different working hours in writing if needed.
- 3 Contractor is to keep work area clean of debris at all times.
- 4 Seal all penetrations in floor above and in existing walls. Seal around all wires, conduit, ductwork, pipes and any other items extending into or out of work area.
- 5 Contractor to give 48 hour notice prior to any power, water, gas or AC interruptions.
- 6 Contractor to maintain negative pressure in work area when sealing CMU Walls and Concrete floors. If fumes or odors extend into the floors above then contractor is to stop sceler application and schedule for either nighttime or weekend application.
- 7 Contractor to rotate sprikler heads to the downward position and extend to suspension ceiling. Install flush mounted/quick response sprinkler heads.
- 8 Contractor to seal all wall and ceiling penetrations with fire caulking.

Legend:

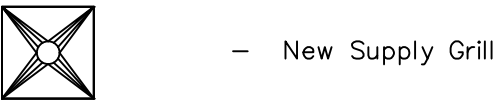

	APPROVED:	APPROVED: SAFETY MANAGER	APPROVED: CHIEF, FACILITIES MANAGEMENT SERVICE LINE	APPROVED: MEDICAL CENTER DIRECTOR	DRAWING TITLE: Demolition/ New Work Mechanical			DRAWING No. MH-101	
	APPROVED:	JUSTIN GREENE	TED HAMB	KARIN McGRAW, MSN, FACHE	PROJECT TITLE: Correct Storage Area Building 6			PROJECT No. 517-14-108	
	APPROVED:	CARLA RAYNES	DEBRA LEGG, RN, MSN	BRIAN NIMMO, MS	DATE 7/18/13	REV.	SCALE NTS	DRAWN BY: JPP	CHECKED BY: KB, JH
		APPROVED:	APPROVED: SERVICE LINE CHIEF	APPROVED: CHIEF OF STAFF	JOHN D. BERRYMAN, M. D.			NOT TO SCALE	

Medical Center
200 Veterans Av
Beckley, WV.
25801

