

GENERAL DRAWING NOTES
























- 1. CONTRACTOR IS RESPONSIBLE FOR COORDINATING DOORS, DOOR FRAMES, AND HARDWARE.
- 2. FRAME AND HARDWARE SUPPLIER IS RESPONSIBLE FOR BUILDING CODE AND FIRE RATED DOOR REQUIREMENTS.
- 3. FIRE RATED DOORS SHALL HAVE APPLIED U.L. LABEL ON INSET SIDE.
- 4. ALL TEMPERED GLASS SHALL BE PERMANENTLY STAMPED TO INDICATE THAT IT IS TEMPERED.
- 5. DOOR FRAMES SIZES TO BE VERIFIED WITH WALL THICKNESS ON THE JOB SITE BY CONSTRUCTION.
- 6. AFTER INSTALLATION OF EACH DOOR FRAME (EXCLUDING ALUMINUM), MARK ON THE INSIDE AND EXTEND TO THE FRAME THE ROOM NUMBER WITH INK WHICH WILL NOT BE WASHED AWAY BY THE SCHEDULE PAINTS TO BE APPLIED.

DOOR SCHEDULE



ROOM NO.	FRAME FINISH	TYPE	WIDTH	HEIGHT	FRAME TYPE	HEAD	JAMB	THRESH	HARDWARE SET	NOTES
100A	-	A	3'-0"	7'-0"	A	H3	J3	T3	HM-SH-3	
100B	90 MIN	B	(2)2'-8"	7'-0"	B	H2	J2	T2	HM-SH-12	1, 2, 3
100C	-	A	3'-0"	7'-0"	A	H3	J3	T3	HM-SH-3	
100D	-	A	3'-0"	7'-0"	A	H1	J1	T1	HM-S	
100E	-	C	15'-4"	15'-8"	-	F1/AES02	J4	T4	HM-E3	
100F	-	D	9'-8"	15'-8"	-	F1/AES02	J4	T4	HM-E3	
100G	-	C	9'-8"	15'-8"	-	F1/AES02	J4	T4	HM-E3	
100H	-	C	9'-8"	15'-8"	-	F1/AES02	J4	T4	HM-E3	
100I	-	C	9'-8"	15'-8"	-	F1/AES02	J4	T4	HM-E3	
100J	-	E	4'-0"	9'-0"	-	F1/AES02	J4	T4	HM-E3	
100K	-	A	3'-0"	7'-0"	A	H4	J5	T1	HM-S	
100L	-	A	3'-0"	7'-0"	A	H1	J1	T1	HM-S	
100M	-	A	3'-0"	7'-0"	A	H5	J6	T3	HM-SH-3	
100N	-	A	4'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100O	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100P	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100Q	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100R	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100S	-	F	3'-0"	7'-0"	A	H4	J5	T1	HM-S0	
100A	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100B	-	F	3'-0"	7'-0"	A	H3	J3	T3	HM-S0	
100C	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100D	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100E	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100F	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100G	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100H	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100I	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100J	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100K	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100L	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100M	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100N	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100O	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100P	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100Q	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100R	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100S	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100T	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100U	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100V	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100W	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100X	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100Y	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	
100Z	-	F	3'-0"	7'-0"	A	H1	J1	T1	HM-S0	

- 1. PROVIDE PAINT EXIT HARDWARE.
- 2. PROVIDE PAINT EXIT HARDWARE.
- 3. PROVIDE FIRE RATED GLAZING.

DOOR SCHEDULE

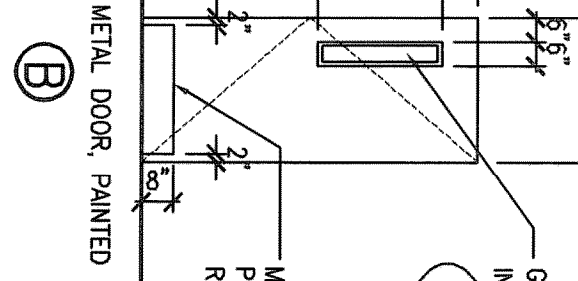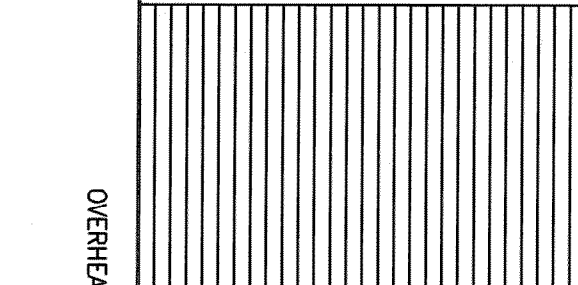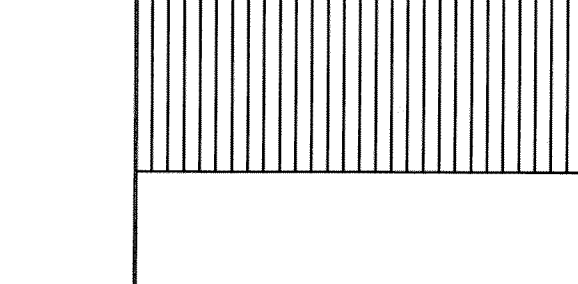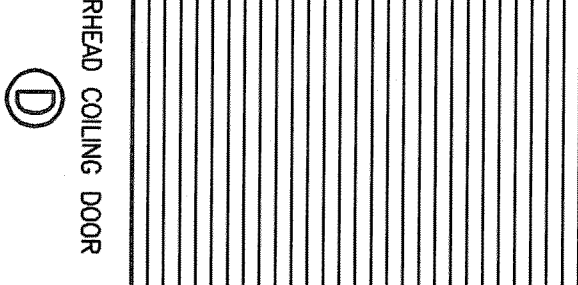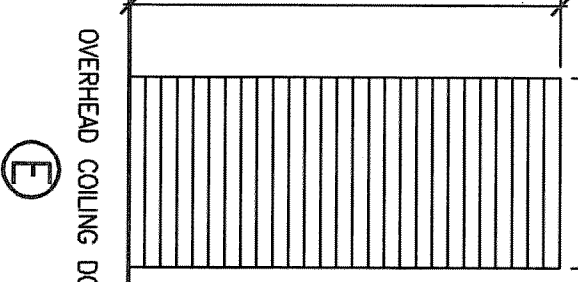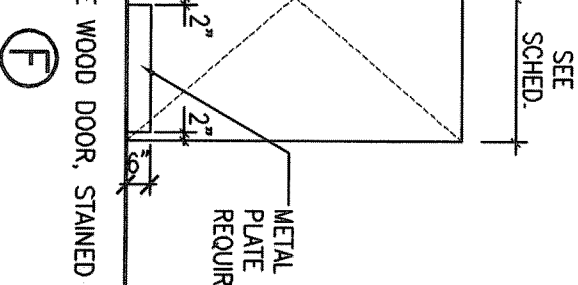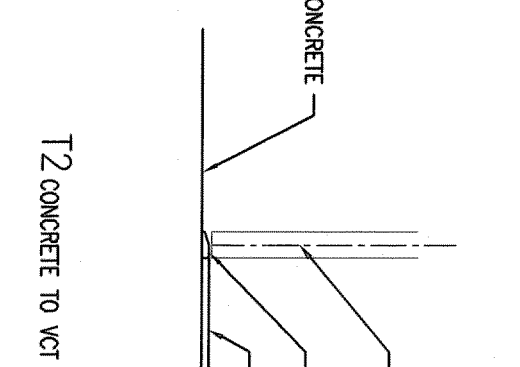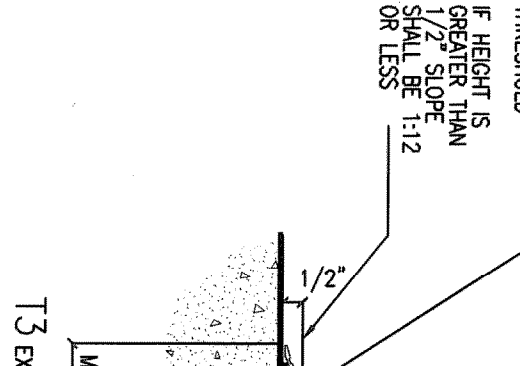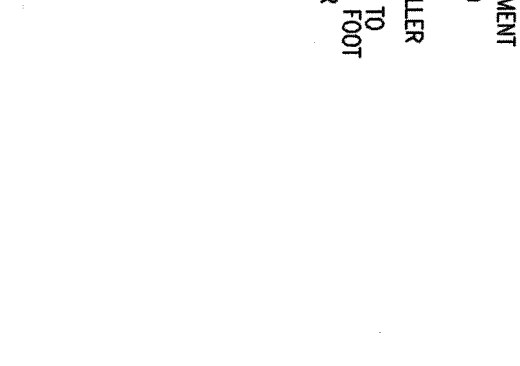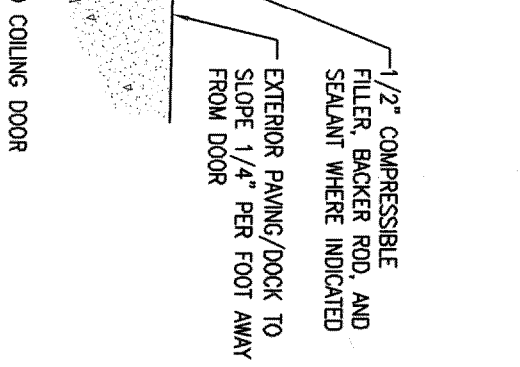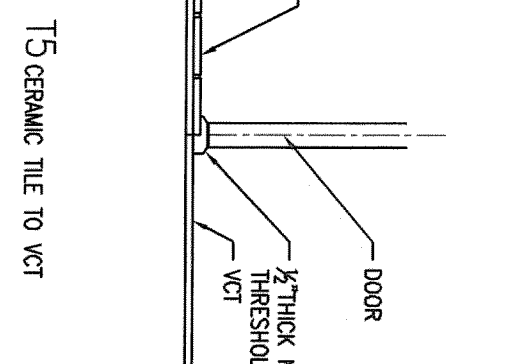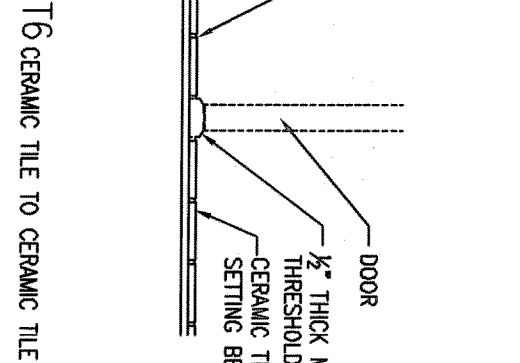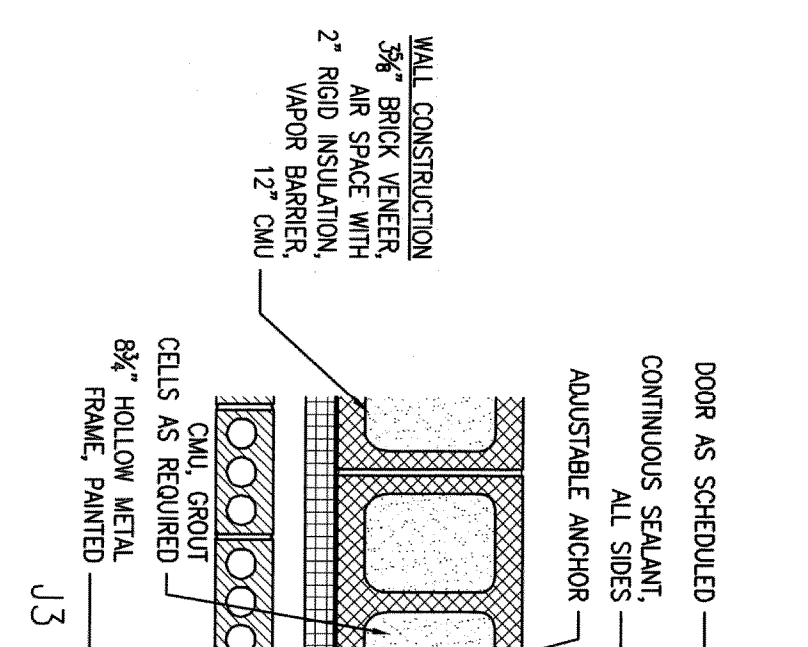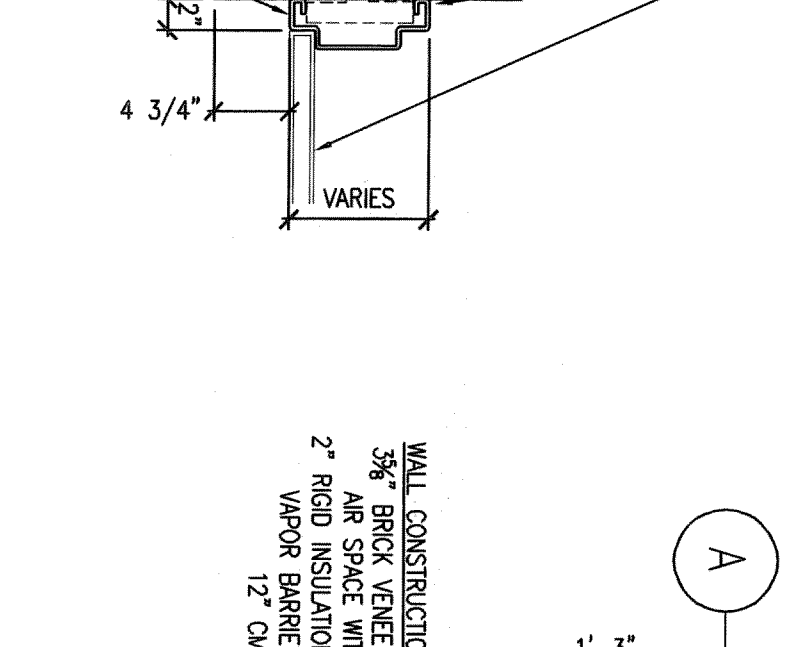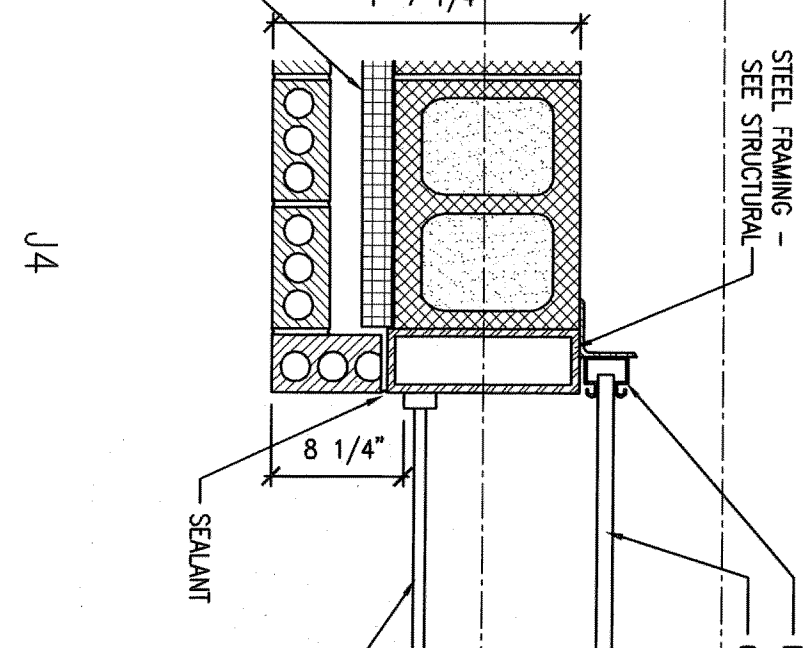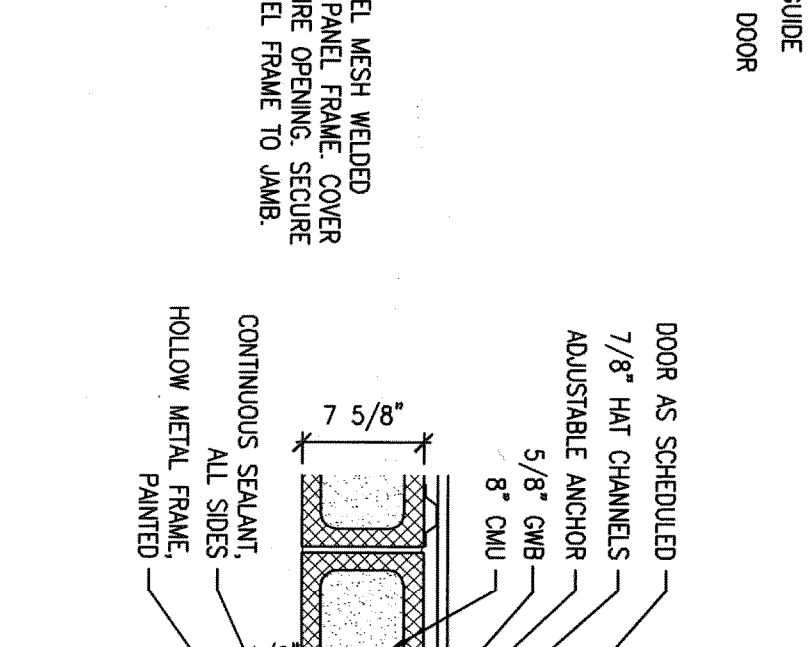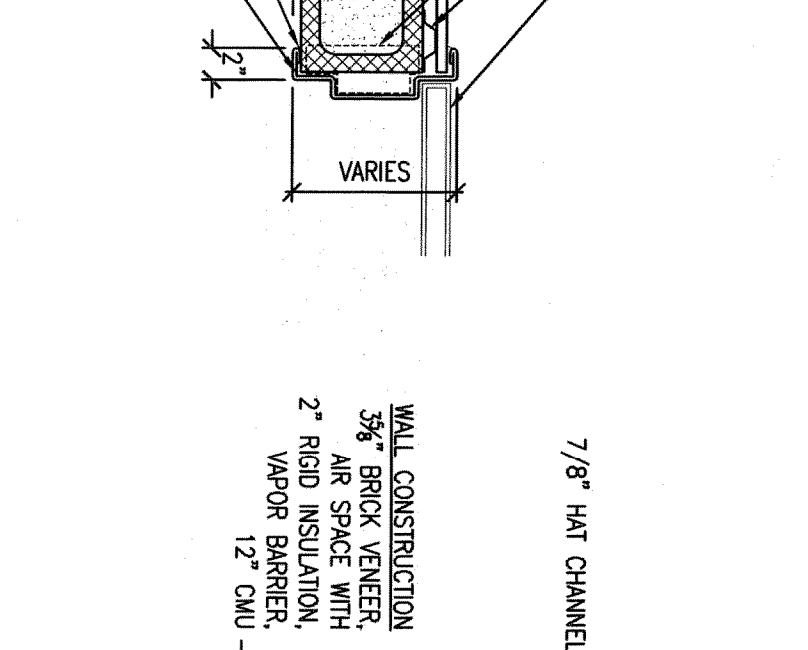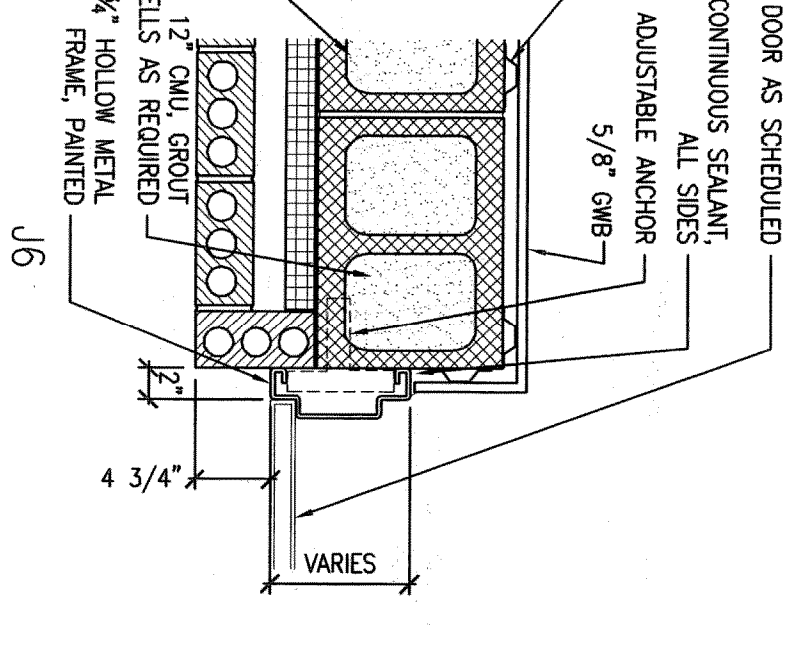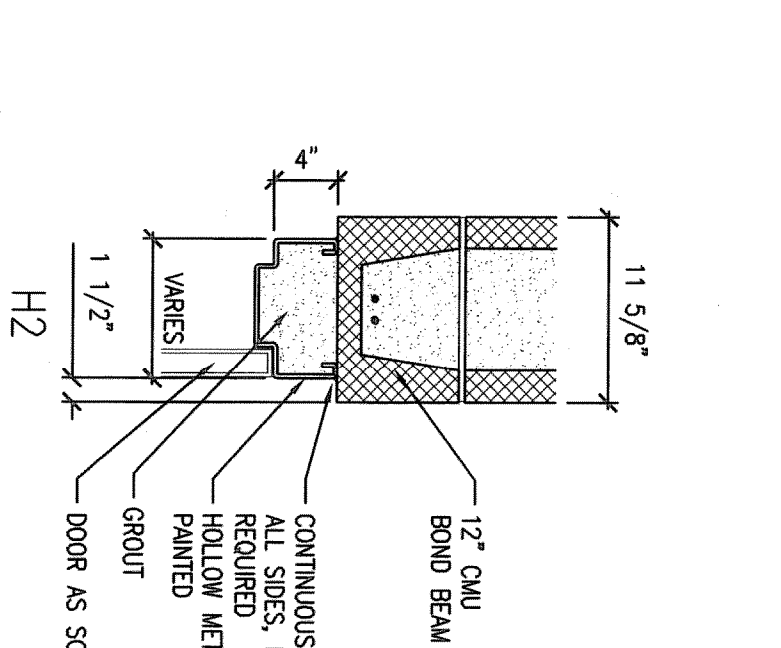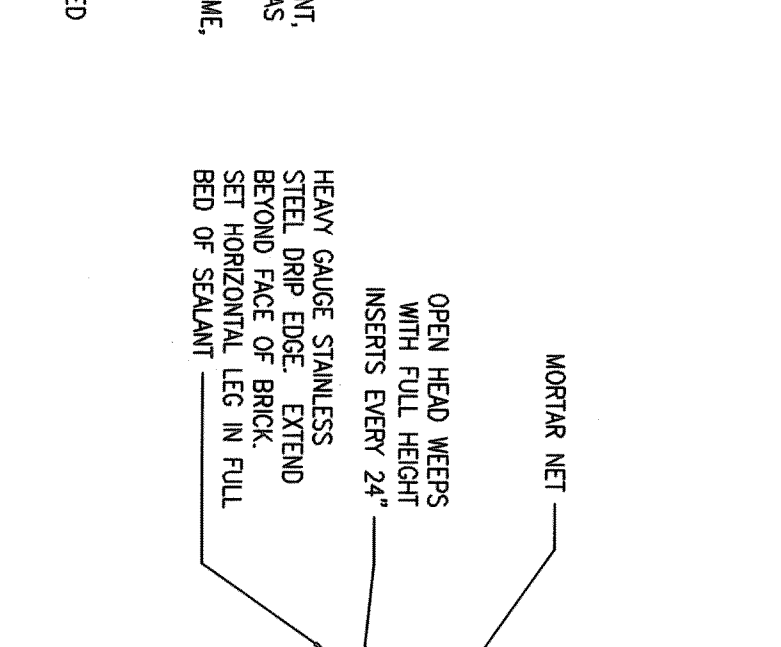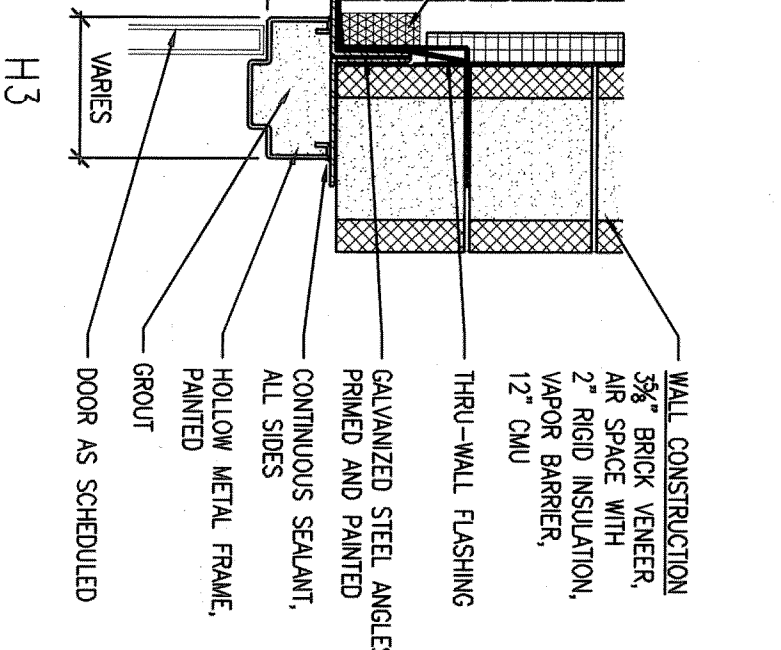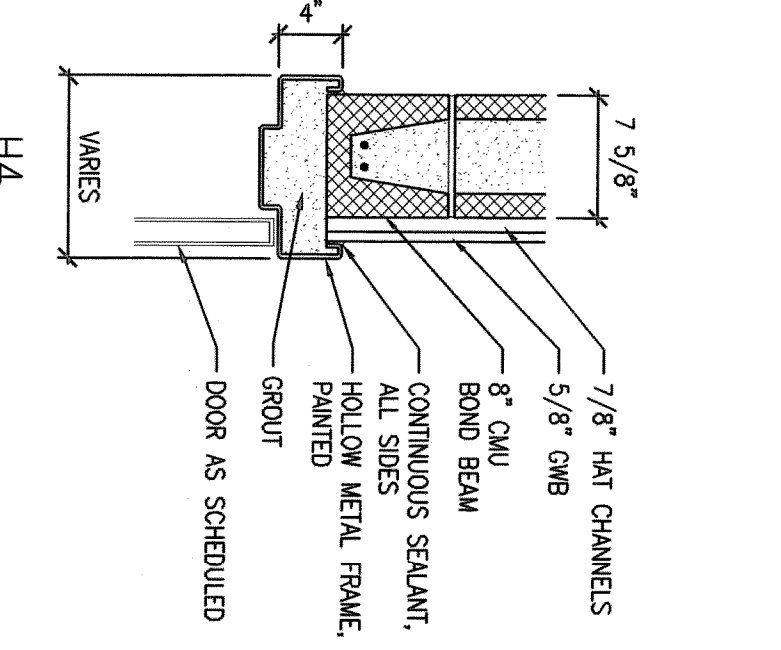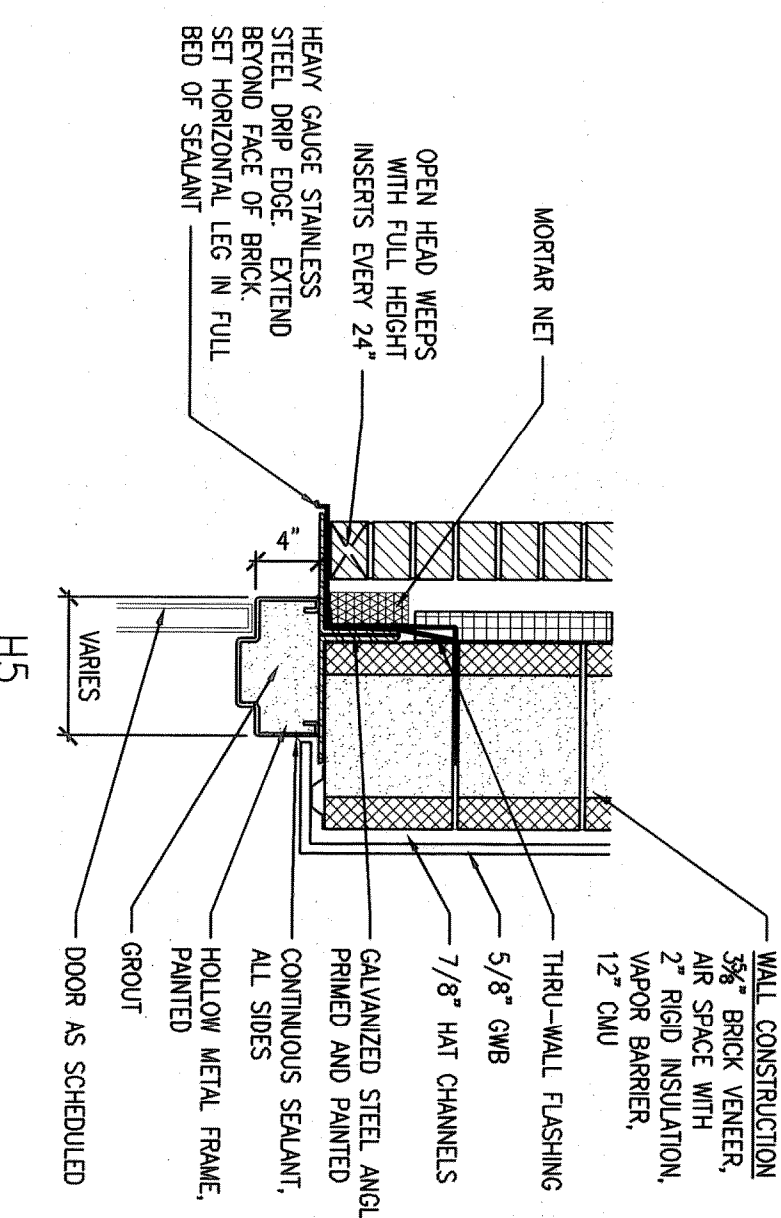

DOOR TYPES

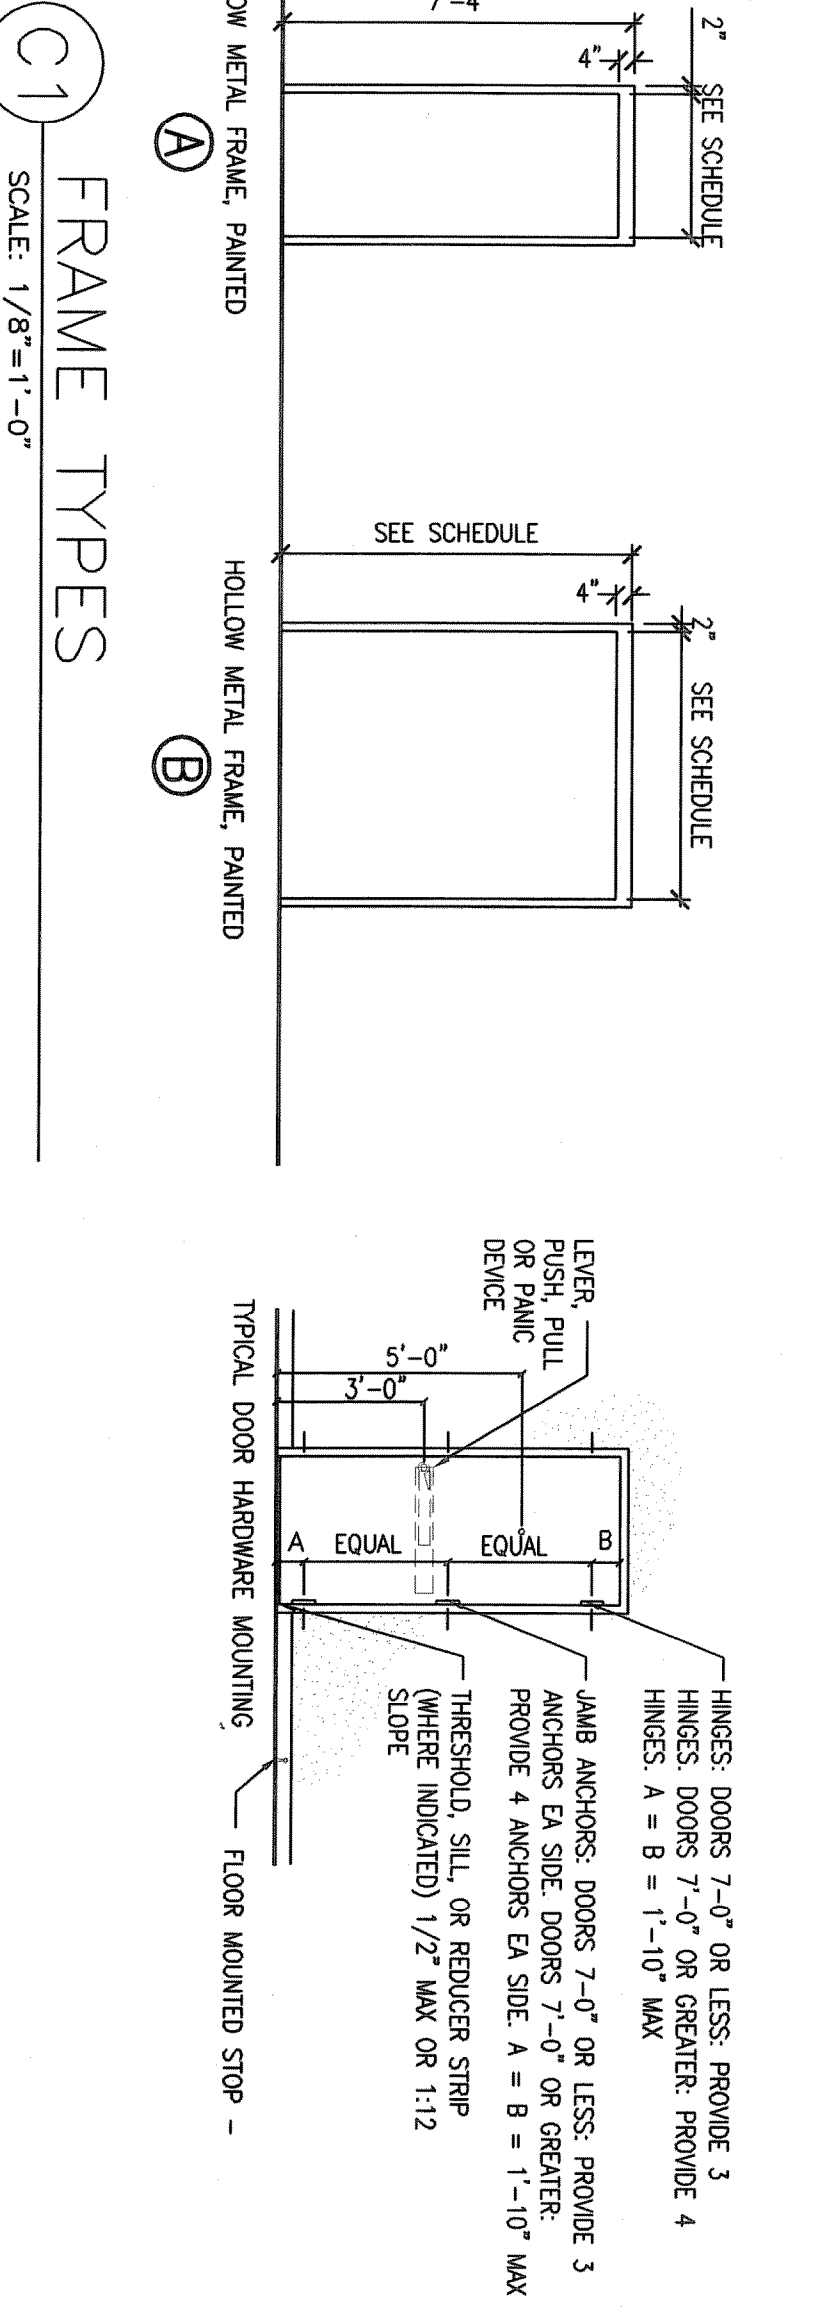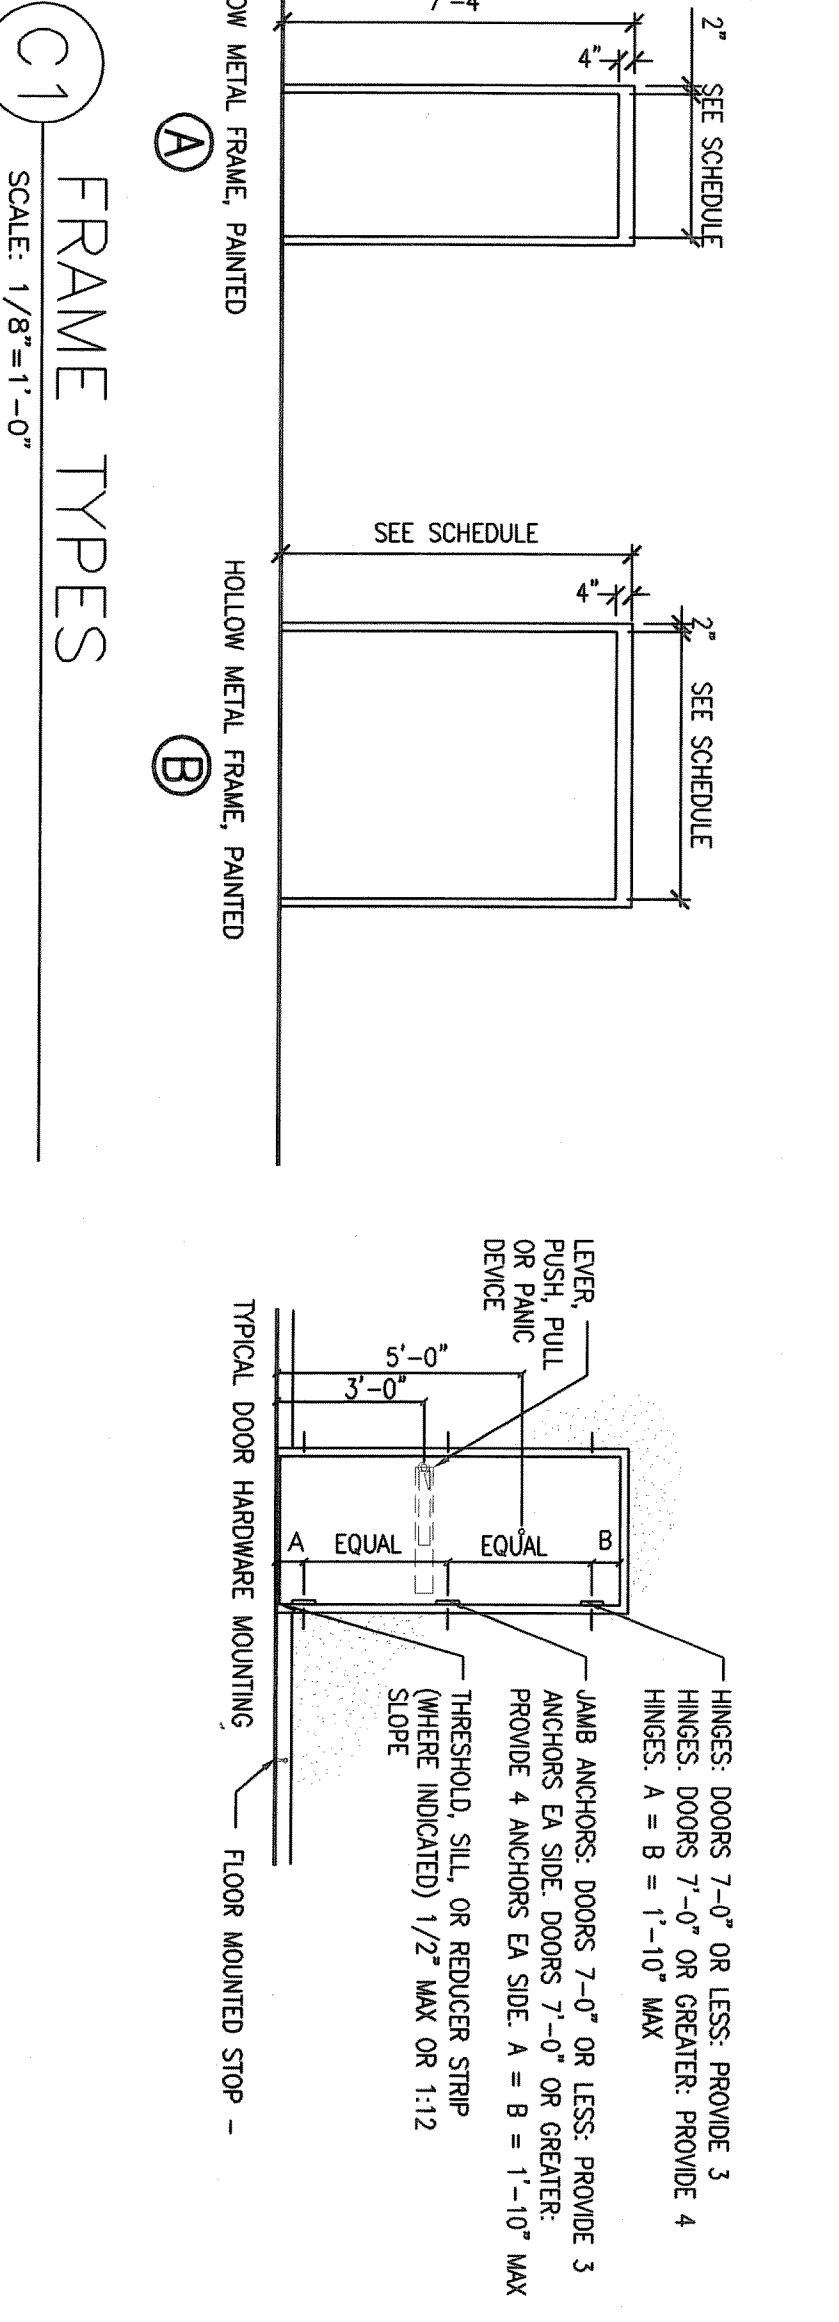

100% CONSTRUCTION DOCUMENTS

REVISION NO. 1 REVISION DESCRIPTION

1

2

3

4

5

6

7

8

9

10

Department of Veterans Affairs

William Jennings Bryan Dorn

VA Medical Center

6439 Garners Ferry Road

Columbia, SC 29209

Architect/Engineer Address

Harrell, Saltrick & Hopper

Design & Management Solutions for the Built Environment

2011 HARRELL, SALTRICK & HOPPER, PC

Recommended Approvals:

1. MEDICAL DIRECTOR

2. ASSOCIATE DIRECTOR

3. CHIEF OF STAFF

4. ASSOC. DIRECTOR

5. SERVICE LINE MGRS.

6. OPERATIONS SERVICE LINE MANAGER

7. INFECTION CONTROL MANAGER

8. SAFETY MANAGER

9. GENERAL ENGINEER

10. COIR

Drawing Title

DOOR SCHEDULE AND DETAILS

Project Title

REPLACE BOILER PLANT/ COGEN/CHP

Drawn

R.S. MAF

Building Number

21

AutoCAD File Name

Conf. Contract No.

Checked

Reviewed

Date

APRIL 30, 2012

Project Number

544-11-101

Drawing No.

AE601

Veterans Affairs