

GENERAL NOTES:

- PARTITION TYPES ARE TYPE A, FULL HEIGHT PARTITIONS (FHP) UNLESS NOTED OTHERWISE. FLOORING AT EXTERIOR WALLS SHALL BE PARTITION TYPE F2 UNLESS NOTED OTHERWISE. OR AS REQUIRED FOR ELECTRICAL POWER AND COMMUNICATION DEVICES OR MEDICAL GASES. FLOORING AT INTERIOR COLUMN ENCLOSURES SHALL BE TYPE F, TYPICAL. SEE A500 FOR PARTITION TYPES.
- REFERENCE SYMBOLS LEGEND:
 - CG-1 FLUSH RECESSED CORNER GUARD - SEE DETAILS 1B AND 1F / A502
 - HR-1 HANDRAIL / WALL GUARD COMBINATION - SEE DETAIL 1B / A502
 - CR-1 WALL GUARD (CRASH RAIL) - SEE DETAIL 1D / A503
 - CR-2 VINYL CHAIR RAIL - SEE DETAIL 5D / A502
 - PWC-1 PLASTIC WALLCOVERING - SEE INTERIORS
 - PWC-2 PLASTIC WALLCOVERING, PATTERNED SURFACE - SEE INTERIORS
 - PWC-3 PLASTIC WALLCOVERING, PATTERNED SURFACE - SEE INTERIORS (CASEWORK SCHEDULE)
 - CA CARD ACCESS
 - KP ELECTRONIC KEYPAD
 - INT INTERCOM
 - WS TOUCHLESS WALL SWITCH (SEE 0001 - INDEX SHEET FOR ADDITIONAL REFERENCE SYMBOLS)
- RATED PARTITIONS LEGEND:
 - 2 HR FIRE RATED SMOKE BARRIER
 - 2 HR FIRE RATED PARTITION
 - 1 HR FIRE RATED SMOKE BARRIER
 - 1 HR FIRE RATED PARTITION
- ROOM NAME LEGEND:
 - ROOM NAME 1 ROOM NAME 2 ROOM NUMBER
- SLOPE ALL SHOWER FLOORS 1/4" PER FOOT TO DRAIN, MINIMUM.
- SEE 1F-3F/A501 FOR TYPICAL DOOR DETAILS. SEE 7F/A501 FOR DOOR ELEVATIONS AND RATINGS.
- REFER TO ER EXAM ROOM 1, 6118, FOR DOORS, ACCESSORIES AND FIXTURES TYPICAL AT ER EXAM ROOMS. AT FAST TRACK EXAM ROOMS AND OBSERVATION ROOMS, SEE EXAM ROOM 3, 61420, FOR TYPICAL WOOD SWINGING DOOR INFORMATION.
- REFER TO STAFF TOILET 61530 FOR TYPICAL TOILET ROOM ACCESSORIES, EXCLUDING PSYCH TOILET 61476.
- PROVIDE HIGH IMPACT GWB AT ALL PARTITIONS AND CEILINGS IN THE FOLLOWING ROOMS:
 - HOLDING TRANSITION, 6119
 - SECURITY HOLDING, 6110A
 - PSYCH FLEX ROOM 1, 61478
 - PSYCH FLEX ROOM 2, 6147C
 - PSYCH HOLD 1, 6147E
 - PSYCH HOLD 2, 6147D

KEYED NOTES:

- APPROXIMATE LOCATION OF EXISTING DUCT TO REMAIN FROM SECOND FLOOR ABOVE, OFFSET NEW PARTITIONS AS REQUIRED.

4C FIRST FLOOR PLAN

SCALE: 1/8" = 1'-0"

CONSULTANTS:

ARCHITECT/ENGINEERS:

brg3s architects

11 W. Huling Avenue
Memphis, Tennessee 38103
t 901.260.9600
f 901.531.8042
brg3s.com

DRAWING TITLE:
FIRST FLOOR PLAN

SCALE: As indicated

APPROVED PROJECT DIRECTOR:

PROJECT TITLE:
EXPAND EMERGENCY ROOM

LOCATION:
VAMC, Memphis, Tennessee

DATE:
May 31, 2012

CHECKED:


DRAWN:


PROJECT NUMBER:
614-10-102

BUILDING NUMBER:
6


DRAWING NUMBER:
A-201

DWG. OF

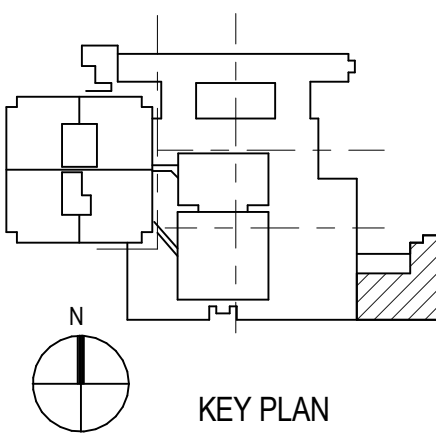

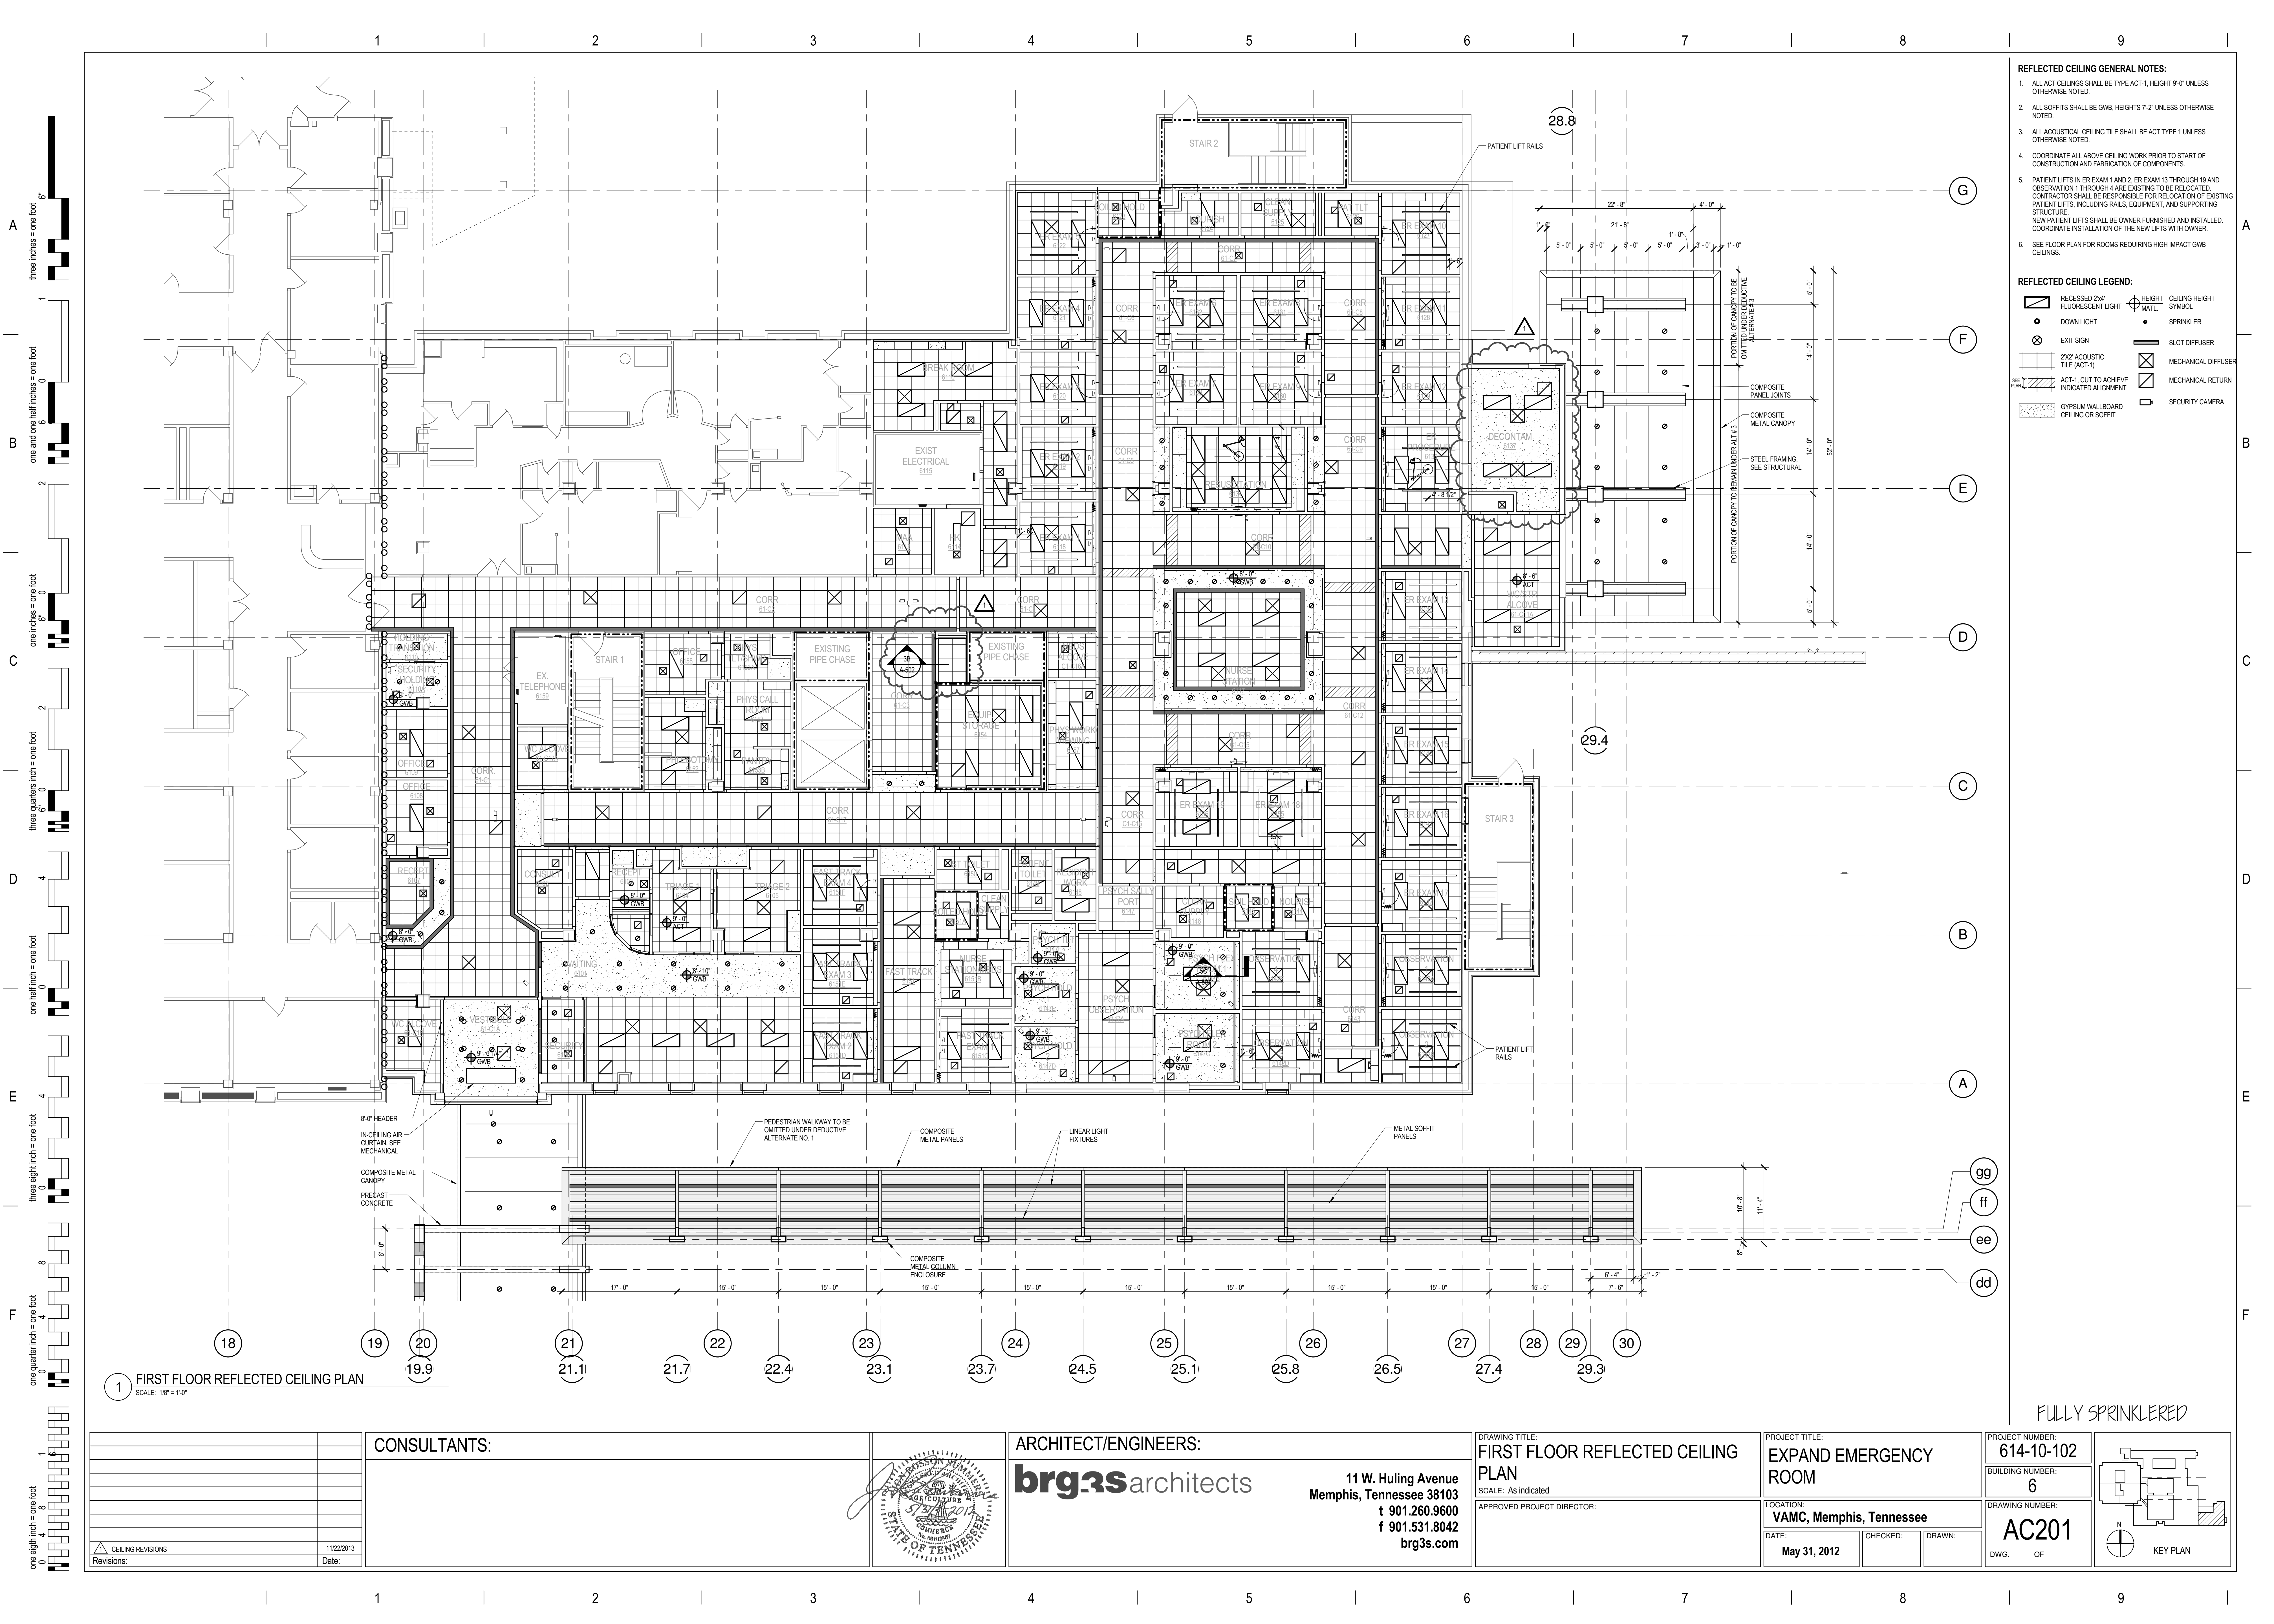

three inches = one foot
one and one half inches = one foot
one quarter inch = one foot
one half inch = one foot
three eighths inch = one foot
one eighth inch = one foot
one quarter inch = one foot
one eighth inch = one foot

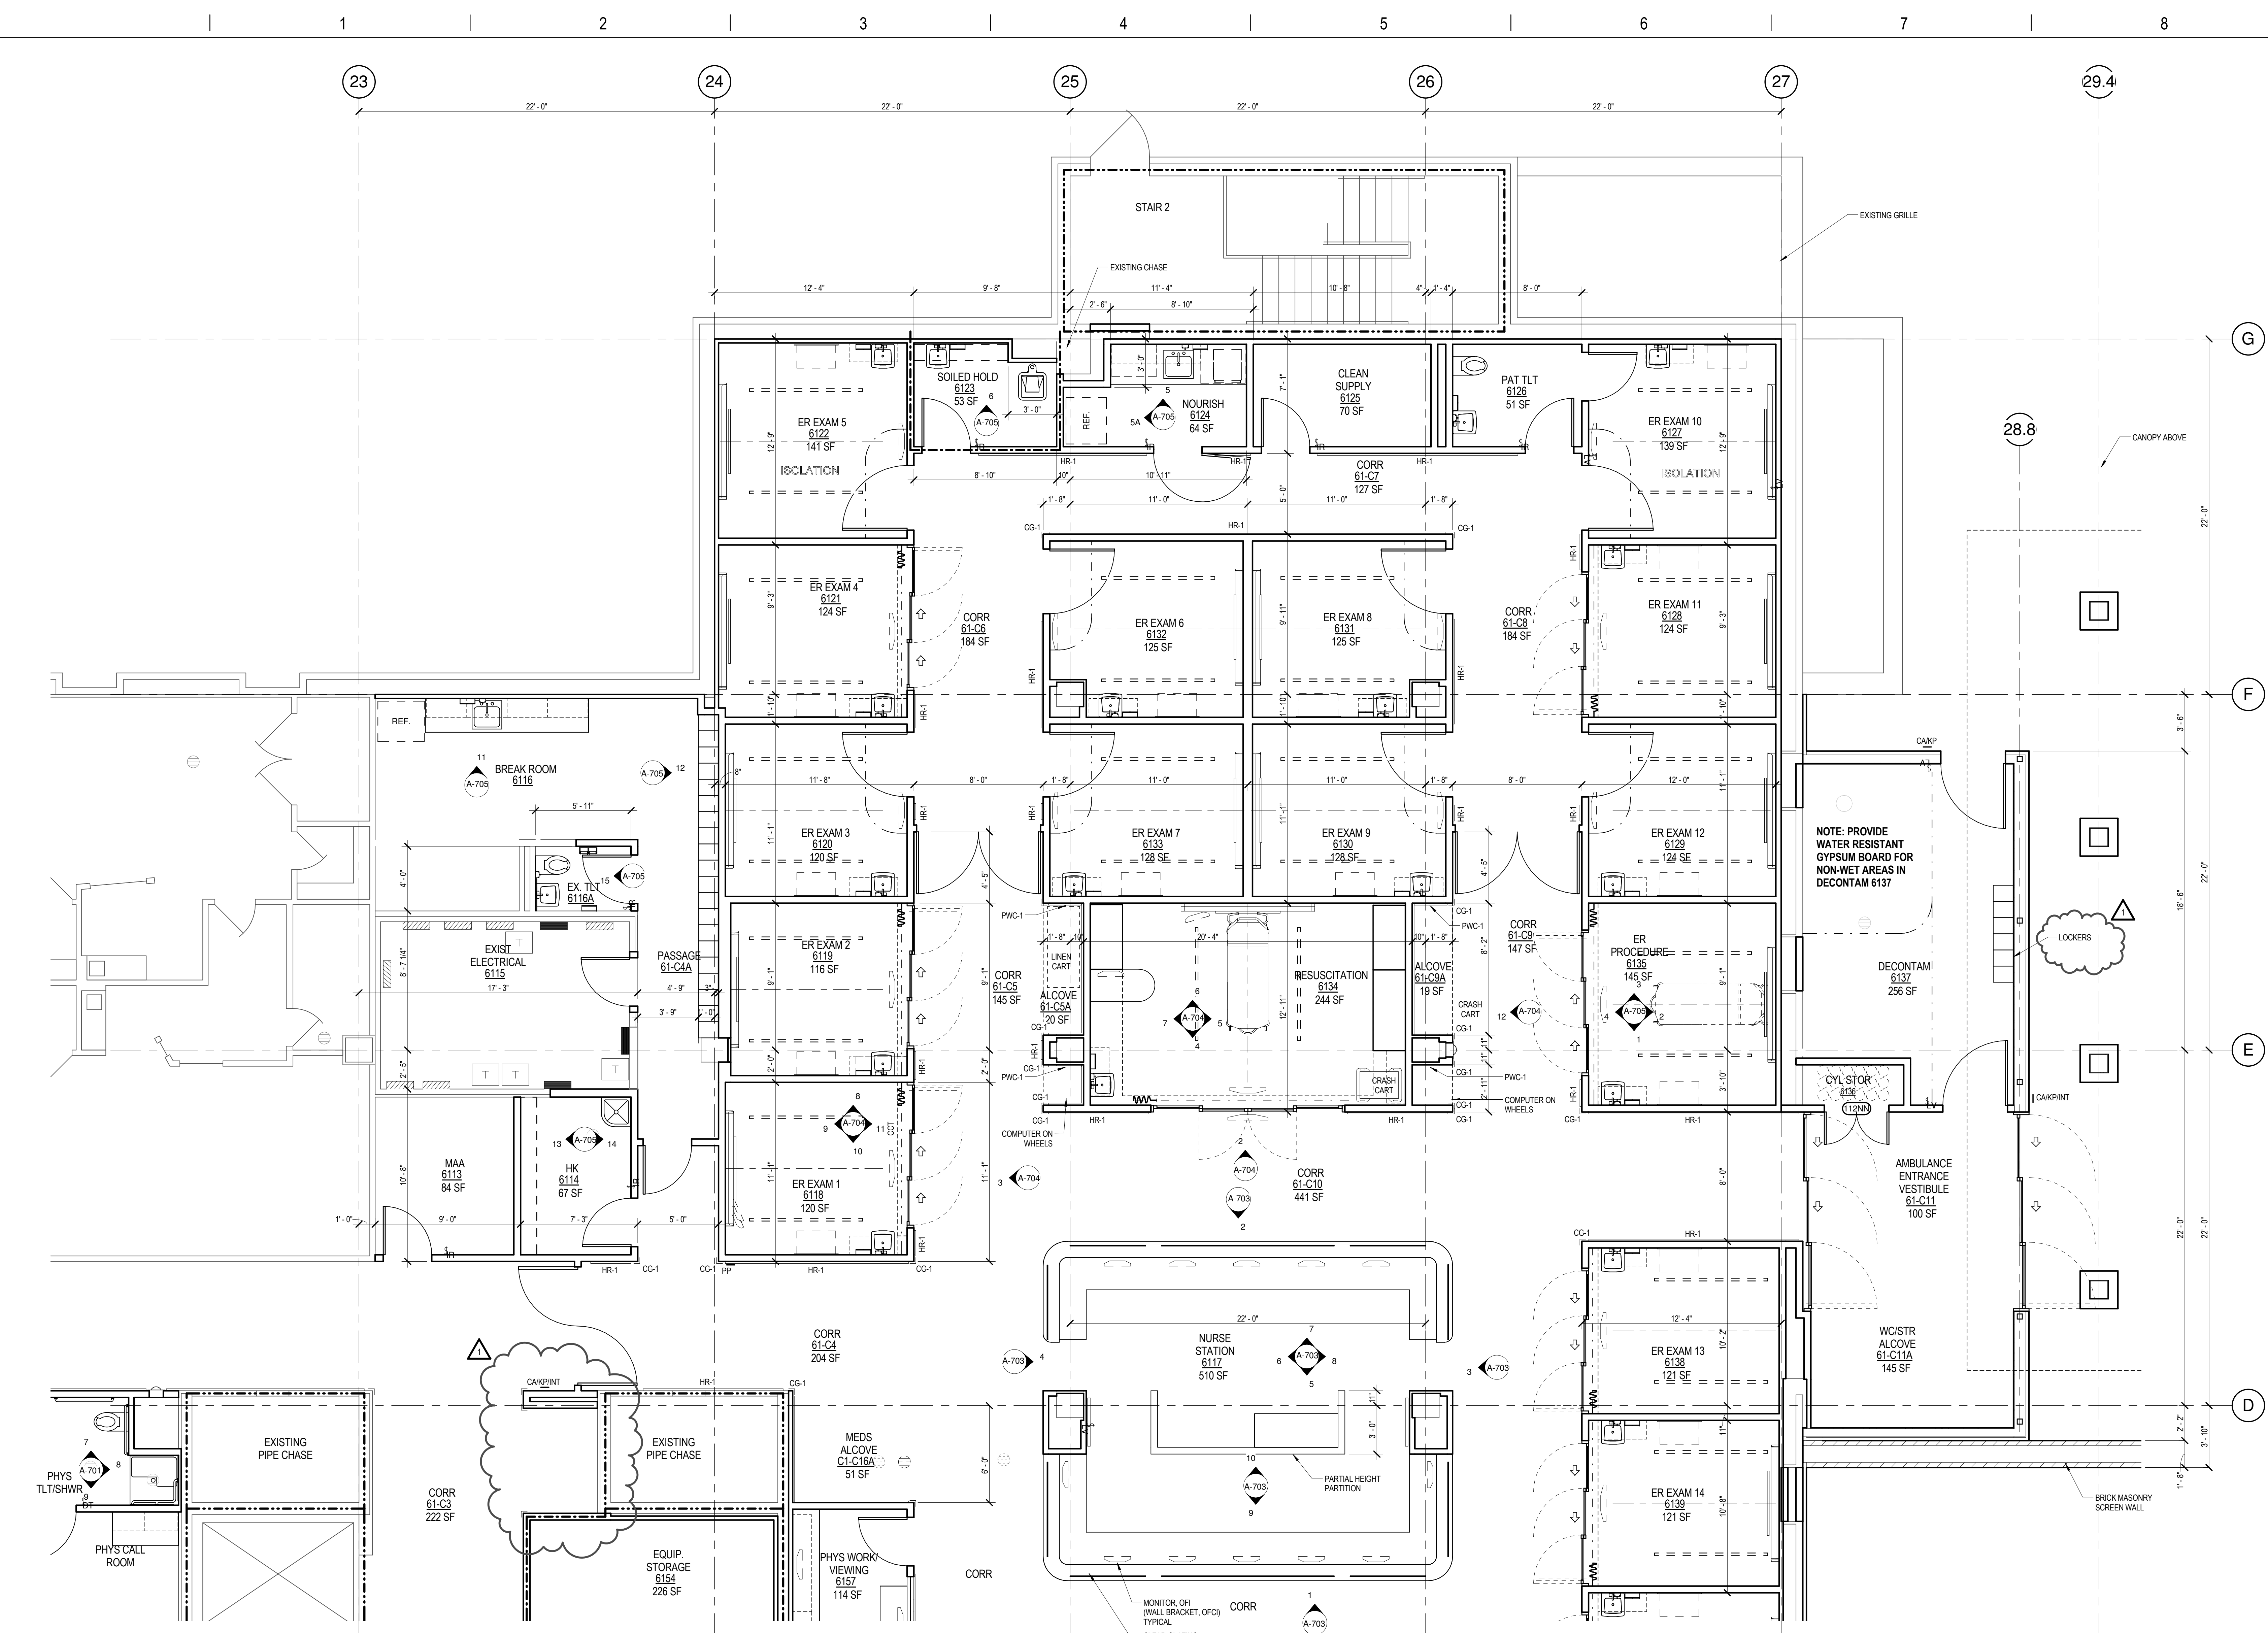





1 FIRST FLOOR DIMENSION PLAN
SCALE: 1/4" = 1'-0"

- GENERAL NOTES:**
- PARTITION TYPES ARE TYPE A, FULL HEIGHT PARTITIONS (FHP) UNLESS NOTED OTHERWISE. FURRING AT EXTERIOR WALLS SHALL BE PARTITION TYPE F2 UNLESS NOTED OTHERWISE, OR AS REQUIRED FOR ELECTRICAL POWER AND COMMUNICATION DEVICES OR MEDICAL GASES. FURRING AT INTERIOR COLUMN ENCLOSURES SHALL BE TYPE F, TYPICAL. SEE A500 FOR PARTITION TYPES.
 - REFERENCE SYMBOLS LEGEND:
 - CG-1 SURFACE MOUNTED CORNER GUARD - SEE DETAILS 1B AND 1F / A502
 - HR-1 HANDRAIL / WALL GUARD COMBINATION - SEE DETAIL 1B / A502
 - CR-1 WALL GUARD (CRASH RAIL) - SEE DETAIL 1D / A503
 - CR-2 VINYL CHAIR RAIL - SEE DETAIL 5D / A502
 - PWC-1 PLASTIC WALLCOVERING - SEE INTERIORS
 - PWC-2 PLASTIC WALLCOVERING, PATTERNED SURFACE - SEE INTERIORS
 - PWC-3 PLASTIC WALLCOVERING, PATTERNED SURFACE - SEE INTERIORS (CASEWORK SCHEDULE)
 - CA CARD ACCESS
 - KP ELECTRONIC KEYPAD
 - INT INTERCOM
 - VS TOUCHLESS WALL SWITCH (SEE G001-INDEX SHEET FOR ADDITIONAL REFERENCE SYMBOLS)
 - RATED PARTITIONS LEGEND:
 - 2 HR FIRE RATED SMOKE BARRIER
 - 2 HR FIRE RATED PARTITION
 - 1 HR FIRE RATED SMOKE BARRIER
 - 1 HR FIRE RATED PARTITION
 - ROOM NAME LEGEND:
 - ROOM NAME 1 ROOM NAME
 - ROOM NAME 2 ROOM NAME
 - BUILDING ROOM NUMBER
 - SLOPE ALL SHOWER FLOORS 1/4" PER FOOT TO DRAIN, MINIMUM.
 - SEE 1F-3F/A501 FOR TYPICAL DOOR DETAILS. SEE 7F/A501 FOR DOOR ELEVATIONS AND RATINGS.
 - REFER TO ER EXAM ROOM 1, 6118, FOR DOORS, ACCESSORIES AND FIXTURES TYPICAL AT ER EXAM ROOMS. AT FAST TRACK EXAM ROOMS AND OBSERVATION ROOMS, SEE EXAM ROOM 3, 6142D, FOR TYPICAL WOOD SWINGING DOOR INFORMATION.
 - REFER TO STAFF TOILET 6150 FOR TYPICAL TOILET ROOM ACCESSORIES, EXCLUDING PSYCH TOILET 6147F.
 - PROVIDE HIGH-IMPACT GWB AT ALL PARTITIONS AND CEILINGS IN THE FOLLOWING ROOMS:
 - SECURITY HOLDING, 6110A
 - PSYCH FLEX ROOM 1, 6147B
 - PSYCH FLEX ROOM 2, 6147C
 - PSYCH HOLD 1, 6147E
 - PSYCH HOLD 2, 6147D

FULLY SPRINKLERED

Revisions:	Date:	CONSULTANTS:	ARCHITECT/ENGINEERS: brg3s architects 11 W. Huling Avenue Memphis, Tennessee 38103 t 901.260.9600 f 901.531.8042 brg3s.com	DRAWING TITLE: ENLARGED PLAN - AREA 'C' SCALE: As indicated APPROVED PROJECT DIRECTOR:	PROJECT TITLE: EXPAND EMERGENCY ROOM LOCATION: VAMC, Memphis, Tennessee DATE: May 31, 2012 CHECKED: DRAWN:	PROJECT NUMBER: 614-10-102 BUILDING NUMBER: 6 DRAWING NUMBER: A-302 DWG. OF	KEY PLAN
------------	-------	--------------	---	--	--	--	----------

three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
one quarter inch = one foot
three eighths inch = one foot
one eighth inch = one foot
one sixteenth inch = one foot

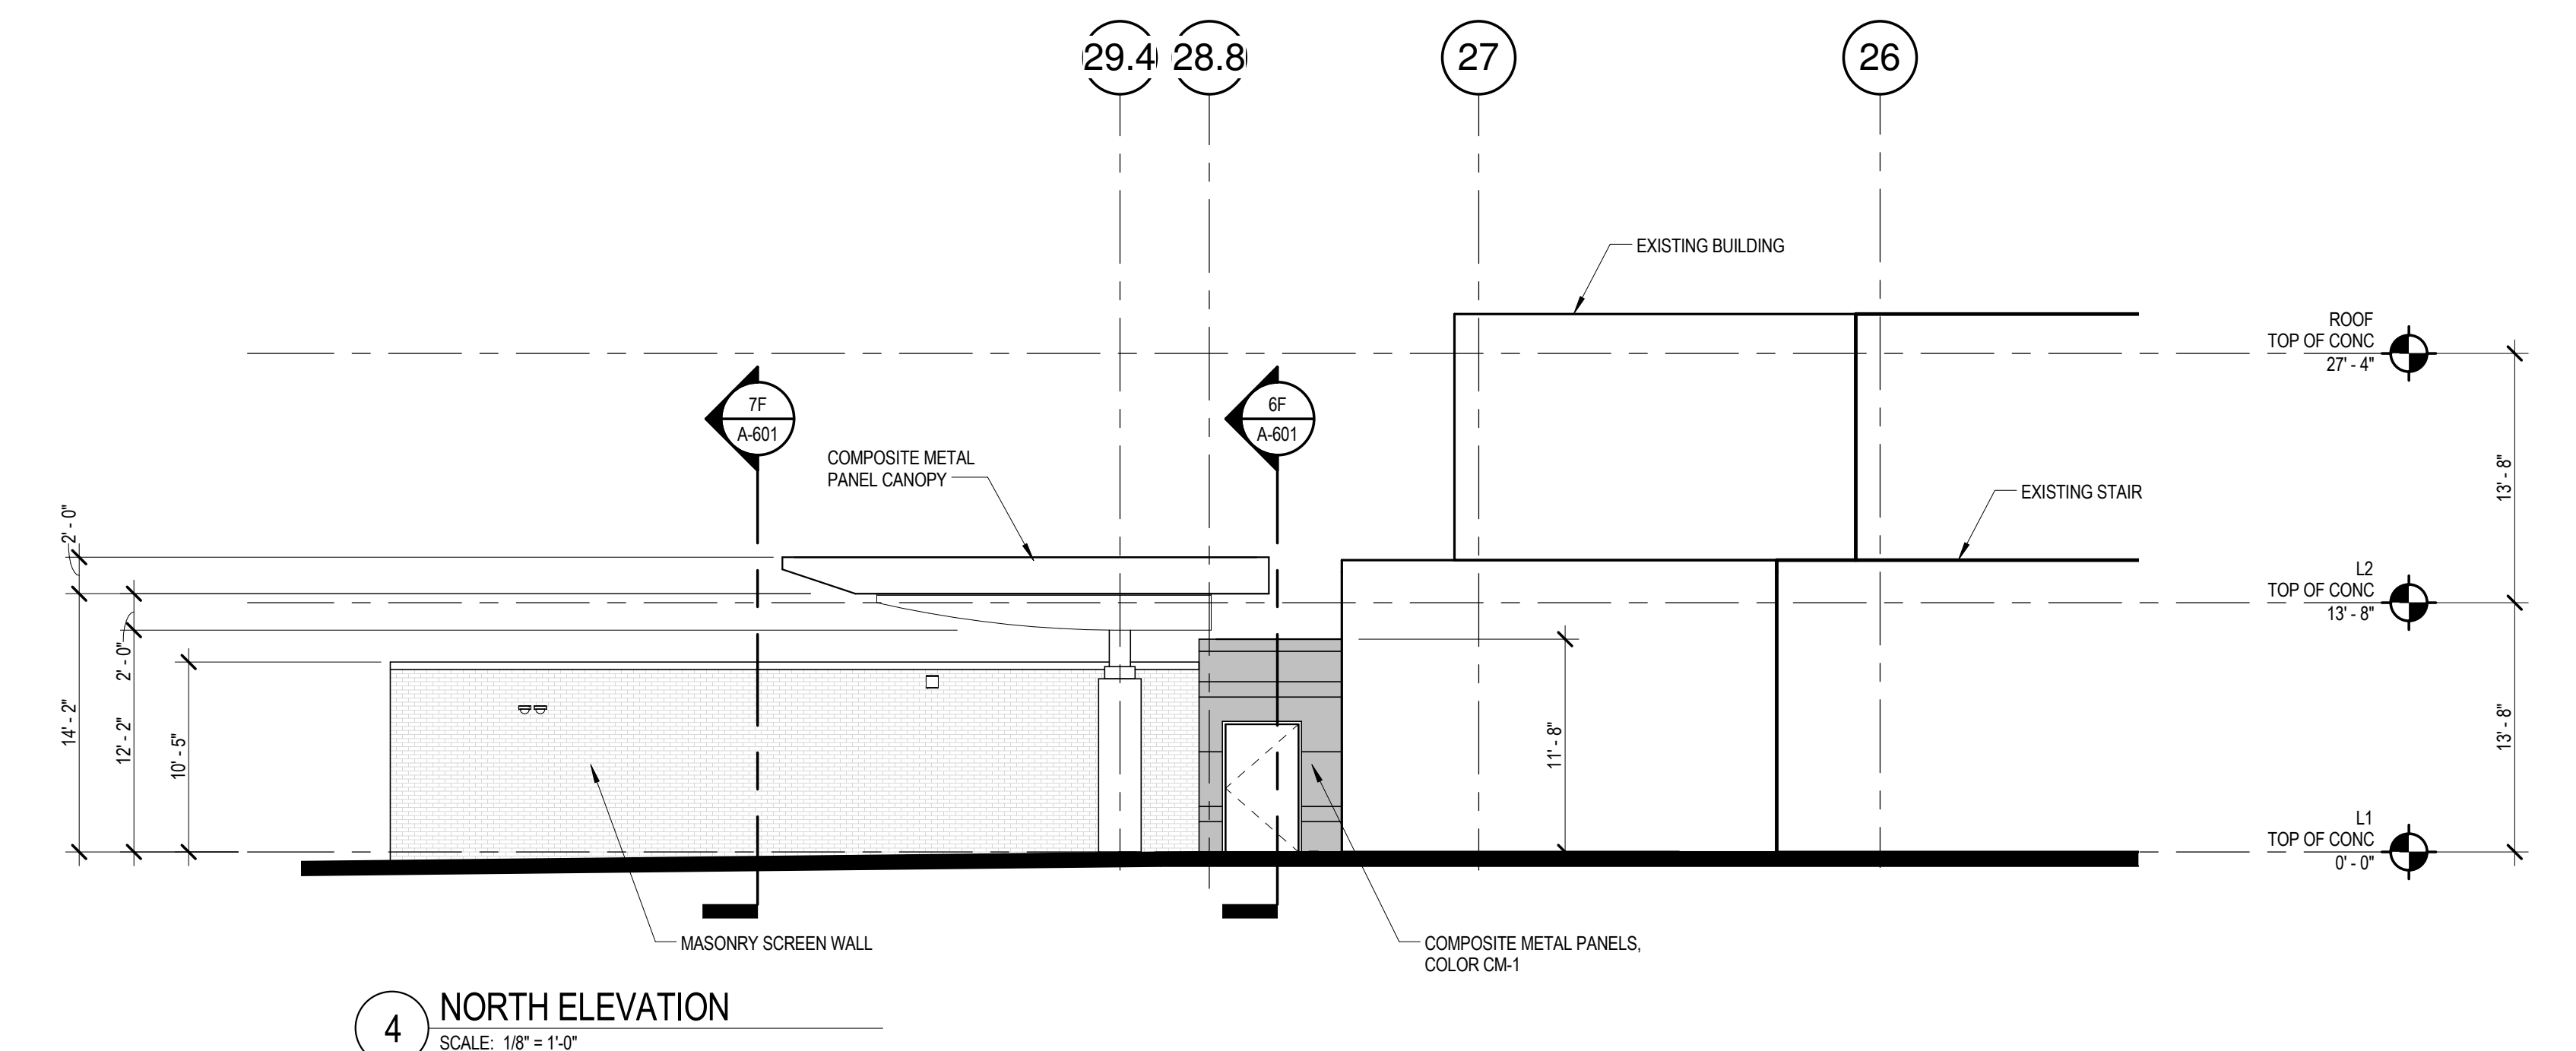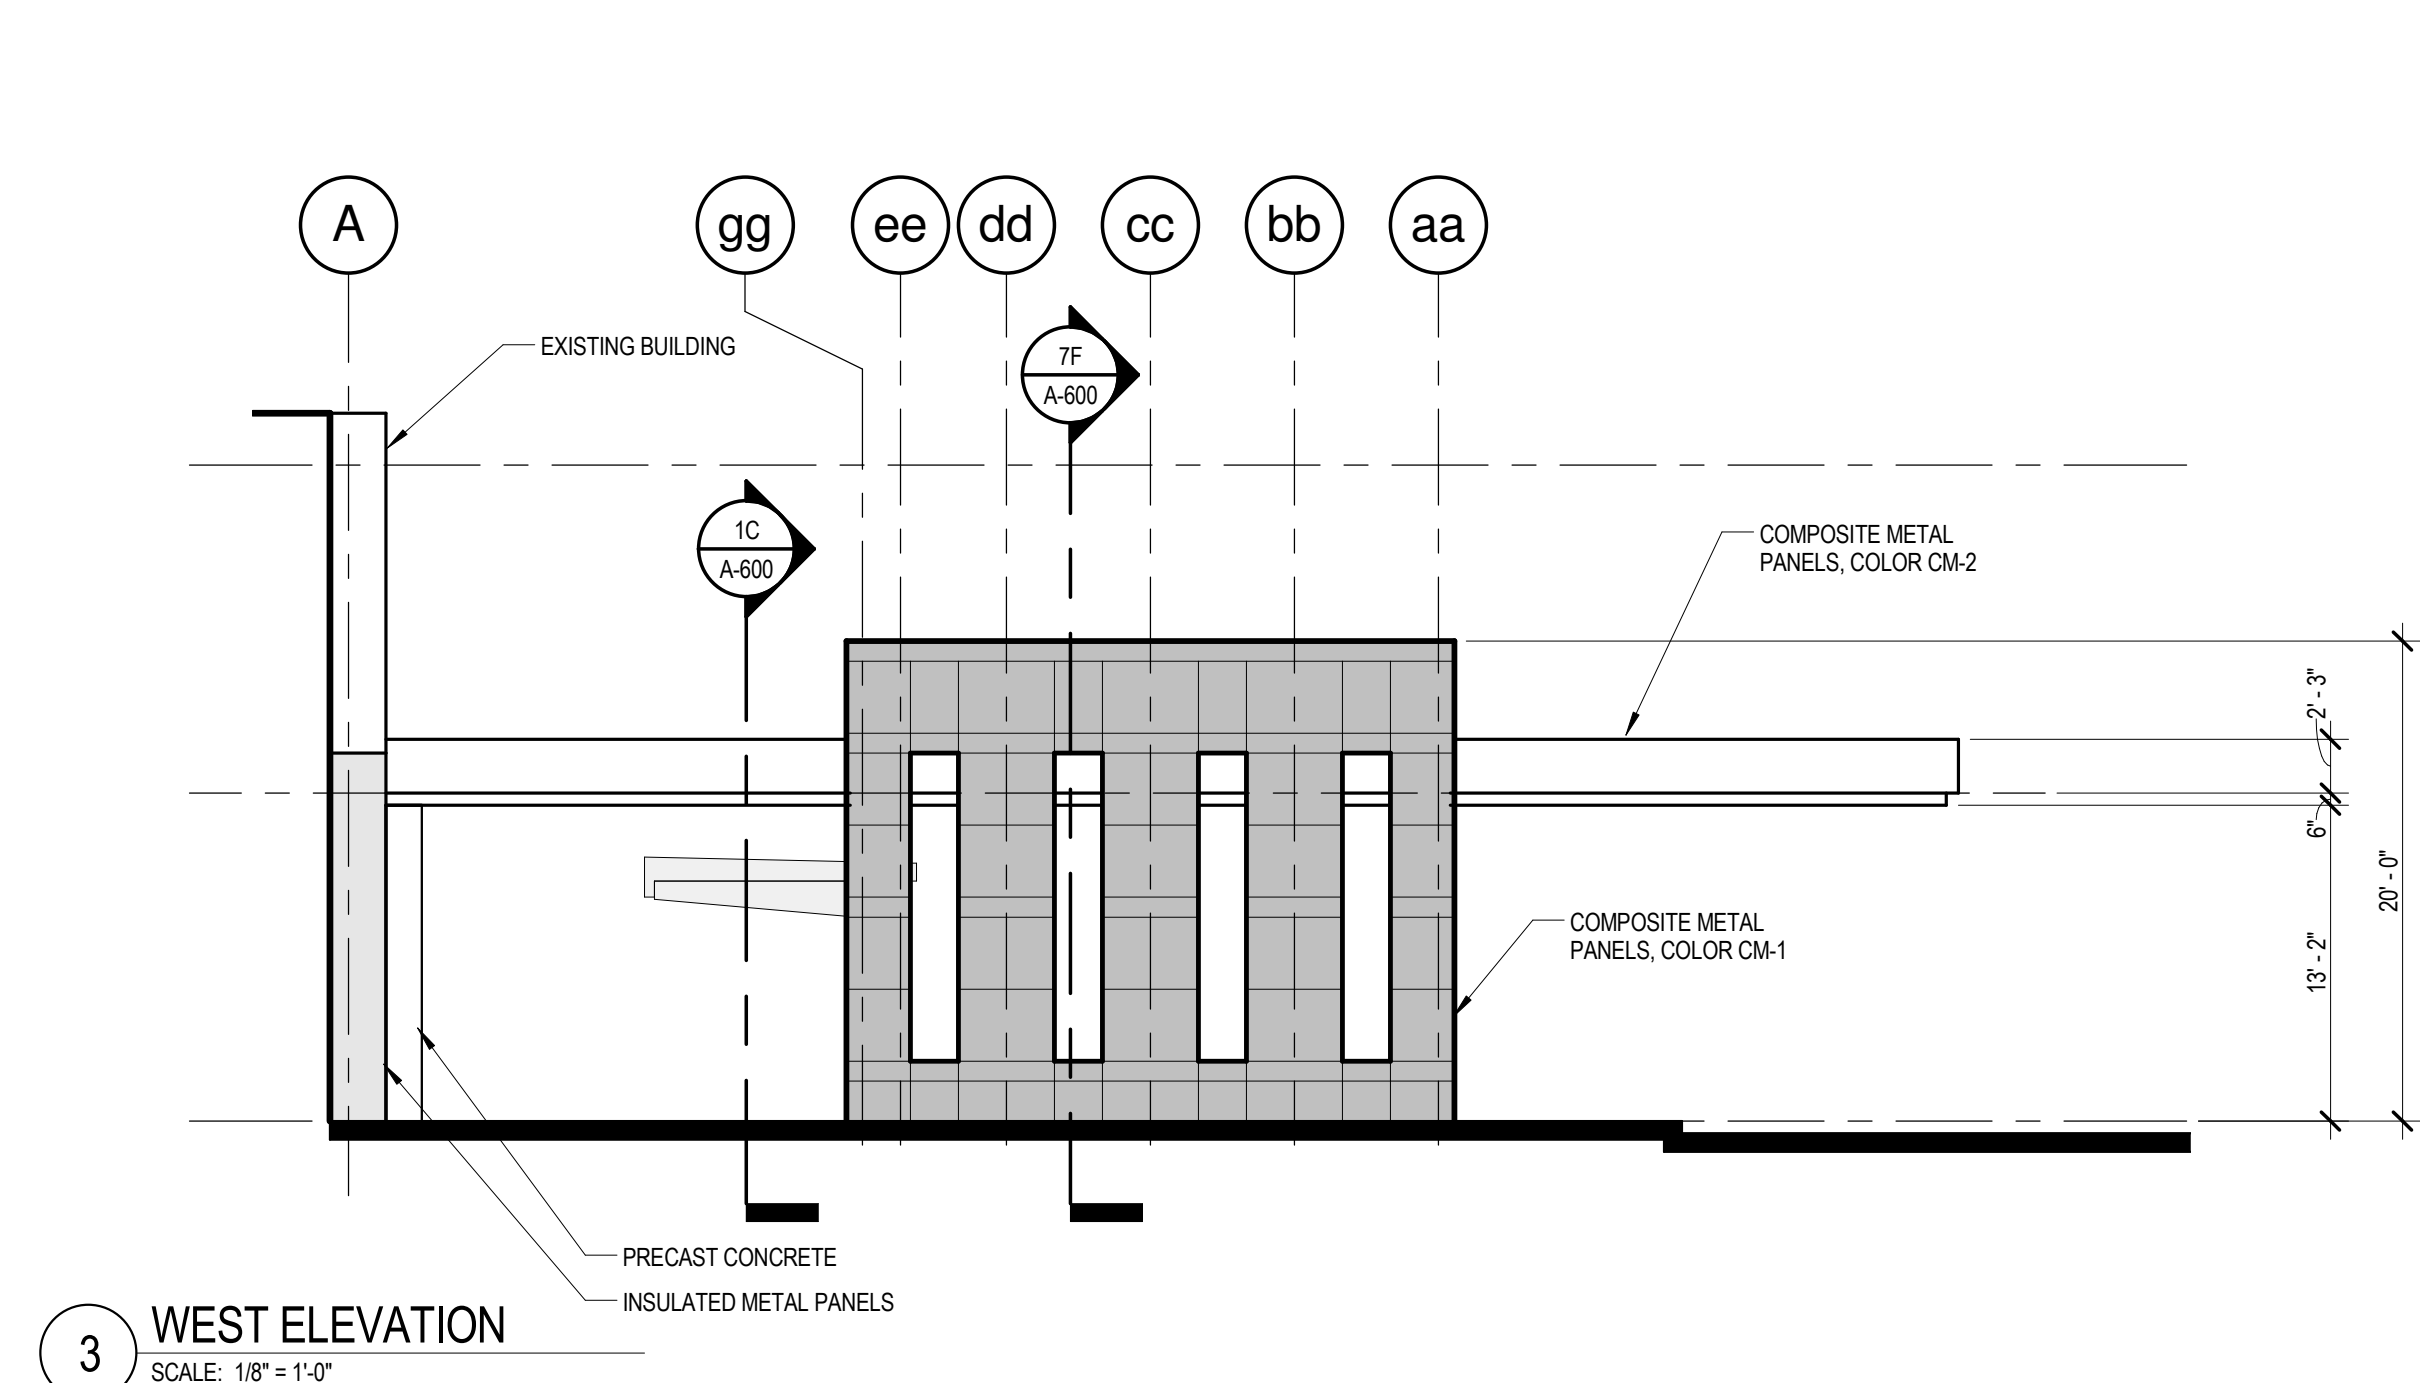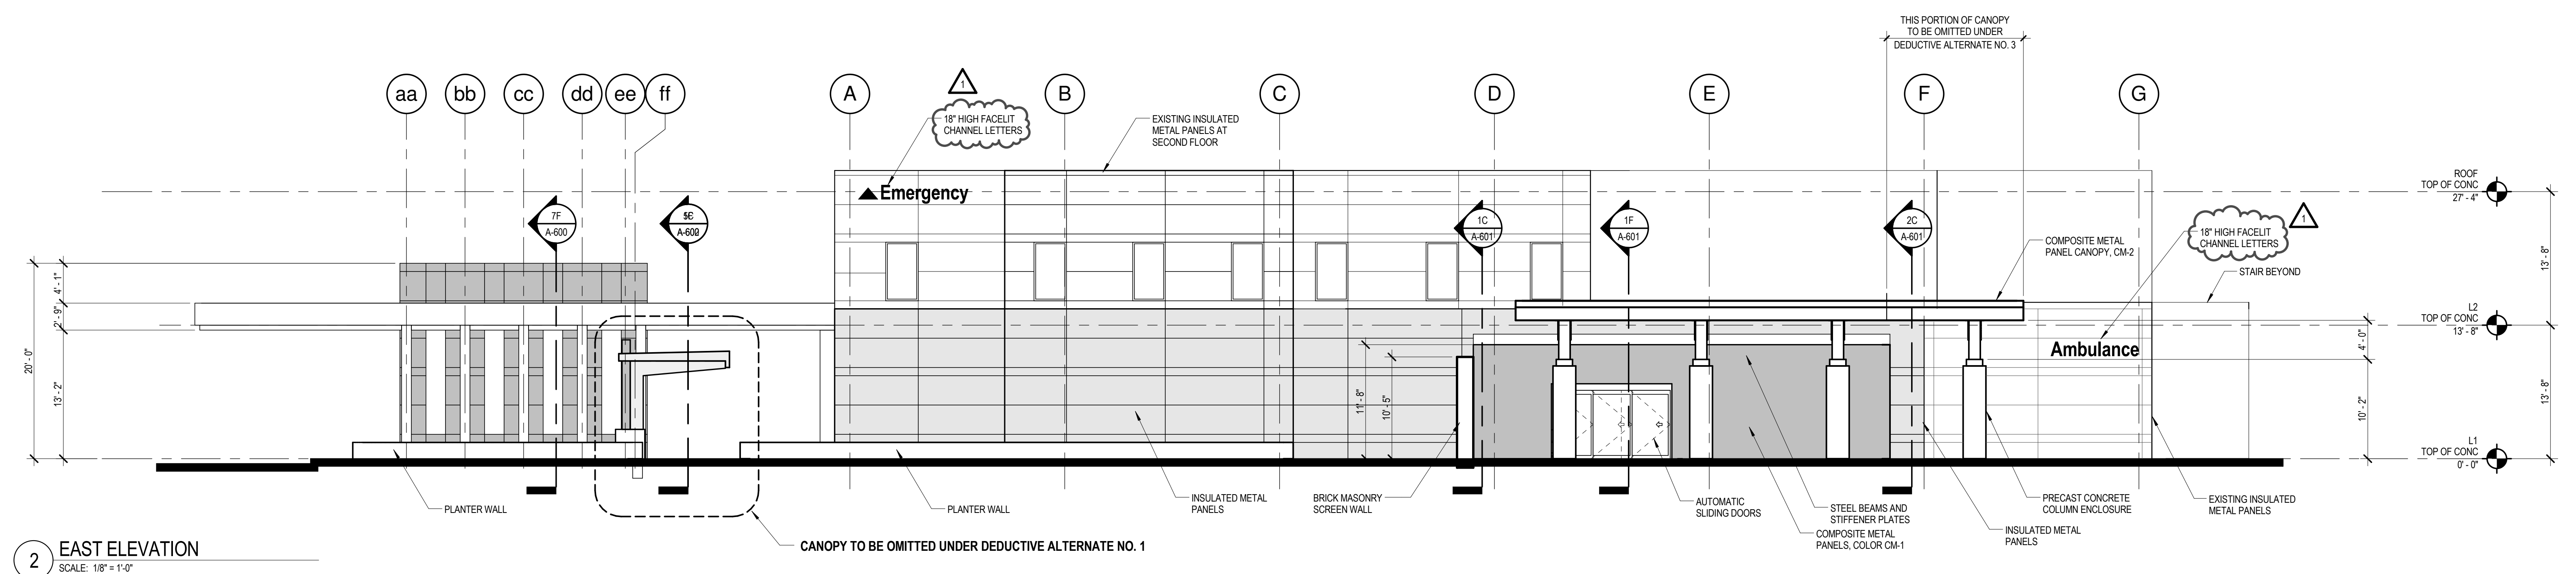
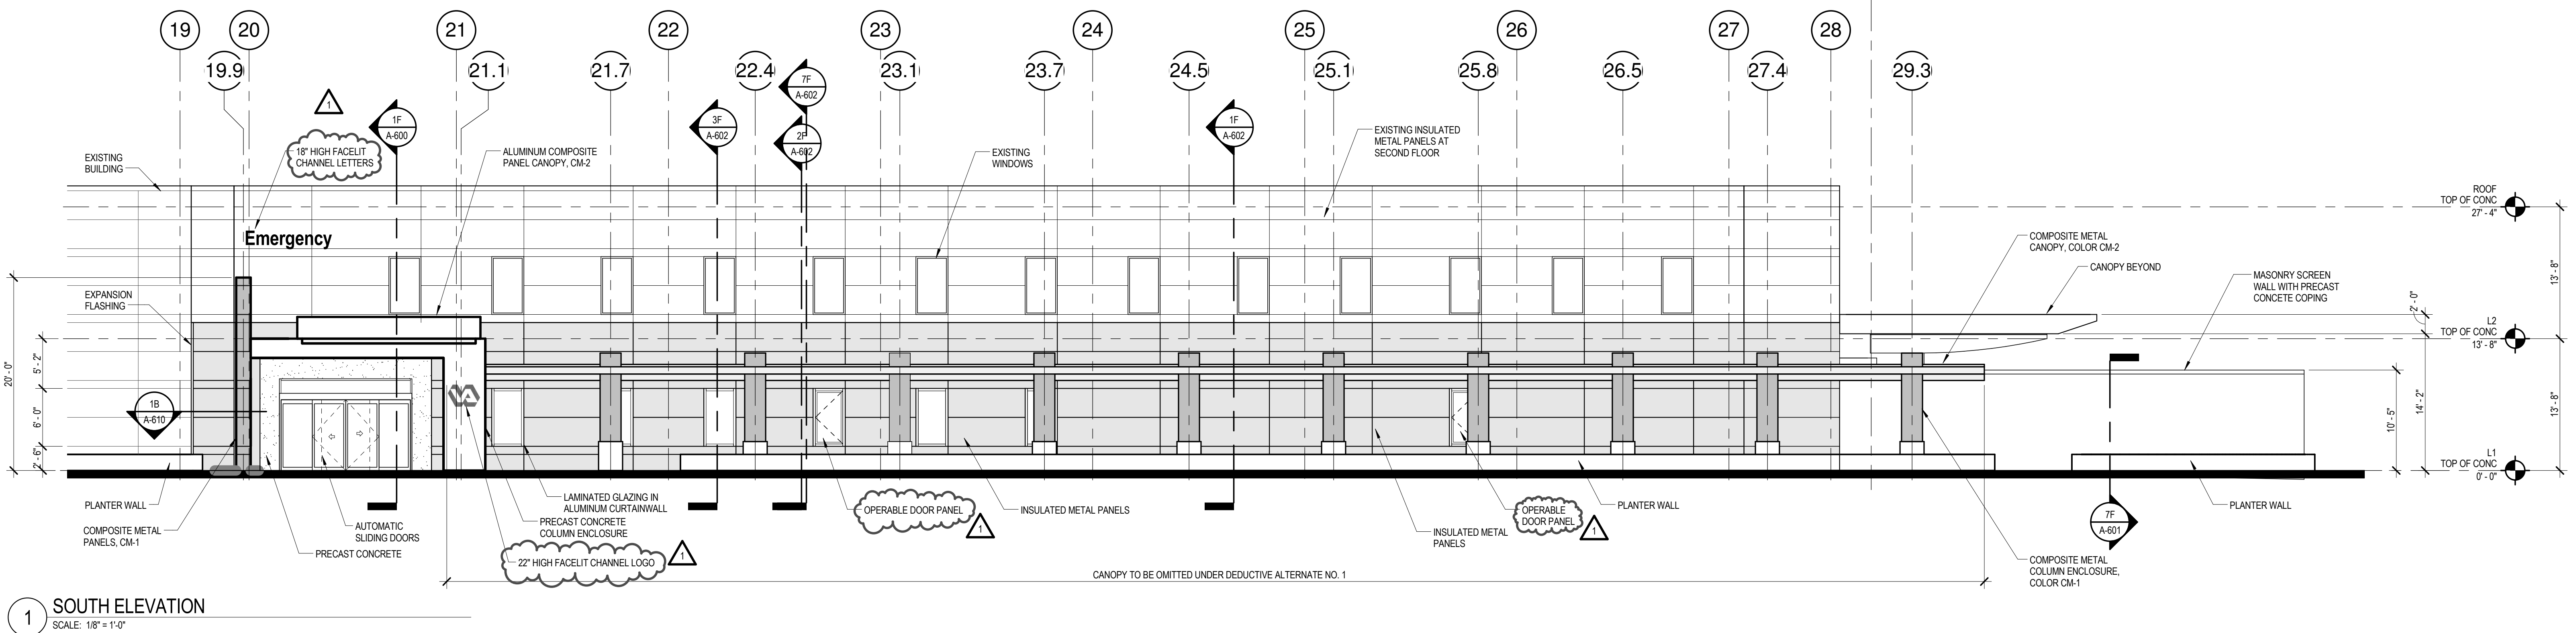


GENERAL NOTES:
1. ALL COMPOSITE METAL WALL SYSTEM TO BE COLOR CM-1, UNLESS NOTED OTHERWISE.

FULLY SPRINKLERED


<p>CONSULTANTS:</p>			<p>ARCHITECT/ENGINEERS:</p> <p>brg3s architects</p> <p>11 W. Huling Avenue Memphis, Tennessee 38103 t 901.260.9600 f 901.531.8042 brg3s.com</p>		<p>DRAWING TITLE:</p> <p>EXTERIOR ELEVATIONS</p> <p>SCALE: As indicated</p> <p>APPROVED PROJECT DIRECTOR:</p>	<p>PROJECT TITLE:</p> <p>EXPAND EMERGENCY ROOM</p> <p>LOCATION:</p> <p>VAMC, Memphis, Tennessee</p> <p>DATE:</p> <p>May 31, 2012</p> <p>CHECKED:</p> <p>DRAWN:</p>	<p>PROJECT NUMBER:</p> <p>614-10-102</p> <p>BUILDING NUMBER:</p> <p>6</p> <p>DRAWING NUMBER:</p> <p>A-400</p> <p>DWG. OF</p>		
<p>REVISIONS:</p> <table><tr><td>1</td><td>11/22/2013</td></tr></table>			1	11/22/2013					
1	11/22/2013								

three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot

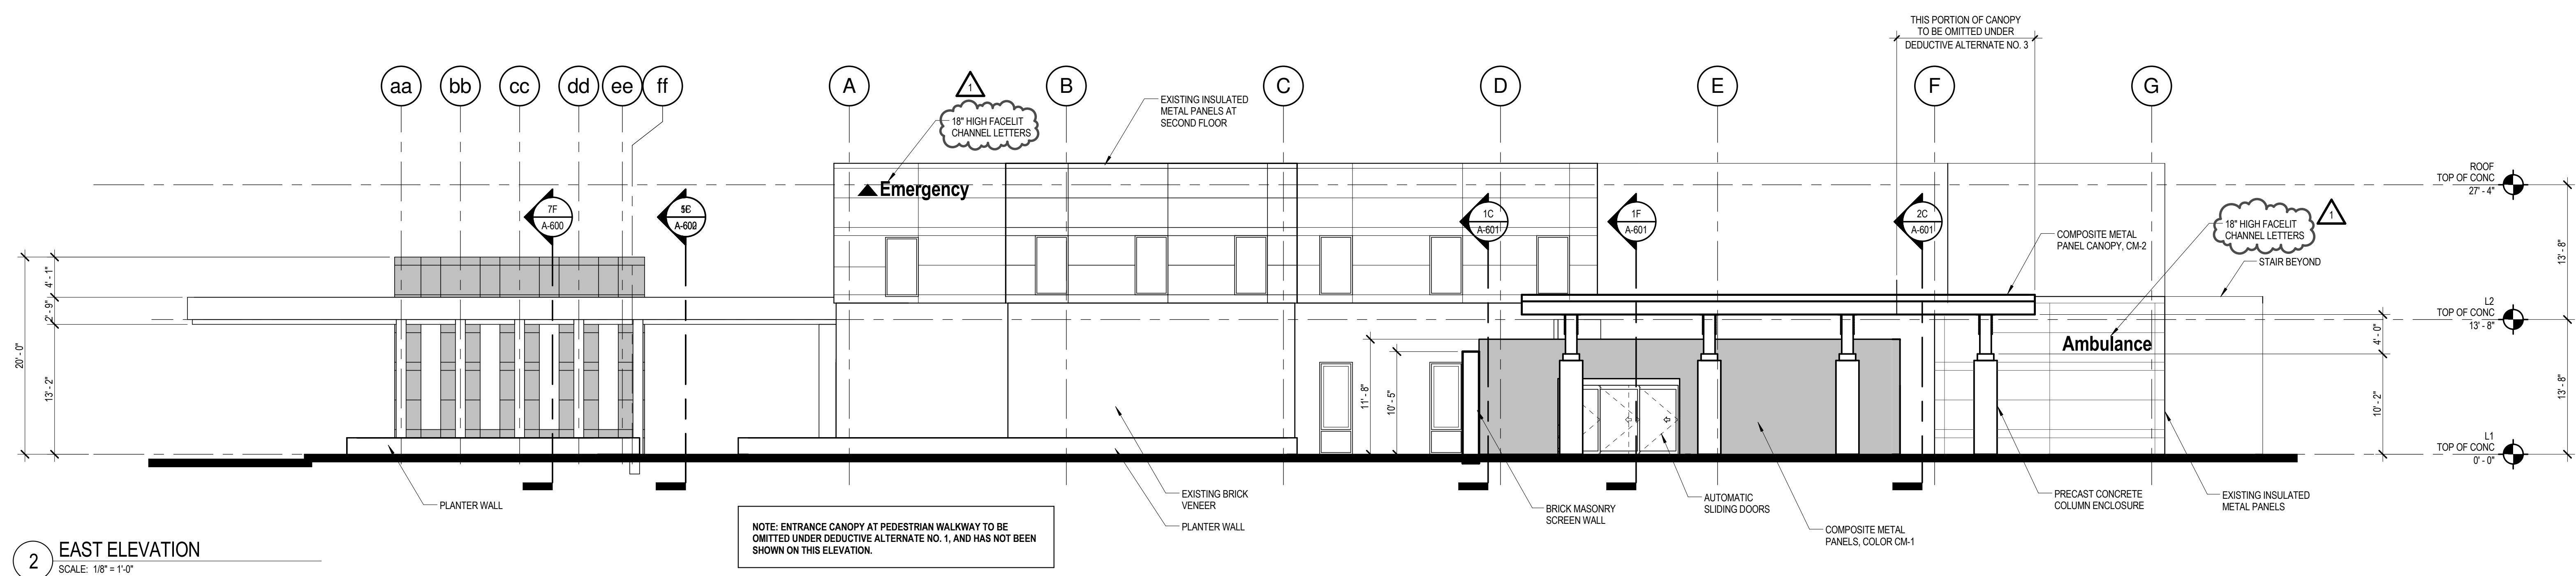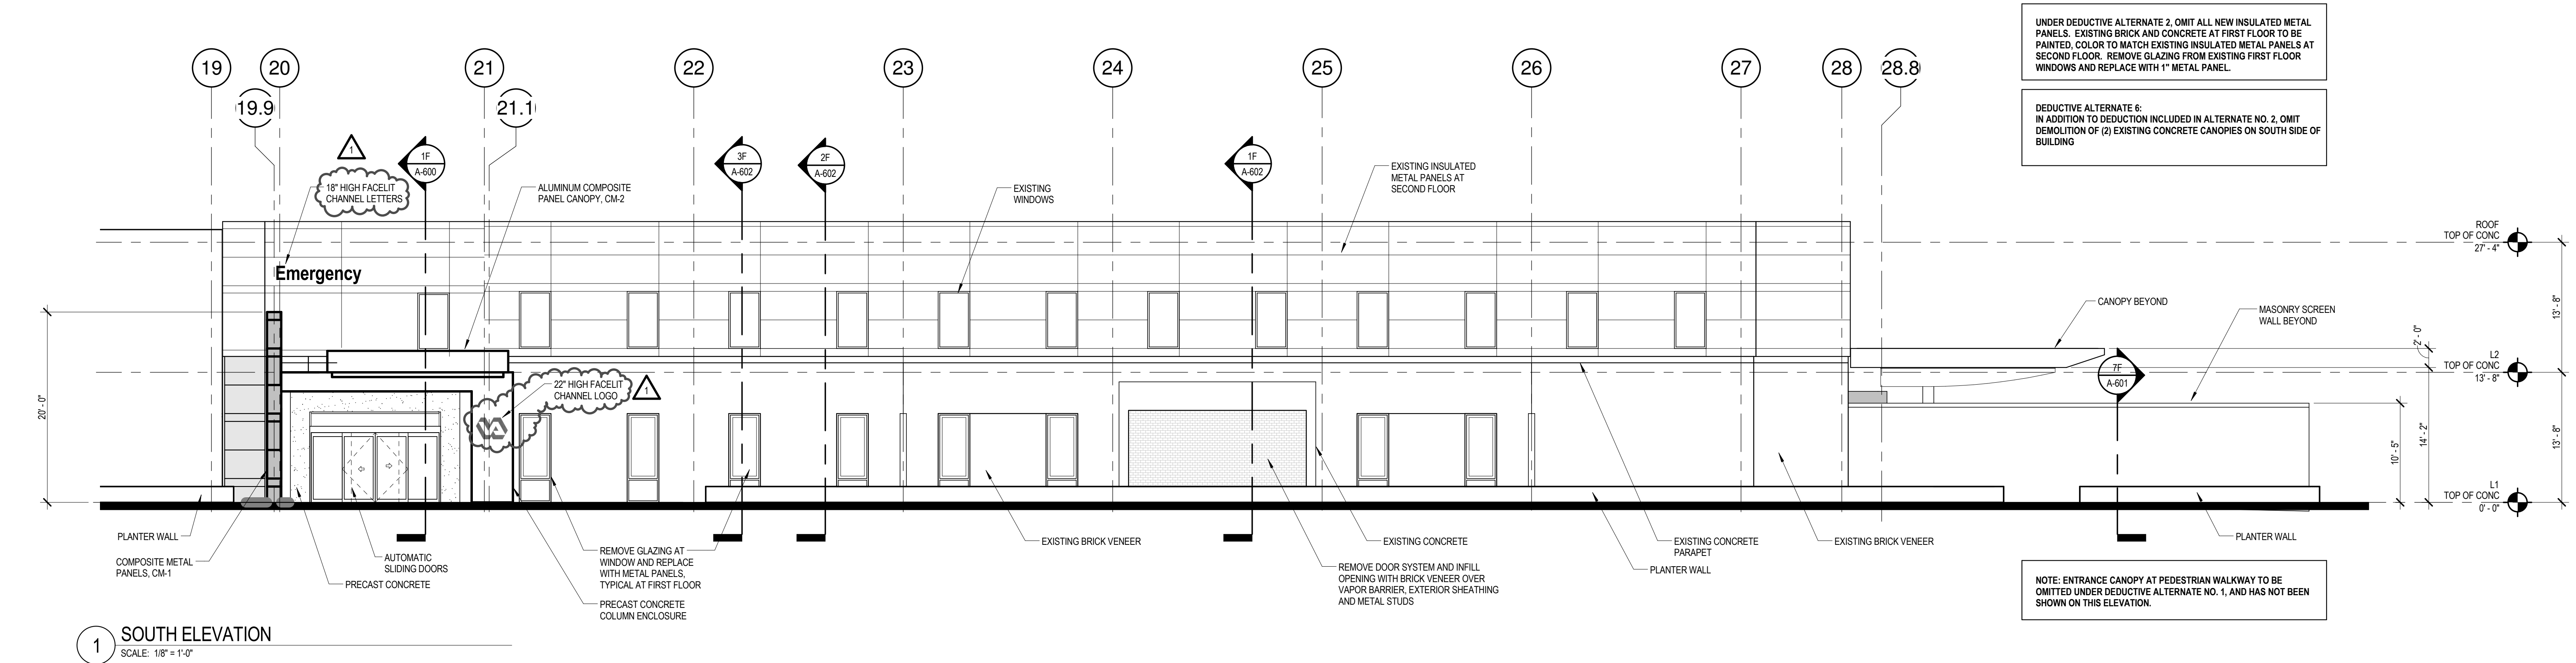

Revisions:	11/22/2013
Date:	

CONSULTANTS:

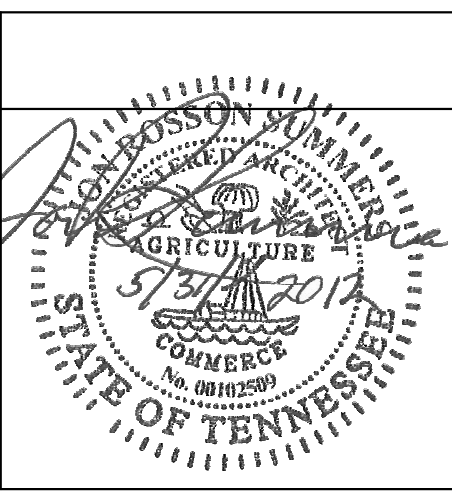


ARCHITECT/ENGINEERS:
brg3sarchitects
11 W. Huling Avenue
Memphis, Tennessee 38103
t 901.260.9600
f 901.531.8042
brg3s.com





DRAWING TITLE:
EXTERIOR ELEVATIONS - DEDUCTIVE ALTERNATES
SCALE: As indicated
APPROVED PROJECT DIRECTOR:

PROJECT TITLE:
EXPAND EMERGENCY ROOM
LOCATION:
VAMC, Memphis, Tennessee
DATE:
May 31, 2012
CHECKED:
DRAWN:





PROJECT NUMBER:
614-10-102
BUILDING NUMBER:
6
DRAWING NUMBER:
A-401
DWG. OF

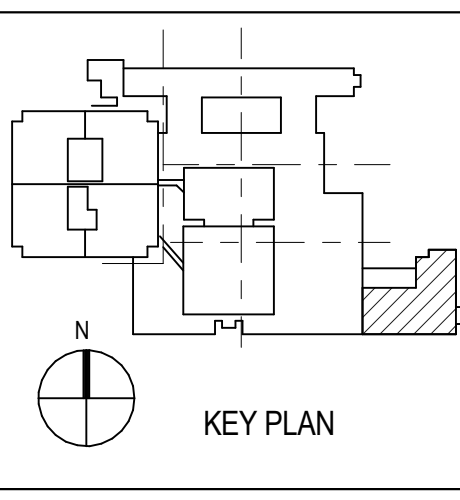

FULLY SPRINKLERED








FULLY SPRINKLERED



1. BRACING WIRES TO BE ATTACHED AT A MAXIMUM OF 45 DEGREES TO THE PLANE OF THE CEILING AND PARALLEL TO COMPONENTS INTERSECTING AT THE BRACE LOCATION. BRACE WIRES TO BE TAUT AND TIED BOTH ENDS WITH A MINIMUM THREE TIGHT WRAPS.

2. GRID BRACING ASSEMBLY 10'-0" O.C. MAX.

3. CROSS RUNNERS SHALL BE ATTACHED WITH MECHANICAL INTERLOCKING CONNECTORS.



PROJECT NUMBER: 614-10-102
BUILDING NUMBER: 6
DRAWING NUMBER: A-612
DWG. OF

FLOORCOVERING FINISH NOTES

FLOORCOVERING MATERIALS ARE IDENTIFIED ON BOTH THE ROOM FINISH SCHEDULE AND ON THE ATTACHED FLOORCOVERING DISTRIBUTION PLAN. THE COMPLEXITY OF FINISHES/MATERIALS ARE CLARIFIED ON THE DISTRIBUTION PLANS BY ONE OF THE SYMBOLS NOTED BELOW:

FLOORCOVERING SYMBOL LEGEND:

1. VINYL TILE, WEAR LAYER
VTW - VINYL TILE, WEAR LAYER
AREAS DESIGNATED AS VTW SHALL RECEIVE MANNINGTON, NATURE'S PATHS.
[A] COLOR: HERITAGE CHERRY, SELECT 12103, 3'X36". INSTALL PER FLOOR FINISH PLAN.
UNLESS DESIGNATED ON THE DISTRIBUTION PLANS TO RECEIVE ANOTHER COLOR ILLUSTRATED BY ONE OF THE SYMBOLS BELOW.
[B] COLOR: HERITAGE CHERRY, NATURAL 12105, 3'X36". INSTALL PER FLOOR FINISH PLAN.

2. VINYL SHEET FLOORING

VSF - VINYL SHEET FLOORING
AREAS DESIGNATED AS VSF SHALL RECEIVE MANNINGTON, REALITIES,
COLOR: BRAZILIAN CHERRY, NATURAL 5634.

3. EPOXY RESINOUS FLOORING

ERF - EPOXY RESINOUS FLOORING
AREAS DESIGNATED AS ERF SHALL RECEIVE NEMEC, 222 DECO TREAD
COLOR: 201.

3. CERAMIC TILE

CT - CERAMIC TILE
AREAS DESIGNATED AS CT SHALL RECEIVE DALTILE, SALERNO
COLOR: CREMONA CAFFE SL82 (12'X12" FIELD TILE).

SPECIAL INSTRUCTIONS: GROUT SHALL BE MORTAMIX LIGHT BUFF (N) TLT. FLOOR AND WALL TILE SHALL MEET AT A 90 DEGREE ANGLE - NO COVE BASE PIECE SHALL BE USED.

4. PORCELAIN PAVET TILE

PPT - PORCELAIN PAVET TILE
AREAS DESIGNATED AS PPT SHALL RECEIVE AMERICAN CLEAN, INFUSION (12' X 24")
COLOR: GRAY WENGIE #F65 (FIELD).

SPECIAL INSTRUCTIONS:

MANUFACTURER RECOMMENDED GROUT JOINT FOR FLOOR TILE 1/8" AND 3/16" FOR BRICK/JOINT PATTERN.
TILE SHALL BE INSTALLED IN ASHLAR PATTERN WITH A MAXIMUM 33% OFFSET TO PREVENT TILE WARRPAGE. GROUT SHALL BE LATICRETE, COLOR: 45 RAVEN.
NO COVE BASE PIECE SHALL BE USED.

5. RUBBER BASE

AREAS TO RECEIVE RB SHALL RECEIVE JOHNSONITE COVE BASE, (4" HIGH)
COLOR: ZEPHYR 31.

6. THE CONTRACTOR SHALL SUBMIT TO THIS OFFICE ACTUAL SAMPLES IN TRIPLICATE, OF EACH COLOR AND MATERIAL SELECTED BY THE DESIGNER FOR DESIGNER'S VERIFICATION AND APPROVAL NOT LATER THAN TWO (2) WEEKS FROM DATE OF CONTRACT. SAMPLES SHALL BE PROPERLY LABELED BY PROJECT AND CODE.

WALL FINISH NOTES

WALL FINISH MATERIALS ARE IDENTIFIED ON BOTH THE ROOM FINISH SCHEDULE AND ON THE ATTACHED WALL FINISH DISTRIBUTION PLAN. THE COMPLEXITY OF FINISHES/MATERIALS ARE CLARIFIED ON THE DISTRIBUTION PLANS BY ONE OF THE SYMBOLS NOTED BELOW:

- WALL FINISH SYMBOL LEGEND:
[A] PAINT DISTRIBUTION SYMBOL
[A] PAINT COLOR CODE
[B] CERAMIC TILE DISTRIBUTION SYMBOL
[B] CERAMIC TILE COLOR CODE
[C] DENOTES COLOR ON ALL WALLS OF ROOM
[D] DENOTES COLOR/MATERIAL ABOVE
[E] DENOTES COLOR/MATERIAL BELOW

1. PAINT

AREAS DESIGNATED AS P-LL SHALL BE SHERWIN WILLIAMS, LOW LUSTER FINISH
COLOR: SW6098 PACER WHITE (FIELD).

EXCEPT THOSE WALLS DESIGNATED TO RECEIVE ANOTHER COLOR SO DESIGNATED BY THE SYMBOLS ILLUSTRATED BELOW:

[A] COLOR: SW1519 FANTASIA (ACCENT).

2. EPOXY PAINT

AREAS DESIGNATED AS EPXY SHALL BE SHERWIN WILLIAMS EPOXY
COLOR SHALL MATCH: SW6098 PACER WHITE (FIELD).

AREAS DESIGNATED AS APP SHALL BE ACRYLIC POLYMER PAINT:

[A] NEMEC ENDURATONE 1029, COLOR SHALL MATCH: SW6098 PACER WHITE (FIELD).

3. PLASTIC WALLCOVERING

PWC - PLASTIC WALLCOVERING
AREAS DESIGNATED AS PWC SHALL RECEIVE CIS ACROVYN.
COLOR: 100 EGGSHELL, SUEDE TEXTURE.

EXCEPT THOSE WALLS DESIGNATED TO RECEIVE ANOTHER COLOR SO DESIGNATED BY THE SYMBOLS ILLUSTRATED BELOW:

[A] COLOR: 930 BLUE SILK, BEADBOARD TEXTURE, 2-3/8" WIDTH.

SPECIAL INSTRUCTIONS: MANUFACTURER RECOMMENDED GROUT JOINT FOR FLOOR TILE 1/8" AND 3/16" FOR BRICK-JOINT PATTERN.

4. WALL TILE

CT - CERAMIC TILE
AREAS DESIGNATED AS CT SHALL RECEIVE DALTILE, SALERNA
COLOR: CREMONA CAFFE SL82 (12'X12" FIELD TILE).

EXCEPT THOSE WALLS DESIGNATED TO RECEIVE ANOTHER COLOR SO DESIGNATED BY THE SYMBOLS ILLUSTRATED BELOW:

[A] COLOR: MARRONE CHIARO SL83 (12'X12" ACCENT TILE).

[B] COLOR: UNIVERSAL BLOCK RANDOM SL87 (12'X12" ACCENT TILE).

SPECIAL INSTRUCTIONS:

REFER TO INTERIOR ELEVATIONS FOR TYPICAL DISTRIBUTION AND PATTERN. BULLNOSE TRIM SHALL BE 3'X12" P-43C3 MARRONE CHIARO SL83.
GROUT SHALL BE MORTAMIX LIGHT BUFF (N) TLT. FLOOR AND WALL TILE SHALL MEET AT A 90 DEGREE ANGLE - NO COVE BASE PIECE SHALL BE USED.

5. CONTRACTOR SHALL SUBMIT TO THIS OFFICE ACTUAL SAMPLES IN TRIPLICATE OF ALL COLORS, MATERIALS AND PATTERNS FOR DESIGNER'S VERIFICATION AND APPROVAL, NOT LATER THAN TWO (2) WEEKS FROM DATE OF CONTRACT. SIZE OF SAMPLES SHALL BE APPROXIMATELY 12"X12".
SAMPLES SHALL BE PROPERLY LABELED BY PROJECT AND CODE AND SUBMITTED FOR APPROVAL PRIOR TO CONTRACTOR ORDERING MATERIAL.

MISCELLANEOUS FINISH NOTES

- WINDOW SILLS SHALL BE SSM-1, CORIAN, COLOR: BISQUE.
- TACKABLE SURFACE SHALL BE WALLTALKERS TAG-WALL, COLOR: C250-82 QUARRY.
- BUMPER RAILS (BR) SHALL BE CIS ACROVYN, COLOR: 100 EGGSHELL.
- VINYL CHAIR RAILS (VCR) SHALL BE CIS ACROVYN, COLOR: 100 EGGSHELL.
- CORNER GUARDS (CG) SHALL BE CIS ACROVYN, COLOR: 100 EGGSHELL.
- INTERIOR SOFFITS DESIGNATED AS P-LL SHALL MATCH ADJACENT FASCIA.
- INTERIOR FASCIAS DESIGNATED AS P-LL SHALL BE PAINTED TO MATCH ADJACENT WALL, UNLESS OTHERWISE NOTED.
- INTERIOR CEILINGS DESIGNATED AS P-LL SHALL BE: CEILING WHITE, LATEX FLAT (F) FINISH.
- INTERIOR DOOR FRAMES DESIGNATED AS P-LL SHALL BE: SHERWIN WILLIAMS, SW6098 PACER WHITE, LATEX SEMI-GLOSS (SG) FINISH.
- INTERIOR WOOD DOORS SHALL BE CLEAR WHITE BIRCH, WHITE BIRCH TO MATCH FACILITY STANDARD.
- METAL LOCKERS SHALL BE: REPUBLIC STORAGE SYSTEMS, COLOR: 67 BLUEBERRY.
- ARCHITECTURAL PATTERN GLASS AT NURSE STATION 6117 SHALL BE: SKYLINE DESIGN, SUZANNE TICK GLASS, STYLE: CANTILEVER - OPTION B. PATTERN SHALL BE ORDERED & INSTALLED IN VERTICAL ORIENTATION. ALL OTHER ARCHITECTURAL PATTERN GLASS SHALL BE: SKYLINE DESIGN, SUZANNE TICK GLASS, STYLE: WARENT - OPTION A.
- EXAM ROOM HEADWALL SYSTEM SHALL BE: HILLROM, HPDL SURFACES SHALL BE: WILSONART LAMINATE, 7054-60 WILD CHERRY. SEE SPECIFICATION MANUAL FOR HEADWALL UNIT.
- THE CONTRACTOR SHALL SUBMIT TO THIS OFFICE ACTUAL SAMPLES IN TRIPLICATE, OF EACH COLOR AND MATERIAL, SELECTED BY THE DESIGNER FOR DESIGNER'S VERIFICATION AND APPROVAL NOT LATER THAN TWO (2) WEEKS FROM DATE OF CONTRACT. SAMPLES SHALL BE PROPERLY LABELED BY PROJECT AND CODE.

CONSULTANTS:

ARCHITECT/ENGINEERS:

brg3s architects

11 W. Huling Avenue
Memphis, Tennessee 38103
t 901.260.9600
f 901.531.8042
brg3s.com

DRAWING TITLE:
INTERIOR FINISH INDEX & FINISH
SCHEDULE
SCALE:

APPROVED PROJECT DIRECTOR:

PROJECT TITLE:
EXPAND EMERGENCY
ROOM

LOCATION:
VAMC, Memphis, Tennessee

DATE:
May 31, 2012

CHECKED:

DRAWN:

PROJECT NUMBER:
614-10-102

BUILDING NUMBER:
6

DRAWING NUMBER:
ID100

DWG. OF

FULLY SPRINKLERED