
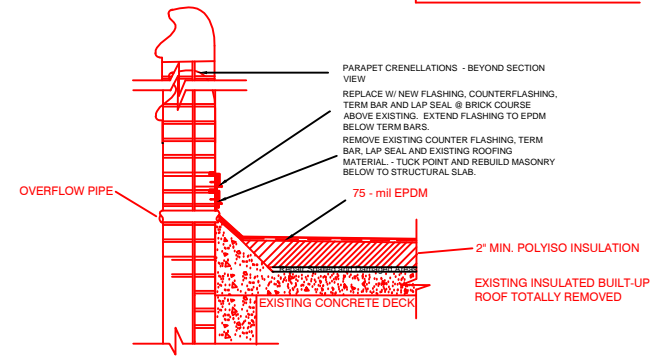
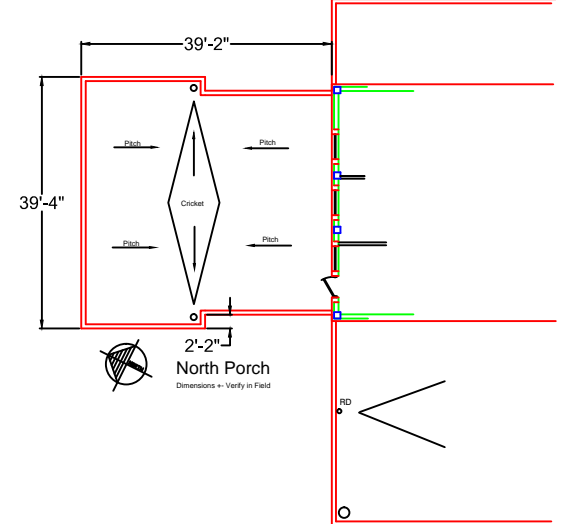


1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

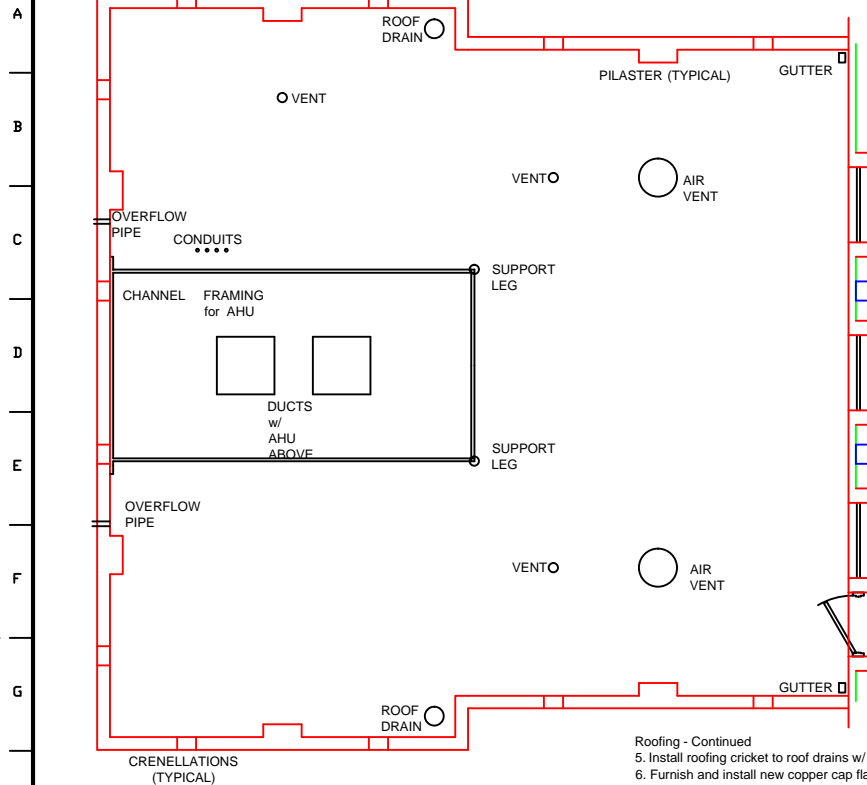

ALL MASONRY/ PARAPET WALL FLASHING
NTS

GENERAL NOTES

- Notes and drawing features of building details or required new work on any drawing shall apply to all drawings and all work.
- Crane lifts over occupied buildings are not allowed during regular VA work hours. Lift plans and personnel to coordinate and confirm building evacuation during overhead crane lifts is the responsibility of the contractor.
- All scaffold and building loading to facilitate the work shall be reviewed and approved by a licensed NYS P.E. prior to engaging in the activity.
- Dust and debris shall be contained at the point of origin by vacuum or other VA approved means. Air intakes shall be protected from all dust at all times. Noise and vibration shall not be permitted during regular VA work hours. Material, rubble and debris is not permitted in or conveyer through Building 1

ROOFING

- Remove and replace all roofing material, associated flashing, insulation, isolation board and wearing pads.
- Replace existing roof drains with the design equivalent of Marathon Pro Liner together with all associated plumbing fittings with 4' of the drain. Installation shall assure a water tight and weather proof installation in an approved method required by the roofing manufacturer to maintain warrantee.
- Provide roofing manufactures approved flashing and sealing around all penetrations. Provide flashing and counter flashing at AHU support channels at face of brick parapet.
- Prior to starting the main removal work the contractor will remove the 2-Globe Air Vents and seal the opening from all weather and ponding water. The Globe vent will be structurally refurbished using original materials of equal quality, gauge and dimensions. Reinstall the vents during roof replacement.

- Roofing - Continued
- Install roofing cricket to roof drains w/ built up Polyisocyanurate insulation.
 - Furnish and install new copper cap flashing equal to existing @ NW Wing.

TUCK POINTING

- Completely refurbish all surfaces of the interior parapet from the roof structural slab up to and including terra cotta cap and crenellations. Include exterior joint tuck pointing at terra cotta cap and exterior crenellations.
- Completely refurbish all surfaces of the south wall including the vertical surface from the roof structural slab to the window sill elevation.

OTHER - ALL B-1 LOCATIONS

- SECURE TERM BARS 8" O.C.
- FLASHING AND COUNTERFLASHING AND TERM BARS SHALL PROVIDE A COMPLETE WEATHER PROOF BARRIER WITHOUT GAPS. CAULKING SHALL NOT BE SUBSTITUTED FOR A CONTINUOUS AND WEATHER PROOF FLASHING SYSTEM.

NORTH PORCH

NO.	DATE	REVISIONS
Building 1 North Porch		
WCC	B1 FLAT ROOFS & MASONRY	
WCC		10/2013
		10262013
APPROVED	CHIEF ENGINEERING SERVICE	2 OF 3
APPROVED	RECTOR, VANCE, CHANDRASEKAR	528A5-14-507
V.A. MEDICAL CENTER		
CANANDAIGUA, NY 14424		