


DEMOLITION FLOOR PLAN

1/4"=1'-0"


- DEMOLITION NOTES:**
- 1 All construction/demolition to be according to all VA specification and standards.
 - 2 Remove existing countertop and cabinets remove existing plumbing and fixtures cap in wall.
 - 3 Remove existing surface mount plug mold.
 - 4 Remove existing ceiling grid and light fixtures See floor plan for new ceiling layout.
 - 5 Remove existing HVAC supply grill to be relocated.
 - 6 Prepare and paint both rooms as required.
 - 7 Remove existing door.

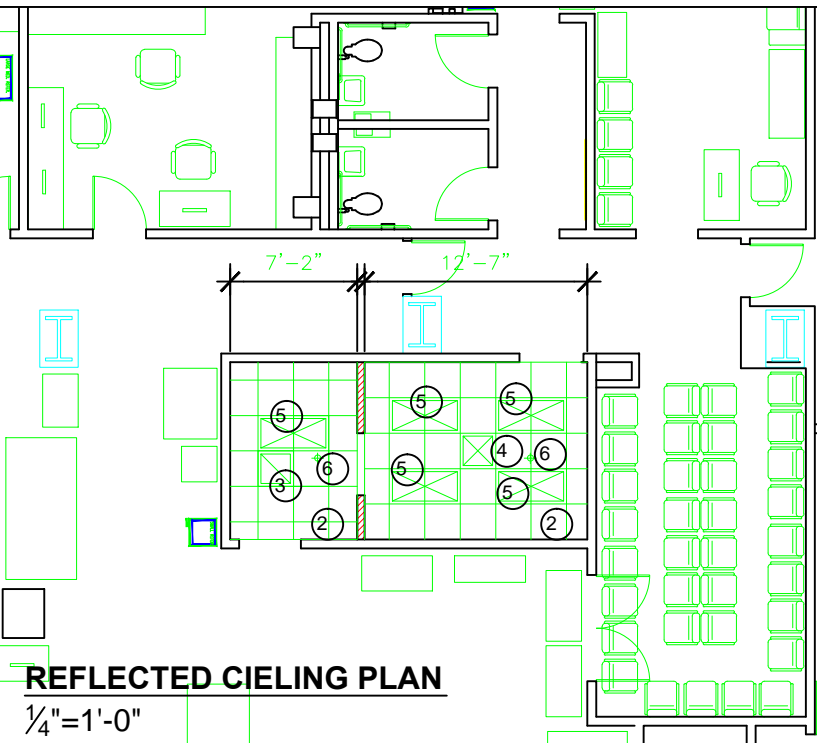

REFLECTED CIELING PLAN

1/4"=1'-0"


- CONSTRUCTION NOTES:**
- 1 All construction to be according to all VA specification and standards.
 - 2 Install new 2 x 2 ceiling grid with tegral edge.
 - 3 New location of HVAC exhaust air, adjust and balance.
 - 4 New location of HVAC return air, adjust and balance.
 - 5 New energy efficient 2x4 light fixtures..
 - 6 Location of existing fire sprinklers.

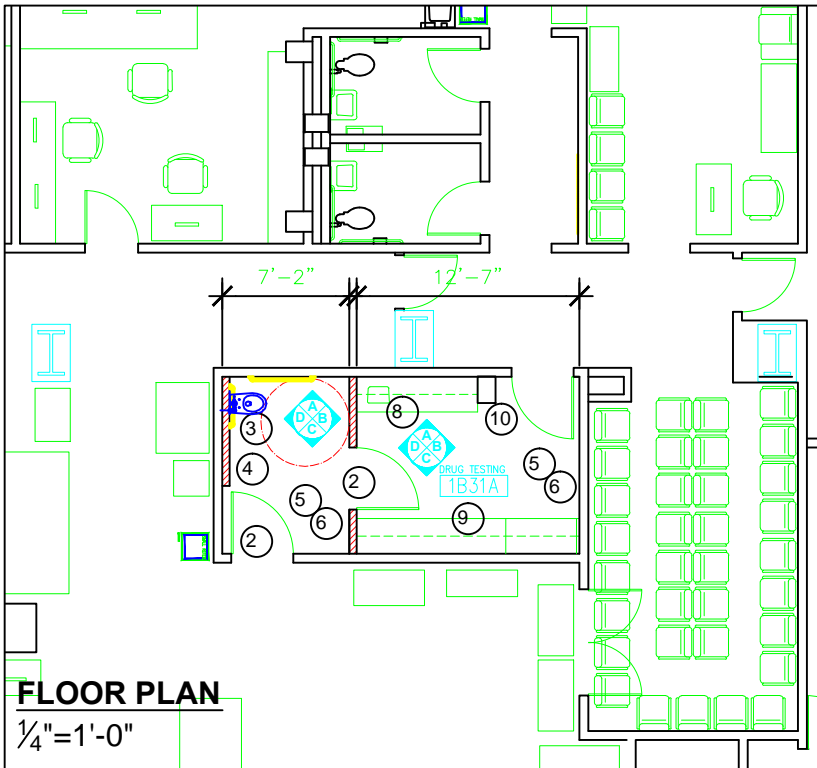

FLOOR PLAN

1/4"=1'-0"

- CONSTRUCTION NOTES:**
- 1 All construction to be according to all VA specification and standards.
 - 2 Construct new door & hardware and wall system, steel studs with 5/8 " typ x gyp board both sides.provide bathroom typ.lock set. All finishes to match existing.
 - 3 Install new wall mount toilet and grab bars as required.
 - 4 Provide water resistant wainscot as required.
 - 5 Adjust lighting system and ceiling grid to provide for new wall.
 - 6 Adjust HVAC system for additional room and function.
 - 7 Prepare and paint both rooms as required.
 - 8 Provide new Herman miller Healthcare system furniture to include hand wash sink and workstation
 - 9 Provide new Herman Miller Healthcare system furniture to include lower cabinets and work surface and upper cabinets.
 - 10 Provide new locker.

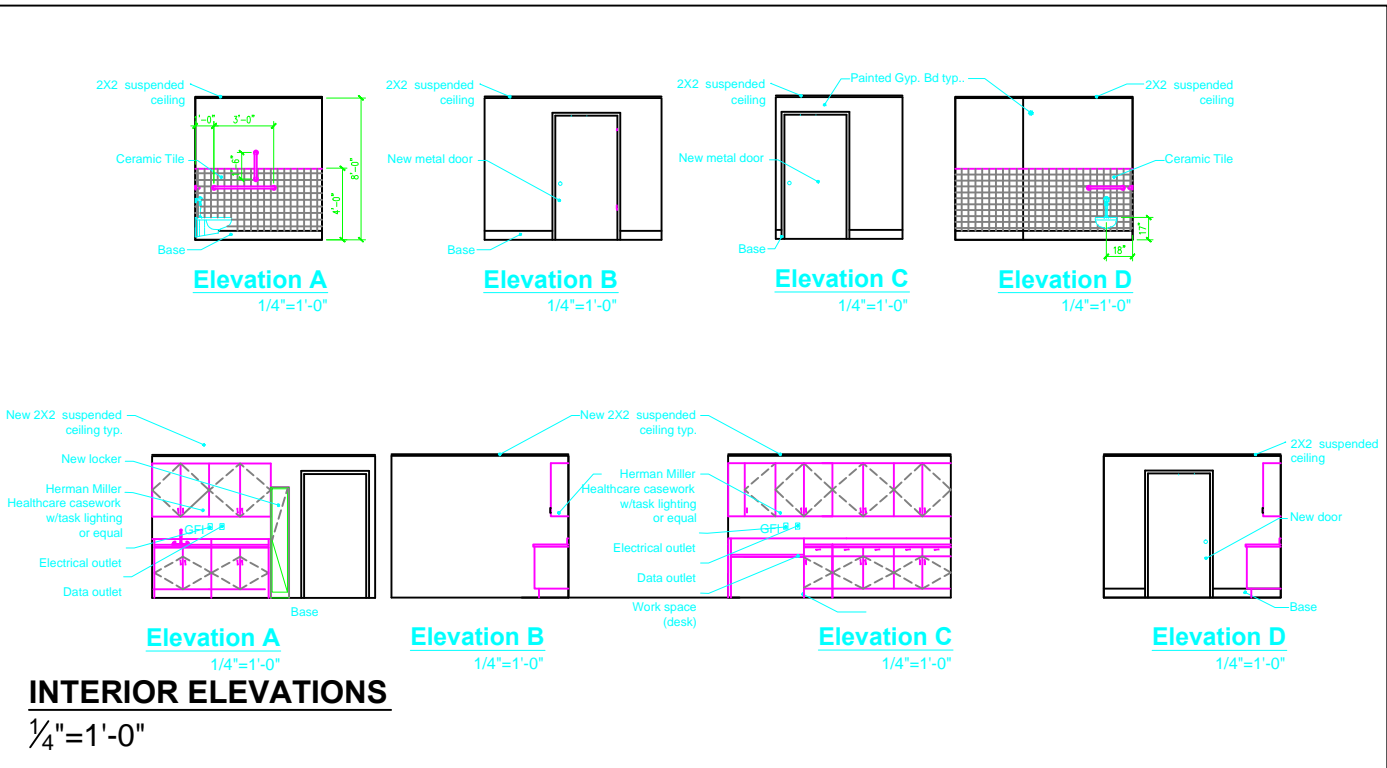

INTERIOR ELEVATIONS

1/4"=1'-0"

Revisions	Date
B-14 1st FLOOR	



CADD Information CAD/FY06/XXX	Drawing Title DEMO PLAN ARCHITECTURAL FLOOR PLAN	Project Title RENOVATE FOR DRUG SCREENING PROGRAM	Date 8/18/06	Drawing No. A-1
Approved	Approved Medical Center Director	Drawn	Project No. 660-14-09S	Dep. 2 of 3
Approved	Approved Chief, Engineering	Checked	Building Number B.1	VAMC Department of Veterans Affairs