


JAMES H. QUILLEN VA MEDICAL CENTER

Renovate Hematology-Oncology

Typical Finish Schedule

Project # 621-14-106

11/14/2013

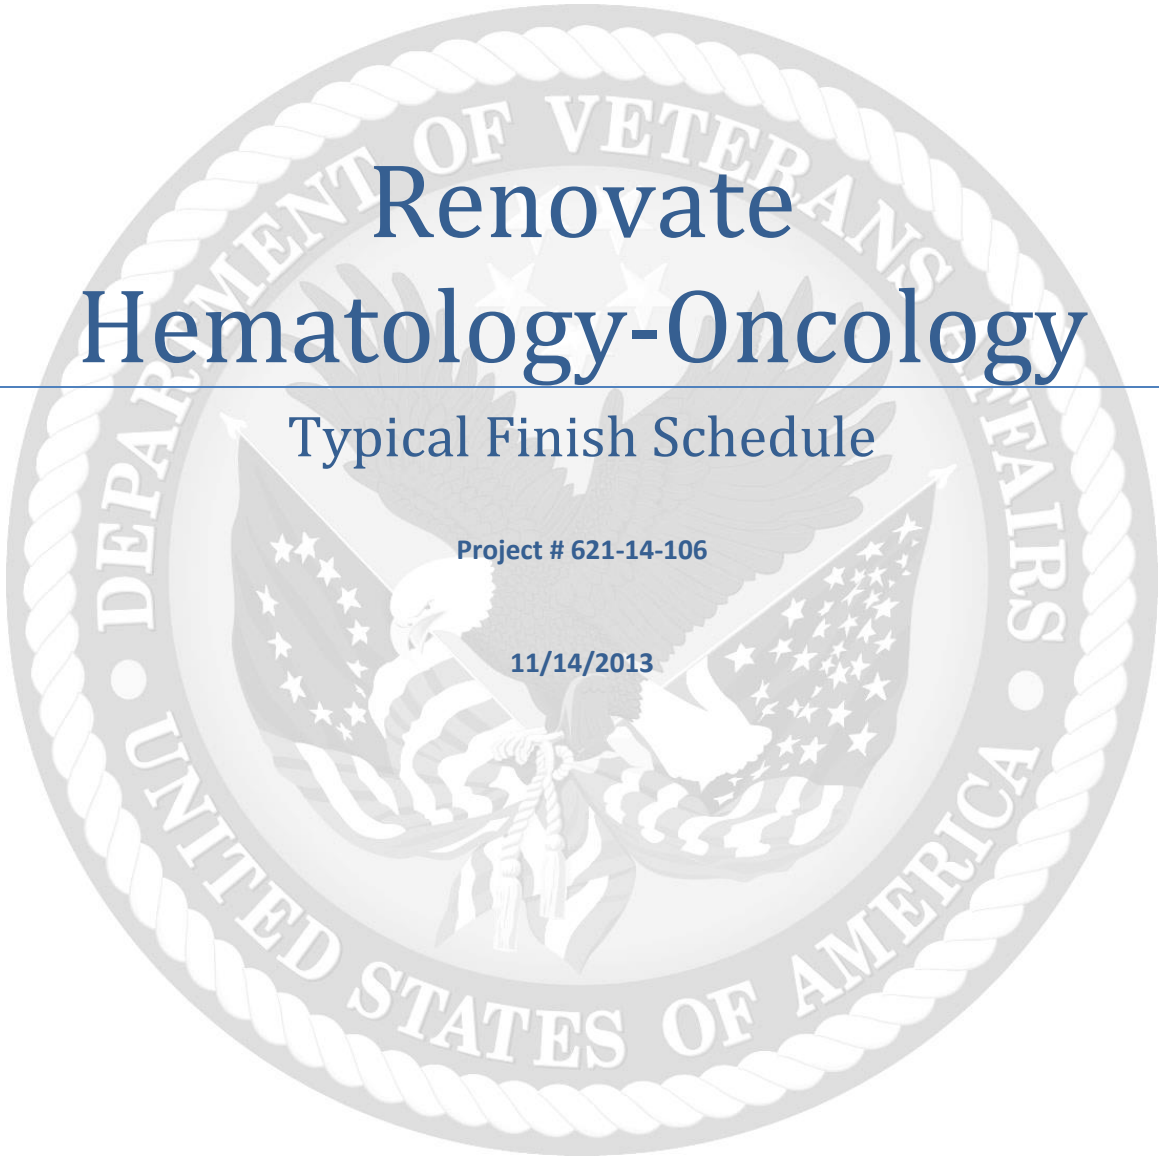

Finish location descriptions are for reference only.

Confirm all finishes with Interior Designer prior to purchasing.

Ceilings

C-1
Manufacturer: Armstrong
Product: Georgian Beveled Tegular 9/16"
Item Number: 1753 or 1750
Dimension: 24" x 24" x 5/8"
Color: White (WH)
Grid: Armstrong 9/16" Interlude XL White
Armstrong Axiom Perimeter Trim AX-252R White (WH)

For use as: General ceiling tile in patient occupancy spaces and corridors

Walls

Paint

General: All walls to be satin finish with the exception of wet/humid areas which are to be semi-gloss. All metal trim including door frames and window frames be semi-gloss. All ceilings, soffits and fascias to be satin finish.

PT-1
Manufacturer: Pittsburgh Paints PPG
Color Name: Wheat Sheaf
Number: 415-3

PT-2
Manufacturer: Glidden Professional
Color Name: Sand White
Number: 30YY 58/082

*Renovate Hematology-Oncology
Finish Schedule
Project # 621-14-106*

PT-3
Manufacturer: Glidden Professional
Color Name: Brushwood
Number: 20YY 31/106

PT-4
Manufacturer: Pittsburgh Paints
Color Name: Patches
Number: 515-6

PT-5
Manufacturer: Sherwin Williams
Color Name: Iron Ore
Number: SW 7069

Wallcoverings

General: Vinyl wallcovering shall be installed in accordance to design themes and standards identified by facility interior designer. Installation areas shall include, but is not limited to:

lobby and reception areas
exam rooms
restrooms
corridors

above and below dado rails
minimum one accent / feature wall
all walls
above and below handrails

WC-1
Manufacturer: Vykon
Pattern Number: VVP521

WC-2
Manufacturer: Vykon
Pattern Number: VVP522

WC-3
Pattern Number: Vykon
VVP523

*Renovate Hematology-Oncology
Finish Schedule
Project # 621-14-106*

Solid Surface

SS-1

Manufacturer: Corian
Color: Cottage Lane
For use as: All horizontal counter surfaces, window sills, knee wall caps, etc.

For restrooms, 48" x 1/8" solid surface sheets shall be installed on wet walls and behind all plumbing fixtures.

Wall Base

VB-1

Manufacturer: Johnsonite
Product: 4" x 1/8" Vinyl Base
Color: Fawn
Color Number: 80
Installation Notes: Do not use 48" long strips. Coil stock is required.
For use as: Vinyl base throughout unless noted otherwise.

VB-2

Manufacturer: Johnsonite
Product: Millwork Inflection 6"
Color: 80 Fawn
For use as: Vinyl base in reception areas and patient corridors

Wall Protection Systems

Corner Guards

Manufacturer: Korogard
Product: G200 Corner Guard
Color: Sand

Hand Rails

Manufacturer: Korogard
Product: G100 Corner Guard
Color: Sand

*Renovate Hematology-Oncology
Finish Schedule
Project # 621-14-106*

High Impact Sheeting

Manufacturer: Korogard
Product: Traffic Patters TP-R921-21
Color: Orleans Damask
For Use As: High impact wall protection around columns, below chair rail, behind hospital I beds, recliners, and equipmet. Etc.

Floors

General: Floor pattern to be installed as graphically indicated on finish plan. Refer to Finish Plans for finish patterns and locations. Floor patterns shall be water jet cut- hand cutting is not permitted.

VCT floors are to receive a UV-Light cured coating in lieu of traditional floor wax.

Armstrong Vinyl Composition Floor 12" X 12"

Vinyl composition tile in this project will only be considered as replacement to match existing product and for corridors and patient exam rooms located within bid deduct one.

VCT-1

Manufacturer: Armstrong
Product Series: Standard Excelon Imperial
Product Number: 51811
Color Name: Antique White

VCT-2

Manufacturer: Armstrong
Product Series: Standard Excelon Imperial
Product Number: 51868
Color Name: Smokey Brown

*Renovate Hematology-Oncology
Finish Schedule
Project # 621-14-106*

Luxury Vinyl Tile

Luxury vinyl tile shall be placed in clinical corridor, waiting areas, lobbies, treatment spaces, infusion area, etc.

LVT-1

Manufacturer: Mannington Commercial
Product Series: Nature's Paths Plank
Product Number: 12125
Color Name: American Walnut- Saddle

LVT-2

Manufacturer: Amtico
Product Series: Amtico-Collection Stone
Product Number: ARS0SRS44
Color Name: Riverstone Mantle

LVT-3

Manufacturer: Amtico
Product Series: Amtico-Collection Stone
Product Number: AROSMS48
Color Name: Stria Canyon

LVT-4

Manufacturer: Centiva
Product Series: Coral reef
Product Number: CR 0066-V
Color Name: Champagne

Seamless Sheet Good

SSG-1

Manufacturer: Mannington Commercial
Series: Vivendi Collection
Product: Perennial
Color: VIV017-Cashmere
For use as: Flooring in patient treatment/exam rooms and chemotherapy infusion areas

*Renovate Hematology-Oncology
Finish Schedule
Project # 621-14-106*

Porcelain Tile

PTL-1
Manufacturer: Stonepeak
Product: Caesar Collection
Color: Golden Aura Natural
Grout: Laticrete : 23 : Antique White
For use as: Flooring in restrooms

Casework

Custom Millwork

CMW-1
HPL-1
Vertical Laminate: Nevamar : WZ0028PV : Kona Blend
SS-1
Corian Solid Surface: Corian Cottage Lane

End of Finish Schedule.