



5960 Fairview Road
Suite 500
Charlotte, NC 28210

704
887.3500
887.3507 fax

Consultants

MECHANICAL/ELECTRICAL/PLUMBING/FIRE PROTECTION:
AME Consulting Engineers, PC
 421 Penman Street, Suite 200
 Charlotte, NC 28203
 704.295.4263 PHONE

STRUCTURAL:
ZARATA, Inc.

ZAPATA, Inc.
6302 Fairview Rd., Ste. 600
Charlotte, NC 28210
704.378.4923 PHONE
704.358.8342 FAX

CIVIL:
COLEJENEST & STONE, P.A.
200 South Tryon Street, Suite 1400
Charlotte, North Carolina 28202
704.376.1555 PHONE
704.376.7851 FAX

Project

VAMC Salisbury Building 42 Additions & Renovation - Phase III

City, State
Salisbury, NC

VA Project Number
659-335

Issued For

Construction

Item	Date	Description
1	01/31/14	Amendment A00003
2	02/21/14	Amendment A00004

Drawn By SLS/SP/BR/FF/ES/AB

Checked By FF

Seal / Signature



Sheet Title


Interior Finish Plan - First Floor Area C

Date _____

December 21, 2012

Sheet Number

IF101C

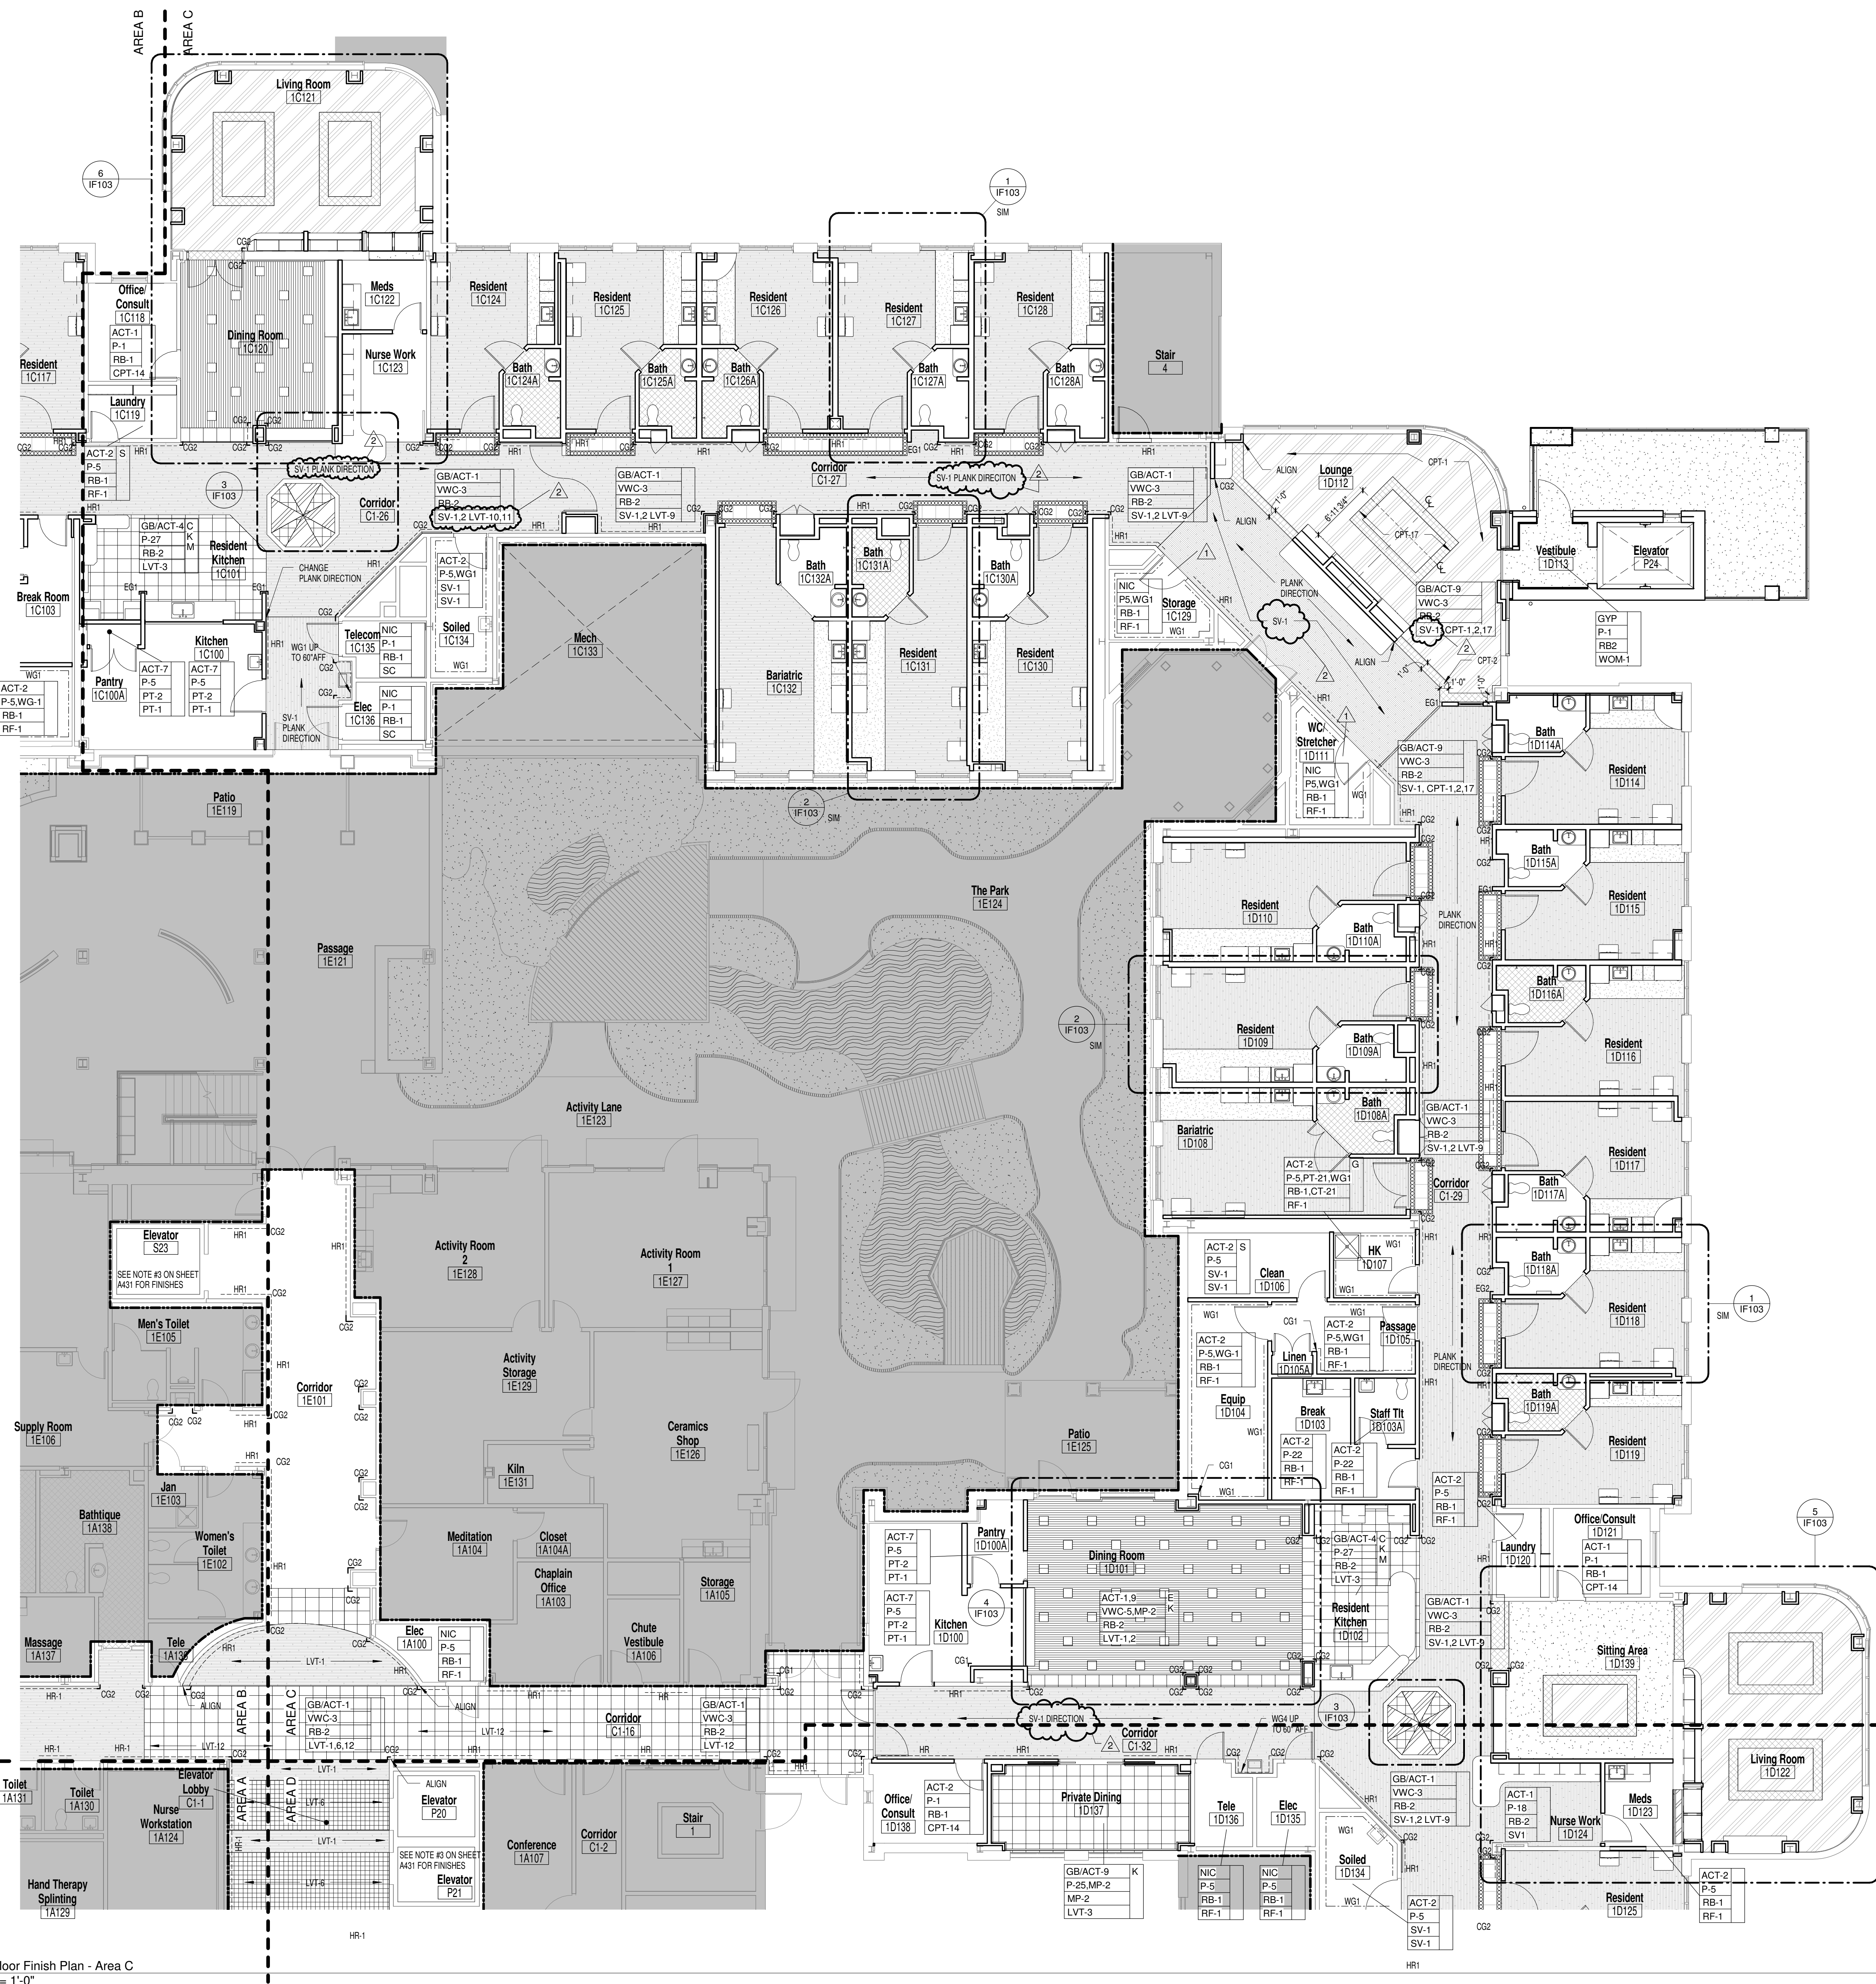


INTERIOR FINISH REMARKS:

- A. SEE ENLARGED FINISH PANEL FOR FLOOR MATERIAL PATTERN.
- B. SEE ENLARGED FINISH PANEL, FLOOR, CONFIGURATION AND LAYOUT.
- C. ALL HORIZONTAL SURFACES TO BE LA-10. ALL VERTICAL SURFACES TO BE LA-11. ALL VERTICAL, UPPER AND LOWER CABSINETS TO BE LA-14. SEE ARCHITECT'S DETAILS & SECTIONS.
- D. ALL HORIZONTAL COUNTERTOPS AND BACKSPASHES TO BE SS-31. ALL VERTICAL SURFACES TO BE SS-31.
- E. 2" HEIGHT WALL AT SERVING COUNTER TO BE SS-31. COUNTERTOPS TO SS-31.
- F. 2" P/21 TO BE INSTALLED 2'-0" TO EITHER SIDES OF JANITOR'S SINK AND 4'-0" F.F.
- H. ALL VERTICAL SURFACES TO BE LA-14. ALL HORIZONTAL SURFACES TO BE LA-10.7.
- I. ALL VERTICAL SURFACES TO BE LA-10.7. ALL HORIZONTAL SURFACES TO BE LA-10.8.
- J. ALL VERTICAL SURFACES TO BE LA-10. ALL HORIZONTAL SURFACES TO BE LA-10.9.
- K. SEE SELECTED CEILING PLAN FOR FINISHES & MATERIAL SPECIFICATIONS.
- L. SEE SELECTED CEILING PLAN FOR FINISHES & MATERIAL SPECIFICATIONS.
- M. SEE REFLECTIONS AND ENLIGHTENMENT DETAILS FOR THE DESIGN AND SPECIFICATION.
- N. INSTALL TILE ON 45 DEGREE ANGLE.
- O. ALL HORIZONTAL COUNTERTOPS AND BACKSPASHES TO BE SS-31. ALL VERTICAL SURFACES TO BE SS-31.
- P. EXISTING FLOORING AND CEILING GRID AND TILES TO REMAIN. PATCH WALLS AND BASE TO EXISTING.
- Q. ALL HORIZONTAL COUNTERTOPS TO BE LA-10. ALL VERTICAL AND LOWER CABSINETS TO BE LA-11.
- R. SEE ENLARGED APPLIED CABINETS BY ARCH. FINISHES TO BE WILSONART. 10745-69 GONTHAL, BEAR FOR VERTICAL CABINETS. HORIZONTAL COUNTERTOPS TO BE SOLID SURFACE COUNTERTOP, PEGE REPAIR FLOORING 1503TM. METAL BASE TO BE SLATE 80.67020. CHAIR SEATLESS UPHOLSTERY TO BE TWINN & BROWN PLAIN CLOTH.
- S. FLOOR TO BE 100% COTTON BASE.
- T. INSTALL VISC 18 18" F.F. TO 4'-0" F.F. WITH ALUMINUM TRIM SURROUND AND MARKER SCROLL.
- U. MILLWORK BY 28" SQUARE VIEW SEE DRAWINGS.


GENERAL INTERIOR FINISH NOTES:

1. ALL GROMMETS TO BE 2" DIAMETER, COLOR TIDY AND TO BE APPROVED BY THE INTERIOR DESIGNER.
2. GET TO FINISH ROOM FOR WALL PAINT COLORS. ALL PAINT TO BE EGGSHELL FINISH, UNLESS OTHERWISE NOTED.
3. TRANSITIONS BETWEEN DISSIMILAR FLOOR FINISHES TO OCCUR AT CENTERLINE OF DOOR UNLESS NOTED OTHERWISE.
INSTALL TRANSITION STRIPS PER DETAILS ON F701. INTERIOR DESIGNER TO APPROVE COLOR OF TRANSITION STRIP.
4. ALL HORIZONTAL COUNTERTOPS AND BACKSPLASHES TO BE LAM-1 UN.O. ALL VERTICAL SURFACE OF UPPER AND LOWER CABINETS TO BE LAM-4 UN.O.
5. ALL WINDOW SILLS TO BE SS-5.
6. FIRE EXTINGUISHER CABINETS, ELECTRICAL PANELS, SUPPLIES AND METAL GRILLS TO BE FACTORY PAINTED ENAMEL FINISH. PAINT TO MATCH ADJOINING WALL AND CEILING FINISH SPECIFICATIONS CEILINGS.
7. NOT USED
8. TOILET PARTITIONS TO BE HDPE, SOLID PLASTIC - AMPSCO, KHAKI 947-122.
9. ALL DOORS TO BE STAINED TO MATCH LAM-4.
10. ALL GROUT TO BE SEALED A MINIMUM OF 2 TIMES.
11. ALL GROUT JOINTS TO BE 1/4" MINIMUM UN.O.
12. ALL WINDOWS TO RECEIVE ROLLER SHADES RS-1 UN.O. SEE DOOR AND WINDOW SCHEDULE.
13. JANITOR'S CLOSET WILL HAVE TILE, PF-1 TO BE INSTALLED UP TO 48" A.F.F. AND 2'-0" TO EITHER SIDE OF SINK.
14. ALL CONTINUOUS CAULK AT BACKSPLASH TO BE CLEAR.
15. ALL CORNERGUARD TO BE CG-1 UN.O. BOTTOM EDGE OF CG-1 TO START AT TOP OF BASE.
16. ALL WALL GUARDS TO BE WG-1 UN.O. WITH MATCHING TOP CAP.
17. ALL BASE TO BE RB-1 UN.O.
18. ALL SUBFLOORS TO BE LEVELLED PRIOR TO FLOORING INSTALLATION - TYP.
19. STAIR RUNNER AND RISER TO BE PAINTED P-2 WITH ENAMEL FINISH UN.O. TREADS TO BE TR-1 AND LANDING TO BE RF-1. HANDRAIL AND POST IN STAIR 101 TO BE PAINTED P-2.
20. COORDINATE WITH ARCHITECTURAL DRAWINGS FOR ALL NON FINISH DETAILS.
21. INSIDE OF OPEN CABINETS TO MATCH ADJACENT CABINET FINISH.
22. ALL ELEMENTS THAT APPEAR TO ALIGN, MUST ALIGN.
23. FLOOR TILES SHOULD BE INSTALLED IN PATTERN SHOWN UN.O.
24. CHALK LINES FOR FLOORING TO BE VERIFIED BY INTERIOR DESIGNER BEFORE INSTALLATION OF MATERIALS.
25. ALL RESIDENT ROOM ENTRY DOORS TYPE C3 & D31 TO RECEIVE DFG-1 48" HIGH AND DP-1 24" HIGH ON THE BOTH SIDES OF THE DOOR.


FLOORING LEGEND

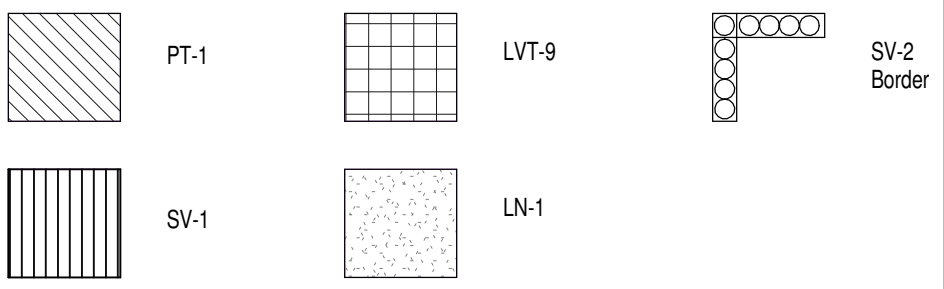

FINISH LEGEND:

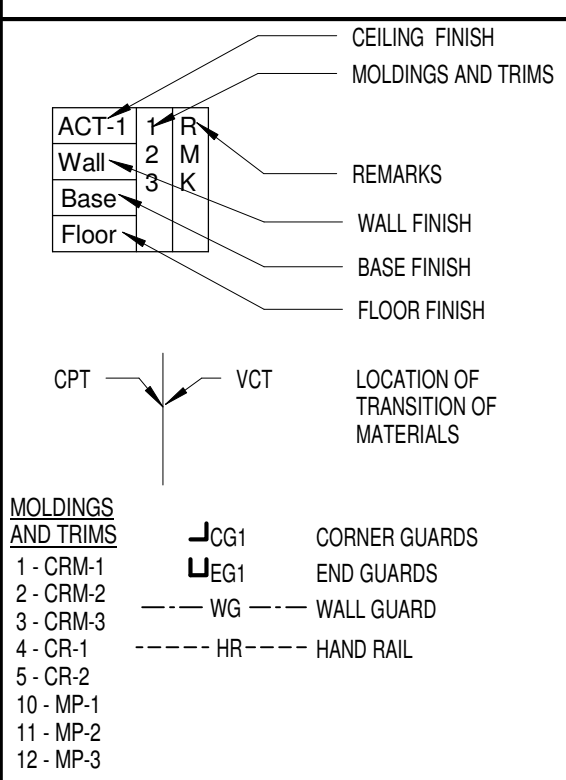

KEY PLAN

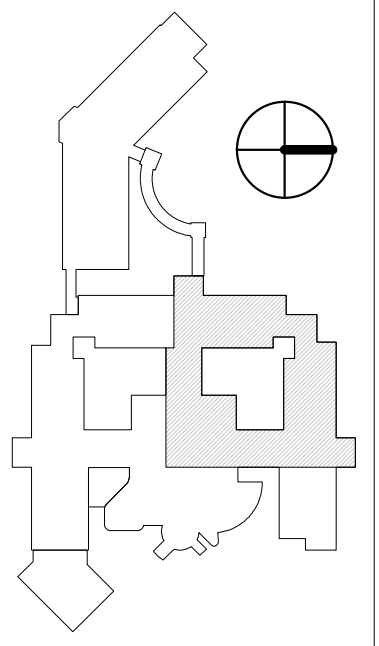

1 1st Floor Finish Plan - Area C
1/8" = 1'-0"