




INTERIOR FINISH REMARKS:

- SEE ENLARGED FINISH PLAN FOR FLOOR MATERIAL PATTERN.
- SEE ELEVATIONS FOR PANEL TYPES, CONFIGURATION AND LAYOUTS.
- ALL HORIZONTAL COUNTERTOPS AND BACKSPLASHES TO BE SSM-4. ALL VERTICAL UPPER & LOWER CABINETS TO BE LAM-4. SEE ELEVATIONS, DETAILS & SECTIONS.
- ALL HORIZONTAL COUNTERTOPS AND BACKSPLASH TO BE SSM-1. ALL VERTICAL UPPER & LOWER CABINETS TO BE LAM-4.
- 1/2" HEIGHT WALL AT SERVING COUNTER TO BE SSM-1. COUNTERS TO BE SSM-1.
- NA
- PT-2 TO BE INSTALLED 2'-0" TO EITHER SIDES OF JANITORS SINK AND 4'-0" A.F.F.
- ALL VERTICAL SURFACES TO BE LAM-4. ALL HORIZONTAL SURFACES TO BE LAM-1.
- ALL VERTICAL SURFACES TO BE LAM-4. ALL HORIZONTAL SURFACES TO BE LAM-4.
- ALL VERTICAL SURFACES TO BE LAM-4. ALL HORIZONTAL SURFACES TO BE LAM-4.
- SEE REFLECTED CEILING PLAN FOR FINISHES & MATERIAL SPECIFICATIONS.
- SEE ELEVATIONS FOR LOCATIONS OF WALL FINISHES, CHAIR RAILS AND CROWN MOLDING.
- SEE ELEVATIONS AND ENLARGEMENT DETAILS FOR TILE DESIGN AND SPECIFICATION.
- INSTALL TILE ON 45 DEGREE ANGLE.
- ALL HORIZONTAL COUNTERTOPS AND BACKSPLASHES TO BE SSM-2. ALL VERTICAL SURFACES TO BE LAM-4.
- EXISTING FLOORING AND CEILING GRID AND TILES TO REMAIN. PATCH WALLS AND BASE TO MATCH EXISTING.
- ALL HORIZONTAL COUNTERTOPS TO BE LAM-10. ALL VERTICAL UPPER AND LOWER CABINETS TO BE LAM-4.
- VENDOR SUPPLIED CABINETS BY ADOE. FINISHES TO BE WILSONART, 10745-60 FORT HILL PEAR FOR VERTICAL CABINETS. HORIZONTAL COUNTERS TO BE SOLID SURFACE GIBBERLIER BEGE TEMPEST 1530TM. METAL BASE TO BE SLATE 86.0970.00. CHAIR SEAMLESS UPHOLSTERY TO BE TANNY 01.3600.02.
- FLOOR TO HAVE 6" COVE BASE.
- INSTALL VMC-18 36" A.F.F. TO 7'-0" A.F.F. WITH ALUMINUM TRIM SURROUND AND MARKER BOARD TRY. SEE PLAN FOR LOCATION.
- MILLWORK BY FURNITURE VENDOR SEE DRAWINGS.

GENERAL INTERIOR FINISH NOTES:

- ALL GROMMETS TO BE 2" DIAMETER, COLOR TBD AND TO BE APPROVED BY THE INTERIOR DESIGNER.
- REFER TO FINISH ROOM TAG FOR WALL PAINT COLORS. ALL PAINT TO BE EGGSHELL FINISH, UNLESS OTHERWISE NOTED.
- TRANSITIONS BETWEEN DISSIMILAR FLOOR FINISHES TO OCCUR AT CENTERLINE OF DOOR UNLESS NOTED OTHERWISE. INSTALL TRANSITION STRIPS PER DETAILS ON IF701. INTERIOR DESIGNER TO APPROVE COLOR OF TRANSITION STRIP.
- ALL HORIZONTAL COUNTERTOPS AND BACKSPLASHES TO BE LAM-1 U.N.O. ALL VERTICAL SURFACE OF UPPER AND LOWER CABINETS TO BE LAM-4 U.N.O.
- ALL WINDOW SILLS TO BE SSM-5.
- ALL FIRE EXTINGUISHER CABINETS, ELECTRICAL PANELS, SUPPLIES AND METAL GRILLS TO BE FACTORY PAINTED ENAMEL PAINT. PAINT TO MATCH ADJOINING WALL AND CEILING FINISH FOR SPECIALTY CEILINGS.
- NOT USED
- TOILET PARTITIONS TO BE HDPE, SOLID PLASTIC - AMPCO, KHAI 947-122.
- ALL DOORS TO BE STAINED TO MATCH LAM-4.
- ALL GROUT TO BE SEALED A MINIMUM OF 2 TIMES.
- ALL GROUT JOINTS TO BE 1/4" MINIMUM U.N.O.
- ALL WINDOWS TO RECEIVE ROLLER SHADES RS-1 U.N.O., SEE DOOR AND WINDOW SCHEDULE.
- JANITORS CLOSET WILL HAVE TILE, PT-21 TO BE INSTALLED UP TO 48" A.F.F. AND 2'-0" TO EITHER SIDE OF SINK.
- ALL CONTINUOUS CAULK AT BACKSPLASH TO BE CLEAR.
- ALL CORNERGUARD TO BE CG-1 U.N.O. BOTTOM EDGE OF CG-1 TO START AT TOP OF BASE.
- ALL WALL GUARDS TO BE WG-1 U.N.O. WITH MATCHING TOP CAP.
- ALL BASE TO BE RB-1 U.N.O.
- ALL SUBFLOORS TO BE LEVELED PRIOR TO FLOORING INSTALLATION - TYP.
- STAR RUNNER AND RISER TO BE PAINTED P-2 WITH ENAMEL FINISH U.N.O. TREADS TO BE TR-1 AND LANDING TO BE RF-1. HANDRAIL AND POST IN STAIR 101 TO BE PAINTED P-2.
- COORDINATE WITH ARCHITECTURAL DRAWINGS FOR ALL NON-FINISH DETAILS.
- INSIDE OF OPEN CABINETS TO MATCH ADJACENT CABINET FINISH.
- ALL ELEMENTS THAT APPEAR TO ALIGN, MUST ALIGN.
- FLOOR TILES SHOULD BE INSTALLED IN PATTERN SHOWN U.N.O.
- CHALK LINES FOR FLOORING TO BE VERIFIED BY INTERIOR DESIGNER BEFORE INSTALLATION OF MATERIALS.
- ALL RESIDENT ROOM ENTRY DOORS TYPE D3 & D11 TO RECEIVE DFG-1 48" HIGH AND DR-1 24" HIGH ON THE BOTH SIDES OF THE DOOR.

FLOORING LEGEND

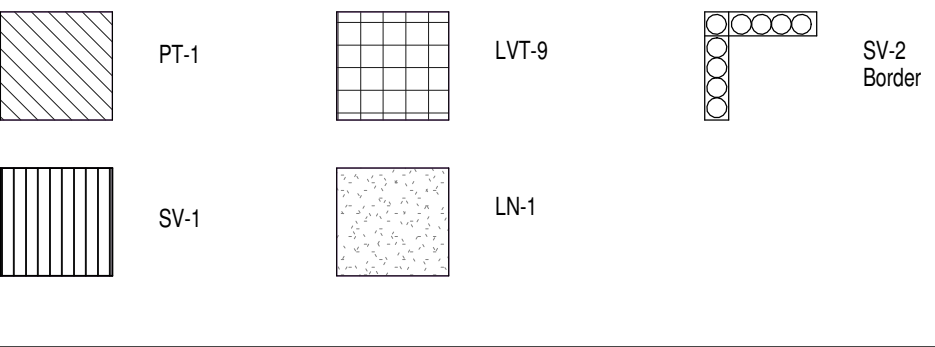

FINISH LEGEND:

