



DEPARTMENT OF VETERANS AFFAIRS

# **Wm. S. Middleton Memorial V.A. Hospital**

Expand Clinical Lab / Project Number 607-13-106

**PROJECT MANUAL  
100% DELIVERABLE**

10 February 2014

Volume 1 of 2

**DEPARTMENT OF VETERANS AFFAIRS  
VHA MASTER SPECIFICATIONS**

**TABLE OF CONTENTS  
Section 00 01 10**

	<b>DIVISION 00 - SPECIAL SECTIONS</b>	<b>DATE</b>
00 01 15	List of Drawing Sheets	09-11
	<b>DIVISION 01 - GENERAL REQUIREMENTS</b>	
01 00 00	General Requirements	10-13
01 32 16.15	Project Schedules	04-13
01 33 23	Shop Drawings, Product Data, and Samples	11-08
01 42 19	Reference Standards	09-11
01 74 19	Construction Waste Management	09-13
01 81 11	Sustainable Design Requirements	02-13
	<b>DIVISION 02 - EXISTING CONDITIONS</b>	
02 41 00	Demolition	05-13
02 82 13.19	Asbestos Floor Tile and Mastic Abatement	07-11
	<b>DIVISION 03 - CONCRETE</b>	
03 30 53	(Short-Form) Cast-in-Place Concrete	10-12
	<b>DIVISION 04 - MASONRY</b>	
	<b>DIVISION 05 - METALS</b>	
	<b>DIVISION 06 - WOOD, PLASTICS AND COMPOSITES</b>	
06 10 00	Rough Carpentry	09-11
06 20 00	Finish Carpentry	06-13
	<b>DIVISION 07 - THERMAL AND MOISTURE PROTECTION</b>	
07 21 13	Thermal Insulation	03-09
07 81 00	Applied Fireproofing	11-11
07 84 00	Firestopping	10-11
07 92 00	Joint Sealants	12-11
	<b>DIVISION 08 - OPENINGS</b>	
08 11 13	Hollow Metal Doors and Frames	01-13
08 14 00	Interior Wood Doors	10-12
08 17 10	Integrated Door Assemblies	02-12
08-33-00	Coiling Doors and Grilles	10-11
08 56 19	Pass Windows	10-11
08 71 00	Door Hardware	09-11

08 71 13	Automatic Door Operators	12-09
08 71 13.11	Low Energy Power Assist Door Operators	01-11
08 80 00	Glazing	10-12
	<b>DIVISION 09 - FINISHES</b>	
09 06 00	Schedule for Finishes	10-11
09 22 16	Non-Structural Metal Framing	07-13
09 29 00	Gypsum Board	02-13
09 51 00	Acoustical Ceilings	10-10
09 65 13	Resilient Base and Accessories	10-11
09 65 16	Resilient Sheet Flooring	07-13
09 91 00	Painting	07-13
	<b>DIVISION 10 - SPECIALTIES</b>	
10 26 00	Wall and Door Protection	01-11
10 44 13	Fire Extinguisher Cabinets	11-11
	<b>DIVISION 11 - EQUIPMENT (NA)</b>	
	<b>DIVISION 12 - FURNISHINGS</b>	
12 31 00	Metal Laboratory Casework	02-14
	<b>DIVISION 13 - SPECIAL CONSTRUCTION</b>	
	<b>DIVISION 14- CONVEYING EQUIPEMENT</b>	
14 70 00	Pneumatic Tube Systems	02-14
	<b>DIVISION 21- FIRE SUPPRESSION</b>	
21 05 11	Common Work Results for Fire Suppression	11-09
21 13 13	Wet-Pipe Sprinkler Systems	05-08
	<b>DIVISION 22 - PLUMBING</b>	
22 05 11	Common Work Results for Plumbing	04-11
22 05 23	General-Duty Valves for Plumbing Piping	12-09
22 07 11	Plumbing Insulation	05-11
22 11 00	Facility Water Distribution	07-13
22 13 00	Facility Sanitary and Vent Piping	12-09
22 53 43	Laboratory Service Fittings and Fixtures	11-13
22 63 00	Gas Systems for Laboratory and Healthcare Facilities	12-10
22 66 00	Chemical-Waste Systems for Laboratory and Healthcare Facilities	12-09
	<b>DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)</b>	
23 05 11	Common Work Results for HVAC	11-10
23 05 41	Noise and Vibration Control for HVAC Piping and Equipment	11-10
23 05 93	Testing, Adjusting, and Balancing for HVAC	05-11

23 07 11	HVAC and Boiler Plant Insulation	05-11	
23 09 23	Direct-Digital Control System for HVAC	09-11	
23 21 13	Hydronic Piping	09-12	
23 25 00	HVAC Water Treatment	02-10	
23 31 00	HVAC Ducts and Casings	03-13	
23 36 00	Air Terminal Units	03-10	
23 37 00	Air Outlets and Inlets	11-09	
23 82 16	Air Coils	04-11	
	<b>DIVISION 25 - INTEGRATED AUTOMATION</b>		
25 13 00	Integrated Building Automation System	08-13	08-1
	<b>DIVISION 26 - ELECTRICAL</b>		
26 05 11	Requirements for Electrical Installations	12-12	
26 05 19	Low-Voltage Electrical Power Conductors and Cables	07-13	
26 05 26	Grounding and Bonding for Electrical Systems	12-12	
26 05 33	Raceway and Boxes for Electrical Systems	09-10	
26 09 23	Lighting Controls	09-10	
26 24 16	Panelboards	12-12	
26 27 26	Wiring Devices	12-12	
26 51 00	Interior Lighting	12-12	
	<b>DIVISION 27 - COMMUNICATIONS</b>		
27 05 11	Requirements for Communications Installations	11-09	
27 05 26	Grounding and Bonding for Communications Systems	10-06	
27 05 33	Raceways and Boxes for Communications Systems	12-05	
27 10 00	Structured Cabling	12-05	
27 15 00	Communications Horizontal Cabling	06-13	
27 51 16	Public Address and Mass Notification Systems	01-10	
	<b>DIVISION 28 - ELECTRONIC SAFETY AND SECURITY</b>		
28 05 00	Common Work Results for Electronic Safety and Security	06-13	
28 05 13	Conductors and Cables for Electronic Safety and Security	09-11	
28 05 26	Grounding and Bonding for Electronic Safety and Security	09-11	
28 05 28.33	Conduits and Backboxes for Electronic Safety and Security	09-11	
28 31 00	Fire Detection and Alarm	10-11	
	<b>DIVISION 31 - EARTHWORK</b>		
	<b>DIVISION 32 - EXTERIOR IMPROVEMENTS</b>		
	<b>DIVISION 33 - UTILITIES</b>		
	<b>DIVISION 34 - TRANSPORTATION</b>		
	<b>DIVISION 48 - Electrical Power Generation</b>		

**SECTION 00 01 15**  
**LIST OF DRAWING SHEETS**

The drawings listed below accompanying this specification form a part of  
the contract.

<u>Drawing No.</u>	<u>Title</u>
G100	Cover Sheet,
G101	Abbreviations and Symbols
G102	Code, Fire and Life Safety
<b>ARCHITECTURAL</b>	
AD100	DB1 Floor Plan - Demolition - Phase 1A
AD101	DB1 Floor Plan - Demolition - Phase 1B/1C
AD102	DB1 Ref. Ceiling Plan - Demolition - Phase 1A
AD103	DB1 Ref. Ceiling Plan - Demolition - Phase 1B/1C
A100	DB1 Floor Plan - Renovation - Phase 1A
A101	DB1 Floor Plan - Renovation - Phase 1B/1C
A102	DB1 Ref. Ceiling Plan - Renovation - Phase 1A
A103	DB1 Ref. Ceiling Plan - Renovation - Phase 1B/1C
A500	Details
A600	Room Finish Schedule and Details
LF100	Lab Casework Floor plan - Phase 1A
LF101	Lab Casework Floor plan - Phase 1B/1C
LF300	Lab Casework Elevations
LF301	Lab Casework Elevations
Q100	Equipment Floor Plan
<b>PLUMBING</b>	
P001	Plumbing Legend, Notes, Schedules, Details and Riser Diagrams
P100	DB1 Floor - "D" Wing Plumbing Demolition Plan - Phase 1A
P200	DB1 Floor - "D" Wing Plumbing Demolition Plan - Phase 1B/1C
P300	DB1 Floor - "D" Wing Plumbing Below Floor Demolition Plan
P400	DB1 Floor - "D" Wing Plumbing New Work Plan - Phase 1A

P500 DB1 Floor - "D" Wing Plumbing New Work Plan -  
Phase 1B/1C

P600 DB1 Floor - "D" Wing Plumbing New Work Plan  
(Below Floor)

FIRE PROTECTION

FP100 DB1 Floor - "D" Wing Fire Protection Plan -  
Phase 1A

FP200 DB1 Floor - "D" Wing Fire Protection Plan -  
Phase 1B/1C

**MECHANICAL**

H001 DB1 Floor - "D" Wing Mechanical Notes, Legends &  
Schedules

HD100 DB1 Floor - "D" Wing Mechanical Demolition Plan  
- Phase 1A

HD101 DB1 Floor - "D" Wing Mechanical Demolition Plan  
- Phase 1B/1C

H100 DB1 Floor - "D" Wing Mechanical Plan - Phase 1A

H101 DB1 Floor - "D" Wing Mechanical Plan - Phase  
1B/1C

H200 DB1 Floor - "D" Wing Mechanical Details

H201 DB1 Floor - "D" Wing Mechanical Details

**ELECTRICAL**

E000 Electrical Legend, Notes & Abbreviations

ED100 DB1 Floor - "D" Wing Lighting Demolition Plan -  
Phase 1A

ED101 DB1 Floor - "D" Wing Lighting Demolition Plan -  
Phase 1B/1C

ED200 DB1 Floor - "D" Wing Power Demolition Plan -  
Phase 1A

ED201 DB1 Floor - "D" Wing Power Demolition Plan -  
Phase 1B/1C

ED300 DB1 Floor - "D" Wing Systems Demolition Plan -  
Phase 1A

ED301 DB1 Floor - "D" Wing Systems Demolition Plan -  
Phase 1B/1C

EL100 DB1 Floor - "D" Wing Lighting Plan - Phase 1A

EL100EM DB1 Floor - "D" Wing Emergency Lighting Plan -  
Phase 1A

EL101	DB1 Floor - "D" Wing Lighting Plan - Phase 1B/1C
EL101EM	DB1 Floor - "D" Wing Emergency Lighting Plan - Phase 1B/1C
EP100	DB1 Floor - "D" Wing Power Plan - Phase 1A
EP101	DB1 Floor - "D" Wing Power Plan - Phase 1B/1C
ES100	DB1 Floor - "D" Wing Systems Plan - Phase 1A
ES101	DB1 Floor - "D" Wing Systems Plan - Phase 1B/1C
E500	Electrical Details
E501	Electrical Details
E501	Electrical Details
E600	Electrical Schedules

- - - END - - -

**SECTION 00 01 15  
LIST OF DRAWING SHEETS**

The drawings listed below accompanying this specification form a part of  
the contract.

<u>Drawing No.</u>	<u>Title</u>
G100	Cover Sheet,
G101	Abbreviations and Symbols
G102	DB1 Floor "D" Wing - Life Safety Plan
<b>ARCHITECTURAL</b>	
AD100	DB1 Floor "D" Wing - Floor Plan Phase 1A - Demolition and Notes
AD101	DB1 Floor "D" Wing - Floor Plan Phase 1B & 1C - Demolition and Notes
AD102	DB1 Floor "D" Wing - Reflected Ceiling Plan Phase 1A - Demolition and Notes
AD103	DB1 Floor "D" Wing - Reflected Ceiling Plan Phase 1B & 1C - Demolition and Notes
A100	DB1 Floor "D" Wing - Floor Plan Phase 1A - Renovation and Notes
A101	DB1 Floor "D" Wing - Floor Plan Phase 1B & 1C - Renovation and Notes
A102	DB1 Floor "D" Wing - Reflected Ceiling Plan Phase 1A - Renovation and Notes
A103	DB1 Floor "D" Wing - Reflected Ceiling Plan Phase 1B & 1C - Renovation and Notes
A500	DB1 Floor "D" Wing - Details
A600	Room Finish Schedule, Door Schedule and Details
LF001	Lab Casework Index Sheet
LF100	DB1 Floor "D" Wing - Lab Casework Phase 1A
LF101	DB1 Floor "D" Wing - Lab Casework Phase 1B & 1C
Q100	DB1 Floor "D" Wing - Equipment Plan For Reference Only - Equipment By Owner

**PLUMBING**

P001 Plumbing Legend, Notes, Schedules, Details and Riser Diagrams

PD100 DB1 Floor "D" Wing - Plumbing Demolition Plan - Phase 1A

PD101 DB1 Floor "D" Wing - Plumbing Demolition Plan - Phase 1B

PD102 DB1 Floor "D" Wing - Plumbing Demolition Plan (Below floor)

P200 DB1 Floor "D" Wing - Plumbing New Work Plan - Phase 1A

P201 DB1 Floor "D" Wing - Plumbing New Work Plan - Phase 1B

P202 DB1 Floor "D" Wing - Plumbing New Work Plan - (Below Floor)

**FIRE PROTECTION**

FP100 DB1 Floor "D" Wing - Fire Protection Plan - Phase 1A

FP200 DB1 Floor "D" Wing - Fire Protection Plan - Phase 1B

**MECHANICAL**

H001 DB1 Floor "D" Wing - Mechanical Notes, Legends & Schedules

HD100 DB1 Floor "D" Wing - Mechanical Demolition Plan - Phase 1A

HD101 DB1 Floor "D" Wing - Mechanical Demolition Plan - Phase 1B/1C

H100 DB1 Floor "D" Wing - Mechanical Plan - Phase 1A

H101 DB1 Floor "D" Wing - Mechanical Plan - Phase 1B/1C

H200 DB1 Floor "D" Wing - Mechanical Details

H201 DB1 Floor "D" Wing - Mechanical Details

**ELECTRICAL**

E000 Electrical Legend, Notes & Abbreviations

ED100 DB1 Floor "D" Wing - Lighting Demolition Plan - Phase 1A

ED101	DB1 Floor "D" Wing - Lighting Demolition Plan - Phase 1B
ED200	DB1 Floor "D" Wing - Power Demolition Plan - Phase 1A
ED201	DB1 Floor "D" Wing - Power Demolition Plan - Phase 1B
ED300	DB1 Floor "D" Wing - Systems Demolition Plan - Phase 1A
ED301	DB1 Floor "D" Wing - Systems Demolition Plan - Phase 1B
EL100	DB1 Floor "D" Wing - Lighting Plan - Phase 1A
EL100EM	DB1 Floor "D" Wing - Emergency Lighting Plan - Phase 1A
EL101	DB1 Floor "D" Wing - Lighting Plan - Phase 1B
EL101EM	DB1 Floor "D" Wing - Emergency Lighting Plan - Phase 1B
EP100	DB1 Floor "D" Wing - Power Plan - Phase 1A
EP101	DB1 Floor "D" Wing - Power Plan - Phase 1B
ES100	DB1 Floor "D" Wing - Systems Plan - Phase 1A
ES101	DB1 Floor "D" Wing - Systems Plan - Phase 1B
E500	Electrical Details
E501	Electrical Details
E502	Electrical Details
E600	Electrical Schedules

- - - END - - -

**SECTION 01 00 00  
GENERAL REQUIREMENTS**

**TABLE OF CONTENTS**

1.1 GENERAL INTENTION .....	1
1.2 STATEMENT OF BID ITEM(S) .....	2
1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR .....	2
1.4 CONSTRUCTION SECURITY REQUIREMENTS.....	2
1.5 FIRE SAFETY.....	5
1.6 OPERATIONS AND STORAGE AREAS.....	8
1.7 ALTERATIONS.....	14
1.8 INFECTION PREVENTION MEASURES.....	15
1.9 DISPOSAL AND RETENTION .....	18
1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS.....	19
1.11 RESTORATION.....	19
1.12 LAYOUT OF WORK.....	20
1.13 AS-BUILT DRAWINGS.....	21
1.14 USE OF ROADWAYS.....	21
1.15 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.....	21
1.16 TEMPORARY USE OF EXISTING ELEVATORS.....	23
1.17 TEMPORARY TOILETS.....	24
1.18 AVAILABILITY AND USE OF UTILITY SERVICES.....	24
1.19 NEW TELEPHONE EQUIPMENT .....	25
1.20 TESTS.....	25
1.21 INSTRUCTIONS.....	26
1.22 GOVERNMENT-FURNISHED PROPERTY.....	27
1.23 RELOCATED EQUIPMENT AND ITEMS .....	28

1.24 PROGRESS MEETINGS.....27

1.25 PROGRESS SCHEDULES AND CHARTS.....28

1.26 PREINSTALLATION MEETING.....29

1.27 WORKING AT THE HOSPITAL.....29

**SECTION 01 00 00**  
**GENERAL REQUIREMENTS**

**1.1 GENERAL INTENTION**

- A. Contractor shall completely prepare site for building operations, including demolition and removal of existing structures, and furnish labor and materials and perform work for William S. Middleton Memorial Veterans Hospital as required by drawings and specifications.
- B. Visits to the site by Bidders may be made only by appointment with the Medical Center Engineering Officer.
- C. Offices of Nagel Architects and IBC Engineering Services as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.
- D. All employees of general contractor and subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.
- E. Prior to commencing work, general contractor shall provide proof that a OSHA designated "competent person" (CP) (29 CFR 1926.20(b)(2)) will maintain a presence at the work site whenever the general or subcontractors are present.
- F. Training:
  - 1. All employees of general contractor or subcontractors shall have the 10-hour or 30-hour OSHA Construction Safety course and other relevant competency training, as determined by RE/COR acting as the Construction Safety Officer with input from the facility Construction Safety Committee.
  - 2. Submit training records of all such employees for approval before the start of work.
- G. VHA Directive 2011-36, Safety and Health during Construction, dated 9/22/2011 in its entirety is made a part of this section

**1.2 STATEMENT OF BID ITEM(S)**

A. BASE BID: GENERAL CONSTRUCTION: Work includes but is not limited to: general construction, alterations, demolition; hazardous material removal and disposal; carpentry; wall installation; interior finishes, door installations; pneumatic tube system extension, lab casework, plumbing including medical gas system, fire protection; HVAC ductwork and piping, controls; electrical power and lighting, security systems and telecommunications. This work is phased construction. Contractor to furnish all labor, materials, equipment and supervision in accordance with construction documents, drawings and specifications to construct/renovate approximately 7,200 square foot of space on DB1 Level to provide for expanded Clinical Lab operations at the William S. Middleton Memorial Veterans Hospital, Madison, WI. The existing clinical lab will remain operational with construction broken into phases as defined further in this specification section. Furthermore, modifications will be required above the ceiling in the floor below to existing utilities. The ceiling construction will be required to be patched to match existing conditions as required.

B. DEDUCTIVE BID NO.1: Furnish and install all work as described in the All Inclusive Base Bid except:

DELETE all provision and installation of the Lab Casework as indicated on LF001, LF100, LF101 Drawings and Specification Section 12 31 00. Provide utilities connections in the VA provided lab casework. Phasing remains as indicated.

**1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR**

A. AFTER AWARD OF CONTRACT, No sets of specifications and drawings will be furnished.

B. Additional sets of drawings may be made by the Contractor, at Contractor's expense.

**1.4 CONSTRUCTION SECURITY REQUIREMENTS**

A. Security Plan:

1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.

2. The General Contractor is responsible for assuring that all sub-contractors working on the project and their employees also comply with these regulations.
3. All Construction personnel are required to wear VA contractor identification badges. To obtain the ID badge all construction personnel are required to undergo a fingerprint and background check.

B. Security Procedures:

1. General Contractor's employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
2. For working outside the "regular hours" as defined in the contract, The General Contractor shall give 3 days' notice to the Contracting Officer so that security arrangements can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.
3. No photography of VA premises is allowed without written permission of the Contracting Officer.
4. VA reserves the right to close down or shut down the project site and order General Contractor's employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.

C. Key Control:

1. The General Contractor shall provide a Trilogy mechanical punch lock on all temporary construction barriers with an override key core compatible to the Medical Center's locking system (Sargent 6-Pin removable core). The VA will provide the contractor with the removable override core for this lockset. Provide the lock combination(s) to the VA Project Manager for the purpose of security inspections of every area of the project including tool boxes and parked machines and take any emergency action.
2. The General Contractor shall turn over all permanent lock cylinders to the VA locksmith for permanent installation. See Section 08 71 00, DOOR HARDWARE and coordinate.

## D. Document Control:

1. Before starting any work, the General Contractor/Sub Contractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of "sensitive information".
2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This information shall be shared only with those with a specific need to accomplish the project.
3. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
4. All paper waste or electronic media such as CD's and diskettes shall be shredded and destroyed in a manner acceptable to the VA.
5. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of "sensitive information".
6. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
  - a. Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
  - b. "Sensitive information" including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

## E. Motor Vehicle Restrictions

1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping off materials and supplies.
2. Separate permits shall be issued for General Contractor and its employees for parking in designated areas only.

**1.5 FIRE SAFETY**

A. Applicable Publications: Publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

1. American Society for Testing and Materials (ASTM):

E84-2009.....Surface Burning Characteristics of Building Materials

2. National Fire Protection Association (NFPA):

10-2010.....Standard for Portable Fire Extinguishers

30-2008.....Flammable and Combustible Liquids Code

51B-2009.....Standard for Fire Prevention During Welding, Cutting and Other Hot Work

70-2011.....National Electrical Code

101-2012.....Life Safety Code

241-2009.....Standard for Safeguarding Construction, Alteration, and Demolition Operations

3. Occupational Safety and Health Administration (OSHA):

29 CFR 1926.....Safety and Health Regulations for Construction

4. VHA Directive 2005-007

B. Fire Safety Plan: Establish and maintain a fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to Project Engineer and Facility Safety Manager for review for compliance with VHA Directive 2005-007, NFPA 101 and NFPA 241. Prior to beginning work, all employees of the contractor and/or any subcontractors shall undergo a safety briefing provided by the general contractor's competent person per OSHA requirements. This briefing shall include information on the construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, etc. Provide documentation to the Resident Engineer that all construction workers have undergone contractor's safety briefing.

- C. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.
- D. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).
- E. Temporary Construction Partitions:
1. Install and maintain temporary construction partitions to provide smoke-tight and dust tight separations between the construction areas that are described in phasing requirements and adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of fire retardant treated wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab deck above. Seal joints and penetrations. At door openings, install Class C, ¾ hour fire/smoke rated doors with self-closing devices.
  2. Install two-hour fire-rated temporary construction partitions as shown on drawings to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.
  3. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.
- F. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.
- G. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with Project Engineer and facility Safety Manager.
- H. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to Project Engineer and facility Safety Manager.

- I. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- J. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.
- K. Sprinklers: Install, test and activate new automatic sprinklers prior to removing existing sprinklers.
- L. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with Project Engineer and facility Safety Manager. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the Project Engineer.
- M. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with Project Engineer and facility Safety Manager.
- N. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Obtain permits from VA Project Manager. Designate contractor's responsible project-site fire prevention program manager to permit hot work.
- O. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to Project Engineer and facility Safety Manager.
- P. Smoking: The William S. Middleton VA Hospital is a smoke-free environment. Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. Violators will be issued a citation.
- Q. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.

- R. Perform other construction, alteration and demolition operations in accordance with 29 CFR 1926.

#### **1.6 OPERATIONS AND STORAGE AREAS**

- A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.
- B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.
- C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.

#### **(FAR 52.236-10)**

- D. Working space and space available for storing materials shall be limited to space within the contractor's job trailer and within the jobsite's space being renovated.
- E. Workmen are subject to rules of Medical Center applicable to their conduct.
- F. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment,

and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly by patients or medical personnel, and Contractor's personnel, except as permitted by Resident Engineer where required by limited working space.

1. Do not store materials and equipment in other than assigned areas.
  2. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient for not more than two work days. Provide unobstructed access to Medical Center areas required to remain in operation.
  3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements.
- G. Phasing: To insure such executions, Contractor shall furnish the Resident Engineer with a schedule of approximate phasing dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. The phasing schedule below identifies estimated maximum allotted time frame for each phase and details minimum requirement necessary for phasing. In addition, Contractor shall notify the Resident Engineer three weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such phasing dates to insure accomplishment of this work in successive phases mutually agreeable to Resident Engineer and Contractor, as follows:

**Phase 1A: (Allotted time 160 days)**

VA and UW will vacate the Lab rooms DB1-194, DB1-199, DB1-212, DB1-213, DB1-214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 223a, 224, 244, & 244A.

Contractor to erect dust partition/construction barriers as shown on drawing AD100.

Contractor to start Phase 1A demolition and build-out as detailed on contact drawings.

Contractor to allow VA Housekeeping Staff access to DB1-225 during the construction project.

Contractor is not permitted to use the Housekeeping Room DB1-225 during the construction project.

Coordinate all shutdowns of the UW Tube station and station controls with the UW and VA hospitals.

Lab Casework: Supply and install the lab casework as shown per LF001, LF010 & LF101 drawings and Specifications. Partial casework to be installed in 4 locations, as shown on Drawing A100, (near columns 6/D, 6/E and 6/E.5) allowing for the Phase 1b construction barrier.

Electrical Contractor to then install wire mold, electrical devices and make all final rough-ins and do the final electrical and communications connections as necessary to complete Phase 1A.

Plumbing Contractor to then complete all of the final plumbing rough-ins and complete the final fixture installations and connections as necessary to complete Phase 1A.

The contractor shall allow approximately 14 days after the Phase 1A electrical & plumbing is complete for the VA to move lab equipment, refrigerators, systems and personnel out of the existing lab and into the completed Phase IA space.

Upon completion of the VA Lab move. The contractor can start Phase 1B.

**Phase 1B: (Allotted time 80 days)**

VA will vacate the Rooms DB1-248, DB1-207A, DB1-207 (partial) and DB1-210.

Contractor to erect dust partition/construction barriers as shown on drawing AD101.

Contractor to proceed with Phase 1B Demolition and build-out as stated on contract drawings.

Coordinate all shutdowns of the UW Tube station and station controls with the UW and VA hospitals.

Lab Casework: Supply and install the lab casework as shown per LF001, LF010 & LF101 drawings and Specifications.

Phase 1B casework installation to include the 4' or 5' table/casework sections at the east ends of Hematology, Coagulation and Urinalysis casework table sections (near columns 6/D, 6/E and 6/E.5)

Electrical Contractor to then install any further required wire mold, electrical devices and make all final rough-ins and do the final electrical and communications connections as necessary to complete Phase 1B.

Plumbing Contractor to then install any further required plumbing rough-ins and do the final fixture installations and connections as necessary to complete Phase 1B.

**Phase 1C: (Allotted time 30 days)** This Phase may be able to start concurrent with Phase 1B.

Contractor to erect dust partition/construction barrier in the corridor for Rooms DB1-247 & 247.

Contractor to proceed with Phase 1c demolition and build-out as stated on contract drawings.

Contractor to complete any of the remaining HVAC, Electrical and Plumbing work, including any post casework utility requirements, flooring and base work in all phases of the project.

**Additional Phasing Notes:**

In addition to the above Phasing Schedule, verify for any project Phasing and or off-tour work requirements.

The contractor shall allow approximately 14 days between each Phase for the VA to move furniture, equipment, systems and personnel into or out of the existing rooms or newly renovated spaces.

The VA requires phasing in order to maintain proper Lab work flow throughout the renovation project and to maintain a continued standard of care for the VA patients, visitors and staff.

The VA Lab will be fully functional during all phases of the construction and will need to be maintained as functional. Any power or utility

interruptions that affect the existing laboratory spaces will need to be pre-coordinated and carefully scheduled. Off tour shut downs may be necessary.

The Electrical Contractor shall provide for alternate source(s) of power during phasing in order for the VA to maintain continual use of the existing lab equipment and stay functional.

- H. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by Resident Engineer.
1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of Resident Engineer. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without the Medical Center Director's prior knowledge and written approval. Refer to specification Sections 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS and 28 05 11, REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS for additional requirements.
  2. Contractor shall submit a request to interrupt any such services to Resident Engineer, in writing, 48 hours in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
  3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than Contractor's normal working hours.

4. Major interruptions of any system must be requested, in writing, at least 15 calendar days prior to the desired time and shall be performed as directed by the Resident Engineer.
  5. In case of a contract construction emergency, service will be interrupted on approval of Resident Engineer. Such approval will be confirmed in writing as soon as practical.
  6. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.
- I. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, which are to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.
- J. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:
1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles.
- K. Coordinate the work for this contract with other construction operations as directed by Resident Engineer. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.
- L. Buildings No. 1 will be occupied during performance of work; but immediate areas of alterations will be vacated.
1. All areas of Building No. 1 will be occupied by Medical Center personnel. Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the Medical Center's operations will not be hindered. Contractor shall permit access to Department of Veterans Affairs personnel and patients through other

construction areas which serve as routes of access to such affected areas and equipment. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Medical Center operations will continue during the construction period.

#### 1.7 ALTERATIONS

- A. Survey: Before any work is started, the Contractor shall make a thorough survey with the Resident Engineer areas of buildings in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by both, to the Contracting Officer. This report shall list by rooms and spaces:
1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of building.
  2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by drawings to be either reused or relocated, or both.
  3. Shall note any discrepancies between drawings and existing conditions at site.
  4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and VA Project Engineer.
- B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of Resident Engineer, to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this subparagraph B, the contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).
- C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and Resident Engineer together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors,

windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:

1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and, will form basis for determining extent of repair work required of Contractor to restore damage caused by Contractor's workmen in executing work of this contract.

D. Protection: Provide the following protective measures:

1. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
2. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

#### **1.8 INFECTION PREVENTION MEASURES**

- A. Implement the requirements of VAMC's Infection Control Risk Assessment (ICRA) team. ICRA Group will monitor dust in the vicinity of the construction work and require the Contractor to take corrective action immediately if the safe levels are exceeded.
- B. Establish and maintain a dust control program as part of the contractor's infection preventive measures in accordance with the guidelines provided by ICRA Group. Prior to start of work, prepare a plan detailing project-specific dust protection measures, including periodic status reports, and submit to Project Engineer and Facility ICRA team for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
  1. All personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center. Education will be offered by Medical Center Infection Control staff at least once a month. Training will last approximately 30 minutes. Upon satisfactory

completion of training, contractor personnel will be issued an Infection Control sticker to be affixed to their VA ID badge.

C. Medical center Infection Control personnel shall monitor for airborne disease (e.g. aspergillosis) as appropriate during construction. A baseline of conditions may be established by the medical center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality. In addition:

1. The RE and VAMC Infection Control personnel shall review pressure differential monitoring documentation to verify that pressure differentials in the construction zone and in the patient-care rooms are appropriate for their settings. The requirement for negative air pressure in the construction zone shall depend on the location and type of activity. Upon notification, the contractor shall implement corrective measures to restore proper pressure differentials as needed.
2. In case of any problem, the medical center, along with assistance from the contractor, shall conduct an environmental assessment to find and eliminate the source.

D. In general, following preventive measures shall be adopted during construction to keep down dust and prevent mold.

1. Dampen debris to keep down dust and provide temporary construction partitions in existing structures where directed by Resident Engineer. Blank off ducts and diffusers to prevent circulation of dust into occupied areas during construction.
2. Do not perform dust producing tasks within occupied areas without the approval of the Resident Engineer. For construction in any areas that will remain jointly occupied by the medical Center and Contractor's workers, the Contractor shall:
  - a. Provide dust proof temporary drywall construction barriers to completely separate construction from the operational areas of the hospital in order to contain dirt debris and dust. Barriers shall be sealed and made presentable on hospital occupied side. Install a self-closing rated door in a metal frame, commensurate with the partition, to allow worker access. Maintain negative air at all times. A fire retardant polystyrene, 6-mil thick or greater

plastic barrier meeting local fire codes may be used where dust control is the only hazard, and an agreement is reached with the Resident Engineer and Medical Center.

- b. All contractors and sub-contractor shall utilize and follow the Ground Floor Level route for all hauling and transport of materials, debris, equipment, tools and containers to the DB1 Floor Level job site. Route is as follows: from the contractor staging area; enter the Ground Floor level at the C-Wing entrance (by smoking shelter). Follow C-Wing north, turn left in to the A-Wing and follow A-Wing to the D-Wing elevator lobby. Contractors may use one of the D-wing elevators or the adjacent stairway (No. 7). Patient, visitors and employees have the right of way for elevator use. Do not haul debris carts in an occupied elevator. GC to coordinate with all sub-contractors.
- c. HEPA filtration is required where the exhaust dust may reenter the breathing zone. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents, or building openings. Install HEPA (High Efficiency Particulate Accumulator) filter vacuum system rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. Insure continuous negative air pressures occurring within the work area. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Exhaust hoses shall be heavy duty, flexible steel reinforced and exhausted so that dust is not reintroduced to the medical center.
- d. Adhesive Walk-off/Carpet Walk-off Mats, minimum 600mm x 900mm (24" x 36"), shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
- e. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as they are created. Transport these outside the construction area in containers with tightly fitting lids.

- f. The contractor shall not haul debris through patient-care areas without prior approval of the Resident Engineer and the Medical Center. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.
  - g. Using a HEPA vacuum, clean inside the barrier and vacuum ceiling tile prior to replacement. Any ceiling access panels opened for investigation beyond sealed areas shall be sealed immediately when unattended.
  - h. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.
  - i. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.
- E. Final Cleanup:
- 1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
  - 2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
  - 3. All new air ducts shall be cleaned prior to final inspection.

### **1.9 DISPOSAL AND RETENTION**

- A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:

1. Reserved items which are to remain property of the Government are identified by attached tags or noted on drawings or in specifications as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by Resident Engineer.
2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.
3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.

#### **1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS**

- A. The Contractor shall preserve and protect all structures and equipment, on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract.
- B. The Contractor shall protect from damage all existing improvements and utilities at or near the work site, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.

**(FAR 52.236-9)**

#### **1.11 RESTORATION**

- A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut,

alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the Resident Engineer. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the Resident Engineer before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.

- B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.
- C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workmen to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are indicated on drawings and which are not scheduled for discontinuance or abandonment.
- D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).

#### **1.12 LAYOUT OF WORK**

- A. The Contractor shall lay out the work from Government established base lines and bench marks, indicated on the drawings, and shall be responsible for all measurements in connection with the layout. The Contractor shall furnish, at Contractor's own expense, all stakes, templates, platforms, equipment, tools, materials, and labor required to lay out any part of the work. The Contractor shall be responsible for executing the work to the lines and grades that may be established or indicated by the Contracting Officer. The Contractor shall also be responsible for maintaining and preserving all stakes and other marks established by the Contracting Officer until authorized to remove them. If such marks are destroyed by the Contractor or through Contractor's

negligence before their removal is authorized, the Contracting Officer may replace them and deduct the expense of the replacement from any amounts due or to become due to the Contractor.

**(FAR 52.236-17)**

- B. Whenever changes from contract drawings are made in line or grading requiring certificates, record such changes on a reproducible drawing bearing the registered land surveyor or registered civil engineer seal, and forward these drawings upon completion of work to Resident Engineer.
- C. The Contractor shall perform the surveying and layout work of this and other articles and specifications in accordance with the provisions of Article "Professional Surveying Services".

**1.13 AS-BUILT DRAWINGS**

- A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.
- B. All variations shall be shown in the same general detail as used in the contract drawings. To insure compliance, as-built drawings shall be made available for the Resident Engineer's review, as often as requested.
- C. Contractor shall deliver two approved completed sets of as-built drawings to the Resident Engineer within 15 calendar days after each completed phase and after the acceptance of the project by the Resident Engineer.
- D. Paragraphs A, B, & C shall also apply to all shop drawings.

**1.14 USE OF ROADWAYS**

- A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the Resident Engineer, such temporary roads which are necessary in the performance of contract work.

**1.15 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT**

- A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to compliance with the following provisions:

1. Permission to use each unit or system must be given by Resident Engineer. If the equipment is not installed and maintained in accordance with the following provisions, the Resident Engineer will withdraw permission for use of the equipment.
  2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.
  3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be eliminated.
  4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
  5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be replaced at completion of construction and prior to testing and balancing of system.
  6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government. Boilers, pumps, feedwater heaters and auxiliary equipment must be operated as a complete system and be fully maintained by operating personnel. Boiler water must be given complete and continuous chemical treatment.
- B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.

C. This paragraph shall not reduce the requirements of the mechanical and electrical specifications sections.

#### 1.16 TEMPORARY USE OF EXISTING ELEVATORS

A. Use of existing elevators for handling building materials and Contractor's personnel will be permitted subject to following provisions:

1. Contractor makes all arrangements with the Resident Engineer for use of elevators. The Resident Engineer will ascertain that elevators are in proper condition. Contractor may use elevators Nos. 5, 8, 9 and 10 in Building No. 1 for daily use between the hours of 6 A.M. - 7 A.M., 9 A.M.-11:30 A.M., 1 P.M.-4:30 P.M. and for special nonrecurring time intervals when permission is granted. Personnel for operating elevators will not be provided by the Department of Veterans Affairs.
2. Contractor covers and provides maximum protection of following elevator components:
  - a. Entrance jambs, heads soffits and threshold plates.
  - b. Entrance columns, canopy, return panels and inside surfaces of car enclosure walls.
  - c. Finish flooring.
3. Government will accept hoisting ropes of elevator and rope of each speed governor if they are worn under normal operation. However, if these ropes are damaged by action of foreign matter such as sand, lime, grit, stones, etc., during temporary use, they shall be removed and replaced by new hoisting ropes.
4. If brake lining of elevators are excessively worn or damaged during temporary use, they shall be removed and replaced by new brake lining.
5. All parts of main controller, starter, relay panel, selector, etc., worn or damaged during temporary use shall be removed and replaced with new parts, if recommended by elevator inspector after elevator is released by Contractor.
6. Place elevator in condition equal, less normal wear, to that existing at time it was placed in service of Contractor as approved by Contracting Officer.

**1.17 TEMPORARY TOILETS**

- A. Contractor may have for use of Contractor's workmen, such toilet accommodations as may be assigned to Contractor by Medical Center. Contractor shall keep such places clean and be responsible for any damage done thereto by Contractor's workmen. Failure to maintain satisfactory condition in toilets will deprive Contractor of the privilege to use such toilets.

**1.18 AVAILABILITY AND USE OF UTILITY SERVICES**

- A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The amount to be paid by the Contractor for chargeable electrical services shall be the prevailing rates charged to the Government. The Contractor shall carefully conserve any utilities furnished without charge.
- B. The Contractor, at Contractor's expense and in a workmanlike manner satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines, and all meters required to measure the amount of electricity used for the purpose of determining charges. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia.
- C. Contractor shall install meters at Contractor's expense and furnish the Medical Center a monthly record of the Contractor's usage of electricity as hereinafter specified.
- D. Electricity (for Construction and Testing): Furnish all temporary electric services.
  - 1. Obtain electricity by connecting to the Medical Center electrical distribution system. The Contractor shall meter and pay for electricity required for electric cranes and hoisting devices, electrical welding devices and any electrical heating devices providing temporary heat. Electricity for all other uses is available at no cost to the Contractor.
- E. Water (for Construction and Testing): Furnish temporary water service.

1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection. Water is available at no cost to the Contractor.
2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (at Resident Engineer's discretion) of use of water from Medical Center's system.

#### **1.19 NEW TELEPHONE EQUIPMENT**

The contractor shall coordinate with the work of installation of telephone equipment by others. This work shall be completed before the building is turned over to VA.

#### **1.20 TESTS**

- A. Pre-test mechanical and electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.
- B. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.
- C. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire complex which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a complex which involves several components of different disciplines is a boiler installation. Efficient and acceptable boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feed water, condensate and other related components.
- D. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably short period of time during which operating and environmental conditions remain reasonably constant.

- E. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

#### **1.21 INSTRUCTIONS**

- A. Contractor shall furnish Maintenance and Operating manuals (hard copies and electronic) and verbal instructions when required by the various sections of the specifications and as hereinafter specified.
- B. Manuals: Maintenance and operating manuals and one compact disc (four hard copies and one electronic copy each) for each separate piece of equipment shall be delivered to the Resident Engineer coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.
- C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed instructions to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All

instruction periods shall be at such times as scheduled by the Resident Engineer and shall be considered concluded only when the Resident Engineer is satisfied in regard to complete and thorough coverage. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the Resident Engineer, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

#### **1.22 GOVERNMENT-FURNISHED PROPERTY**

- A. The Government shall deliver to the Contractor, the Government-furnished property shown on the drawings.
- B. Equipment furnished by Government to be installed by Contractor will be furnished to Contractor at the Medical Center.
- C. Storage space for equipment will be provided by the Government and the Contractor shall be prepared to unload and store such equipment therein upon its receipt at the Medical Center.
- D. Notify Contracting Officer in writing, 60 days in advance, of date on which Contractor will be prepared to receive equipment furnished by Government. Arrangements will then be made by the Government for delivery of equipment.
  - 1. Immediately upon delivery of equipment, Contractor shall arrange for a joint inspection thereof with a representative of the Government. At such time the Contractor shall acknowledge receipt of equipment described, make notations, and immediately furnish the Government representative with a written statement as to its condition or shortages.
  - 2. Contractor thereafter is responsible for such equipment until such time as acceptance of contract work is made by the Government.
- E. Equipment furnished by the Government will be delivered in a partially assembled (knock down) condition in accordance with existing standard commercial practices, complete with all fittings, fastenings, and appliances necessary for connections to respective services installed under contract. All fittings and appliances (i.e., couplings, ells, tees, nipples, piping, conduits, cables, and the like) necessary to make the connection between the Government furnished equipment item and the

utility stub-up shall be furnished and installed by the contractor at no additional cost to the Government.

- F. Completely assemble and install the Government furnished equipment in place ready for proper operation in accordance with specifications and drawings.
- G. Furnish supervision of installation of equipment at construction site by qualified factory trained technicians regularly employed by the equipment manufacturer.

#### **1.23 RELOCATED EQUIPMENT AND ITEMS**

- A. Contractor shall disconnect, dismantle as necessary, remove and reinstall in new location, all existing equipment and items indicated or otherwise shown to be relocated by the Contractor.
- B. Perform relocation of such equipment or items at such times and in such a manner as directed by the Resident Engineer.
- C. Suitably cap existing service lines, such as steam, condensate return, water, drain, gas, air, vacuum and/or electrical, whenever such lines are disconnected from equipment to be relocated. Remove abandoned lines in finished areas and cap as specified herein before under paragraph "Abandoned Lines".
- D. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.
- E. All service lines such as noted above for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

#### **1.24 PROGRESS MEETINGS**

- A. Schedule and administer meeting throughout progress of the work at bi-weekly intervals.
- B. Arrange for meetings, prepare agenda with dcopies for participants, and preside at meetings.

C. Attendance required: Job superintendent, major subcontractors and supplier, VA Project Manager, Architect as appropriate to agenda topics for each meeting.

D. Agenda:

1. Review minutes of previous meetings.
2. Review of work progress.
3. Field Observations
4. Identification of problems, which impede planned progress.
5. Review of submittals schedule and status of submittals
6. Review of off-site fabrication and delivery schedules.
7. Maintenance of progress schedule.
8. Corrective measures to regain projected schedules.
9. Planned progress during succeeding work period.
10. Coordination of projected progress.
11. Maintenance of quality and work standards
12. Effect of proposed changes on progress schedule and coordination.
13. Review old action items. Date when action item is resolved.
14. Establish new action items as required. Date each action item.  
Assign responsibility.
15. Other business related work.

#### **1.25 PROGRESS SCHEDULES AND CHARTS**

A. GC/Contractor shall present an updated schedule at each progress meeting. Progress schedules shall be either CPM or Gantt chart. Tasks shall be broken down to provide all parties concerned parties of upcoming tasks that will impact their work. At a minimum, the schedule shall show the past two weeks progress and the upcoming four to six weeks of anticipated work.

**1.26 PREINSTALLATION MEETING**

- A. When required in individual specification sections, convene a pre-installation meeting at the site prior to commencing work of the section.
- B. Require attendance of parties directly affecting, or affected by, work of the specific section.
- C. Notify prime consultant and VA Project Manager four days in advance of meeting date.
- D. Prepare agenda and preside at meeting:
  - 1. Review conditions of installation, preparation and installation procedures.
  - 2. Review coordination with related work.
- E. GC shall record minutes and distribute copies within two day after meeting to participants, with copies to Architect, VA Project Manager, participants, and those affected by decisions made.

**1.27 WORKING AT THE HOSPITAL**

## Safety, Rules &amp; Procedures for Contractors

- Hospital Policy: All construction personnel shall be orientated and trained on hospital safety, rules and procedures before starting work and periodically throughout the project duration. The general contractor and subcontractors' field supervisors/foremen shall be thoroughly familiar with Specification Section 01 00 00 "General Requirements" and those items covered in the "Field Supervisors/Foremen Agreement" below.
- Purpose: To ensure that each individual contractor employee is responsible for complying with established hospital standards, applicable OSHA Safety Requirements, federal, state and local environmental regulations, wearing prescribed safety equipment, and preventing avoidable accidents.
- Procedure: Each individual Field Supervisor/Foreman (G.C & Sub-contractor) is to review, understand and acknowledge (sign) the following information prior to the commencement of work scheduled at this facility.

## Field Supervisors/Foremen Agreement

## i. Access to Construction Areas

- All contractors shall check-in with the COTR before beginning a project or work. The contractor shall be prepared to provide the following information; scope of work, authorization, duration, as well as other pertinent information.
- Access is limited to areas such as critical care, patient care and surgical units, as well as mechanical/electrical rooms. Access can be obtained through the COTR.
- Access to any floors of the facility after normally scheduled work hours (Monday-Friday, 7:00am - 4:30pm) must be scheduled in advance with the COTR. The VA Police reserve the right to refuse access to anyone without prior authorization and identification.
- Ready access for Engineering, Safety, Police and Fire Department shall be maintained to all areas under construction at all times.
- Areas under construction shall be locked during non-business hours. Keys and cylinders for this purpose are obtained through the COTR. Contractors will not put their locks on any doors without COTR approval.

## ii. Accident and Injuries

- The contractor must post emergency phone numbers and treatment facilities for use by contractor employees if injured on the job or in need of medical treatment.
- Work site injuries must be reported to the COTR. The VA accident reporting form is Number 2162. The COTR/Safety/or Security and Police Service will initiate the 2162. The injured individual will need to complete the narrative portion of the report.

## iii. Asbestos

- There are both friable and non-friable asbestos-containing materials located within the hospital complex. Inspection reports are available from the COTR. Contractors are required to be aware of the asbestos material located near their work. Further, all contractors are expressly forbidden to disturb any asbestos-containing materials unless specifically authorized in writing by the COTR. Under no circumstances are any materials supplied or installed by the contractor to contain asbestos in any form or quantity.
- Asbestos removal contractors will be trained and licensed, and will follow OSHA, VA Specifications, state and local regulations from notification to disposal.

- A VA Representative will verify the adequacy of the barriers and ventilation before any asbestos removal work is conducted.
- The contractor(s) is responsible for monitoring their employees' exposure to asbestos.
- Additional asbestos removal specifications will apply.

#### iv. Clean-up

- All work activities within occupied portions of the facility shall be immediately cleaned and restored to its original finished condition upon completion of the activity. If the activity continues into the next workday, the area shall be left safe, clean, and presentable.
- Public restrooms are not to be used for cleaning tools or equipment. Janitor's slop sinks are available for this purpose. If (housekeeping closets are used they must be cleaned. (Permission to use the Housekeeping closets must be obtained from the COTR)
- Trash, combustible waste, and excess construction materials must be removed daily to prevent accumulation. Contractors must arrange for the removal of their debris and waste.
- All work for an area must be confined within that space. Public corridors, stairwells, equipment rooms, and vacant floors are not to be used for the storage of materials or as a workshop. Tracking of construction dirt into the public corridors or stairwells must be prevented. The contractor will provide tack pads at all entrances and exits from the construction space.
- If smoke detectors are covered during dust-producing activities, they must be uncovered at the end of each day.
- All contractors working above the ceiling are required to reset all disturbed ceiling tiles by the end of the day.

#### v. Compressed Gas Cylinders

- Compressed gas cylinders are very dangerous if not treated properly.
- Employees who work with compressed gas cylinders must have specific training in that area.
- Make sure that they are secured properly when in use or in storage.
- Always keep the caps on the cylinders when they are not in use.
- Hot work permit(s) are required.

## vi. Confined Space

- ❑ Consult with the COTR before entering sewers, manholes, and underground vaults. Identify which require confined space permits.
- ❑ All construction personnel that require entry into a confined space must abide by the Confined Space Program procedure. NO ONE will be allowed to enter these areas without the proper qualifications, equipment and training.
- ❑ It is the sole responsibility of the contractor to coordinate entry into any confined space. The contractor shall notify the COTR prior to entering a confined space.
- ❑ Anyone entering a permit-required confine space must follow OSHA regulations, 29 CFR 1910.120.

## vii. Contractor's Impact

System	Possible Interruption	Possible Effect to Patients
Electrical	<ul style="list-style-type: none"> <li>- Changing position of switches and breakers</li> <li>- Cutting or splicing into wires</li> <li>- Disconnecting wires or terminals</li> <li>- Disturbing Junction Boxes/Electrical Panels</li> <li>- Core Drilling</li> <li>- Demolition of walls</li> <li>- Excavation</li> </ul>	<p>Electrical Systems provides LIFE SUPPORT (Directly and Indirectly)</p> <ul style="list-style-type: none"> <li>- Can cause DEATH to critical patients</li> </ul>
Water Lines	<ul style="list-style-type: none"> <li>- Turning valves</li> <li>- Cutting into lines</li> <li>- Demolition &amp; Excavation</li> </ul>	<p>Dialysis, OR, HVAC, ICU, X Ray, etc</p> <p>Can cause DEATH to critical patients</p> <p>Infection Control issues</p> <p>Major Cleanup issues</p>
Medical Gases: Oxygen	<ul style="list-style-type: none"> <li>- Cutting or disturbing into lines (labeled, unlabeled)</li> </ul>	<p>Oxygen, vacuum, air, etc.</p>

Air Vacuum Nitrous Oxide Nitrogen	<ul style="list-style-type: none"> <li>- Changing valve positions</li> <li>- Deactivating alarms</li> <li>- Demolition &amp; Excavation</li> </ul>	ICU, OR, Med/Surg.  Can cause DEATH to critical patients
HVAC	<ul style="list-style-type: none"> <li>- Shutting down</li> <li>- Modifying</li> <li>- Changing controls</li> <li>- Cutting into the roof</li> <li>- Producing foul odors near intakes</li> <li>- Cutting into chilled water lines</li> <li>- Obstruct fresh air intake</li> </ul>	Temperature is critical in OR, ICU, etc. Infection Control issues  Major Air Quality Issues
Fire Alarm and Sprinklers	<ul style="list-style-type: none"> <li>- ANY modifications</li> <li>- covering or removing smoke heads</li> <li>- Demolition &amp; Excavation</li> <li>- Damage or set off sprinkler heads</li> <li>- Duct work modifications</li> </ul>	<ul style="list-style-type: none"> <li>- Compromising Fire Safety</li> <li>- False Alarms</li> <li>- Floods</li> <li>- Major disruptions and distractions</li> </ul> ALL THE ABOVE CAN RESULT IN DEATH
Code Alarms Nurse Call Wander Guards	<ul style="list-style-type: none"> <li>- Demolition &amp; Excavation</li> <li>- Unplugging</li> <li>- Changing position of switches/breakers</li> </ul>	Lack of communicating system can result in patient death or injury

## viii. Contractor Room/Space

- Materials will be kept on the job site in the contractors' room or in storage space provided for the contractor by the COTR.
- Any shared space within the storage room(s) must be accessible to the COTR, Police, and Fire Department.
- Corridors are not to be used for storage.
- Contractors will manage the signed space and assure the site is kept clean and safe. Refer to OSHA standards.
- Any disputes or concerns will be directed to the COTR.

## ix. Damage by Contractors

- Any damage caused by the contractor's employees is to be reported to the COTR immediately.

## x. Deliveries

- All material deliveries at the loading dock must be coordinated with the COTR. Deliveries of material and equipment are to be made at times when the contractor or subcontractor is available to accept them. The VA will not be responsible for receiving or storing items, and warehouse personnel will not allow deliveries to be unloaded.
- In order to minimize delays and interferences, large deliveries must occur Monday through Friday after 7:30 a.m. and before 2:30 p.m. No weekend and after hours deliveries to the VA loading dock.

## xi. Dress Code

- All personnel must be appropriately dressed for their work. T-shirts or garments with obscene or suggestive messages are not permitted. Personnel found improperly dressed will be asked to leave the facility.

## xii. Dust Barriers and Ventilation Requirements

- All dust barriers will be coordinated with the COTR before installation.
- Dust barriers are needed to protect occupied areas on any portion of the construction project that has the potential to generate dust.
- The barriers must be smoke resistive and non-combustible. When barriers are part of a smoke or fire barrier, the construction barriers must be equivalent.

## xiii. Emergency Preparedness Notification

- ❑ Contractors are to post the "VA Emergency Guidebook" in a conspicuous spot for all construction personnel to review. Contraction personnel are to be trained on the postings prior to beginning work and as the project progresses.
- ❑ The guidebook lists all emergency phone number and explains what to do in the case of an emergency. Such as; bomb threat, workplace injuries, emergency preparedness, hazardous materials & spills, tornado procedures, fire plan, and utility & equipment failures. A copy of the guidebook is available from the COTR.

## xiv. Elevator Usage

- ❑ Contractors shall not hold or block from use any public elevators in any building unless authorized by the COTR.
- ❑ The COTR will define which elevators shall be used and the times for moving materials and waste to and from the site(s).

## xv. Equipment Safety

- ❑ Ladders are not to be left unattended in public areas during breaks and lunch hours. Ladders shall be laid down and placed out of the traffic areas during these periods.
- ❑ No tools, carts, ladders or other equipment are to be left unattended outside a secured area.
- ❑ Yellow safety barricades must be used when working in public areas.
- ❑ Use of hospital equipment is not permitted.

## xvi. Equipment and Supplies

- ❑ Caution must be used with all flammable materials, i.e., adhesives, thinners, varnishes, etc.
- ❑ All paint shall be low odor latex paint. The contractor will use odor reducing agents in all paints and solvents. Ventilation will be required if toxic or foul smelling materials have to be applied.
- ❑ Only a one-day supply of paints, materials and gas cylinders is permitted outside an approved storage area.

## xvii. Fire Alarm System

- ❑ Care must be exercised to prevent the accidental tripping of smoke detectors and fire alarms.

- Notify the COTR of your activities and location while performing work in the hospital.
- Cover and protect the smoke alarms when raising dust or creating smoke. Remove plastic bags around smoke detectors upon completion of the work and at the end of each workday.
- Notify the COTR immediately if the alarm is tripped.

xviii. Hazardous Materials and Waste

- A listing of all hazardous materials that will be used on the job and their material safety data sheets (MSDS) will be available on site for COTR review.
- Ant excess or used chemicals will be removed from the hospital promptly and properly disposed of by the contractor in accordance with federal, state and local regulations.
- Do not store excessive amounts of flammable or combustible materials on the job site. A safe location to store these materials will be provided by the COTR.

xix. Heavy Lifting

- Hoisting heavy materials/items require prior review by the COTR.

xx. Hospital Fire Plan R-A-C-E

- Fire Plan - There is no difference between a fire drill and an actual fire.
- Make sure you know where the pull stations are in the areas you are working.
- If you are in the area of the fire:
  - R** Rescue anyone from the area if necessary
  - A** Pull the nearest Pull Station
  - C** Contain the fire by closing all doors in the area
  - E** Extinguish if possible or Evacuate the area immediately
- If you are NOT in the area of the fire:

Construction Workers are to cease activities, stay in place, and wait for further instructions or cancellation of the fire drill.

DO NOT move through the hospital. DO NOT use the elevators or stairwells.

xxi. Housekeeping

- ❑ Housekeeping in public areas of the hospital will be maintained at the highest level, even while work is ongoing.
- ❑ In secured areas, housekeeping will be performed as needed, but at a minimum at the end of each day.

#### xxii. Hot Work and Above Ceiling Permits

- ❑ Before any cutting, soldering, grinding, welding, etc., is conducted, the contractor or sub-contractor shall obtain permission through a hot work permit. The contractor shall be responsible for obtaining the hot work permits from the COTR.
- ❑ Gas and oxygen canisters shall be properly chained and protected and two 10 - pound fire extinguishers shall be present.
- ❑ The contractor shall maintain a fire watch during the hot work operations, and 30 minutes after the hot work is completed.
- ❑ Prior to performing any work within 10 feet of a fire wall or smoke partition/wall, the contractor shall obtain permission through a above ceiling work permit issued by the COTR.

#### xxiii. Identification Badges

The construction personnel will be required to wear VA Contractor Identification Badges.

#### xxiv. Infection Control

- ❑ Prior to all construction activities, infection control procedures must be review and approved by the COTR.
- ❑ The construction personnel are to read and follow the directions listed on any Infection Control Precaution sheet posted outside a patient's room. Generally, this means permission must be obtained from the nursing staff before entry.
- ❑ Temporary walls or dust barriers are required to enclose areas under construction.
- ❑ Under some conditions, it may be necessary to block return and supply ducts. There shall be no re-circulation of air from a construction area that will generate dust, smoke or odors to other parts of the hospital.
- ❑ Tack pads must be located entrances and exits to the construction area.
- ❑ Contractor shall promptly remove any dust tracked outside of construction barriers.

- ❑ As a standard precaution assume that any person may carry contagious disease. In order to protect you from these diseases always assume blood; non-intact skin, mucous membranes and other body fluids and excretions are infectious. Do not touch any such materials but contact the COTR immediately. Needle container boxes are provided for the disposal of syringes and other sharps used in the medical center. These must be properly removed and disposed of by hospital personnel.

#### xxv. Interim Life Safety

- ❑ The hospital will document whether and to what extent Interim Life Safety Measures (ILSM) will be implemented for each project.
- ❑ Any life safety code violations incurred during construction or renovation will result in close coordination with COTR to implement the hospital's Interim Life Safety Measures. JCAHO and NFPA require these measures.
- ❑ The Contractor in cooperation with the COTR will ensure ILSMs are employed to temporarily compensate for hazards posed by existing Life Safety Code (LSC) deficiencies or construction activities.
- ❑ ILSMs apply to both construction and hospital employees.
- ❑ ILSMs will require increased walkthrough and inspections by the superintendent/foreman, COTR and Safety Officer. A daily interim life safety measure inspection report will be provided to the contractor at the preconstruction meeting.
- ❑ Training of construction workers and hospital staff will always be a significant part of any ILSM procedure. The contractor, COTR and Safety Official all share responsibility to make sure everyone under increased risk is made aware of the risk and compensating ILSMs.

#### xxvi. Life Safety

- ❑ Temporary construction partitions of non-combustible materials shall be installed as required to provide a smoke tight separation between the areas undergoing renovation and/or construction and adjoining areas that are occupied by the facility.
- ❑ Exits for occupied areas of the building including rooms, suites, corridors and floors shall not be blocked by the construction or by construction materials. Exit may be blocked temporarily if it is unavoidable and adequate alternative measures are provided, such as signage, instructions to occupants and approved by the COTR.
- ❑ Existing fire protection systems including fire alarm systems, smoke detection systems, and sprinkler systems shall not be altered except as required for the alteration and/or renovation

project. Any alteration to the system shall be coordinated with COTR

- It is the responsibility of each contractor to know exactly where the fire extinguishers and pull stations are in the work area.
- Fire hazard inspections shall be conducted daily by the contractor once construction starts and until the work is turned back over to the facility.
- All temporary electrical wiring and equipment used for construction shall be installed and used in accordance with pertinent provisions of NFPA 70 and National Electrical Code.
- Maintain construction site to permit access to fire department as necessary. Clear building construction areas of obstructions so that all portions are accessible for fire department apparatus and permit emergency egress of patients and other personnel.

xxvii. Lockout/Tag out

- Lock Out/Tag Out - No contract workers is allowed to change the status/position of ANY switch, valve or any other energy source without prior approval from the COTR. All Lock out/Tag out activities need prior approval before implementation. Any activity requiring a Lockout/Tag out process must comply with the hospital policy.
- All contractors shall comply with OSHA Regulation 29 CFR 1910.147 on Lockout/Tag out procedures.
- Only VA personnel are authorized to shutdown hospital equipment or utilities unless permission is specifically granted.

xxviii. Material Safety Data Sheets (MSDS)

- MSDS must be provided for any hazardous materials that will be used on VA property.
- MSDS are available for all materials used in the hospital. Contact the COTR for all hospital MSDSs.

xxix. Noise

- All core drilling, chipping and hole drilling shall be done at a time and day determined by the COTR in consultation with occupants of the space and adjacent areas.
- Patients, visitors and staff deserve consideration and the quiet enjoyment of their premises. Anyone found being loud, rude or otherwise annoying to the patients, their guests or hospital staff would be asked to leave the hospital.

- All work activity within occupied portions of the hospital shall be accomplished with minimal disruption to the patients, physicians, visitors and staff.
- Playing of radios, tapes and CD players is not permitted in any occupied area. "Walkman" radios/tapes and CD players are not permitted anywhere in the hospital.
- The playing of radios, tapes and CD players are permitted in vacant areas but shall not be heard outside the vacant area.

xxx. OSHA Compliance

- All contractors are subject to Occupational Safety and Health Administration (OSHA) regulations. The contractor is expected to enforce and comply with these standards in the performance of their work. OSHA regulations can be found in Chapter 29 of the Code of Federal Regulations (CFR). Failure on the part of any contractor or their employee to comply with these standards and/or conduct their work in a safe fashion will result in an interruption in the work schedule for which the contractor will be solely responsible.

xxxii. Parking

- COTR will designate contractor employee parking areas. Contractors may not block fire lanes or other roadways.
- Contractor to coordinate parking and obtain parking permits from the COTR.

xxxiii. Patient/Visitor Privacy

- No construction personnel are allowed to review, acknowledge or move any patient information or records.

xxxiiii. Personal Protective Equipment

- Many situations require specific personal protective equipment for worker safety according to OSHA. It is the responsibility of the individual contractor to know when it is to be used and is responsible to wear them.

xxxiv. Posting and Training

- The field superintendents/foremen are to post the following hospital specific documents for all construction employees to read; Construction Commandments, VA Emergency Guidebook and Hospital Smoking Policy.
- Each field superintendent/foreman is responsible for construction personnel working under his/her supervision. This person shall make sure each employee working on the site has been trained on the Construction Commandments; as well as, other posted information.

## xxxv. Restroom Usage

- Construction personnel shall use the public restrooms and shall not use restrooms in occupied areas.

## xxxvi. Request for Information

- All requests for assistance, coordination and information shall be done through the COTR.

Address: COTR (Engineering Service)

Wm. S. Middleton Memorial VA Hospital

2500 Overlook Terrace

Madison, WI 53705

Phone No. (608)280-7040

Fax No. (608)280-7186

## xxxvii. Safety Regulations

- Contractors are expected to comply with all Occupational Safety and Health Administration (OSHA) regulation, 29 CFR 1926 and 1910.
- Appropriate job signs and barriers are in place to prevent occupants from straying into the construction area.
- Stairwell doors cannot be propped open or blocked at any time. Equipment cannot be stored in the stairwells.
- All contractors shall close doors to construction area. All doors shall be locked when not under contractor direct supervision.
- All contractors are encouraged to frequently review these guidelines with their employees and subcontractors on site (e.g., during weekly Tool Box Safety Meetings).
- All contractors and their subcontractors are responsible for complying with these guidelines, specification section 01 00 00 , and OSHA rules and regulations.

## xxxviii. Security of Construction Areas

- Before beginning work on a project, all contractors shall check in with the COTR. The contractor will supply the following information: scope of work, authorization, duration, and any pertinent information that is required.

- ❑ Contractor to use VA supplied locks; cylinders and keys allowing access to the construction area.
- ❑ The COTR, Facilities Engineering, Safety Office and Police must have be able to access the construction area as needed to perform their assigned responsibilities.
- ❑ Two evacuation routes from the worksite must be maintained at all times.
- ❑ Contractors may lock up their personnel tools, etc., with personal locks.

#### xxxix. Shutdowns/Connections to Utilities and Building Systems

- ❑ All connections, tie-ins, or alterations to the building life safety components and utility systems must be performed with COTR coordination and approval at least one week prior to the date requested.

#### xl. Smoking

- ❑ The hospital and campus are smoke free environments. Smoking is permitted only in two designated smoking shelters. All construction employees must comply with this policy. Any construction employee not complying with this policy will be asked to leave the facility grounds for the duration of the project.
- ❑ Construction superintendents/foremen are expected to enforce this smoking policy.

#### xli. Stop Work

- ❑ The hospital safety officer and the COTR have the Director's authorization to stop work whenever conditions pose an imminent threat to life and health or threaten damage to equipment or buildings.

#### xlii. Subcontractors

- ❑ The general contractor is responsible for obtaining and submitting signed "Field Supervisors/Foremen Agreement" from each of subcontractors working in the hospital. A subcontractor will not be paid until the COTR has received the signed agreements.
- ❑ The COTR reserves the right to reject any subcontractor proposed or working on a project for just cause.
- ❑ An on-site construction employee must be designated "In Charge" at all times the contractor is on site.

#### xliii. Traffic Control

- Contractor shall provide trained personnel and equipment, signage, barricades, etc., to regulate traffic whenever construction operations affect traffic patterns.

xliv. Trenching and Digging

- OSHA regulations must be followed during trenching operations.

xlv. Waste

- Trash, combustible waste and excess construction materials must be removed daily to prevent accumulation. Contractors must arrange for the removal of their debris and waste with the COTR.
- Contractor shall use their Dumpster. Coordinate dumpster location with the COTR.
- The contractor is encouraged to recycle construction materials. Refer to specification Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT for specific requirements.
- The contractor is expected to comply with all environmental regulations.

xlvi. Wall and Floor Penetrations

- Prior to making any penetrations in walls, floors or ceilings, it is the contractor's responsibility to identify fire and smoke rated systems.
- The contractor shall have the COTR inspect and approve all floor and wall penetration.
- All wall and floor penetrations must be located, marked and sealed by the contractor responsible for the penetration.
- All repaired penetrations on rated systems must be completed using a fire rated material matching the rating of the system and must be inspected by the COTR before ceiling tiles are replaced or area is concealed.

**IF THERE IS ANY QUESTION REGARDING ANY OF THE INFORMATION ON THIS DOCUMENT, IMMEDIATELY CONTACT THE COTR TO RESOLVE ISSUES PRIOR TO WORK COMMENCEMENT.**

Company: \_\_\_\_\_

Receipt Acknowledged: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

**Return signed copy to VA Project Manager.**

- - - E N D - - -

**SECTION 01 32 16.15**  
**PROJECT SCHEDULES**

**PART 1- GENERAL**

**1.1 DESCRIPTION:**

- A. The Contractor shall develop a Critical Path Method (CPM) plan and schedule demonstrating fulfillment of the contract requirements (Project Schedule), and shall keep the Project Schedule up-to-date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating and monitoring work under this contract (including all activities of subcontractors, equipment vendors and suppliers).

**1.2 CONTRACTOR'S REPRESENTATIVE:**

- A. The Contractor shall designate an authorized representative responsible for the Project Schedule including preparation, review and progress reporting with and to the Contracting Officer's Representative (COTR).
- B. The Contractor's representative shall have direct project control and complete authority to act on behalf of the Contractor in fulfilling the requirements of this specification section.
- C. The Contractor's representative shall have the option of developing the project schedule within their organization or to engage the services of an outside consultant.
- D. The Contractor's representative shall submit a qualification proposal to the COTR, within 10 days of bid acceptance. The qualification proposal shall include:
1. The name and address of the proposed representative.
  2. Information to show that the proposed representative has the qualifications to meet the requirements specified in the preceding paragraph.
  3. A representative sample of prior construction projects, which the proposed representative has performed complete project scheduling services. These representative samples shall be of similar size and scope.
- E. The Contracting Officer has the right to approve or disapprove the proposed representative, and will notify the Contractor of the VA decision within seven calendar days from receipt of the qualification proposal. In case of disapproval, the Contractor shall resubmit another representative within 10 calendar days for renewed consideration. The Contractor shall have their scheduling representative approved prior to submitting any schedule for approval.

**1.3 COMPUTER PRODUCED SCHEDULES**

- A. The contractor shall provide monthly, to the Department of Veterans Affairs (VA), computer-produced time/cost schedules and reports. This monthly computer service will include: three copies of different reports (inclusive of all pages) available within the user defined reports of the scheduling software approved by the Contracting Officer; a hard copy listing of all project schedule changes, and associated data, made at the update and an electronic file of this data; and the resulting monthly updated schedule in PDM format. These must be submitted with and substantively support the contractor's monthly payment request and the signed look ahead report.
- B. The contractor shall be responsible for the correctness and timeliness of the computer-produced reports. The Contractor shall also be responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.
- C. The VA will report errors in computer-produced reports to the Contractor's representative within ten calendar days from receipt of reports. The Contractor shall reprocess the computer-produced reports and associated diskette(s), when requested by the Contracting Officer's representative, to correct errors which affect the payment and schedule for the project.

**1.4 THE COMPLETE PROJECT SCHEDULE SUBMITTAL**

- A. Within 45 calendar days after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; two copies of the interim schedule and an electronic file in the previously approved CPM schedule program. The submittal shall also include three copies of a computer-produced activity/event ID schedule showing project duration; phase completion dates; and other data, including event cost. Each activity/event on the computer-produced schedule shall contain as a minimum, but not limited to, activity/event ID, activity/event description, duration, budget amount, early start date, early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start or start-to-start without lead or lag constraints. Activity/event date constraints, not required by the contract, will not be accepted unless submitted to and approved by the Contracting Officer. The contractor shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer's written approval before incorporating them into the network diagram. The Contracting Officer's separate approval of the Project

Schedule shall not excuse the contractor of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events, but must have zero duration. The complete working schedule shall reflect the Contractor's approach to scheduling the complete project. The final Project Schedule in its original form shall contain no contract changes or delays which may have been incurred during the final network diagram development period and shall reflect the entire contract duration as defined in the bid documents. These changes/delays shall be entered at the first update after the final Project Schedule has been approved. The Contractor should provide their requests for time and supporting time extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

- D. Within 30 calendar days after receipt of the complete project interim Project Schedule and the complete final Project Schedule, the Contracting Officer or his representative, will do one or both of the following:
  - 1. Notify the Contractor concerning his actions, opinions, and objections.
  - 2. A meeting with the Contractor at or near the job site for joint review, correction or adjustment of the proposed plan will be scheduled if required. Within 14 calendar days after the joint review, the Contractor shall revise and shall submit three blue line copies of the revised Project Schedule, three copies of the revised computer-produced activity/event ID schedule and a revised electronic file as specified by the Contracting Officer. The revised submission will be reviewed by the Contracting Officer and, if found to be as previously agreed upon, will be approved.
- E. The approved baseline schedule and the computer-produced schedule(s) generated there from shall constitute the approved baseline schedule until subsequently revised in accordance with the requirements of this section.

#### **1.5 PROJECT SCHEDULE REQUIREMENTS**

- A. Show on the project schedule the sequence of work activities/events required for complete performance of all items of work. The Contractor Shall:
  - 1. Show activities/events as:
    - a. Contractor's time required for submittal of shop drawings, templates, fabrication, delivery and similar pre-construction work.

- b. Contracting Officer's and Architect-Engineer's review and approval of shop drawings, equipment schedules, samples, template, or similar items.
  - c. Interruption of VA Facilities utilities, delivery of Government furnished equipment, and rough-in drawings, project phasing and any other specification requirements.
  - d. Test, balance and adjust various systems and pieces of equipment, maintenance and operation manuals, instructions and preventive maintenance tasks.
  - e. VA inspection and acceptance activity/event with a minimum duration of five work days at the end of each phase and immediately preceding any VA move activity/event required by the contract phasing for that phase.
2. Show not only the activities/events for actual construction work for each trade category of the project, but also trade relationships to indicate the movement of trades from one area, floor, or building, to another area, floor, or building, for at least five trades who are performing major work under this contract.
  3. Break up the work into activities/events of a duration no longer than 20 work days each or one reporting period, except as to non-construction activities/events (i.e., procurement of materials, delivery of equipment, concrete and asphalt curing) and any other activities/events for which the COTR may approve the showing of a longer duration. The duration for VA approval of any required submittal, shop drawing, or other submittals will not be less than 20 work days.
  4. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.
  5. The schedule shall be generally numbered in such a way to reflect either discipline, phase or location of the work.
- B. The Contractor shall submit the following supporting data in addition to the project schedule:
1. The appropriate project calendar including working days and holidays.
  2. The planned number of shifts per day.
  3. The number of hours per shift.
- Failure of the Contractor to include this data shall delay the review of the submittal until the Contracting Officer is in receipt of the missing data.

- C. To the extent that the Project Schedule or any revised Project Schedule shows anything not jointly agreed upon, it shall not be deemed to have been approved by the COTR. Failure to include any element of work required for the performance of this contract shall not excuse the Contractor from completing all work required within any applicable completion date of each phase regardless of the COTR's approval of the Project Schedule.
- D. Compact Disk Requirements and CPM Activity/Event Record Specifications: Submit to the VA an electronic file(s) containing one file of the data required to produce a schedule, reflecting all the activities/events of the complete project schedule being submitted.

**1.6 PAYMENT TO THE CONTRACTOR:**

- A. Monthly, the contractor shall submit the AIA application and certificate for payment documents. The Contractor shall be entitled to a monthly progress payment upon pre-approval of estimates as determined from the currently approved updated project schedule. Monthly payment requests shall include: a listing of all agreed upon project schedule changes and associated data; and an electronic file (s) of the resulting monthly updated schedule.
- B. Approval of the Contractor's monthly Application for Payment shall be contingent, among other factors, on the submittal of a satisfactory monthly update of the project schedule.

**1.7 PAYMENT AND PROGRESS REPORTING**

- A. Monthly schedule update meetings will be held on dates mutually agreed to by the COTR and the Contractor. Contractor and their CPM consultant (if applicable) shall attend all monthly schedule update meetings. The Contractor shall accurately update the Project Schedule and all other data required and provide this information to the COTR three work days in advance of the schedule update meeting. Job progress will be reviewed to verify:
1. Actual start and/or finish dates for updated/completed activities/events.
  2. Remaining duration for each activity/event started, or scheduled to start, but not completed.
  3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the Project Schedule.
  4. Changes in activity/event sequence and/or duration which have been made, pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
  5. Completion percentage for all completed and partially completed activities/events.

6. Logic and duration revisions required by this section of the specifications.
  7. Activity/event duration and percent complete shall be updated independently.
- B. After completion of the joint review, the contractor shall generate an updated computer-produced calendar-dated schedule and supply the Contracting Officer's representative with schedule reports in accordance with this section.
  - C. After completing the monthly schedule update, the contractor's representative or scheduling consultant shall rerun all current period contract change(s) against the prior approved monthly project schedule.
  - D. Following approval of the CPM schedule, the VA, the General Contractor, its approved CPM representative and all subcontractors needed, as determined by the SRE, shall meet to discuss the monthly updated schedule. The main emphasis shall be to address work activities to avoid slippage of project schedule and to identify any necessary actions required to maintain project schedule during the reporting period. The Government representatives and the Contractor should conclude the meeting with a clear understanding of those work and administrative actions necessary to maintain project schedule status during the reporting period. This schedule coordination meeting will occur after each monthly project schedule update meeting utilizing the resulting schedule reports from that schedule update. If the project is behind schedule, discussions should include ways to prevent further slippage as well as ways to improve the project schedule status, when appropriate.

#### **1.8 RESPONSIBILITY FOR COMPLETION**

- A. If it becomes apparent from the current revised monthly progress schedule that phasing or contract completion dates will not be met, the Contractor shall execute some or all of the following remedial actions:
  1. Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.
  2. Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.
  3. Reschedule the work in conformance with the specification requirements.
- B. Prior to proceeding with any of the above actions, the Contractor shall notify and obtain approval from the COTR for the proposed schedule changes. If such actions are approved, the representative schedule revisions shall be incorporated by the Contractor into the Project

Schedule before the next update, at no additional cost to the Government.

#### **1.9 CHANGES TO THE SCHEDULE**

- A. Within 30 calendar days after VA acceptance and approval of any updated project schedule, the Contractor shall submit a revised electronic file (s) and a list of any activity/event changes including predecessors and successors for any of the following reasons:
  - 1. Delay in completion of any activity/event or group of activities/events, which may be involved with contract changes, strikes, unusual weather, and other delays will not relieve the Contractor from the requirements specified unless the conditions are shown on the CPM as the direct cause for delaying the project beyond the acceptable limits.
  - 2. Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.
  - 3. The schedule does not represent the actual prosecution and progress of the project.
  - 4. When there is, or has been, a substantial revision to the activity/event costs regardless of the cause for these revisions.
- B. CPM revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, vacating of areas by the VA Facility, contract phase(s) and sub phase(s), utilities furnished by the Government to the Contractor, or any other previously contracted item, shall be furnished in writing to the Contracting Officer for approval.
- C. Contracting Officer's approval for the revised project schedule and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or the VA representative.
- D. The cost of revisions to the project schedule resulting from VA approved contract changes will be included in the proposal for changes in work as specified in FAR 52.243 - 4 (Changes) and VAAR 852.236 - 88 (Changes - Supplemental), and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.
- E. The cost of revisions to the Project Schedule not resulting from contract changes is the responsibility of the Contractor.

#### **1.10 ADJUSTMENT OF CONTRACT COMPLETION**

- A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the Contractor shall be supported with a justification, CPM data

and supporting evidence as the COTR may deem necessary for determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in work days) and costs is obligatory to any approvals. The schedule must clearly display that the Contractor has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.

- B. Actual delays in activities/events which, according to the computer-produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the facts and advise the Contractor in writing of the Contracting Officer's decision.
- C. The Contractor shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under FAR 52.243 - 4 (Changes) and VAAR 852.236 - 88 (Changes - Supplemental). The Contractor shall include, as a part of each change order proposal, a sketch showing all CPM logic revisions, duration (in work days) changes, and cost changes, for work in question and its relationship to other activities on the approved network diagram.
- D. All delays due to non-work activities/events such as RFI's, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month by month basis.

- - - E N D - - -

**SECTION 01 33 23**  
**SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES**

- 1-1. Refer to Articles titled SPECIFICATIONS AND DRAWINGS FOR CONSTRUCTION (FAR 52.236-21) and, SPECIAL NOTES (VAAR 852.236-91), in GENERAL CONDITIONS.
- 1-2. For the purposes of this contract, samples, test reports, certificates, and manufacturers' literature and data shall also be subject to the previously referenced requirements. The following text refers to all items collectively as SUBMITTALS.
- 1-3. Submit for approval, all of the items specifically mentioned under the separate sections of the specification, with information sufficient to evidence full compliance with contract requirements. Materials, fabricated articles and the like to be installed in permanent work shall equal those of approved submittals. After an item has been approved, no change in brand or make will be permitted unless:
  - A. Satisfactory written evidence is presented to, and approved by Contracting Officer, that manufacturer cannot make scheduled delivery of approved item or;
  - B. Item delivered has been rejected and substitution of a suitable item is an urgent necessity or;
  - C. Other conditions become apparent which indicates approval of such substitute item to be in best interest of the Government.
- 1-4. Forward submittals in sufficient time to permit proper consideration and approval action by Government. Time submission to assure adequate lead time for procurement of contract - required items. Delays attributable to untimely and rejected submittals will not serve as a basis for extending contract time for completion.
- 1-5. Submittals will be reviewed for compliance with contract requirements by Architect-Engineer, and action thereon will be taken by Resident Engineer on behalf of the Contracting Officer.
- 1-6. Upon receipt of submittals, Architect-Engineer will assign a file number thereto. Contractor, in any subsequent correspondence, shall refer to this file and identification number to expedite replies relative to previously approved or disapproved submittals.
- 1-7. The Government reserves the right to require additional submittals, whether or not particularly mentioned in this contract. If additional submittals beyond those required by the contract are furnished pursuant to request therefor by Contracting Officer, adjustment in contract price

and time will be made in accordance with Articles titled CHANGES (FAR 52.243-4) and CHANGES - SUPPLEMENT (VAAR 852.236-88) of the GENERAL CONDITIONS.

- 1-8. Schedules called for in specifications and shown on shop drawings shall be submitted for use and information of Department of Veterans Affairs and Architect-Engineer. However, the Contractor shall assume responsibility for coordinating and verifying schedules. The Contracting Officer and Architect-Engineer assumes no responsibility for checking schedules or layout drawings for exact sizes, exact numbers and detailed positioning of items.
- 1-9. Submittals must be submitted by Contractor only and shipped prepaid. Contracting Officer assumes no responsibility for checking quantities or exact numbers included in such submittals.
  - A. Submit samples required by Section 09 06 00, SCHEDULE FOR FINISHES, in quadruplicate. Submit othersamples in single units unless otherwise specified. Submit shop drawings, schedules, manufacturers' literature and data, and certificates in quadruplicate, except where a greater number is specified.
  - B. Submittals will receive consideration only when covered by a transmittal letter signed by Contractor. Letter shall be sent via first class mail and shall contain the list of items, name of Medical Center, name of Contractor, contract number, applicable specification paragraph numbers, applicable drawing numbers (and other information required for exact identification of location for each item), manufacturer and brand, ASTM or Federal Specification Number (if any) and such additional information as may be required by specifications for particular item being furnished. In addition, catalogs shall be marked to indicate specific items submitted for approval.
    1. A copy of letter must be enclosed with items, and any items received without identification letter will be considered "unclaimed goods" and held for a limited time only.
    2. Each sample, certificate, manufacturers' literature and data shall be labeled to indicate the name and location of the Medical Center, name of Contractor, manufacturer, brand, contract number and ASTM or Federal Specification Number as applicable and location(s) on project.
    3. Required certificates shall be signed by an authorized representative of manufacturer or supplier of material, and by Contractor.
  - C. If submittal samples have been disapproved, resubmit new samples as soon as possible after notification of disapproval. Such new samples shall be

- marked "Resubmitted Sample" in addition to containing other previously specified information required on label and in transmittal letter.
- D. Approved samples will be kept on file by the Resident Engineer at the site until completion of contract, at which time such samples will be delivered to Contractor as Contractor's property. Where noted in technical sections of specifications, approved samples in good condition may be used in their proper locations in contract work. At completion of contract, samples that are not approved will be returned to Contractor only upon request and at Contractor's expense. Such request should be made prior to completion of the contract. Disapproved samples that are not requested for return by Contractor will be discarded after completion of contract.
- E. Submittal drawings (shop, erection or setting drawings) and schedules, required for work of various trades, shall be checked before submission by technically qualified employees of Contractor for accuracy, completeness and compliance with contract requirements. These drawings and schedules shall be stamped and signed by Contractor certifying to such check.
1. For each drawing required, submit one legible photographic paper or vellum reproducible.
  2. Reproducible shall be full size.
  3. Each drawing shall have marked thereon, proper descriptive title, including Medical Center location, project number, manufacturer's number, reference to contract drawing number, detail Section Number, and Specification Section Number.
  4. A space 120 mm by 125 mm (4-3/4 by 5 inches) shall be reserved on each drawing to accommodate approval or disapproval stamp.
  5. Submit drawings, ROLLED WITHIN A MAILING TUBE, fully protected for shipment.
  6. One reproducible print of approved or disapproved shop drawings will be forwarded to Contractor.
  7. When work is directly related and involves more than one trade, shop drawings shall be submitted to Architect-Engineer under one cover.
- 1-10. Samples, shop drawings, test reports, certificates and manufacturers' literature and data, shall be submitted for approval to:
- Integrated Design Group [Nagel - IBC JV 1]  
13100 Watertown Plank Road, Suite 200  
Elm Grove, Wisconsin 53122

1-11. At the time of transmittal to the Architect-Engineer, the Contractor shall also send a copy of the complete submittal directly to the Resident Engineer.

- - - E N D - - -

**SECTION 01 42 19**  
**REFERENCE STANDARDS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

**1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)**

- A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to - GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.
- B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

**1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)**

The specifications and standards cited in this solicitation can be examined at the following location:

DEPARTMENT OF VETERANS AFFAIRS  
Office of Construction & Facilities Management  
Facilities Quality Service (00CFM1A)  
425 Eye Street N.W, (sixth floor)  
Washington, DC 20001  
Telephone Numbers: (202) 632-5249 or (202) 632-5178  
Between 9:00 AM - 3:00 PM

**1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)**

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

AA Aluminum Association Inc.  
<http://www.aluminum.org>

AABC Associated Air Balance Council  
<http://www.aabchq.com>

AAMA American Architectural Manufacturer's Association  
<http://www.aamanet.org>

AAN American Nursery and Landscape Association  
<http://www.anla.org>

AASHTO American Association of State Highway and Transportation Officials  
<http://www.aashto.org>

AATCC American Association of Textile Chemists and Colorists  
<http://www.aatcc.org>

ACGIH American Conference of Governmental Industrial Hygienists  
<http://www.acgih.org>

ACI American Concrete Institute  
<http://www.aci-int.net>

ACPA American Concrete Pipe Association  
<http://www.concrete-pipe.org>

ACPPA American Concrete Pressure Pipe Association  
<http://www.acppa.org>

ADC Air Diffusion Council  
<http://flexibleduct.org>

AGA American Gas Association  
<http://www.aga.org>

AGC Associated General Contractors of America  
<http://www.agc.org>

AGMA American Gear Manufacturers Association, Inc.  
<http://www.agma.org>

AHAM Association of Home Appliance Manufacturers  
<http://www.aham.org>

AISC American Institute of Steel Construction  
<http://www.aisc.org>

AISI American Iron and Steel Institute  
<http://www.steel.org>

AITC American Institute of Timber Construction  
<http://www.aitc-glulam.org>

AMCA Air Movement and Control Association, Inc.  
<http://www.amca.org>

ANLA American Nursery & Landscape Association  
<http://www.anla.org>

ANSI American National Standards Institute, Inc.  
<http://www.ansi.org>

APA The Engineered Wood Association  
<http://www.apawood.org>

ARI Air-Conditioning and Refrigeration Institute  
<http://www.ari.org>

ASAE American Society of Agricultural Engineers  
<http://www.asae.org>

ASCE American Society of Civil Engineers  
<http://www.asce.org>

ASHRAE American Society of Heating, Refrigerating, and  
Air-Conditioning Engineers  
<http://www.ashrae.org>

ASME American Society of Mechanical Engineers  
<http://www.asme.org>

ASSE American Society of Sanitary Engineering  
<http://www.asse-plumbing.org>

ASTM American Society for Testing and Materials  
<http://www.astm.org>

AWI Architectural Woodwork Institute  
<http://www.awinet.org>

AWS American Welding Society  
<http://www.aws.org>

AWWA American Water Works Association  
<http://www.awwa.org>

BHMA Builders Hardware Manufacturers Association  
<http://www.buildershardware.com>

BIA Brick Institute of America  
<http://www.bia.org>

CAGI Compressed Air and Gas Institute  
<http://www.cagi.org>

CGA Compressed Gas Association, Inc.  
<http://www.cganet.com>

CI The Chlorine Institute, Inc.  
<http://www.chlorineinstitute.org>

CISCA Ceilings and Interior Systems Construction Association  
<http://www.cisca.org>

CISPI Cast Iron Soil Pipe Institute  
<http://www.cispi.org>

CLFMI Chain Link Fence Manufacturers Institute  
<http://www.chainlinkinfo.org>

CPMB Concrete Plant Manufacturers Bureau  
<http://www.cpmb.org>

CRA California Redwood Association  
<http://www.calredwood.org>

CRSI Concrete Reinforcing Steel Institute  
<http://www.crsi.org>

CTI Cooling Technology Institute  
<http://www.cti.org>

DHI Door and Hardware Institute  
<http://www.dhi.org>

EGSA Electrical Generating Systems Association  
<http://www.egsa.org>

EEI Edison Electric Institute  
<http://www.eei.org>

EPA Environmental Protection Agency  
<http://www.epa.gov>

ETL ETL Testing Laboratories, Inc.  
<http://www.etl.com>

FAA Federal Aviation Administration  
<http://www.faa.gov>

FCC Federal Communications Commission  
<http://www.fcc.gov>

FPS The Forest Products Society  
<http://www.forestprod.org>

GANA Glass Association of North America  
<http://www.cssinfo.com/info/gana.html/>

FM Factory Mutual Insurance  
<http://www.fmglobal.com>

GA Gypsum Association  
<http://www.gypsum.org>

GSA General Services Administration  
<http://www.gsa.gov>

HI Hydraulic Institute  
<http://www.pumps.org>

HPVA Hardwood Plywood & Veneer Association  
<http://www.hpva.org>

ICBO International Conference of Building Officials  
<http://www.icbo.org>

ICEA Insulated Cable Engineers Association Inc.  
<http://www.icea.net>

\ICAC Institute of Clean Air Companies  
<http://www.icac.com>

IEEE Institute of Electrical and Electronics Engineers  
<http://www.ieee.org>

IMSA International Municipal Signal Association  
<http://www.imsasafety.org>

IPCEA Insulated Power Cable Engineers Association

NBMA Metal Buildings Manufacturers Association  
<http://www.mbma.com>

MSS Manufacturers Standardization Society of the Valve and Fittings Industry Inc.  
<http://www.mss-hq.com>

NAAMM National Association of Architectural Metal Manufacturers  
<http://www.naamm.org>

NAPHCC Plumbing-Heating-Cooling Contractors Association  
<http://www.phccweb.org.org>

NBS National Bureau of Standards  
See - NIST

NBBPVI National Board of Boiler and Pressure Vessel Inspectors  
<http://www.nationboard.org>

NEC National Electric Code  
See - NFPA National Fire Protection Association

NEMA National Electrical Manufacturers Association  
<http://www.nema.org>

NFPA National Fire Protection Association  
<http://www.nfpa.org>

NHLA National Hardwood Lumber Association  
<http://www.natlhardwood.org>

NIH National Institute of Health  
<http://www.nih.gov>

NIST National Institute of Standards and Technology  
<http://www.nist.gov>

NLMA Northeastern Lumber Manufacturers Association, Inc.  
<http://www.nelma.org>

NPA National Particleboard Association  
18928 Premiere Court  
Gaithersburg, MD 20879  
(301) 670-0604

NSF National Sanitation Foundation  
<http://www.nsf.org>

NWWDA Window and Door Manufacturers Association  
<http://www.nwwda.org>

OSHA Occupational Safety and Health Administration  
Department of Labor  
<http://www.osha.gov>

PCA Portland Cement Association  
<http://www.portcement.org>

PCI Precast Prestressed Concrete Institute  
<http://www.pci.org>

PPI The Plastic Pipe Institute  
<http://www.plasticpipe.org>

PEI Porcelain Enamel Institute, Inc.  
<http://www.porcelainenamel.com>

PTI Post-Tensioning Institute  
<http://www.post-tensioning.org>

RFCI The Resilient Floor Covering Institute  
<http://www.rfci.com>

RIS Redwood Inspection Service  
See - CRA

RMA Rubber Manufacturers Association, Inc.  
<http://www.rma.org>

SCMA Southern Cypress Manufacturers Association  
<http://www.cypressinfo.org>

SDI Steel Door Institute  
<http://www.steeldoor.org>

IGMA Insulating Glass Manufacturers Alliance  
<http://www.igmaonline.org>

SJI Steel Joist Institute  
<http://www.steeljoist.org>

SMACNA Sheet Metal and Air-Conditioning Contractors  
National Association, Inc.  
<http://www.smacna.org>

SSPC The Society for Protective Coatings  
<http://www.sspc.org>

STI Steel Tank Institute  
<http://www.steeltank.com>

SWI Steel Window Institute  
<http://www.steelwindows.com>

TCA Tile Council of America, Inc.  
<http://www.tileusa.com>

TEMA Tubular Exchange Manufacturers Association  
<http://www.tema.org>

TPI Truss Plate Institute, Inc.  
583 D'Onofrio Drive; Suite 200  
Madison, WI 53719  
(608) 833-5900

UBC The Uniform Building Code  
See ICBO

UL Underwriters' Laboratories Incorporated  
<http://www.ul.com>

ULC Underwriters' Laboratories of Canada  
<http://www.ulc.ca>

WCLIB West Coast Lumber Inspection Bureau  
6980 SW Varns Road, P.O. Box 23145  
Portland, OR 97223  
(503) 639-0651

WRCLA Western Red Cedar Lumber Association  
P.O. Box 120786  
New Brighton, MN 55112  
(612) 633-4334

WWPA Western Wood Products Association  
<http://www.wwpa.org>

- - - E N D - - -

**SECTION 01 74 19**  
**CONSTRUCTION WASTE MANAGEMENT**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.
- B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.
- C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:
  - 1. Waste Management Plan development and implementation.
  - 2. Techniques to minimize waste generation.
  - 3. Sorting and separating of waste materials.
  - 4. Salvage of existing materials and items for reuse or resale.
  - 5. Recycling of materials that cannot be reused or sold.
- D. At a minimum the following waste categories shall be diverted from landfills:
  - 1. Soil.
  - 2. Inerts (eg, concrete, masonry and asphalt).
  - 3. Clean dimensional wood and palette wood.
  - 4. Green waste (biodegradable landscaping materials).
  - 5. Engineered wood products (plywood, particle board and I-joists, etc).
  - 6. Metal products (eg, steel, wire, beverage containers, copper, etc).
  - 7. Cardboard, paper and packaging.
  - 8. Bitumen roofing materials.
  - 9. Plastics (eg, ABS, PVC).
  - 10. Carpet and/or pad.
  - 11. Gypsum board.
  - 12. Insulation.
  - 13. Paint.
  - 14. Fluorescent lamps.

**1.2 RELATED WORK**

- A. Section 02 41 00, DEMOLITION.
- B. Section 01 00 00, GENERAL REQUIREMENTS.

### 1.3 QUALITY ASSURANCE

- A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction /Demolition waste includes products of the following:
1. Excess or unusable construction materials.
  2. Packaging used for construction products.
  3. Poor planning and/or layout.
  4. Construction error.
  5. Over ordering.
  6. Weather damage.
  7. Contamination.
  8. Mishandling.
  9. Breakage.
- B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.
- C. Contractor shall develop and implement procedures to recycle construction and demolition waste to a minimum of 50 percent.
- D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.
- E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations. The Whole Building Design Guide website <http://www.wbdg.org/tools/cwm.php> provides a Construction Waste Management Database that contains information on companies that haul, collect, and process recyclable debris from construction projects.
- F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.

- G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.
- H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

#### **1.4 TERMINOLOGY**

- A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.
- B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.
- C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.
- D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.
- E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).
- F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.
- G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.
- H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.
- I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.
- J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.
- K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.

- L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.
  - 1. On-site Recycling - Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
  - 2. Off-site Recycling - Materials hauled to a location and used in an altered form in the manufacture of new products.
- M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.
- N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.
- O. Return: To give back reusable items or unused products to vendors for credit.
- P. Salvage: To remove waste materials from the site for resale or re-use by a third party.
- Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.
- R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.
- S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

#### **1.5 SUBMITTALS**

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:
- B. Prepare and submit to the Resident Engineer a written demolition debris management plan. The plan shall include, but not be limited to, the following information:
  - 1. Procedures to be used for debris management.
  - 2. Techniques to be used to minimize waste generation.
  - 3. Analysis of the estimated job site waste to be generated:

- a. List of each material and quantity to be salvaged, reused, recycled.
  - b. List of each material and quantity proposed to be taken to a landfill.
4. Detailed description of the Means/Methods to be used for material handling.
- a. On site: Material separation, storage, protection where applicable.
  - b. Off site: Transportation means and destination. Include list of materials.
    - 1) Description of materials to be site-separated and self-hauled to designated facilities.
    - 2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
  - c. The names and locations of mixed debris reuse and recycling facilities or sites.
  - d. The names and locations of trash disposal landfill facilities or sites.
  - e. Documentation that the facilities or sites are approved to receive the materials.
- C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.
- D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.

#### **1.6 APPLICABLE PUBLICATIONS**

- A Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.
- B. U.S. Green Building Council (USGBC):  
LEED Green Building Rating System for New Construction

#### **1.7 RECORDS**

Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the LEED Reference Guide and LEED Template.

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

- A. List of each material and quantity to be salvaged, recycled, reused.
- B. List of each material and quantity proposed to be taken to a landfill.
- C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

**PART 3 - EXECUTION**

**3.1 COLLECTION**

- A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.
- B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.
- C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

**3.2 DISPOSAL**

- A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.
- B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

**3.3 REPORT**

- A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.
- B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.
- C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

**SECTION 01 81 11****SUSTAINABLE DESIGN REQUIREMENTS****PART 1 - GENERAL****1.1 SUMMARY**

This Section describes general requirements and procedures to comply with the Guiding Principles for Leadership in High Performance and Sustainable Buildings Memorandum of Understanding incorporated in the Executive Orders 13423 and 13514; Energy Policy Act of 2005 (EPA 2005) and the Energy Independence and Security Act of 2007 (EISA 2007).

**1.2 OBJECTIVES**

- A. To maximize resource efficiency and reduce the environmental impacts of construction and operation, the Contractor during the construction phase of this project shall implement the following procedures:
1. Select products that minimize consumption of energy, water and non-renewable resources, while minimizing the amounts of pollution resulting from the production and employment of building technologies. It is the intent of this project to conform with EPA's Five Guiding Principles on environmentally preferable purchasing. The five principles are:
    - a. Include environmental considerations as part of the normal purchasing process.
    - b. Emphasize pollution prevention early in the purchasing process.
    - c. Examine multiple environmental attributes throughout a product's or service's life cycle.
    - d. Compare relevant environmental impacts when selecting products and services.
    - e. Collect and base purchasing decisions on accurate and meaningful information about environmental performance.
  2. Control sources for potential Indoor Air Quality (IAQ) pollutants by controlled selection of materials and processes used in project construction in order to attain superior IAQ.
  3. Products and processes that achieve the above objectives to the extent currently possible and practical have been selected and included in these Construction Documents. The Contractor is responsible to maintain and support these objectives in developing means and methods for performing the work of this Contract and in

proposing product substitutions and/or changes to specified processes.

4. Use building practices that insure construction debris and particulates do not contaminate or enter duct work prior to system startup and turn over.

### **1.3 RELATED DOCUMENTS**

- A. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT

### **1.4 DEFINITIONS**

- A. Agrifiber Products: Composite panel products derived from agricultural fiber
- B. Biobased Product: As defined in the 2002 Farm Bill, a product determined by the Secretary to be a commercial or industrial product (other than food or feed) that is composed, in whole or in significant part, of biological products or renewable domestic agricultural materials (including plant, animal, and marine materials) or forestry materials
- C. Biobased Content: The weight of the biobased material divided by the total weight of the product and expressed as a percentage by weight
- D. Certificates of Chain-of-Custody: Certificates signed by manufacturers certifying that wood used to make products has been tracked through its extraction and fabrication to ensure that it was obtained from forests certified by a specified certification program
- E. Composite Wood: A product consisting of wood fiber or other plant particles bonded together by a resin or binder
- F. Construction and Demolition Waste: Includes solid wastes, such as building materials, packaging, rubbish, debris, and rubble resulting from construction, remodeling, repair and demolition operations. A construction waste management plan is to be provided by the Contractor as defined in Section 01 74 19.
- G. Third Party Certification: Certification of levels of environmental achievement by nationally recognized sustainability rating system.
- H. Light Pollution: Light that extends beyond its source such that the additional light is wasted in an unwanted area or in an area where it inhibits view of the night sky
- I. Recycled Content Materials: Products that contain pre-consumer or post-consumer materials as all or part of their feedstock

- J. Post-Consumer Recycled Content: The percentage by weight of constituent materials that have been recovered or otherwise diverted from the solid-waste stream after consumer use
- K. Pre-Consumer Recycled Content: Materials that have been recovered or otherwise diverted from the solid-waste stream during the manufacturing process. Pre-consumer content must be material that would not have otherwise entered the waste stream as per Section 5 of the FTC Act, Part 260 "Guidelines for the Use of Environmental Marketing Claims": [www.ftc.gov/bcp/grnrule/guides980427](http://www.ftc.gov/bcp/grnrule/guides980427)
- L. Regional Materials: Materials that are extracted, harvested, recovered, and manufactured within a radius of 250 miles (400 km) from the Project site
- M. Salvaged or Reused Materials: Materials extracted from existing buildings in order to be reused in other buildings without being manufactured
- N. Sealant: Any material that fills and seals gaps between other materials
- O. Type 1 Finishes: Materials and finishes which have a potential for short-term levels of off gassing from chemicals inherent in their manufacturing process, or which are applied in a form requiring vehicles or carriers for spreading which release a high level of particulate matter in the process of installation and/or curing.
- P. Type 2 Finishes: "Fuzzy" materials and finishes which are woven, fibrous, or porous in nature and tend to adsorb chemicals offgas
- Q. Volatile Organic Compounds (VOCs): Any compound of carbon, excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate, which participates in atmospheric photochemical reactions. Compounds that have negligible photochemical reactivity, listed in EPA 40 CFR 51.100(s), are also excluded from this regulatory definition.

#### **1.5 SUBMITTALS**

- A. Sustainable Design Submittals:
  - 1. Water Conserving Fixtures: Submittals must include manufacturer's cut sheets for all water-consuming plumbing fixtures and fittings (toilets, urinals, faucets, showerheads, etc.) highlighting maximum flow rates and/or flush rates. Include cut sheets for any automatic faucet-control devices.
  - 2. Elimination of CFCs AND HCFCs: Provide manufacturer's cut sheets for all cooling equipment with manufacturer's product data, highlighting

- refrigerants; provide manufacturer's cut sheets for all fire-suppression equipment, highlighting fire-suppression agents; provide manufacturer's cut-sheets for all polystyrene insulation (XPS) and closed-cell spray foam polyurethane insulation, highlighting the blowing agent(s).
3. Appliances and Equipment: Provide copies of manufacturer's product data for all Energy Star eligible equipment and appliances, including office equipment, computers and printers, electronics, and commercial food service equipment (excluding HVAC and lighting components), verifying compliance with EPA's Energy Star program.
  4. Measurement and Verification Systems: Provide cut sheets and manufacturer's product data for all controls systems, highlighting electrical metering and trending capability components.
  5. Salvaged or Reused Materials: Provide documentation that lists each salvaged or reused material, the source or vendor of the material, the purchase price, and the replacement cost if greater than the purchase price.
  6. Recycled Content: Submittals for all materials with recycled content (excluding MEP systems equipment and components) must include the following documentation: Manufacturer's product data, product literature, or a letter from the manufacturer verifying the percentage of post-consumer and pre-consumer recycled content (by weight) of each material or product
  7. Regional Materials: Submittals for all products or materials expected to contribute to the regional calculation (excluding MEP systems equipment and components) must include the following documentation:
    - a. Cost of each material or product, excluding cost of labor and equipment for installation
    - b. Location of product manufacture and distance from point of manufacture to the Project Site
    - c. Location of point of extraction, harvest, or recovery for each raw material in each product and distance from the point of extraction, harvest, or recovery to the Project Site
    - d. Manufacturer's product data, product literature, or a letter from the manufacturer verifying the location and distance from the Project Site to the point of manufacture for each regional material

- e. Manufacturer's product data, product literature, or a letter from the manufacturer verifying the location and distance from the Project Site to the point of extraction, harvest, or recovery for each regional material or product, including, at a minimum, gravel and fill, planting materials, concrete, masonry, and GWB
8. Interior Adhesives and Sealants: Submittals for all field-applied adhesives and sealants, which have a potential impact on indoor air, must include manufacturer's MSDSs or other Product Data highlighting VOC content.
- a. Provide manufacturers' documentation verifying all adhesives used to apply laminates, whether shop-applied or field-applied, contain no urea-formaldehyde.
9. Interior Paints and Coatings: Submittals for all field-applied paints and coatings, which have a potential impact on indoor air, must include manufacturer's MSDSs or other Product Data highlighting VOC content
10. Floorcoverings:
- a. Carpet Systems: Submittals for all carpet must include the following:
    - 1) A copy of an assessment from the Building for Environmental and Economic Sustainability (BEES) software model, either Version 3.0 or 4.0, with parameters of the model set as described by this specification section.
    - 2) Manufacturer's product data verifying that all carpet systems meet or exceed the testing and product requirements of the Carpet and Rug Institute Green Label Plus program.
11. Composite Wood and Agrifiber Binders: Submittals for all composite wood and agrifiber products (including but not limited to particleboard, wheatboard, strawboard, agriboard products, engineered wood components, solid-core wood doors, OSB, MDF, and plywood products) must include manufacturer's product data verifying that these products contain no urea-formaldehyde resins.
12. Systems Furniture and Seating: Provide manufacturer's product data verifying that all systems furniture and seating products meet the requirements of one of the following:
- a. Greenguard certification
  - b. SCS Indoor Advantage certification
  - c. SCS Indoor Advantage Gold certification

- d. BIFMA Standard X7.1-2005, as tested to BIFMA method M7.1-2005 and as verified by an independent laboratory
  - d. Calculated indoor air concentration limits for furniture systems and seating determined by the U.S. EPA's Environmental Technology Verification Large Chamber Test Protocol for Measuring Emissions of VOCs and Aldehydes (September 1999) testing protocol as conducted in an independent air quality testing laboratory
13. Air Filtration: Provide manufacturer's cut sheets and product data highlighting the following:
    - a. Minimum Efficiency Reporting Value (MERV) for filtration media in all air handling units (AHUs) per ASHRAE HVAC Design Manual for Hospitals and Clinics.
    - b. Minimum Efficiency Reporting Value (MERV) for filtration media installed at return air grilles during construction if permanently installed AHUs are used during construction. See above for requirements
  14. Mercury in Lighting: Provide manufacturer's cut sheets or product data for all fluorescent or HID lamps highlighting mercury content.
  15. Lighting Controls: Provide manufacturer's cut sheets and shop drawing documentation highlighting all lighting controls systems components.
  16. Thermal Comfort Controls: Provide manufacturer's cut sheets and shop drawing documentation highlighting all thermal comfort-control systems components.
  17. Gypsum Wall Board: Provide manufacturer's cut sheets or product data verifying that all gypsum wallboard products are moisture and mold-resistant.
  18. Fiberglass Insulation: Provide manufacturer's cut sheets or product data verifying that fiberglass batt insulation contains no urea-formaldehyde.
  19. Duct Acoustical Insulation: Provide manufacturer's cut sheets or product data verifying that mechanical sound insulation materials in air distribution ducts consists of an impervious, non-porous coatings that prevent dust from accumulating in the insulating materials.
  20. Green Housekeeping: Provide documentation that all cleaning products and janitorial paper products meet the VOC limits and content requirements of this specification section.

- B. Project Materials Cost Data: Provide a spreadsheet in an electronic file indicating the total cost for the Project and the total cost of building materials used for the Project, as follows:
1. Not more than 60 days after the Preconstruction Meeting, the General Contractor shall provide to the Owner and Architect a preliminary schedule of materials costs for all materials used for the Project organized by specification section. Exclude labor costs and all mechanical, electrical, and plumbing (MEP) systems materials and labor costs. Include the following:
    - a. Identify each reused or salvaged material, its cost, and its replacement value.
    - b. Identify each recycled-content material, its post-consumer and pre-consumer recycled content as a percentage the product's weight, its cost, its combined recycled content value (defined as the sum of the post-consumer recycled content value plus one-half of the pre-consumer recycled content value), and the total combined recycled content value for all materials as a percentage of total materials costs.
    - c. Identify each regional material, its cost, its manufacturing location, the distance of this location from the Project site, the source location for each raw material component of the material, the distance of these extraction locations from the Project site, and the total value of regional materials as a percentage of total materials costs.
    - d. Identify each biobased material, its source, its cost, and the total value of biobased materials as a percentage of total materials costs. Also provide the total value of rapidly renewable materials (materials made from plants that are harvested in less than a 10-year cycle) as a percentage of total materials costs.
    - e. Identify each wood-based material, its cost, the total wood-based materials cost, each FSC Certified wood material, its cost, and the total value of Certified wood as a percentage of total wood-based materials costs.
  2. Provide final versions of the above spreadsheets to the Owner and Architect not more than 14 days after Substantial Completion.
- C. Construction Waste Management: See Section 01 74 19 "Construction Waste Management" for submittal requirements.

- D. Construction Indoor Air Quality (IAQ) Management: Submittals must include the following:
1. Not more than 30 days after the Preconstruction Meeting, prepare and submit for the Architect and Owner's approval, an electronic copy of the draft Construction IAQ Management Plan in an electronic file including, but not limited to, descriptions of the following:
  2. Instruction procedures for meeting or exceeding the minimum requirements of the Sheet Metal and Air Conditioning National Contractors Association (SMACNA) IAQ Guidelines for Occupied Buildings Under Construction, 1995, Chapter 3, including procedures for HVAC Protection, Source Control, Pathway Interruption, Housekeeping, and Scheduling
    - a. Instruction procedures for protecting absorptive materials stored on-site or installed from moisture damage
    - b. Schedule of submission to Architect of photographs of on-site construction IAQ management measures such as protection of ducts and on-site stored oil installed absorptive materials
    - c. Instruction procedures if air handlers must be used during construction, including a description of filtration media to be used at each return air grille
    - d. Instruction procedure for replacing all air-filtration media immediately prior to occupancy after completion of construction, including a description of filtration media to be used at each air handling or air supply unit
  3. Not more than 30 days following receipt of the approved draft CIAQMP, submit an electronic copy of the approved CIAQMP in an electronic file, along with the following:
    - a. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for all filtration media to be installed at return air grilles during construction if permanently installed AHUs are used during construction.
    - b. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for filtration media in all air handling units (AHUs).
  4. Not more than 14 days after Substantial Completion provide the following:
    - a. Documentation verifying required replacement of air filtration media in all air handling units (AHUs) after the completion of

construction and prior to occupancy and, if applicable, required installation of filtration during construction.

- b. Minimum of 18 Construction photographs: Six photographs taken on three different occasions during construction of the SMACNA approaches employed, along with a brief description of each approach, documenting implementation of the IAQ management measures, such as protection of ducts and on-site stored or installed absorptive materials.
- E. Sustainable Design Progress Reports: Concurrent with each Application for Payment, submit reports for the following:
- 1. Construction Waste Management: Waste reduction progress reports and logs complying with the requirements of Section 01 74 19 "Construction Waste Management."
  - 2. Construction IAQ Management: See details below under Section 3.2 Construction Indoor Air Quality Management for Construction IAQ management progress report requirements.

#### **1.6 QUALITY ASSURANCE**

- A. Preconstruction Meeting: After award of Contract and prior to the commencement of the Work, schedule and conduct meeting with Owner, Architect, and all Subcontractors to discuss the Construction Waste Management Plan, the required Construction Indoor Air Quality (IAQ) Management Plan, and all other Sustainable Design Requirements. The purpose of this meeting is to develop a mutual understanding of the Project's Sustainable Design Requirements and coordination of the Contractor's management of these requirements with the Contracting Officer and the Construction Quality Manager.
- B. Construction Job Conferences: The status of compliance with the Sustainable Design Requirements of these specifications will be an agenda item at all regular job meetings conducted during the course of work at the site.

### **PART 2 - PRODUCTS**

#### **2.1 PRODUCT ENVIRONMENTAL REQUIREMENTS**

- A. Do not burn rubbish, organic matter, etc. or any material on the site. Dispose of legally in accordance with Specifications Sections 01 74 19.
- B. Water-Conserving Fixtures: Plumbing fixtures and fittings shall use in aggregate at least 20% less water than the water use baseline calculated for the building after meeting the Energy Policy Act of 1992

fixture performance requirements. Flow and flush rates shall not exceed the following:

1. Toilets: no more than 1.3 gallons per flush, otherwise be dual flush 1.6/0.8 gallons per flush, and have documented bowl evacuation capability per MaP testing of at least 400 grams
2. Urinals: Waterless or Water sense rated with no more than 0.5 gallons per flush.
3. Lavatory Faucets: 0.5 gpm with automatic faucet controls
4. Kitchen Sink Lavatories: 2.2 gpm
5. Showerheads: no more than 1.5gpm

C. Elimination of CFCs AND HCFCs:

1. Ozone Protection and Greenhouse Gas Reduction: Base building cooling equipment shall contain no refrigerants other than the following: HCFC-123, HFC-134a, HFC-245fa, HFC-407c, or HFC 410a.
2. Fire suppression systems may not contain ozone-depleting substances such as halon 1301 and 1211.

D. Appliances and Equipment: All materials and equipment being installed that falls under the Energy Star or FEMP programs must be Energy Star or FEMP-rated. Eligible equipment includes refrigerators, motors, laundry equipment, office equipment and more. Refer to each program's website for a complete list.

E. HVAC Distribution Efficiency:

1. All duct systems shall be constructed of aluminum, stainless steel or galvanized sheet metal, as deemed appropriate based on the application requirements. No fiberglass duct board shall be permitted.
2. All medium- and high-pressure ductwork systems shall be pressure-tested in accordance with the current SMACNA standards.
3. All ductwork shall be externally insulated. No interior duct liner shall be permitted.
4. Where possible, all air terminal connections shall be hard-connected with sheet metal ductwork. If flexible ductwork is used, no flexible duct extension shall be more than six feet in length.
5. All HVAC equipment shall be isolated from the ductwork system with flexible duct connectors to minimize the transmittance of vibration.
6. All supply and return air branch ducts shall include the appropriate style of volume damper. Air terminal devices such as grilles,

- registers, and diffusers shall be balanced at duct branch dampers, not at terminal face.
- F. Measurement and Verification: Install controls and monitoring devices as required by MEP divisions order to comply with International Performance Measurement & Verification Protocol (IPMVP), Volume III: Concepts and Options for Determining Energy Savings in New Construction, April 2003, Option D.
1. The IPMVP provides guidance on situation-appropriate application of measurement and verification strategies.
- G. Salvaged or Reused materials: There shall be no substitutions for specified salvaged and reused materials and products.
1. Salvaged materials: Use of salvaged materials reduces impacts of disposal and manufacturing of replacements.
- H. Recycled Content of Materials:
1. Provide building materials with recycled content such that post-consumer recycled content value plus half the pre-consumer recycled content value constitutes a minimum of 30% of the cost of materials used for the Project, exclusive of all MEP equipment, labor, and delivery costs. The Contractor shall make all attempts to maximize the procurement of materials with recycled content.
    - a. e post-consumer recycled content value of a material shall be determined by dividing the weight of post-consumer recycled content by the total weight of the material and multiplying by the cost of the material.
    - b. Do not include mechanical and electrical components in the calculations.
    - c. Do not include labor and delivery costs in the calculations.
    - d. Recycled content of materials shall be defined according to the Federal Trade Commission's "Guide for the Use of Environmental Marketing Claims," 16 CFR 260.7 (e).
    - e. Utilize all on-site existing paving materials that are scheduled for demolition as granulated fill, and include the cost of this material had it been purchased in the calculations for recycled content value.
    - f. The materials in the following list must contain the minimum recycled content indicated:

<b>Category</b>	<b>Minimum Recycled Content</b>
Cast-in-Place Concrete	6% pre-consumer
Steel Fabrications	60% combined
Steel Studs	30% combined
Aluminum Fabrications	35% combined
Rigid Insulation	20% pre-consumer
Batt insulation	30% combined

I. Biobased Content:

1. For products designated by the USDA's BioPreferred program, provide products that meet or exceed USDA recommendations for biobased content, so long as products meet all other performance requirements in VA master specifications. For more information regarding the product categories covered by the BioPreferred program, visit <http://www.biopreferred.gov>

- - - E N D - - -

**SECTION 02 41 00**  
**DEMOLITION**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

This section specifies demolition and removal of buildings, portions of buildings, utilities, other structures and debris from trash dumps shown.

**1.2 RELATED WORK:**

- A. Safety Requirements: GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- B. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.
- C. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.
- D. Construction Waste Management: Section 017419 CONSTRUCTION WASTE MANAGEMENT.
- E. Infectious Control: Section 01 00 00, GENERAL REQUIREMENTS, Article 1.7, INFECTION PREVENTION MEASURES.

**1.3 PROTECTION:**

- A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations. Comply with requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article PROTECTION OF EXISTING STRUCTURES, EQUIPMENT, UTILITIES AND IMPROVEMENTS.
- C. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in hazardous or objectionable condition such as, but not limited to; ice, flooding, or pollution. Vacuum and dust the work area daily.
- D. In addition to previously listed fire and safety rules to be observed in performance of work, include following:
  - 1. No wall or part of wall shall be permitted to fall outwardly from structures.
  - 2. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for

- immediate use. Instruct all possible users in use of fire extinguishers.
3. Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4500 mm (15 feet) of fire hydrants.
- E. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the Resident Engineer. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have Resident Engineer's approval.
- F. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article 1.7 INFECTION PREVENTION MEASURES.

**PART 2 - PRODUCTS (NOT USED)**

**PART 3 - EXECUTION**

**3.1 DEMOLITION:**

- A. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Medical Center to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by the Resident Engineer. Break up concrete slabs below grade that do not require removal from present location into pieces not exceeding 600 mm (24 inches) square to permit drainage. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.
- B. Remove and legally dispose of all materials, other than earth to remain as part of project work, from any trash dumps shown. Materials removed shall become property of contractor and shall be disposed of in compliance with applicable federal, state or local permits, rules and/or regulations. All materials in the indicated trash dump areas, including above surrounding grade and extending to a depth of 1500mm (5feet) below surrounding grade, shall be included as part of the lump sum

compensation for the work of this section. Materials that are located beneath the surface of the surrounding ground more than 1500 mm (5 feet), or materials that are discovered to be hazardous, shall be handled as unforeseen. The removal of hazardous material shall be referred to Hazardous Materials specifications.

- C. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the Resident Engineer. When Utility lines are encountered that are not indicated on the drawings, the Resident Engineer shall be notified prior to further work in that area.

**3.2 CLEAN-UP:**

On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to Resident Engineer. Clean-up shall include off the Medical Center disposal of all items and materials not required to remain property of the Government as well as all debris and rubbish resulting from demolition operations.

- - - E N D - - -

**SECTION 02 82 13.19**  
**ASBESTOS FLOOR TILE AND MASTIC ABATEMENT**

**TABLE OF CONTENTS**

PART 1 - GENERAL.....	1
1.1 SUMMARY OF THE WORK.....	1
1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS.....	1
1.1.2 EXTENT OF WORK.....	1
1.1.3 RELATED WORK.....	1
1.1.4 TASKS.....	1
1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES.....	1
1.2 VARIATIONS IN QUANTITY.....	1
1.3 STOP ASBESTOS REMOVAL.....	1
1.4 DEFINITIONS.....	1
1.4.1 GENERAL.....	1
1.4.2 GLOSSARY.....	1
1.4.3 REFERENCED STANDARDS ORGANIZATIONS.....	1
1.5 APPLICABLE CODES AND REGULATIONS.....	1
1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS.....	1
1.5.2 CONTRACTOR RESPONSIBILITY.....	1
1.5.3 FEDERAL REQUIREMENTS.....	1
1.5.4 STATE REQUIREMENTS.....	1
1.5.5 LOCAL REQUIREMENTS.....	1
1.5.6 STANDARDS.....	1
1.5.7 EPA GUIDANCE DOCUMENTS.....	1
1.5.8 NOTICES.....	1
1.5.9 PERMITS/LICENSES.....	1
1.5.10 POSTING AND FILING OF REGULATIONS.....	1
1.5.11 VA RESPONSIBILITIES.....	1
1.5.12 SITE SECURITY.....	1
1.5.13 EMERGENCY ACTION PLAN AND ARRANGEMENTS.....	1
1.5.14 PRE-construction MEETING.....	1
1.6 PROJECT COORDINATION.....	1
1.6.1 PERSONNEL.....	1
1.7 RESPIRATORY PROTECTION.....	1
1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM.....	1
1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR.....	1
1.7.3 SELECTION AND USE OF RESPIRATORS.....	1

1.7.4	MINIMUM RESPIRATORY PROTECTION.....	2
1.7.5	MEDICAL WRITTEN OPINION.....	2
1.7.6	RESPIRATOR FIT TEST.....	2
1.7.7	RESPIRATOR FIT CHECK.....	2
1.7.8	MAINTENANCE AND CARE OF RESPIRATORS.....	2
1.8	WORKER PROTECTION.....	2
1.8.1	TRAINING OF ABATEMENT PERSONNEL.....	2
1.8.2	MEDICAL EXAMINATIONS.....	2
1.8.3	PERSONAL PROTECTIVE EQUIPMENT.....	2
1.8.4	REGULATED AREA ENTRY PROCEDURE.....	2
1.8.5	DECONTAMINATION PROCEDURE.....	2
1.8.6	REGULATED AREA REQUIREMENTS.....	2
	PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT.....	2
2.1	MATERIALS AND EQUIPMENT.....	2
2.1.1	GENERAL REQUIREMENTS (all abatement projects).....	2
2.1.2	NEGATIVE PRESSURE FILTRATION SYSTEM.....	2
2.1.3	DESIGN AND LAYOUT.....	2
2.1.4	NEGATIVE AIR MACHINES (HEPA UNITS).....	2
2.1.5	PRESSURE DIFFERENTIAL.....	2
2.2	CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA.....	2
2.2.1	GENERAL.....	2
2.2.3	CONTROLLING ACCESS TO THE REGULATED AREA.....	2
2.2.4	CRITICAL BARRIERS.....	2
2.2.5	Secondary barriers:.....	2
2.2.6	EXTENSION OF THE REGULATED AREA.....	2
2.3	MONITORING, INSPECTION AND TESTING.....	2
2.3.1	GENERAL.....	2
2.3.2	SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT.....	2
2.3.3	MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH/CIH.....	2
2.4	Asbestos hazard abatement plan.....	2
2.5	SUBMITTALS.....	2
2.5.1	PRE-start MEETING SUBMITTALS.....	2
2.5.2	SUBMITTALS DURING ABATEMENT.....	2
2.5.3	SUBMITTALS AT COMPLETION OF ABATEMENT.....	2
	PART 3 - EXECUTION.....	2
3.1	PRE-ABATEMENT ACTIVITIES.....	2
3.1.1	PRE-ABATEMENT MEETING.....	2

3.1.2	PRE-ABATEMENT INSPECTIONS AND PREPARATIONS.....	3
3.1.3	PRE-ABATEMENT CONSTRUCTION AND OPERATIONS.....	3
3.2	REGULATED AREA PREPARATIONS.....	3
3.2.1	OSHA DANGER SIGNS.....	3
3.2.2	CONTROLLING ACCESS TO THE REGULATED AREA.....	3
3.2.3	SHUT DOWN - LOCK OUT ELECTRICAL.....	3
3.2.4	SHUT DOWN - LOCK OUT HVAC.....	3
3.2.5	SANITARY FACILITIES.....	3
3.2.7	PREPARATION PRIOR TO SEALING OFF.....	3
3.2.8	Critical Barriers.....	3
3.2.10	PRE-CLEANING MOVABLE OBJECTS.....	3
3.2.11	PRE-CLEANING FIXED OBJECTS.....	3
3.2.12	PRE-CLEANING SURFACES IN THE REGULATED AREA.....	3
3.2.13	EXTENSION OF THE REGULATED AREA.....	3
3.3	REMOVAL OF CLASS II FLOORING AND TRANSITE MATERIALS:.....	3
3.3.1	GENERAL.....	3
3.3.2	REMOVAL OF flooring materials:.....	3
3.3.3	REMOVAL OF MASTIC.....	3
3.4	DISPOSAL OF CLASS ii WASTE MATERIAL:.....	3
3.4.1	GENERAL.....	3
3.5	PROJECT DECONTAMINATION.....	3
3.5.1	GENERAL.....	3
3.5.2	REGULATED AREA CLEARANCE.....	3
3.5.3	WORK DESCRIPTION.....	3
3.5.4	PRE-DECONTAMINATION CONDITIONS.....	3
3.5.5	CLEANING:.....	3
3.6	VISUAL INSPECTION AND AIR CLEARANCE TESTING.....	3
3.6.1	GENERAL.....	3
3.6.2	VISUAL INSPECTION.....	3
3.6.3	AIR CLEARANCE TESTING.....	3
3.6.4	final AIR CLEARANCE PROCEDURES.....	3
3.7	ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE.....	3
3.7.1	COMPLETION OF ABATEMENT WORK.....	3
3.7.2	CERTIFICATE OF COMPLETION BY CONTRACTOR.....	3
3.7.3	WORK SHIFTS.....	3
	ATTACHMENT #1.....	3
	ATTACHMENT #2.....	3

ATTACHMENT #3..... 4  
ATTACHMENT #4..... 4

02 82 13.19  
ASBESTOS FLOOR TILE AND MASTIC ABATEMENT SPECIFICATIONS

**PART 1 - GENERAL**

**1.1 SUMMARY OF THE WORK**

**1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS**

Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

**1.1.2 EXTENT OF WORK**

A. Below is a brief description of the estimated quantities of asbestos flooring materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.

B. Removal, clean-up and disposal of ACM flooring in an appropriate regulated area in the following approximate quantities and locations:

1,850 Square feet of flooring and mastic;  
Sheet Flooring over Asbestos Containing Floor Tile and Black Mastic.  
Rooms DB1-210, Rooms DB1-207 (partial), and DB1-207A.  
Includes allowances for: Door frame, wall removal and repair, floor removal for new sheet vinyl borders and residual floor mastic.

300 Square feet of duct mastic;  
Coordinate removal with GC & HVAC Contractors.

1 Each of fire door. Room DB1-244A.

**1.1.3 RELATED WORK**

- A. Section 07 84 00, FIRESTOPPING.
- B. Section 02 41 00, DEMOLITION.
- C. Division 09 FINISHES.

**1.1.4 TASKS**

The work tasks are summarized briefly as follows:

- A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, regulated area preparations, emergency procedures arrangements, and Asbestos Hazard Abatement Plans for asbestos abatement work.
- B. Abatement activities including sheet flooring, VCT flooring, flooring mastic, duct and/or duct mastic removal, encapsulation, enclosure, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections. Removal will be phased as required. Refer to the drawings and specifications for phasing and barrier requirements.
- C. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

**1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES**

- A. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.
- B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design Construction Procedure. VA Design Construction Procedure drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings or specifications shall be secured in writing from the VA representative through the pre-abatement plan of action. Refer to project drawings and specifications for room numbers, project phasing, construction areas and limitations. Coordinate with the General and Hvac Contractors for all project phasing schedules and required demolition materials and activities. Limitations of use shall apply to existing facilities shown on drawings and specifications.

**1.2 VARIATIONS IN QUANTITY**

The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated which are limited by the physical constraints imposed by occupancy of the buildings and accessibility to ACM. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this

contract. Where additional work is required beyond the above variation, the contractor shall provide unit prices for newly discovered ACM and those prices shall be used for additional work required under the contractor.

### 1.3 STOP ASBESTOS REMOVAL

If the Contracting Officer; their field representative; (the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/Certified Industrial Hygienist (VPIH/CIH) presents a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered negative pressure air flow in the containment and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA shall follow-up with a written order to the Contractor as soon as it is practicable. The Contractor shall not resume any asbestos removal activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following events shall be reported immediately by the Contractor's competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:

- A. Airborne PCM analysis results equal to or greater than 0.01 f/cc outside a regulated area or >0.05 f/cc inside a regulated area;
- B. breach or break in regulated area containment barrier(s);
- C. less than -0.02" WCG pressure in the regulated area;
- D. serious injury/death at the site;
- E. fire/safety emergency at the site;
- F. respiratory protection system failure;
- G. power failure or loss of wetting agent; or
- H. any visible emissions observed outside the regulated area.

### 1.4 DEFINITIONS

#### 1.4.1 GENERAL

Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

#### 1.4.2 GLOSSARY

**Abatement** - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

**Aerosol** - Solid or liquid particulate suspended in air.

**Adequately wet** - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

**Aggressive method** - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

**Aggressive sampling** - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

**AHERA** - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

**Aircell** - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

**Air monitoring** - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air. For personal samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis. NIOSH Method 7402 can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

**Air sample filter** - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

**Amended water** - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

**Asbestos** - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

**Asbestos Hazard Abatement Plan (AHAP)** - Asbestos work procedures required to be submitted by the contractor before work begins.

**Asbestos-containing material (ACM)** - Any material containing more than one percent of asbestos.

**Asbestos contaminated elements (ACE)** - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

**Asbestos-contaminated soil (ACS)** - Soil found in the work area or in adjacent areas such as crawlspaces or pipe tunnels which is contaminated with asbestos-containing material debris and cannot be easily separated from the material.

**Asbestos-containing waste (ACW) material** - Asbestos-containing material or asbestos contaminated objects requiring disposal.

**Asbestos Project Monitor** - Some states require that any person conducting asbestos abatement clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

**Asbestos waste decontamination facility** - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

**Authorized person** - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

**Authorized visitor** - Any person approved by the VA; the contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA0..

**Barrier** - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

**Containment Barrier** - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

**Critical Barrier** - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

**Primary Barrier** - Plastic barriers placed over critical barriers and exposed directly to abatement work.

**Secondary Barrier** - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

**Breathing zone** - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

**Bridging encapsulant** - An encapsulant that forms a layer on the surface of the ACM.

**Building/facility owner** - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

**Bulk testing** - The collection and analysis of suspect asbestos containing materials.

**Certified Industrial Hygienist (CIH)** - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

**Class I asbestos work** - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

**Class II asbestos work** - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

**Clean room/Changing room** - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

**Clearance sample** - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's professional industrial hygiene consultant/Certified Industrial Hygienist (VPIH/CIH).

**Closely resemble** - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

**Competent person** - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

**Contractor's Professional Industrial Hygienist (CPIH/CIH)** - The asbestos abatement contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of a PIH and may be a certified industrial hygienist (CIH).

**Count** - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.

**Crawl space** - An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials and/or asbestos contaminated soil.

**Decontamination area/unit** - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

**Demolition** - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

**VA Total** - means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

**Disposal bag** - Typically 6 mil thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

**Disturbance** - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag which shall not exceed 60 inches in length or width.

**Drum** - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

**Employee exposure** - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

**Encapsulant** - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

**Encapsulation** - Treating ACM with an encapsulant.

**Enclosure** - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

**Equipment room** - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

**Fiber** - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

**Fibers per cubic centimeter (f/cc)** - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

**Filter** - Media used in respirators, vacuums, or other machines to remove particulate from air.

**Firestopping** - Material used to close the open parts of a structure in order to prevent a fire from spreading.

**Friable asbestos containing material** - Any material containing more than one (1) percent or asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

**Glovebag** - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

**High efficiency particulate air (HEPA) filter** - An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

**HEPA vacuum** - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

**Homogeneous area** - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

**HVAC** - Heating, Ventilation and Air Conditioning

**Industrial hygienist (IH)** - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

**Industrial hygienist technician (IH Technician)** - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned. Some states require that an industrial hygienist technician conducting asbestos abatement clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

**Intact** - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

**Lockdown** - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

**National Emission Standards for Hazardous Air Pollutants (NESHAP)** - EPA's rule to control emissions of asbestos to the environment (40 CFR Part 61, Subpart M).

**Negative initial exposure assessment** - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PELs.

**Negative pressure** - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

**Negative pressure respirator** - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

**Non-friable ACM** - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

**Organic vapor cartridge** - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

**Outside air** - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

**Owner/operator** - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

**Penetrating encapsulant** - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

**Personal protective equipment (PPE)** - equipment designed to protect user from injury and/or specific job hazard. Such equipment may

include protective clothing, hard hats, safety glasses, and respirators.

**Personal sampling/monitoring** - Representative air samples obtained in the breathing zone for one or workers within the regulated area using a filter cassette and a calibrated air sampling pump to determine asbestos exposure.

**Permissible exposure limit (PEL)** - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the eight (8) hour time weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit is 1.0 fibers per cubic centimeter (1 f/cc).

**Pipe Tunnel** - An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings, or asbestos-contaminated soil.

**Polarized light microscopy (PLM)** - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

**Polyethylene sheeting** - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, flame retardant per NFPA 241.

**Positive/negative fit check** - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing in (inhaling) and then temporarily occluding the exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator respectively.

**Presumed ACM (PACM)** - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (b).

**Professional IH** - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH. The PIH may be either the VA's PIH (VPIH) or Contractor's PIH (CPIH/CIH).

**Project designer** - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B)(5).

**Assigned Protection factor** - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

**Qualitative fit test (QLFT)** - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

**Quantitative fit test (QNFT)** - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

**Regulated area** - An area established by the employer to demarcate where Class I, II, and III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a

work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

**Regulated ACM (RACM)** - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

**Removal** - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

**Renovation** - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

**Repair** - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

**Shower room** - The portion of the PDF where personnel shower before leaving the regulated area.

**Supplied air respirator (SAR)** - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-1989.

**Surfacing ACM** - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

**Surfactant** - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

**Thermal system ACM** - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

**Transmission electron microscopy (TEM)** - A microscopy method that can identify and count asbestos fibers.

**VA Professional Industrial Hygienist (VPIH/CIH)** - The Department of Veterans Affairs Professional Industrial Hygienist must meet the qualifications of a PIH, and may be a Certified Industrial Hygienist (CIH).

**VA Representative** - The VA official responsible for on-going project work.

**Visible emissions** - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

**Waste/Equipment decontamination facility (W/EDF)** - The area in which equipment is decontaminated before removal from the regulated area.

**Waste generator** - Any owner or operator whose act or process produces asbestos-containing waste material.

**Waste shipment record** - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

**Wet cleaning** - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

#### 1.4.3 REFERENCED STANDARDS ORGANIZATIONS

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses may be subject to change.

- A. VA Department of Veterans Affairs  
810 Vermont Avenue, NW  
Washington, DC 20420
- B. AIHA American Industrial Hygiene Association  
2700 Prosperity Avenue, Suite 250  
Fairfax, VA 22031  
703-849-8888
- C. ANSI American National Standards Institute  
1430 Broadway  
New York, NY 10018  
212-354-3300
- D. ASTM American Society for Testing and Materials  
1916 Race St.  
Philadelphia, PA 19103  
215-299-5400
- E. CFR Code of Federal Regulations  
Government Printing Office  
Washington, DC 20420
- F. CGA Compressed Gas Association  
1235 Jefferson Davis Highway  
Arlington, VA 22202  
703-979-0900
- G. CS Commercial Standard of the National Institute of Standards and  
Technology (NIST)  
U. S. Department of Commerce  
Government Printing Office  
Washington, DC 20420
- H. EPA Environmental Protection Agency  
401 M St., SW  
Washington, DC 20460  
202-382-3949
- I. MIL-STD Military Standards/Standardization Division  
Office of the Assistant Secretary of Defense  
Washington, DC 20420
- I. NEC National Electrical Code (by NFPA)
- J. NEMA National Electrical Manufacturer's Association  
2101 L Street, NW  
Washington, DC 20037
- K. NFPA National Fire Protection Association  
1 Batterymarch Park  
P.O. Box 9101  
Quincy, MA 02269-9101  
800-344-3555

- L. NIOSH National Institutes for Occupational Safety and Health  
4676 Columbia Parkway  
Cincinnati, OH 45226  
513-533-8236
- M. OSHA Occupational Safety and Health Administration  
U.S. Department of Labor  
Government Printing Office  
Washington, DC 20402
- N. UL Underwriters Laboratory  
333 Pfingsten Rd.  
Northbrook, IL 60062  
312-272-8800

## **1.5 APPLICABLE CODES AND REGULATIONS**

### **1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS**

- A. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.
- B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.
- C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

### **1.5.2 CONTRACTOR RESPONSIBILITY**

The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE) including respiratory protection including respirator fit testing, as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH/CIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

### **1.5.3 FEDERAL REQUIREMENTS**

Federal requirements which govern some aspect of asbestos abatement include, but are not limited to, the following regulations.

- A. Occupational Safety and Health Administration (OSHA)
  - 1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos

2. Title 29 CFR 1910.132 - Personal Protective Equipment
  3. Title 29 CFR 1910.134 - Respiratory Protection
  4. Title 29 CFR 1926 - Construction Industry Standards
  5. Title 29 CFR 1910.20 - Access to Employee Exposure and Medical Records
  6. Title 29 CFR 1910.1200 - Hazard Communication
  7. Title 29 CFR 1910.151 - Medical and First Aid
- B. Environmental Protection Agency (EPA)
1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
  2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)
- C. Department of Transportation (DOT)
- Title 49 CFR 100 - 185 - Transportation

#### **1.5.4 STATE REQUIREMENTS**

State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following:

**Wisconsin Administrative Code NR 447**

**Wisconsin State Statues 285.11, 285.13, 285.17 and 285.27**

**Wisconsin Department of Health Services DHS 159**

#### **1.5.5 LOCAL REQUIREMENTS**

If local requirements are more stringent than federal or state standards, the local standards are to be followed.

#### **1.5.6 STANDARDS**

- A. Standards which govern asbestos abatement activities include, but are not limited to, the following:
1. American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems Z88.2 - Practices for Respiratory Protection.
  2. Underwriters Laboratories (UL) 586-90 - UL Standard for Safety of HEPA filter Units, 7th Edition.
- B. Standards which govern encapsulation work include, but are not limited to, the following:
1. American Society for Testing and Materials (ASTM)
- C. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
  2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
  3. NFPA 101 - Life Safety Code

#### **1.5.7 EPA GUIDANCE DOCUMENTS**

- A. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.
- B. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
- C. Asbestos Waste Management Guidance EPA 530-SW-85-007

- D. A Guide to Respiratory Protection for the Asbestos Abatement Industry  
EPA-560-OPTS-86-001
- E. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

#### 1.5.8 NOTICES

- A. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:
- B. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification are given to EPA, State, and Local authorities.

#### 1.5.9 PERMITS/LICENSES

- A. The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

#### 1.5.10 POSTING AND FILING OF REGULATIONS

- A. Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

#### 1.5.11 VA RESPONSIBILITIES

Prior to commencement of work:

- A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipments and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**
- B. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized, calibration data and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

#### 1.5.12 SITE SECURITY

- A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.
- B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent person shall immediately notify the VA.
- C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.

- D. Access to the regulated area shall be through of a critical barrier doorway. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside; however, they shall be sealed with poly sheeting and taped until needed.
- E. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.
- F. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
- G. The regulated area shall be locked during non-working hours and secured by VA security guards.

#### **1.5.13 EMERGENCY ACTION PLAN AND ARRANGEMENTS**

- A. An Emergency Action Plan shall be developed prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a);(b).
- B. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.
- C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
- D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
- E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
  - 1. For non life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
  - 2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.
- F. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
- G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.

- H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the Asbestos Hazard Abatement Plans during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

#### **1.5.14 PRE-CONSTRUCTION MEETING**

Prior to commencing the work, the Contractor shall meet with the VA Certified Industrial Hygienist (VPCIH) to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

- A. Proof of Contractor licensing.
- B. Proof the Competent Person(s) is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person(s) shall also be presented.
- C. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
- D. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
- E. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).
- F. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
- G. A copy of the Asbestos Hazard Abatement Plan. In these procedures, the following information must be detailed, specific for this project.
  - 1. Regulated area preparation procedures;
  - 2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
  - 3. Decontamination area set-up/layout and decontamination procedures for employees;
  - 4. Abatement methods/procedures and equipment to be used;
  - 5. Personal protective equipment to be used;
- H. At this meeting the Contractor shall provide all submittals as required.
- I. Procedures for handling, packaging and disposal of asbestos waste.
- J. Emergency Action Plan and Contingency Plan Procedures.

#### **1.6 PROJECT COORDINATION**

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

##### **1.6.1 PERSONNEL**

- A. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for

compliance with these specifications and all other applicable requirements.

B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with color picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.

C. Minimum qualifications for Contractor and assigned personnel are:

1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of federal (and state as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the state; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive Asbestos Hazard Abatement Plans for asbestos work; and has adequate materials, equipment and supplies to perform the work.
2. The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
3. The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete Asbestos Hazard Abatement Plan for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.
4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the Asbestos Hazard Abatement Plans of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical and respiratory protection documentation; and has certificate of training/current refresher and State accreditation/license.

All personnel should be in compliance with OSHA construction safety training as applicable and submit certification.

## **1.7 RESPIRATORY PROTECTION**

### **1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM**

The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with the January 8,

1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.Subpart I;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c)(1)(i - ix) - Respiratory Protection Program.

#### **1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR**

The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) year's experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

#### **1.7.3 SELECTION AND USE OF RESPIRATORS**

The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

#### **1.7.4 MINIMUM RESPIRATORY PROTECTION**

Minimum respiratory protection shall be a half face, HEPA filtered, air purifying respirator when fiber levels are maintained consistently at or below 0.1 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

#### **1.7.5 MEDICAL WRITTEN OPINION**

No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically qualified to wear the class of respirator to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress.

#### **1.7.6 RESPIRATOR FIT TEST**

All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Quantitative fit tests shall be done for PAPRs which have been put into a motor/blower failure mode.

#### **1.7.7 RESPIRATOR FIT CHECK**

The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a user seal check shall preclude that person from wearing a respirator inside the regulated area until resolution of the problem.

#### **1.7.8 MAINTENANCE AND CARE OF RESPIRATORS**

The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and Care of Respirators.

#### **1.7.9 SUPPLIED AIR SYSTEMS**

If a supplied air system is used, the system shall meet all requirements of 29 CFR 1910.134 and the ANSI/Compressed Gas Association (CGA) Commodity Specification for Air current requirements for Type 1 - Grade D breathing air. Low pressure systems are not allowed to be used on asbestos abatement projects. Supplied Air respirator use shall be in accordance with EPA/NIOSH publication EPA-560-OPTS-86-001 "A Guide to Respiratory Protection for the Asbestos Abatement Industry". The competent person on site will be responsible for the supplied air system to ensure the safety of the worker.

### **1.8 WORKER PROTECTION**

#### **1.8.1 TRAINING OF ABATEMENT PERSONNEL**

Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

#### **1.8.2 MEDICAL EXAMINATIONS**

Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the medical opinion the person has been evaluated for working in a heat and cold stress environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

#### **1.8.3 PERSONAL PROTECTIVE EQUIPMENT**

Provide whole body clothing, head coverings, foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle. Worker protection shall meet the most stringent requirements.

#### **1.8.4 REGULATED AREA ENTRY PROCEDURE**

The Competent Person shall ensure that each time workers enter the regulated area they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room

to the equipment room where they put on non-disposable required personal protective equipment.

#### **1.8.5 DECONTAMINATION PROCEDURE**

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

- A. When exiting the regulated area, remove all disposable PPE and dispose of in a disposal bag provided in the regulated area.
- B. Carefully decontaminate and clean the respirator. Put in a clean container/bag.

#### **1.8.6 REGULATED AREA REQUIREMENTS**

The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for Class I regulated areas at 29 CFR 1926.1101 (e) are met applicable to Class II work. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

#### **1.9 DECONTAMINATION FACILITIES:**

##### **1.9.1 DESCRIPTION:**

Provide each regulated area with separate personnel decontamination facilities (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

##### **1.9.2 GENERAL REQUIREMENTS**

All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j)(1) and these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

##### **1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF**

The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141 (d)(3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel equipped with GFCI protection for all temporary power in the clean room. Provide adequate


lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.

#### 1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)

1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3 layers of 6 mil opaque fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6 mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, minimum 10 pounds capacity, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.
2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6 mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be changed a minimum of daily or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.
3. Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made with 2 layers of 6 mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and

the rest of the building by air tight walls and ceiling constructed of a minimum of 3 layers of 6 mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.

4. The PDF shall be as follows: Clean room at the entrance followed by a shower room followed by an equipment room leading to the regulated area. Each doorway in the PDF shall be a minimum of 2 layers of 6 mil opaque fire retardant poly.

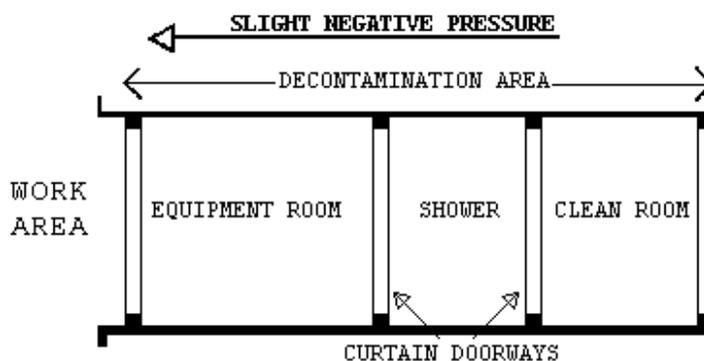


#### 1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF)

The Competent Person shall provide an W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:

1. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
2. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6 mil fire retardant poly.
3. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6 mil fire retardant poly.
4. Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 2 x 4 wood framing and 2 layers of 6 mil fire retardant poly. The clean room shall be located so as to provide access to the holding

room from the building exterior. Doorways to the clean room shall be constructed of 2 layers of 6 mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.

5. The W/EDF shall be as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

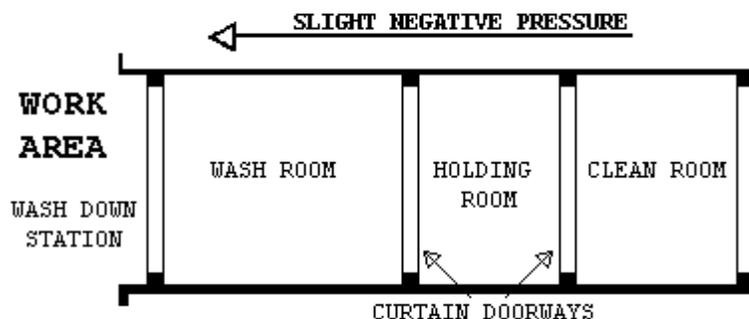

#### 1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES:

At the washdown station in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. These personnel will not be required to wear PPE. At no time shall personnel from the clean side be allowed to enter the Wash Room.

## PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT

### 2.1 MATERIALS AND EQUIPMENT

#### 2.1.1 GENERAL REQUIREMENTS (ALL ABATEMENT PROJECTS)

Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's representative.

- A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
- B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable and combustible materials cannot be stored

- inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.
- C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.
  - D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
  - E. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mil shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
  - F. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
  - G. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6 mil fire retardant poly.
  - H. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
  - I. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
  - J. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).
  - K. Disposal bags - 2 layers of 6 mil poly for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
  - L. The VA shall be provided an advance copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-project submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.
  - M. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
  - N. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).

### **2.1.2 NEGATIVE PRESSURE FILTRATION SYSTEM**

The Contractor shall provide enough HEPA negative air machines to continuously maintain a pressure differential of -0.02" water column gauge (WCG). The Competent Person shall determine the number of units

needed for the regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the cubic feet per minute (CFM) for each unit to determine the number of units needed to continuously maintain a pressure differential of  $-0.02$ " WCG. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area.

NIOSH has done extensive studies and has determined that negative air machines typically operate at ~50% efficiency. The contractor shall consider this in their determination of number of units needed to continuously maintain a pressure differential of  $-0.02$ " WCG. The contractor shall use 8 air changes per hour or double the number of machines, based on their calculations, or submit proof their machines operate at stated capacities, at a 2" pressure drop across the filters.

### **2.1.3 DESIGN AND LAYOUT**

- A. Before start of work submit the design and layout of the regulated area and the negative air machines. The submittal shall indicate the number of, location of and size of negative air machines. The point(s) of exhaust, air flow within the regulated area, anticipated negative pressure differential, and supporting calculations for sizing shall be provided. In addition, submit the following:
  1. Method of supplying power to the units and designation/location of the panels.
  2. Description of testing method(s) for correct air volume and pressure differential.
  3. If auxiliary power supply is to be provided for the negative air machines, provide a schematic diagram of the power supply and manufacturer's data on the generator and switch.

### **2.1.4 NEGATIVE AIR MACHINES (HEPA UNITS)**

- A. Negative Air Machine Cabinet: The cabinet shall be constructed of steel or other durable material capable of withstanding potential damage from rough handling and transportation. The width of the cabinet shall be less than 30" in order to fit in standard doorways. The cabinet must be factory sealed to prevent asbestos fibers from being released during use, transport, or maintenance. Any access to and replacement of filters shall be from the inlet end. The unit must be on casters or wheels.
- B. Negative Air Machine Fan: The rating capacity of the fan must indicate the CFM under actual operating conditions. Manufacturer's typically use "free-air" (no resistance) conditions when rating fans. The fan must be a centrifugal type fan.
- C. Negative Air Machine Final Filter: The final filter shall be a HEPA filter. The filter media must be completely sealed on all edges within a structurally rigid frame. The filter shall align with a continuous flexible gasket material in the negative air machine housing to form an air tight seal. Each HEPA filter shall be certified by the manufacturer to have an efficiency of not less than 99.97%. Testing shall have been done in accordance with Military Standard MIL-STD-282 and Army Instruction Manual 136-300-175A. Each filter must bear a UL586 label to indicate ability to perform under specified conditions. Each filter shall be marked with the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.

- D. Negative Air Machine Pre-filters: The pre-filters, which protect the final HEPA filter by removing larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-filtration are required. A first stage pre-filter shall be a low efficiency type for particles 10 micron or larger. A second stage pre-filter shall have a medium efficiency effective for particles down to 5 micron or larger. Pre-filters shall be installed either on or in the intake opening of the NAM and the second stage filter must be held in place with a special housing or clamps.
- E. Negative Air Machine Instrumentation: Each unit must be equipped with a gauge to measure the pressure drop across the filters and to indicate when filters have become loaded and need to be changed. A table indicating the cfm for various pressure readings on the gauge shall be affixed near the gauge for reference or the reading shall indicate at what point the filters shall be changed, noting cfm delivery. The unit must have an elapsed time meter to show total hours of operation.
- F. Negative Air Machine Safety and Warning Devices: An electrical/mechanical lockout must be provided to prevent the fan from being operated without a HEPA filter. Units must be equipped with an automatic shutdown device to stop the fan in the event of a rupture in the HEPA filter or blockage in the discharge of the fan. Warning lights are required to indicate normal operation; too high a pressure drop across filters; or too low of a pressure drop across filters.
- G. Negative Air Machine Electrical: All electrical components shall be approved by the National Electrical Manufacturer's Association (NEMA) and Underwriters Laboratories (UL). Each unit must be provided with overload protection and the motor, fan, fan housing, and cabinet must be grounded.
- H. It is essential that replacement HEPA filters be tested using an "in-line" testing method, to ensure the seal around the periphery was not damaged during replacement. Damage to the outer HEPA filter seal could allow contaminated air to bypass the HEPA filter and be discharged to an inappropriate location. Contractor will provide written documentation of test results for negative air machine units with HEPA filters changed by the contractor or documentation when changed and tested by the contractor filters.

#### **2.1.5 PRESSURE DIFFERENTIAL**

The fully operational negative air system within the regulated area shall continuously maintain a pressure differential of -0.02" water column gauge. Before any disturbance of any asbestos material, this shall be demonstrated to the VA by use of a pressure differential meter/manometer as required by OSHA 29 CFR 1926.1101(e)(5)(i). The Competent Person shall be responsible for providing, maintaining, and documenting the negative pressure and air changes as required by OSHA and this specification.

### **2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA**

#### **2.2.1 GENERAL**

- A. Using critical barriers, seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All surfaces in the regulated area must be covered to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated as a result of the work, shall immediately stop work and clean up the contamination at no additional cost to the VA. Provide firestopping and

identify all fire barrier penetrations due to abatement work as specified in Section 3.1.4.8; FIRESTOPPING.

- B. Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. All uncontaminated removable furniture, equipment and/or supplies shall be removed by the VA from the regulated area before commencing work. Any objects remaining in the regulated area shall be completely covered with 2 layers of 6-mil fire retardant poly sheeting and secured with duct tape. Lock out and tag out any HVAC/electrical systems in the regulated area.

### **2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA**

Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to, or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid and capable of withstanding the negative pressure.

### **2.2.4 CRITICAL BARRIERS**

Completely separate any operations in the regulated area from adjacent areas using 2 layers of 6 mil fire retardant poly and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects/openings in the regulated area. Heat must be shut off any objects covered with poly.

### **2.2.5 SECONDARY BARRIERS:**

A loose layer of 6 mil poly shall be used as a drop cloth to protect the primary layers from debris generated during the abatement. This layer shall be replaced as needed during the work and at a minimum once per work day.

### **2.2.6 EXTENSION OF THE REGULATED AREA**

If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. Decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

### **2.2.7 FIRESTOPPING**

- A. Through penetrations caused by cables, cable trays, pipes, sleeves, conduits, etc. must be firestopped with a fire-rated firestop system providing an air tight seal.
- B. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA representative immediately. All walls, floors and ceilings are

considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.

- C. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

## **2.3 MONITORING, INSPECTION AND TESTING**

### **2.3.1 GENERAL**

- A. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. OSHA requires that the Employee exposure to asbestos must not exceed 0.1 fibers per cubic centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.
- B. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.
- C. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH/CIH with review and approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

### **2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT**

- A. The purpose of the work of the VPIH/CIH is to: assure quality; adherence to the specification; resolve problems; prevent the spread of contamination beyond the regulated area; and assure clearance at the end of the project. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:
1. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
  2. Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
  3. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
  4. Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of conflicts, interpret data, etc.
  5. Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area at the conclusion of the abatement to certify compliance with all regulations and VA requirements/specifications.
  6. Task 6: Issue certificate of decontamination for each regulated area and project report.
- B. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
- C. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

### **2.3.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH/CIH**

The Contractor's CPIH/CIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH

Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor (or Abatement Worker) and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation on substantially similar projects in size and scope. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for air personal monitoring for asbestos in 29 CFR 1926.1101 (f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

#### **2.4 ASBESTOS HAZARD ABATEMENT PLAN**

The Contractor shall have established Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of this project and the specifications. The AHAP(s) shall be submitted for review and approval to the VA prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAP(s) are:

- A. Minimum Personnel Qualifications
- B. Emergency Action Plan/Contingency Plans and Arrangements
- C. Security and Safety Procedures
- D. Respiratory Protection/Personal Protective Equipment Program and Training
- E. Medical Surveillance Program and Recordkeeping
- F. Regulated Area Requirements - Containment Barriers/Isolation of Regulated Area
- G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
- H. Negative Pressure Systems Requirements
- I. Monitoring, Inspections, and Testing
- J. Removal Procedures for ACM
- K. Removal of Contaminated Soil (if applicable)
- L. Encapsulation Procedures for ACM
- M. Disposal of ACM waste/equipment
- N. Regulated Area Decontamination/Clean-up
- O. Regulated Area Visual and Air Clearance
- P. Project Completion/Closeout

## 2.5 SUBMITTALS

### 2.5.1 PRE-START MEETING SUBMITTALS

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:

- A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
- B. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
- C. Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
- D. Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
  1. Supplied air system, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
  2. Waste water filtration system, shower system, containment barriers.
  3. Encapsulants, surfactants, hand held sprayers, airless sprayers, and fire extinguishers.
  4. Respirators, protective clothing, personal protective equipment.
  5. Fire safety equipment to be used in the regulated area.
- E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
- F. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.
- G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A. And area or clearance air monitoring in accordance with EPA AHERA protocols.
- H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
  1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; and Completion Date
  2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution

3. List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal and state EPA), penalties, and legal actions taken against the company including and of the company's officers (including damages paid) in the last 3 years. Provide copies and all information needed for verification.
- I. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH/CIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.
    1. CPIH/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of AHAP(s) developed; medical opinion; and current respirator fit test.
    2. Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
    3. Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
  - J. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of the AHAP incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and Asbestos Hazard Abatement Plans; copies of monitoring results of the five referenced projects listed and analytical method(s) used.
  - K. Rented equipment must be decontaminated prior to returning to the rental agency.
  - L. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all MSDS, and application instructions.

#### **2.5.2 SUBMITTALS DURING ABATEMENT**

- A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breeching, equipment failures, emergencies, and any cause for stopping work; representative

air monitoring and results/TWAs/ELs. Submit this information daily to the VPIH/CIH.

- B. The CPIH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.
  - 1. Removal of any poly barriers.
  - 2. Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant.
  - 3. Packaging and removal of ACM waste from regulated area.
  - 4. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

### **2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT**

The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in accordance with Attachment #1. All clearance and perimeter area samples must be submitted. The VA Representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

## **PART 3 - EXECUTION**

### **3.1 PRE-ABATEMENT ACTIVITIES**

#### **3.1.1 PRE-ABATEMENT MEETING**

The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH/CIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed. This is a Phased Project, coordinate with the General & Hvac Contractors all of the phasing and demolition requirements.

#### **3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS**

Before any work begins on the construction of the regulated area, the Contractor will:

- A. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video

photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.

- B. The VA Representative, the Contractor, and the VPIH/CIH must be aware of VA A/E Quality Alert 07/09 indicating the failure to identify asbestos in the areas listed as well as common issues when preparing specifications and contract documents. This is especially critical when demolition is planned, because AHERA surveys are non-destructive, and ACM may remain undetected. A NESHAPS (destructive) ACM inspection should be conducted on all building structures that will be demolished. Ensure the following areas are inspected on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility chases/walls; transite piping/ductwork/sheets; behind radiators; lab fume hoods; transite lab countertops; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawl spaces( previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; and steam line trench coverings.
- C. Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned and removed or properly protected from contamination.
- D. If present and required, remove and dispose of carpeting from floors in the regulated area. If ACM floor tile is attached to the carpet while the Contractor is removing the carpet that section of the carpet will be disposed of as asbestos waste.
- E. Inspect existing firestopping in the regulated area. Correct as needed.

### **3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS**

- A. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
- B. Upon completion of all preparatory work, the CPIH/CIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved AHAP, especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation. The operational systems for respiratory protection and the negative pressure system shall be demonstrated for proper performance.
- C. The CPIH/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.
- D. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification and all applicable regulations.

## **3.2 REGULATED AREA PREPARATIONS**

### **3.2.1 OSHA DANGER SIGNS**

Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed the PEL. Signs shall be

posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.

### **3.2.2 CONTROLLING ACCESS TO THE REGULATED AREA**

Access to the regulated area is allowed only through the personnel decontamination facility (PDF), if required. All other means of access shall be eliminated and OSHA Danger demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly sheeting to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid

### **3.2.3 SHUT DOWN - LOCK OUT ELECTRICAL**

Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.

### **3.2.4 SHUT DOWN - LOCK OUT HVAC**

Shut down and lock out/tag out heating, cooling, and air conditioning system (**HVAC**) components that are in, supply or pass through the regulated area.

Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil poly disposal bags for disposal as asbestos waste.

### **3.2.5 SANITARY FACILITIES**

The Contractor may use the on-site restrooms and maintain them in a clean and sanitary condition throughout the abatement project.

### **3.2.6 WATER FOR ABATEMENT**

The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.

### **3.2.7 PREPARATION PRIOR TO SEALING OFF**

Place all tools, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Remove all uncontaminated removable furniture, equipment and/or supplies from the regulated area before commencing work, or completely cover with 2 layers of 6-mil fire retardant poly sheeting and secure with duct tape. Lock out and tag out any HVAC systems in the regulated area.

### **3.2.8 CRITICAL BARRIERS**

Completely separate any openings into the regulated area from adjacent areas using fire retardant poly at least 6 mils thick and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects in the regulated area. Heat must be shut off any objects covered with poly

### **3.2.9 FLOOR BARRIERS**

If floor removal is not being done, all floors in the regulated area shall be covered with 2 layers of 6 mil fire retardant poly and brought up the wall 12 inches

### **3.2.10 PRE-CLEANING MOVABLE OBJECTS**

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.

Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location.

### **3.2.11 PRE-CLEANING FIXED OBJECTS**

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area

Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.

### **3.2.12 PRE-CLEANING SURFACES IN THE REGULATED AREA**

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area

Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with

equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

### **3.2.13 EXTENSION OF THE REGULATED AREA**

If the regulated area barrier is breached in any manner that could allow the passage of asbestos fibers or debris, the Competent Person shall immediately stop work, continue wetting, and proceed to extend the regulated area to enclose the affected area as per procedures described in this specification. If the affected area cannot be enclosed, decontamination measures and cleanup shall start immediately. All personnel shall be isolated from the affected area until decontamination/cleanup is completed as verified by visual inspection and air monitoring. Air monitoring at completion must indicate background levels.

### **3.3 REMOVAL OF CLASS II FLOORING AND TRANSITE MATERIALS:**

#### **3.3.1 GENERAL**

All applicable requirements of OSHA, EPA, and DOT shall be followed during Class II work. Keep materials intact; do not disturb; wet while working with it; wrap as soon as possible with 2 layers of 6 mil plastic for disposal.

#### **3.3.2 REMOVAL OF FLOORING MATERIALS:**

- A. All requirements of OSHA Flooring agreement provisions shall be followed:
  1. The Contractor shall provide enough HEPA negative air machines to effect  $> - 0.02$ " WCG pressure. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area. The contractor shall use double the number of machines, based on their calculations, or submit proof their machines operate at stated capacities, at a 2" pressure drop across the filters.
  2. Flooring shall be removed intact, as much as possible. Do not rip or tear flooring.
  3. Mechanical chipping or sanding is not allowed.
  4. Flooring shall be removed with an infra-red heating unit operated by trained personnel following the manufacturer's instructions.
  5. Wet clean and HEPA vacuum the floor before and after removal of flooring.
  6. Place a 6 mil poly layer 4' by 10' adjacent to the regulated area for use as a decontaminated area. All waste must be contained in the regulated area.
  7. Package all waste in 6 mil poly lined fiberboard drums.

#### **3.3.3 REMOVAL OF MASTIC**

- A. All chemical mastic removers must be low in volatile organic compound (VOC) content, have a flash point greater than 200° Fahrenheit, contain no chlorinated solvents, and comply with California Air Resources Board (CARB) thresholds for VOCs (effective January 1, 2010).
- B. A negative air machine as required under flooring removal shall be provided.
- C. Follow all manufacturers' instructions in the use of the mastic removal material.
- D. Package all waste in 6 mil poly lined fiberboard drums.

- E. Prior to application of any liquid material, check the floor for penetrations and seal before removing mastic.

### **3.4 DISPOSAL OF CLASS II WASTE MATERIAL:**

#### **3.4.1 GENERAL**

Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

### **3.5 PROJECT DECONTAMINATION**

#### **3.5.1 GENERAL**

- A. The VA must be notified at least 24 hours in advance of any waste removed from the containment,
- B. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
- C. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
- D. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

#### **3.5.2 REGULATED AREA CLEARANCE**

Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

#### **3.5.3 WORK DESCRIPTION**

Decontamination includes the clearance air testing in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

#### **3.5.4 PRE-DECONTAMINATION CONDITIONS**

- A. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the secondary barrier of poly removed and disposed of along with any gross debris generated by the work.
- B. At the start of decontamination, the following shall be in place:
  - 1. Critical barriers over all openings consisting of two layers of 6 mil poly which is the sole barrier between the regulated area and the rest of the building or outside.
  - 2. Decontamination facilities, if required for personnel and equipment in operating condition.

### 3.5.5 CLEANING:

Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. Additional cleaning(s) may be needed as determined by the CPIH/VPIH/CIH.

## 3.6 VISUAL INSPECTION AND AIR CLEARANCE TESTING

### 3.6.1 GENERAL

Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH after the final cleaning.

### 3.6.2 VISUAL INSPECTION

Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

### 3.6.3 AIR CLEARANCE TESTING

- A. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final clearance testing. Air samples will be collected and analyzed in accordance with procedures for AHERA in this specification. If work is less than 260 lf/160 sf/35 cf, 5 PCM samples shall be collected for clearance and a minimum of one field blank. If work is equal to or more than 260 lf/160 sf/35 cf, AHERA TEM sampling shall be performed for clearance. TEM analysis shall be done in accordance with procedures for EPA AHERA in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved. **All Additional inspection and testing costs will be borne by the Contractor.**
- B. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

### 3.6.4 FINAL AIR CLEARANCE PROCEDURES

- A. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured by the AHERA PCM protocol, or 70 AHERA structures per square millimeter (s/mm<sup>2</sup>) by AHERA TEM.
- B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations

have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:

1. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method or asbestos fibers counted using the AHERA TEM method.
2. Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques except where soil is not encapsulated or enclosed. Samples will be collected on 0.8µm MCE filters for PCM analysis and 0.45µm Polycarbonate filters for TEM. A minimum of 1200 Liters of using calibrated pumps shall be collected for clearance samples. Before pumps are started, initiate aggressive air mixing sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.

### **3.7 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE**

#### **3.7.1 COMPLETION OF ABATEMENT WORK**

- A. After thorough decontamination, complete asbestos abatement work upon meeting the regulated area clearance criteria and fulfilling the following:
  1. Remove all equipment, materials, and debris from the project area.
  2. Package and dispose of all asbestos waste as required.
  3. Repair or replace all interior finishes damaged during the abatement work.
  4. Fulfill other project closeout requirements as specified elsewhere in this specification.

#### **3.7.2 CERTIFICATE OF COMPLETION BY CONTRACTOR**

The CPIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

#### **3.7.3 WORK SHIFTS**

Work may be done during administrative hours (8:00 AM to 4:30 PM) Monday - Friday excluding Federal Holidays. If it is necessary to perform work after hours due to Project Phasing or if scheduling interferes with the VA's Labs ability to function. Then off tour work will be required at no additional expense to the VA.

**ATTACHMENT #1**

**CERTIFICATE OF COMPLETION**

DATE: \_\_\_\_\_ VA Project #: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_ Abatement Contractor: \_\_\_\_\_

VAMC/ADDRESS: \_\_\_\_\_

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):  
which took place from        /        /        to        /        /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all abatement work was done in accordance with OSHA requirements and the manufacturer's recommendations.

CPIH/CIH Signature/Date: \_\_\_\_\_

CPIH/CIH Print Name: \_\_\_\_\_

Abatement Contractor Signature/Date: \_\_\_\_\_

Abatement Contractor Print Name: \_\_\_\_\_

**ATTACHMENT #2****CERTIFICATE OF WORKER'S ACKNOWLEDGMENT**

PROJECT NAME: \_\_\_\_\_ DATE: \_\_\_\_\_

PROJECT ADDRESS: \_\_\_\_\_

ABATEMENT CONTRACTOR'S NAME: \_\_\_\_\_

**WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.**

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature: \_\_\_\_\_

Printed Name: \_\_\_\_\_

Social Security Number: \_\_\_\_\_

Witness: \_\_\_\_\_

**ATTACHMENT #3**

**AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION**

VA PROJECT NAME AND NUMBER: \_\_\_\_\_

VA MEDICAL FACILITY: \_\_\_\_\_

ABATEMENT CONTRACTOR'S NAME AND ADDRESS: \_\_\_\_\_

1. I verify that the following individual

Name: \_\_\_\_\_ Social Security Number: \_\_\_\_\_

who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

Address: \_\_\_\_\_

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name of CPIH/CIH: \_\_\_\_\_

Signature of Contractor: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name of Contractor: \_\_\_\_\_

**ATTACHMENT #4**

**ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS**

VA Project Location: \_\_\_\_\_

VA Project #: \_\_\_\_\_

VA Project Description: \_\_\_\_\_

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature \_\_\_\_\_ Date \_\_\_\_\_

Abatement Contractor Competent Person(s) \_\_\_\_\_ Date \_\_\_\_\_

- - END - -

**SECTION 03 30 53  
(SHORT-FORM) CAST-IN-PLACE CONCRETE**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

This section specifies cast-in-place structural concrete and material and mixes for other concrete.

**1.2 TOLERANCES:**

- A. ACI 117.
- B. Slab Finishes: ACI 117, F-number method in accordance with ASTM E1155.

**1.3 REGULATORY REQUIREMENTS:**

- A. ACI SP-66 ACI Detailing Manual
- B. ACI 318 - Building Code Requirements for Reinforced Concrete.

**1.4 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Concrete Mix Design.
- C. Shop Drawings: Reinforcing steel: Complete shop drawings.
- D. Manufacturer's Certificates: Air-entraining admixture, chemical admixtures, curing compounds.

**1.5 APPLICABLE PUBLICATIONS:**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Concrete Institute (ACI):
  - 117-10.....Specification for Tolerances for Concrete Construction, Materials and Commentary
  - 211.1-91(R2009).....Standard Practice for Proportions for Normal, Heavyweight, and Mass Concrete
  - 211.2-98(R2004).....Standard Practice for Selecting Proportions for Structural Lightweight Concrete
  - 301-10.....Specifications for Structural Concrete
  - 305.1-06.....Specification for Hot Weather Concreting
  - 306.1-90(R2002).....Standard Specification for Cold Weather Concreting
  - SP-66-04 .....ACI Detailing Manual
  - 318-11.....Building Code Requirements for Structural Concrete and Commentary
  - 347-04.....Guide to Formwork for Concrete
- C. American Society for Testing And Materials (ASTM):

A185/A185M-07.....Standard Specification for Steel Welded Wire  
 Reinforcement, Plain, for Concrete Reinforcement  
 A615/A615M-09.....Standard Specification for Deformed and Plain  
 Carbon Steel Bars for Concrete Reinforcement  
 A996/A996M-09.....Standard Specification for Rail Steel and Axle  
 Steel Deformed Bars for Concrete Reinforcement  
 C31/C31M-10.....Standard Practice for Making and Curing Concrete  
 Test Specimens in the Field  
 C33/C33M-11a.....Standard Specification for Concrete Aggregates  
 C39/C39M-12.....Standard Test Method for Compressive Strength of  
 Cylindrical Concrete Specimens  
 C94/C94M-12.....Standard Specification for Ready Mixed Concrete  
 C143/C143M-10.....Standard Test Method for Slump of Hydraulic  
 Cement Concrete  
 C150-11.....Standard Specification for Portland Cement  
 C171-07.....Standard Specification for Sheet Material for  
 Curing Concrete  
 C172-10.....Standard Practice for Sampling Freshly Mixed  
 Concrete  
 C173-10.....Standard Test Method for Air Content of Freshly  
 Mixed Concrete by the Volumetric Method  
 C192/C192M-07.....Standard Practice for Making and Curing Concrete  
 Test Specimens in the Laboratory  
 C231-10.....Standard Test Method for Air Content of Freshly  
 Mixed Concrete by the Pressure Method  
 C260-10.....Standard Specification for Air-Entraining  
 Admixtures for Concrete  
 C330-09.....Standard Specification for Lightweight  
 Aggregates for Structural Concrete  
 C494/C494M-11.....Standard Specification for Chemical Admixtures  
 for Concrete  
 C618-12.....Standard Specification for Coal Fly Ash and Raw  
 or Calcined Natural Pozzolan for Use in Concrete  
 D1751-04(R2008) .....Standard Specification for Preformed Expansion  
 Joint Fillers for Concrete Paving and Structural  
 Construction (Non-extruding and Resilient  
 Bituminous Types)  
 D4397-10.....Standard Specification for Polyethylene Sheeting  
 for Construction, Industrial and Agricultural  
 Applications

E1155-96(2008).....Standard Test Method for Determining  $F_F$  Floor  
Flatness and  $F_L$  Floor Levelness Numbers

**PART 2 - PRODUCTS**

**2.1 FORMS:**

Wood, plywood, metal, or other materials, approved by Resident Engineer, of grade or type suitable to obtain type of finish specified.

**2.2 MATERIALS:**

- A. Portland Cement: ASTM C150, Type I or II.
- B. Fly Ash: ASTM C618, Class C or F including supplementary optional requirements relating to reactive aggregates and alkalis, and loss on ignition (LOI) not to exceed 5 percent.
- C. Coarse Aggregate: ASTM C33, Size 67. Size 467 may be used for footings and walls over 300 mm (12 inches) thick. Coarse aggregate for applied topping and metal pan stair fill shall be Size 7.
- D. Fine Aggregate: ASTM C33.
- E. Mixing Water: Fresh, clean, and potable.
- F. Air-Entraining Admixture: ASTM C260.
  
- G. Vapor Barrier: ASTM D4397, //0.25 mm (10 mil)//0.38 mm (15 mil)//.
- H. Welded Wire Fabric: ASTM A185.
- I. Expansion Joint Filler: ASTM D1751.
- J. Sheet Materials for Curing Concrete: ASTM C171.
- K. Liquid Densifier/Sealer: 100 percent active colorless aqueous silicate solution.
- L. Grout, Non-Shrinking: Premixed ferrous or non-ferrous, mixed and applied in accordance with manufacturer's recommendations. Grout shall show no settlement or vertical drying shrinkage at 3 days or thereafter based on initial measurement made at time of placement, and produce a compressive strength of at least 18mpa (2500 psi) at 3 days and 35mpa (5000 psi) at 28 days.

**2.3 CONCRETE MIXES:**

- A. Design of concrete mixes using materials specified shall be the responsibility of the Contractor as set forth under Option C of ASTM C94.
- B. Compressive strength at 28 days shall be not less than // 25mpa // 30 Mpa // (//3000 psi // 4000 psi // ).
- C. Establish strength of concrete by testing prior to beginning concreting operation. Test consists of average of three cylinders made and cured in accordance with ASTM C192 and tested in accordance with ASTM C39.

- D. Maximum slump for vibrated concrete is 100 mm (4 inches) tested in accordance with ASTM C143.
- E. Cement and water factor (See Table I):

**TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE**

Concrete: Strength	Non-Air-Entrained		Air-Entrained	
Min. 28 Day Comp. Str. MPa (psi)	Min. Cement kg/m <sup>3</sup> (lbs/c. yd)	Max. Water Cement Ratio	Min. Cement kg/m <sup>3</sup> (lbs/c. yd)	Max. Water Cement Ratio
30 (4000) <sup>1,3</sup>	325 (550)	0.55	340 (570)	0.50

1. If trial mixes are used, the proposed mix design shall achieve a compressive strength 8.3 MPa (1200 psi) in excess of f'c. For concrete strengths above 35 Mpa (5000 psi), the proposed mix design shall achieve a compressive strength 9.7 MPa (1400 psi) in excess of f'c.

**2.4 BATCHING & MIXING:**

- A. Store, batch, and mix materials as specified in ASTM C94.
1. Job-Mixed: Concrete mixed at job site shall be mixed in a batch mixer in manner specified for stationary mixers in ASTM C94.
  2. Ready-Mixed: Ready-mixed concrete comply with ASTM C94, except use of non-agitating equipment for transporting concrete to the site will not be permitted. With each load of concrete delivered to project, ready-mixed concrete producer shall furnish, in duplicate, certification as required by ASTM C94.

**PART 3 - EXECUTION****3.1 FORMWORK:**

- A. Installation conform to ACI 347. Sufficiently tight to hold concrete without leakage, sufficiently braced to withstand vibration of concrete, and to carry, without appreciable deflection, all dead and live loads to which they may be subjected.
- B. Treating and Wetting: Treat or wet contact forms as follows:
1. Coat plywood and board forms with non-staining form sealer. In hot weather cool forms by wetting with cool water just before concrete is placed.
  2. Clean and coat removable metal forms with light form oil before reinforcement is placed. In hot weather cool metal forms by thoroughly wetting with water just before placing concrete.
  3. Use sealer on reused plywood forms as specified for new material.

- C. Inserts, sleeves, and similar items: Flashing reglets, masonry ties, anchors, inserts, wires, hangers, sleeves, boxes for floor hinges and other items specified as furnished under this and other sections of specifications and required to be in their final position at time concrete is placed shall be properly located, accurately positioned and built into construction, and maintained securely in place.
- D. Construction Tolerances:
1. Contractor is responsible for setting and maintaining concrete formwork to assure erection of completed work within tolerances specified to accommodate installation or other rough and finish materials. Remedial work necessary for correcting excessive tolerances is the responsibility of the Contractor. Erected work that exceeds specified tolerance limits shall be remedied or removed and replaced, at no additional cost to the Government.
  2. Permissible surface irregularities for various classes of materials are defined as "finishes" in specification sections covering individual materials. They are to be distinguished from tolerances specified which are applicable to surface irregularities of structural elements.

### **3.2 REINFORCEMENT:**

Details of concrete reinforcement, unless otherwise shown, in accordance with ACI 318 and ACI SP-66. Support and securely tie reinforcing steel to prevent displacement during placing of concrete.

### **3.3 VAPOR BARRIER:**

- A. Except where membrane waterproofing is required, place interior concrete slabs on a continuous vapor barrier.
- B. Place 100 mm (4 inches) of fine granular fill over the vapor barrier to act as a blotter for concrete slab.
- C. Lap joints 150 mm (6 inches) and seal with a compatible pressure-sensitive tape.
- D. Patch punctures and tears.

### **3.4 PLACING CONCRETE:**

- A. Remove water from excavations before concrete is placed. Remove hardened concrete, debris and other foreign materials from interior of forms, and from inside of mixing and conveying equipment. Obtain approval of Resident Engineer before placing concrete. Provide screeds at required elevations for concrete slabs.
- B. Before placing new concrete on or against concrete which has set, existing surfaces shall be roughened and cleaned free from all laitance, foreign matter, and loose particles.

- C. Convey concrete from mixer to final place of deposit by method which will prevent segregation or loss of ingredients. Do not deposit in work concrete that has attained its initial set or has contained its water or cement more than 1 1/2 hours. Do not allow concrete to drop freely more than 1500 mm (5 feet) in unexposed work nor more than 900 mm (3 feet) in exposed work. Place and consolidate concrete in horizontal layers not exceeding 300 mm (12 inches) in thickness. Consolidate concrete by spading, rodding, and mechanical vibrator. Do not secure vibrator to forms or reinforcement. Vibration shall be carried on continuously with placing of concrete.

### **3.5 PROTECTION AND CURING:**

Protect exposed surfaces of concrete from premature drying, wash by rain or running water, wind, mechanical injury, and excessively hot or cold temperature. Curing method shall be subject to approval by Resident Engineer.

### **3.6 FINISHES:**

#### **A. Slab Finishes:**

1. Scratch Finish: Slab surfaces to receive a bonded applied cementitious application shall all be thoroughly raked or wire broomed after partial setting (within 2 hours after placing) to roughen surface to insure a permanent bond between base slab and applied cementitious materials.
2. Floating: Allow water brought to surface by float used for rough finishing to evaporate before surface is again floated or troweled. Do not sprinkle dry cement on surface to absorb water.
3. Float Finish: Ramps, stair treads, and platforms, both interior and exterior, equipment pads, and slabs to receive non-cementitious materials, except as specified, shall be screened and floated to a smooth dense finish. After first floating, while surface is still soft, surfaces shall be checked for alignment using a straightedge or template. Correct high spots by cutting down with a trowel or similar tool and correct low spots by filling in with material of same composition as floor finish. Remove any surface projections on floated finish by rubbing or dry grinding. Refloat the slab to a uniform sandy texture.
4. Steel Trowel Finish: Applied toppings, concrete surfaces to receive resilient floor covering or carpet, future floor roof and all monolithic concrete floor slabs exposed in finished work and for which no other finish is shown or specified shall be steel troweled. Final steel troweling to secure a smooth, dense surface shall be delayed as long as possible, generally when the surface can no longer

be dented with finger. During final troweling, tilt steel trowel at a slight angle and exert heavy pressure on trowel to compact cement paste and form a dense, smooth surface. Finished surface shall be free of trowel marks, uniform in texture and appearance.

5. Finished slab flatness (FF) and levelness (FL) values comply with the following minimum requirements:

Slab on grade & Shored suspended slabs	Unshored suspended slabs
Specified overall value F <sub>F</sub> 25/F <sub>L</sub> 20	Specified overall value F <sub>F</sub> 25
Minimum local value F <sub>F</sub> 17/F <sub>L</sub> 15	Minimum local value F <sub>F</sub> 17

### 3.7 SURFACE TREATMENTS:

- A. Surface treatments shall be mixed and applied in accordance with manufacturer's printed instructions.
- B. Liquid Densifier/Sealer: Use on all exposed concrete floors and concrete floors to receive carpeting // except those specified to receive non-slip finish //.

### 3.8 APPLIED TOPPING:

- A. Separate concrete topping with thickness and strength shown with only enough water to insure a stiff, workable, plastic mix.
- B. Continuously place applied topping until entire section is complete, struck off with straightedge, compact by rolling or tamping, float and steel trowel to a hard smooth finish.

### 3.9 RESURFACING FLOORS:

Remove existing flooring, in areas to receive resurfacing, to expose existing structural slab and to extend not less than 25 mm (1 inch) below new finished floor level. Prepare exposed structural slab surface by roughening, broom cleaning, wetting, and grouting. Apply topping as specified.

- - - E N D - - -

**SECTION 06 10 00  
ROUGH CARPENTRY**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

Section specifies wood blocking, framing, sheathing, furring, nailers, sub-flooring, rough hardware, and light wood construction.

**1.2 RELATED WORK:**

- A. Milled woodwork: Section 06 20 00, FINISH CARPENTRY.
- B. Gypsum sheathing: Section 09 29 00, GYPSUM BOARD.

**1.3 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings showing framing connection details, fasteners, connections and dimensions.

**1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:**

- A. Protect lumber and other products from dampness both during and after delivery at site.
- B. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.
- C. Stack plywood and other board products so as to prevent warping.
- D. Locate stacks on well drained areas, supported at least 150 mm (6 inches) above grade and cover with well ventilated sheds having firmly constructed over hanging roof with sufficient end wall to protect lumber from driving rain.

**1.5 APPLICABLE PUBLICATIONS:**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Forest and Paper Association (AFPA):  
National Design Specification for Wood Construction  
NDS-05.....Conventional Wood Frame Construction
- C. American Institute of Timber Construction (AITC):  
A190.1-07.....Structural Glued Laminated Timber
- D. American Society of Mechanical Engineers (ASME):  
B18.2.1-96(R2005).....Square and Hex Bolts and Screws  
B18.2.2-87.....Square and Hex Nuts  
B18.6.1-97.....Wood Screws  
B18.6.4-98(R2005).....Thread Forming and Thread Cutting Tapping Screws  
and Metallic Drive Screws

- E. American Plywood Association (APA):  
 E30-07.....Engineered Wood Construction Guide
- F. American Society for Testing And Materials (ASTM):  
 A47-99(R2009).....Ferritic Malleable Iron Castings  
 A48-03(R2008).....Gray Iron Castings  
 A653/A653M-10.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-  
 Iron Alloy Coated (Galvannealed) by the Hot Dip  
 Process  
 C954-10.....Steel Drill Screws for the Application of Gypsum  
 Board or Metal Plaster Bases to Steel Studs from  
 0.033 inch (2.24 mm) to 0.112-inch (2.84 mm) in  
 thickness  
 C1002-07.....Steel Self-Piercing Tapping Screws for the  
 Application of Gypsum Panel Products or Metal  
 Plaster Bases to Wood Studs or Metal Studs  
 D143-09.....Small Clear Specimens of Timber, Method of  
 Testing  
 D1760-01.....Pressure Treatment of Timber Products  
 D2559-10.....Adhesives for Structural Laminated Wood Products  
 for Use Under Exterior (Wet Use) Exposure  
 Conditions  
 D3498-11.....Adhesives for Field-Gluing Plywood to Lumber  
 Framing for Floor Systems  
 F844-07.....Washers, Steel, Plan (Flat) Unhardened for  
 General Use  
 F1667-08.....Nails, Spikes, and Staples
- G. Federal Specifications (Fed. Spec.):  
 MM-L-736C.....Lumber; Hardwood
- H. Commercial Item Description (CID):  
 A-A-55615.....Shield, Expansion (Wood Screw and Lag Bolt Self  
 Threading Anchors)
- I. Military Specification (Mil. Spec.):  
 MIL-L-19140E.....Lumber and Plywood, Fire-Retardant Treated
- J. Truss Plate Institute (TPI):  
 TPI-85.....Metal Plate Connected Wood Trusses
- K. U.S. Department of Commerce Product Standard (PS)  
 PS 1-95.....Construction and Industrial Plywood  
 PS 20-05.....American Softwood Lumber Standard

**PART 2 - PRODUCTS****2.1 LUMBER:**

- A. Unless otherwise specified, each piece of lumber bear grade mark, stamp, or other identifying marks indicating grades of material, and rules or standards under which produced.
  - 1. Identifying marks in accordance with rule or standard under which material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
  - 2. Inspection agency for lumber approved by the Board of Review, American Lumber Standards Committee, to grade species used.
- B. Structural Members: Species and grade as listed in the AFPA, National Design Specification for Wood Construction having design stresses as shown.
- C. Lumber Other Than Structural:
  - 1. Unless otherwise specified, species graded under the grading rules of an inspection agency approved by Board of Review, American Lumber Standards Committee.
  - 2. Framing lumber: Minimum extreme fiber stress in bending of 1100.
  - 3. Furring, blocking, nailers and similar items 100 mm (4 inches) and narrower Standard Grade; and, members 150 mm (6 inches) and wider, Number 2 Grade.
- D. Sizes:
  - 1. Conforming to Prod. Std., PS20.
  - 2. Size references are nominal sizes, unless otherwise specified, actual sizes within manufacturing tolerances allowed by standard under which produced.
- E. Moisture Content:
  - 1. At time of delivery and maintained at the site.
  - 2. Boards and lumber 50 mm (2 inches) and less in thickness: 19 percent or less.
  - 3. Lumber over 50 mm (2 inches) thick: 25 percent or less.
- F. Fire Retardant Treatment:
  - 1. Mil Spec. MIL-L-19140 with piece of treated material bearing identification of testing agency and showing performance rating.
  - 2. Treatment and performance inspection, by an independent and qualified testing agency that establishes performance ratings.
- G. Preservative Treatment:
  - 1. Do not treat Heart Redwood and Western Red Cedar.

2. Treat wood members and plywood exposed to weather or in contact with plaster, masonry or concrete, including framing of open roofed structures; sills, sole plates, furring, and sleepers that are less than 600 mm (24 inches) from ground; nailers, edge strips, blocking, crickets, curbs, cant, vent strips and other members used in connection with roofing and flashing materials.
3. Treat other members specified as preservative treated (PT).
4. Preservative treat by the pressure method complying with ASTM D1760, except any process involving the use of Chromated Copper arsenate (CCA) for pressure treating wood is not permitted.

## **2.2 PLYWOOD**

- A. Comply with Prod. Std., PS 1.
- B. Bear the mark of a recognized association or independent inspection agency that maintains continuing control over quality of plywood which identifies compliance by veneer grade, group number, span rating where applicable, and glue type.
- C. Sheathing:
  1. APA rated Exposure 1 or Exterior; panel grade CD or better.
  2. Wall sheathing:
    - a. Minimum 9 mm (11/32 inch) thick with supports 400 mm (16 inches) on center and 12 mm (15/32 inch) thick with supports 600 mm (24 inches) on center unless specified otherwise.
    - b. Minimum 1200 mm (48 inches) wide at corners without corner bracing of framing.

## **2.3 STRUCTURAL-USE PANELS**

- A. Comply with APA.
- B. Bearing the mark of a recognized association or independent agency that maintains continuing control over quality of panel which identifies compliance by end use, Span Rating, and exposure durability classification.
- C. Plywood Backing Panels:
  1. For mounting electrical or telephone equipment, provide fire-retardant-treated plywood panels with grade C-D plugged Exposure 1, in thickness indicated on Contract documents or, if not otherwise indicated, not less than 15/32 inch (11.9 mm) thick.

## **2.4 ROUGH HARDWARE AND ADHESIVES:**

- A. Anchor Bolts:
  1. ASME B18.2.1 and ANSI B18.2.2 galvanized, 13 mm (1/2 inch) unless shown otherwise.

2. Extend at least 200 mm (8 inches) into masonry or concrete with ends bent 50 mm (2 inches).
- B. Miscellaneous Bolts: Expansion Bolts: C1D, A-A-55615; lag bolt, long enough to extend at least 65 mm (2-1/2 inches) into masonry or concrete. Use 13 mm (1/2 inch) bolt unless shown otherwise.
- C. Washers
1. ASTM F844.
  2. Use zinc or cadmium coated steel or cast iron for washers exposed to weather.
- D. Screws:
1. Wood to Wood: ANSI B18.6.1 or ASTM C1002.
  2. Wood to Steel: ASTM C954, or ASTM C1002.
- E. Nails:
1. Size and type best suited for purpose unless noted otherwise. Use aluminum-alloy nails, plated nails, or zinc-coated nails, for nailing wood work exposed to weather and on roof blocking.
  2. ASTM F1667:
    - a. Common: Type I, Style 10.
    - b. Concrete: Type I, Style 11.
    - c. Barbed: Type I, Style 26.
    - d. Underlayment: Type I, Style 25.
    - e. Masonry: Type I, Style 27.
    - f. Use special nails designed for use with ties, strap anchors, framing connectors, joists hangers, and similar items. Nails not less than 32 mm (1-1/4 inches) long, 8d and deformed or annular ring shank.

### **PART 3 - EXECUTION**

#### **3.1 INSTALLATION OF FRAMING AND MISCELLANEOUS WOOD MEMBERS:**

- A. Conform to applicable requirements of the following:
1. AFPA WCD-number 1, Manual for House Framing for nailing and framing unless specified otherwise.
  2. APA for installation of plywood or structural use panels.
  3. ASTM F 499 for wood underlayment.
- B. Fasteners:
1. Nails.
    - a. Nail in accordance with the Recommended Nailing Schedule as specified in AFPA Manual for House Framing where detailed nailing requirements are not specified in nailing schedule. Select nail

size and nail spacing sufficient to develop adequate strength for the connection without splitting the members.

- b. Use special nails with framing connectors.
  - c. Use eight penny or larger nails for nailing through 25 mm (1 inch) thick lumber and for toe nailing 50 mm (2 inch) thick lumber.
  - d. Use 16 penny or larger nails for nailing through 50 mm (2 inch) thick lumber.
- C. Cut notch, or bore in accordance with NFPA Manual for House-Framing for passage of ducts wires, bolts, pipes, conduits and to accommodate other work. Repair or replace miscut, misfit or damaged work.
- D. Blocking Nailers, and Furring:
1. Install furring, blocking, nailers, and grounds where shown.
  2. Use longest lengths practicable.
  3. Use fire retardant treated wood blocking where shown at openings and where shown or specified.
  4. Layers of Blocking or Plates:
    - a. Stagger end joints between upper and lower pieces.
    - b. Nail at ends and not over 600 mm (24 inches) between ends.
    - c. Stagger nails from side to side of wood member over 125 mm (5 inches) in width.
- E. Partition and Wall Framing:
1. Use 50 mm by 100 mm (2 inch by 4 inch) studs spaced 400 mm (16 inches) on centers; unless shown otherwise.
  2. Install double studs at openings and triple studs at corners.
  3. Installation of sole plate:
    - a. Anchor plates of walls or partitions resting on concrete floors in place with expansion bolts, one near ends of piece and at intermediate intervals of not more than 1200 mm (4 feet) or with power actuated drive pins with threaded ends of suitable type and size, spaced 600 mm (2 feet) on center unless shown otherwise.
    - b. Nail plates to wood framing through subfloor as specified in nailing schedule.
  4. Headers or Lintels:
    - a. Make headers for openings of two pieces of 50 mm (2 inch) thick lumber of size shown with plywood filler to finish flush with face of studs or solid lumber of equivalent size.
    - b. Support ends of headers on top of stud cut for height of opening. Spike cut stud to adjacent stud. Spike adjacent stud to header.

5. Use double top plates, with members lapped at least 610 mm (2-feet) spiked together.
6. Install intermediate cut studs over headers and under sills to maintain uniformity of stud spacing.
7. Use single sill plates at bottom of opening unless shown otherwise. Toe nail to end stud, face nail to intermediate studs.
8. Install 50 mm (2 inch) blocking for firestopping so that maximum dimension of any concealed space is not over 2400mm (8 feet) in accordance with NFPA Manual for House Framing.
9. Install corner bracing when plywood or structured use panel sheathing is not used.
  - a. Let corner bracing into exterior surfaces of studs at an angle of approximately 45 degrees, extended completely over walls plates, and secured at bearing with two nails.
  - b. Use 25 mm by 100 mm (1 inch by 4 inch) corner bracing.

F. Sheathing:

1. Use plywood or structural-use panels for sheathing.
2. Lay panels with joints staggered, with edge and ends 3 mm (1/8 inch) apart and nailed over bearings as specified.
3. Set nails not less than 9 mm (3/8 inch) from edges.
4. Install 50 mm by 100 mm (2 inch by 4 inch) blocking spiked between joists, rafters and studs to support edge or end joints of panels.

- - - E N D - - -

**SECTION 06 20 00**  
**FINISH CARPENTRY**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies exterior and interior millwork.
- B. Items specified.
  - Counter Shelf
  - Counter or Work Tops
  - Wall Paneling
  - Mounting Strips, Shelves, and Rods

**1.2 RELATED WORK**

- A. Framing, furring and blocking: Section 06 10 00, ROUGH CARPENTRY.
- B. Wood doors: Section 08 14 00, WOOD DOORS.
- C. Color and texture of finish: Section 09 06 00, SCHEDULE FOR FINISHES.
- D. Other Countertops: Division 11, EQUIPMENT and Division 12, FURNISHINGS.
- E. Electrical light fixtures and duplex outlets: Division 26, ELECTRICAL.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
  - 1. Millwork items - Half full size scale for sections and details 1:50 (1/4-inch) for elevations and plans.
  - 2. Show construction and installation.
- C. Samples:
  - Plastic laminate finished plywood or particleboard, 150 mm by 300 mm (six by twelve inches).
- D. Certificates:
  - 1. Indicating moisture content of materials meet the requirements specified.
- E. Manufacturer's literature and data:
  - 1. Finish hardware
  - 2. Sinks with fittings
  - 3. Electrical components

**1.4 DELIVERY, STORAGE AND HANDLING**

- A. Protect lumber and millwork from dampness, maintaining moisture content specified both during and after delivery at site.
- B. Store finishing lumber and millwork in weathertight well ventilated structures or in space in existing buildings designated by Resident Engineer. Store at a minimum temperature of 21°C (70°F) for not less than 10 days before installation.

- C. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.

#### 1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Testing and Materials (ASTM):
- A36/A36M-08.....Structural Steel
- A53-12.....Pipe, Steel, Black and Hot-Dipped Zinc Coated,  
Welded and Seamless
- A167-99 (R2009).....Stainless and Heat-Resisting Chromium-Nickel  
Steel Plate, Sheet, and Strip
- B26/B26M-09.....Aluminum-Alloy Sand Castings
- B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods,  
Wire, Profiles, and Tubes
- E84-10.....Surface Burning Characteristics of Building  
Materials
- C. American Hardboard Association (AHA):
- A135.4-04.....Basic Hardboard
- D. Builders Hardware Manufacturers Association (BHMA):
- A156.9-03.....Cabinet Hardware
- A156.11-10.....Cabinet Locks
- A156.16-08.....Auxiliary Hardware
- E. Hardwood Plywood and Veneer Association (HPVA):
- HP1-09.....Hardwood and Decorative Plywood
- F. National Particleboard Association (NPA):
- A208.1-09.....Wood Particleboard
- G. American Wood-Preservers' Association (AWPA):
- AWPA C1-03.....All Timber Products - Preservative Treatment by  
Pressure Processes
- H. Architectural Woodwork Institute (AWI):
- AWI-09.....Architectural Woodwork Quality Standards and  
Quality Certification Program
- I. National Electrical Manufacturers Association (NEMA):
- LD 3-05.....High-Pressure Decorative Laminates
- J. U.S. Department of Commerce, Product Standard (PS):
- PS20-10.....American Softwood Lumber Standard
- K. Military Specification (Mil. Spec.):
- MIL-L-19140E.....Lumber and Plywood, Fire-Retardant Treated
- L. Federal Specifications (Fed. Spec.):
- A-A-1922A.....Shield Expansion

A-A-1936.....Contact Adhesive  
 FF-N-836D.....Nut, Square, Hexagon Cap, Slotted, Castle  
 FF-S-111D(1).....Screw, Wood  
 MM-L-736(C).....Lumber, Hardwood

## **PART 2 - PRODUCTS**

### **2.1 LUMBER**

#### A. Grading and Marking:

1. Lumber shall bear the grade mark, stamp, or other identifying marks indicating grades of material.
2. Such identifying marks on a material shall be in accordance with the rule or standard under which the material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
3. The inspection agency for lumber shall be approved by the Board of Review, American Lumber Standards Committee, to grade species used.

#### B. Sizes:

1. Lumber Size references, unless otherwise specified, are nominal sizes, and actual sizes shall be within manufacturing tolerances allowed by the standard under which product is produced.
2. Millwork, standing and running trim, and rails: Actual size as shown or specified.

#### C. Hardwood: MM-L-736, species as specified for each item.

#### D. Softwood: PS-20, exposed to view appearance grades:

1. Use C select or D select, vertical grain for transparent finish including stain transparent finish.
2. Use Prime for painted or opaque finish.

#### E. Use edge grain Wood members exposed to weather.

### **2.2 PLYWOOD**

#### A. Softwood Plywood:

1. Prod. Std.
2. Grading and Marking:
  - a. Each sheet of plywood shall bear the mark of a recognized association or independent inspection agency that maintains continuing control over the quality of the plywood.
  - b. The mark shall identify the plywood by species group or identification index, and shall show glue type, grade, and compliance with PS1.
3. Plywood, 13 mm (1/2 inch) and thicker; not less than five ply construction, except 32 mm (1-1/4 inch) thick plywood not less than seven ply.

4. Plastic Laminate Plywood Cores:
    - a. Exterior Type, and species group.
    - b. Veneer Grade: A-C.
  5. Shelving Plywood:
    - a. Interior Type, any species group.
    - b. Veneer Grade: A-B or B-C.
  6. Other: As specified for item.
- B. Hardwood Plywood:
1. HPVA: HP.1
  2. Species of face veneer shall be as shown or as specified in connection with each particular item.
  3. Inside of Building:
    - a. Use Type II (interior) A grade veneer for transparent finish.
    - b. Use Type II (interior) Sound Grade veneer for paint finish.
  4. Use plain sliced rotary cut white birch unless specified otherwise.

### **2.3 PARTICLEBOARD**

- A. NPA A208.1
- B. Plastic Laminate Particleboard Cores:
  1. Use Type 1, Grade 1-M-3, or Type 2, Grade 2-M-2, unless otherwise specified.
  2. Use Type 2, Grade 2-M-2, exterior bond, for tops with sinks.
- C. General Use: Type 1, Grade 1-M-3 or Type 2, Grade 2-M-2.

### **2.4 PLASTIC LAMINATE**

- A. NEMA LD-3.
- B. Exposed decorative surfaces including countertops, both sides of cabinet doors, and for items having plastic laminate finish. General Purpose, Type HGL.
- C. Cabinet Interiors including Shelving: Both of following options to comply with NEMA, CLS as a minimum.
  1. Plastic laminate clad plywood or particle board.
  2. Resin impregnated decorative paper thermally fused to particle board.
- D. Backing sheet on bottom of plastic laminate covered wood tops: Backer, Type HGP.
- E. Post Forming Fabrication, Decorative Surfaces: Post forming, Type HGP.

### **2.5 BUILDING BOARD (HARDBOARD)**

- A. ANSI/AHA A135.4, 6 mm (1/4 inch) thick unless specified otherwise.
- B. Perforated hardboard (Pegboard): Type 1, Tempered perforated 6 mm (1/4 inch) diameter holes, on 25 mm (1 inch) centers each way, smooth surface one side.
- C. Wall paneling at gas chain rack: Type 1, tempered, Fire Retardant treated, smooth surface on side.

**2.6 ADHESIVE**

- A. For Plastic Laminate: Fed. Spec. A-A-1936.
- B. For Interior Millwork: Unextended urea resin, unextended melamine resin, phenol resin, or resorcinol resin.
- C. For Exterior Millwork: Unextended melamine resin, phenol resin, or resorcinol resin.

**2.7 STAINLESS STEEL**

ASTM A167, Type 302 or 304.

**2.8 ALUMINUM CAST**

ASTM B26

**2.9 ALUMINUM EXTRUDED**

ASTM B221

**2.10 HARDWARE**

- A. Rough Hardware:
  - 1. Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electric-galvanizing process. Galvanized where specified.
  - 2. Fasteners:
    - a. Bolts with Nuts: FF-N-836.
    - b. Expansion Bolts: A-A-1922A.
    - c. Screws: Fed. Spec. FF-S-111.
- B. Finish Hardware
  - 1. Cabinet Hardware: ANSI A156.9.
    - a. Door/Drawer Pulls: B02011. Door in seismic zones: B03182.
    - b. Drawer Slides: B05051 for drawers over 150 mm (6 inches) deep, B05052 for drawers 75 mm to 150 mm (3 to 6 inches) deep, and B05053 for drawers less than 75 mm (3 inches) deep.
    - c. Sliding Door Tracks: B07063.
    - d. Adjustable Shelf Standards: B4061 with shelf rest B04083.
    - e. Concealed Hinges: B1601, minimum 110 degree opening.
    - f. Butt Hinges: B01361, for flush doors, B01381 for inset lipped doors, and B01521 for overlay doors.
    - g. Cabinet Door Catch: B0371 or B03172.
    - h. Vertical Slotted Shelf Standard: B04103 with shelf brackets B04113, sized for shelf depth.
  - 2. Cabinet Locks: ANSI A156.11.
    - a. Drawers and Hinged Door: E07262.
    - b. Sliding Door: E07162.
  - 3. Auxiliary Hardware: ANSI A156.16.

- a. Shelf Bracket: B04041, japanned or enameled finish.
  - b. Combination Garment rod and Shelf Support: B04051 japanned or enamel finish.
  - c. Closet Bar: L03131 chrome finish of required length.
  - d. Handrail Brackets: L03081 or L03101.
    - 1) Cast Aluminum, satin polished finish.
    - 2) Cast Malleable Iron, japanned or enamel finish.
4. Steel Channel Frame and Leg supports for Counter top. Fabricated under Section 05 50 00, METAL FABRICATIONS.
5. Pipe Bench Supports:
- a. Pipe: ASTM A53.
6. Fabricated Wall Bench Supports:
- a. Steel Angles: ASTM A36 steel with chrome finish, or ASTM A167, stainless steel with countersunk wood screws, holes at 64 mm (2-1/2 inches) on center on horizontal member.
  - b. Use 38 mm by 38 mm by 5 mm (1-1/2 by 1-1/2 by 3/16 inch) angle thick drilled for screw and bolt holes unless shown otherwise. Drill 6 mm (1/4 inch) holes for anchors on vertical member, not more than 200 mm (8 inches) on center between ends or corners.
  - c. Stainless steel bars brackets: ASTM A167, fabricated to shapes shown, Number 4 finish. Use 50 mm by 5 mm (2 inch by 3/16 inch) bars unless shown otherwise. Drill for anchors and screws. Drill countersunk wood screw holes at 64 mm (2-1/2 inches) on center on horizontal members and not less than two 13 mm (1/4 inch) hole for anchors on vertical member.
7. Thru-Wall Counter Brackets:
- a. Steel angles drilled for fasteners on 100 mm (4 inches) centers.
  - b. Baked enamel prime coat finish.
8. Folding Shelf Bracket:
- a. Steel Shelf bracket, approximately 400 mm by 400 mm (16 by 16 inches), folding type with baked gray enamel finish or chrome plated finish.
  - b. Bracket legs shall be approximately 28 mm (1-1/8 inches) wide.
  - c. Distance from center line of hinge pin to back of vertical leg shall be 44 mm (1-3/4 inches) or provide for wood spacer if hinge line is at joint of vertical and horizontal leg.
  - d. Distance from face to face of bracket when closed shall be 50 mm (2 inches).
  - e. Brackets shall automatically lock when counter is raised parallel to floor and shall unlock manually.

- f. Each bracket shall support not less than 68 Kg (150 pounds) evenly distributed.
- 9. Edge Strips Moldings:
  - a. Driven type "T" shape with serrated retaining stem; vinyl plastic to match plastic laminate color, stainless steel, or 3 mm (1/8 inch) thick extruded aluminum.
  - b. Stainless steel or extruded aluminum channels.
  - c. Stainless steel, number 4 finish; aluminum, mechanical applied medium satin finish, clear anodized 0.1 mm (0.4 mils) thick.
- 10. Rubber or Vinyl molding
  - a. Rubber or vinyl standard stock and in longest lengths practicable.
  - b. Design for closures at joints with walls and adhesive anchorage.
  - c. Adhesive as recommended by molding manufacturer.
- 11. Primers: Manufacturer's standard primer for steel providing baked enamel finish.

#### **2.11 MOISTURE CONTENT**

- A. Moisture content of lumber and millwork at time of delivery to site.
  - 1. Interior finish lumber, trim, and millwork 32 mm (1-1/4 inches) or less in nominal thickness: 12 percent on 85 percent of the pieces and 15 percent on the remainder.
  - 2. Exterior treated or untreated finish lumber and trim 100 mm (4 inches) or less in nominal thickness: 15 percent.
  - 3. Moisture content of other materials shall be in accordance with the standards under which the products are produced.

#### **2.12 FIRE RETARDANT TREATMENT**

- A. Where wood members and plywood are specified to be fire retardant treated, the treatment shall be in accordance with Mil. Spec. MIL-L19140.
- B. Treatment and performance inspection shall be by an independent and qualified testing agency that establishes performance ratings.
- C. Each piece of treated material shall bear identification of the testing agency and shall indicate performance in accordance with such rating of flame spread and smoke developed.
- D. Treat wood for maximum flame spread of 25 and smoke developed of 25.
- E. Fire Resistant Softwood Plywood:
  - 1. Use Grade A, Exterior, plywood for treatment.
  - 2. Meet the following requirements when tested in accordance with ASTM E84.
    - a. Flame spread: 0 to 25.
    - b. Smoke developed: 100 maximum

F. Fire Resistant Hardwood Plywood:

1. Core: Fire retardant treated softwood plywood.
2. Hardwood face and back veneers untreated,
3. Factory seal panel edges, to prevent loss of fire retardant salts.

**2.13 PRESERVATIVE TREATMENT**

Wood members and plywood exposed to weather or in contact with plaster, masonry or concrete, including wood members used for rough framing of millwork items except heart-wood Redwood and Western Red Cedar shall be preservative treated in accordance with AWPA Standards.

- B. Use Grade A, exterior plywood for treatment.

**2.14 FABRICATION**

A. General:

1. Except as otherwise specified, use AWI Custom Grade for architectural woodwork and interior millwork.
2. Finish woodwork shall be free from pitch pockets.
3. Except where special profiles are shown, trim shall be standard stock molding and members of the same species.
4. Plywood shall be not less than 13 mm (1/2 inch), unless otherwise shown or specified.
5. Edges of members in contact with concrete or masonry shall have a square corner caulking rebate.
6. Fabricate members less than 4 m (14 feet) in length from one piece of lumber, back channeled and molded as shown.
7. Interior trim and items of millwork to be painted may be fabricated from jointed, built-up, or laminated members, unless otherwise shown on drawings or specified.
8. Plastic Laminate Work:
  - a. Factory glued to either a plywood or a particle board core, thickness as shown or specified.
  - b. Cover exposed edges with plastic laminate, except where aluminum, stainless steel, or plastic molded edge strips are shown or specified. Use plastic molded edge strips on 19 mm (3/4-inch) molded thick or thinner core material.
  - c. Provide plastic backing sheet on underside of countertops, vanity tops, thru-wall counter // and sills // including back splashes and end splashes of countertops.
  - d. Use backing sheet on concealed large panel surface when decorative face does not occur.

B. Mounting Strips, Shelves and Rods:

1. Cut mounting strips from 25 mm by 100 mm (1 by 4 inches) softwood stock, with exposed edge slightly rounded.

2. Cut wood shelf from softwood 1 inch stock, of width shown, exposed edge slightly rounded. Option: Use 19 mm (3/4 inch) thick plywood with 19 mm (3/4 inch) softwood edge nosing on exposed edge, slightly rounded.
3. Plastic laminate covered, 19 mm (3/4 inch) thick plywood or particle board core with edges and ends having plastic molded edge strips. Size, finish and number as shown.
4. Rod or Closet Bar: L03131. Combination Garment and Shelf Support, intermediate support for closet bar: B04051 for rods over 1800 mm (6 feet) long.

C. Pegboard:

1. Perforated hardboard sheet size as shown.
2. Spacing strip: 13 mm by 13 mm (1/2 by 1/2 inch); glued to hardboard sheet.
  - a. Locate at perimeter of sheet edge.
  - b. Locate material intermediate spacing strips at 800 mm (32 inches) o.c.
3. Use 19 mm (3/4 inch) one quarter round edge trim to cover exposed edge and finish flush with hardboard surface. Glue to spacing strip and hard board.

D. Counter or Work Tops:

1. Fabrication with plastic laminate over 32 mm (1-1/4 inch) thick core unless shown otherwise.
  - a. Use decorative laminate for exposed edges of tops 38 mm (1-1/2 inches) wide and on back splash and end splash. Use plastic or metal edges for top edges less than 38 mm (1-1/2 inches) wide.
  - b. Assemble back splash and end splash to counter top.
  - c. Use one piece counters for straight runs.
  - d. Miter corners for field joints with overlapping blocking on underside of joint.
2. Fabricate wood counter for work benches as shown.

**PART 3 - EXECUTION**

**3.1 ENVIRONMENTAL REQUIREMENTS**

- A. Maintain work areas and storage areas to a minimum temperature of 21°C (70°F) for not less than 10 days before and during installation of interior millwork.
- B. Do not install finish lumber or millwork in any room or space where wet process systems such as concrete, masonry, or plaster work is not complete and dry.

### 3.2 INSTALLATION

#### A. General:

1. Millwork receiving transparent finish shall be primed and back-painted on concealed surfaces. Set no millwork until primed and back-painted.
2. Secure trim with fine finishing nails, screws, or glue as required.
3. Set nails for putty stopping. Use washers under bolt heads where no other bearing plate occurs.
4. Seal cut edges of preservative and fire retardant treated wood materials with a certified acceptable sealer.
5. Coordinate with plumbing and electrical work for installation of fixtures and service connections in millwork items.
6. Plumb and level items unless shown otherwise.
7. Nail finish at each blocking, lookout, or other nailer and intermediate points; toggle or expansion bolt in place where nails are not suitable.

#### B. Pegboard or Perforated Hardboard:

1. Install board with chromium plated steel round-head toggle bolts or other fasteners capable of supporting board when loaded at 122 kg/m<sup>2</sup> (25 psf) of board.
2. Install board with spacers to allow hooks and accessories to be inserted and removed.
3. Install 6 mm (1/4 inch) round trim at perimeter to finish flush with face of board and close space between wall and hardboard.

#### D. Shelves:

1. Install mounting strip at back wall and end wall for shelves in closets where shown secured with toggle bolts at each end and not over 600 mm (24 inch) centers between ends.
  - a. Nail Shelf to mounting strip at ends and to back wall strip at not over 900 mm (36 inches) on center.
  - b. Install metal bracket, ANSI A156.16, B04041, not over 1200 mm (4 feet) centers when shelves exceed 1800 mm (6 feet) in length.
  - c. Install metal bracket, ANSI A156.16, B04051, not over 1200 mm (4 feet) on centers where shelf length exceeds 1800 mm (6 feet) in length with metal rods, clothes hanger bars ANSI A156.16, L03131, of required length, full length of shelf.
2. Install vertical slotted shelf standards, ANSI A156.9, B04103 to studs with toggle bolts through each fastener opening. Double slotted shelf standards may be used where adjacent shelves terminate.

- a. Install brackets ANSI A156.9, B04113, providing supports for shelf not over 900 mm (36 inches) on center and within 13 mm (1/2 inch) of shelf end unless shown otherwise.
- b. Install shelves on brackets so front edge is restrained by bracket.

- - - E N D - - -

SECTION 07 21 13 THERMAL INSULATION

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies thermal and acoustical insulation for buildings.
- B. Acoustical insulation is identified by thickness and words "Acoustical Insulation".

1.2 RELATED WORK

- C. Insulation in connection with roofing and waterproofing: Section 07 22 00, ROOF AND DECK INSULATION.
- E. Safing insulation: Section 07 84 00, FIRESTOPPING.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES .
- B. Manufacturer's Literature and Data:
  - 1. Insulation, each type used
  - 2. Adhesive, each type used.
  - 3. Tape
- C. Certificates: Stating the type, thickness and "R" value (thermal resistance) of the insulation to be installed.

1.4 STORAGE AND HANDLING:

- A. Store insulation materials in weathertight enclosure.
- B. Protect insulation from damage from handling, weather and construction operations before, during, and after installation.

1.5 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - C578-10.....Rigid, Cellular Polystyrene Thermal Insulation
  - C591-09.....Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation
  - C612-10.....Mineral Fiber Block and Board Thermal Insulation
  - C954-10.....Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Base to Steel Studs From 0.033 (0.84 mm) inch to 0.112 inch (2.84 mm) in thickness

- C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
- D312-00(R2006).....Asphalt Used in Roofing
- E84-10.....Surface Burning Characteristics of Building Materials
- F1667-11.....Driven Fasteners: Nails, Spikes and Staples.

**PART 2 - PRODUCTS**

**2.1 INSULATION - GENERAL:**

- A. Where thermal resistance ("R" value) is specified or shown for insulation, the thickness shown on the drawings is nominal. Use only insulation with actual thickness that is not less than that required to provide the thermal resistance specified.
- B. Where "R" value is not specified for insulation, use the thickness shown on the drawings.
- C. Where more than one type of insulation is specified, the type of insulation for each use is optional, except use only one type of insulation in any particular area.
- D. Insulation Products shall comply with following minimum content standards for recovered materials:

Material Type	Percent by Weight
Perlite composite board	23 percent post consumer recovered paper
Polyisocyanurate/polyurethane	
Rigid foam	9 percent recovered material
Foam-in-place	5 percent recovered material
Glass fiber reinforced	6 percent recovered material
Phenolic rigid foam	5 percent recovered material
Rock wool material	75 percent recovered material

The minimum-content standards are based on the weight (not the volume) of the material in the insulating core only.

**2.2 MASONRY CAVITY WALL INSULATION:**

- B. Polyurethane or Polyisocyanurate Board: ASTM C591, Type I, faced with a vapor retarder having a perm rating of not more than 0.5.
- C. Polystyrene Board: ASTM C578, Type X.

**2.5 ACOUSTICAL INSULATION:**

- A. Mineral Fiber boards: ASTM C553, Type II, flexible, or Type III, semirigid (4.5 pound nominal density).
- B. Mineral Fiber Batt or Blankets: ASTM C665. Maximum flame spread of 25 and smoke development of 450 when tested in accordance with ASTM E84.
- C. Thickness as shown; of widths and lengths to fit tight against framing.

**2.7 RIGID INSULATION:**

- A. On the inside face of exterior walls, spandrel beams, floors, bottom of slabs, and where shown.
- B. Mineral Fiber Board: ASTM C612, Type IB or 2.
- C. Perlite Board: ASTM C728.
- D. Cellular Glass Block: ASTM C552, Type I.
- .
- B. Perlite Insulation: ASTM C549, Type IV.

**2.9 FASTENERS:**

- A. Staples or Nails: ASTM F1667, zinc-coated, size and type best suited for purpose.
- B. Screws: ASTM C954 or C1002, size and length best suited for purpose with washer not less than 50 mm (two inches) in diameter.
- C. Impaling Pins: Steel pins with head not less than 50 mm (two inches) in diameter with adhesive for anchorage to substrate. Provide impaling pins of length to extend beyond insulation and retain cap washer when washer is placed on the pin.

**2.10 ADHESIVE:**

- A. As recommended by the manufacturer of the insulation.
- B. Asphalt: ASTM D312, Type III or IV.
- C. Mortar: ASTM C270, Type 0.

**2.11 TAPE:**

- A. Pressure sensitive adhesive on one face.
- B. Perm rating of not more than 0.50.

**PART 3 - EXECUTION****3.1 INSTALLATION - GENERAL**

- B. Install rigid insulating units with joints close and flush, in regular courses and with cross joints broken.
- C. Install batt or blanket insulation with tight joints and filling framing void completely. Seal cuts, tears, and unlapped joints with tape.

- D. Fit insulation tight against adjoining construction and penetrations, unless specified otherwise.

### **3.2 MASONRY CAVITY WALLS:**

- A. Mount insulation on exterior faces of inner wythes of masonry cavity walls and brick faced concrete walls. Fill joints with same material used for bonding.
- C. Bond mineral fiberboard, polyurethane or polyisocyanurate board, and perlite board to surfaces with adhesive as recommended by insulation manufacturer.

### **3.3 PERIMETER INSULATION:**

- A. Horizontal insulation under concrete floor slab:
  - 1. Lay insulation boards and blocks horizontally on level, compacted and drained fill.
  - 2. Extend insulation from foundation walls towards center of building not less than 600 mm (24 inches) or as shown.

### **3.4 EXTERIOR FRAMING OR FURRING BLANKET INSULATION:**

### **3.7 ACOUSTICAL INSULATION:**

- A. Fasten blanket insulation between metal studs and wall furring with continuous pressure sensitive tape along edges or adhesive.
- B. Pack insulation around door frames and windows and in cracks, expansion joints, control joints, door soffits and other voids. Pack behind outlets, around pipes, ducts, and services encased in wall or partition. Hold insulation in place with pressure sensitive tape or adhesive.
- C. Do not compress insulation below required thickness except where embedded items prevent required thickness.
- D. Where acoustical insulation is installed above suspended ceilings install blanket at right angles to the main runners or framing. Extend insulation over wall insulation systems not extending to structure above.
- E. Where semirigid insulation is used which is not full thickness of cavity, adhere to one side of cavity maintaining continuity of insulation and covering penetrations or embedments in insulation.
- F. Where sound deadening board is shown, secure with screws to metal or wood framing. Secure sufficiently in place until subsequent cover is installed. Seal all cracks with caulking.

- - - E N D - - -

**SECTION 07 84 00**  
**FIRESTOPPING**

**PART 1 GENERAL**

**1.1 DESCRIPTION**

- A. Closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction.
- B. Closure of openings in walls against penetration of gases or smoke in smoke partitions.

**1.2 RELATED WORK**

- A. Expansion and seismic joint firestopping: Section 07 95 13, EXPANSION JOINT COVER ASSEMBLIES.
- B. Spray applied fireproofing: Section 07 81 00, APPLIED FIREPROOFING
- C. Sealants and application: Section 07 92 00, JOINT SEALANTS.
- D. Fire and smoke damper assemblies in ductwork: Section 23 31 00, HVAC DUCTS AND CASINGS & Section 23 37 00, AIR OUTLETS AND INLETS.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturers literature, data, and installation instructions for types of firestopping and smoke stopping used.
- C. List of FM, UL, or WH classification number of systems installed.
- D. Certified laboratory test reports for ASTM E814 tests for systems not listed by FM, UL, or WH proposed for use.

**1.4 DELIVERY AND STORAGE**

- A. Deliver materials in their original unopened containers with manufacturer's name and product identification.
- B. Store in a location providing protection from damage and exposure to the elements.

**1.5 WARRANTY**

Firestopping work subject to the terms of the Article "Warranty of Construction", FAR clause 52.246-21, except extend the warranty period to five years.

**1.6 QUALITY ASSURANCE**

FM, UL, or WH or other approved laboratory tested products will be acceptable.

## 1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - E84-10.....Surface Burning Characteristics of Building Materials
  - E814-11.....Fire Tests of Through-Penetration Fire Stops
- C. Factory Mutual Engineering and Research Corporation (FM):
  - Annual Issue Approval Guide Building Materials
- D. Underwriters Laboratories, Inc. (UL):
  - Annual Issue Building Materials Directory
  - Annual Issue Fire Resistance Directory
  - 1479-10.....Fire Tests of Through-Penetration Firestops
- E. Warnock Hersey (WH):
  - Annual Issue Certification Listings

## PART 2 - PRODUCTS

### 2.1 FIRESTOP SYSTEMS

- A. Use either factory built (Firestop Devices) or field erected (through-Penetration Firestop Systems) to form a specific building system maintaining required integrity of the fire barrier and stop the passage of gases or smoke.
- B. Through-penetration firestop systems and firestop devices tested in accordance with ASTM E814 or UL 1479 using the "F" or "T" rating to maintain the same rating and integrity as the fire barrier being sealed. "T" ratings are not required for penetrations smaller than or equal to 100 mm (4 in) nominal pipe or 0.01 m<sup>2</sup> (16 sq. in.) in overall cross sectional area.
- C. Products requiring heat activation to seal an opening by its intumescence shall exhibit a demonstrated ability to function as designed to maintain the fire barrier.
- D. Firestop sealants used for firestopping or smoke sealing shall have following properties:
  1. Contain no flammable or toxic solvents.
  2. Have no dangerous or flammable out gassing during the drying or curing of products.
  3. Water-resistant after drying or curing and unaffected by high humidity, condensation or transient water exposure.

4. When used in exposed areas, shall be capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.
- E. Firestopping system or devices used for penetrations by glass pipe, plastic pipe or conduits, unenclosed cables, or other non-metallic materials shall have following properties:
  1. Classified for use with the particular type of penetrating material used.
  2. Penetrations containing loose electrical cables, computer data cables, and communications cables protected using firestopping systems that allow unrestricted cable changes without damage to the seal.
  3. Intumescent products which would expand to seal the opening and act as fire, smoke, toxic fumes, and, water sealant.
- F. Maximum flame spread of 25 and smoke development of 50 when tested in accordance with ASTM E84.
- G. FM, UL, or WH rated or tested by an approved laboratory in accordance with ASTM E814.
- H. Materials to be asbestos free.

## **2.2 SMOKE STOPPING IN SMOKE PARTITIONS**

- A. Use silicone sealant in smoke partitions as specified in Section 07 92 00, JOINT SEALANTS.
- B. Use mineral fiber filler and bond breaker behind sealant.
- C. Sealants shall have a maximum flame spread of 25 and smoke developed of 50 when tested in accordance with E84.
- D. When used in exposed areas capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

## **PART 3 - EXECUTION**

### **3.1 EXAMINATION**

Submit product data and installation instructions, as required by article, submittals, after an on site examination of areas to receive firestopping.

### **3.2 PREPARATION**

- A. Remove dirt, grease, oil, loose materials, or other substances that prevent adherence and bonding or application of the firestopping or smoke stopping materials.

- B. Remove insulation on insulated pipe for a distance of 150 mm (six inches) on either side of the fire rated assembly prior to applying the firestopping materials unless the firestopping materials are tested and approved for use on insulated pipes.

### **3.3 INSTALLATION**

- A. Do not begin work until the specified material data and installation instructions of the proposed firestopping systems have been submitted and approved.
- B. Install firestopping systems with smoke stopping in accordance with FM, UL, WH, or other approved system details and installation instructions.
- C. Install smoke stopping seals in smoke partitions.

### **3.4 CLEAN-UP AND ACCEPTANCE OF WORK**

- A. As work on each floor is completed, remove materials, litter, and debris.
- B. Do not move materials and equipment to the next-scheduled work area until completed work is inspected and accepted by the Resident Engineer.
- C. Clean up spills of liquid type materials.

- - - E N D - - -

**SECTION 07 92 00**  
**JOINT SEALANTS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

Section covers all sealant and caulking materials and their application, wherever required for complete installation of building materials or systems.

**1.2 RELATED WORK:**

- A. Firestopping penetrations: Section 07 84 00, FIRESTOPPING.
- B. Aluminum Windows: Section 08 51 13, ALUMINUM WINDOWS.
- C. Glazing: Section 08 80 00, GLAZING.
- C. Sound rated gypsum partitions/sound sealants: Section 09 29 00, GYPSUM BOARD.
- D. Mechanical Work: Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION; Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING; Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

**1.3 QUALITY CONTROL:**

- A. Installer Qualifications: An experienced installer who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance.
- B. Source Limitations: Obtain each type of joint sealant through one source from a single manufacturer.
- E. VOC: Acrylic latex and Silicon sealants shall have less than 50g/l VOC content.

**1.4 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's installation instructions for each product used.
- C. Cured samples of exposed sealants for each color where required to match adjacent material.
- D. Manufacturer's Literature and Data:
  - 1. Caulking compound
  - 2. Primers

3. Sealing compound, each type, including compatibility when different sealants are in contact with each other.

**1.5 PROJECT CONDITIONS:**

A. Environmental Limitations:

1. Do not proceed with installation of joint sealants under following conditions:
  - a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 °C (40 °F).
  - b. When joint substrates are wet.

B. Joint-Width Conditions:

1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:

1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

**1.6 DELIVERY, HANDLING, AND STORAGE:**

- A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.
- B. Carefully handle and store to prevent inclusion of foreign materials.
- C. Do not subject to sustained temperatures exceeding 32° C (90° F) or less than 5° C (40° F).

**1.7 DEFINITIONS:**

- A. Definitions of terms in accordance with ASTM C717 and as specified.
- B. Back-up Rod: A type of sealant backing.
- C. Bond Breakers: A type of sealant backing.
- D. Filler: A sealant backing used behind a back-up rod.

**1.8 WARRANTY:**

- A. Warranty exterior sealing against leaks, adhesion, and cohesive failure, and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be extended to two years.
- B. General Warranty: Special warranty specified in this Article shall not deprive Government of other rights Government may have under other provisions of Contract Documents and shall be in addition to, and run

concurrent with, other warranties made by Contractor under requirements of Contract Documents.

**1.9 APPLICABLE PUBLICATIONS:**

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Society for Testing and Materials (ASTM):

C509-06.....Elastomeric Cellular Preformed Gasket and Sealing Material.

C612-10.....Mineral Fiber Block and Board Thermal Insulation.

C717-10.....Standard Terminology of Building Seals and Sealants.

C834-10.....Latex Sealants.

C919-08.....Use of Sealants in Acoustical Applications.

C920-10.....Elastomeric Joint Sealants.

C1021-08.....Laboratories Engaged in Testing of Building Sealants.

C1193-09.....Standard Guide for Use of Joint Sealants.

C1330-02 (R2007).....Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants.

D1056-07.....Specification for Flexible Cellular Materials—Sponge or Expanded Rubber.

E84-09.....Surface Burning Characteristics of Building Materials.

C. Sealant, Waterproofing and Restoration Institute (SWRI).  
The Professionals' Guide

**PART 2 - PRODUCTS**

**2.1 SEALANTS:**

A. S-1:

1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 20-40

B. S-2:

1. ASTM C920, polyurethane or polysulfide.

2. Type M.
3. Class 25.
4. Grade P.
5. Shore A hardness of 25-40.

C. S-3:

1. ASTM C920, polyurethane or polysulfide.
2. Type S.
3. Class 25, joint movement range of plus or minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-25.
6. Minimum elongation of 700 percent.

D. S-4:

1. ASTM C920 polyurethane or polysulfide.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-40.

E. S-6:

1. ASTM C920, silicone, neutral cure.
2. Type S.
3. Class: Joint movement range of plus 100 percent to minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-20.
6. Minimum elongation of 1200 percent.

F. S-9:

1. ASTM C920 silicone.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Non-yellowing, mildew resistant.

**2.2 CAULKING COMPOUND:**

- A. C-1: ASTM C834, acrylic latex.
- B. C-2: One component acoustical caulking, non drying, non hardening, synthetic rubber.

**2.3 COLOR:**

- A. Sealants used with exposed masonry shall match color of mortar joints.

- B. Sealants used with unpainted concrete shall match color of adjacent concrete.
- C. Color of sealants for other locations shall be light gray or aluminum, unless specified otherwise.
- D. Caulking shall be light gray or white, unless specified otherwise.

**2.4 JOINT SEALANT BACKING:**

- A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
  - 1. Type C: Closed-cell material with a surface skin.
- C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056, nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32° C (minus 26° F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.
- D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

**2.5 FILLER:**

- A. Mineral fiber board: ASTM C612, Class 1.
- B. Thickness same as joint width.
- C. Depth to fill void completely behind back-up rod.

**2.6 PRIMER:**

- A. As recommended by manufacturer of caulking or sealant material.
- B. Stain free type.

**2.7 CLEANERS-NON POUROUS SURFACES:**

Chemical cleaners acceptable to manufacturer of sealants and sealant backing material, free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

**PART 3 - EXECUTION**

**3.1 INSPECTION:**

- A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.
- B. Coordinate for repair and resolution of unsound substrate materials.
- C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

**3.2 PREPARATIONS:**

- A. Prepare joints in accordance with manufacturer's instructions and SWRI.
- B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.
  - 1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
  - 2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include the following:
    - a. Concrete.
    - b. Masonry.
    - c. Unglazed surfaces of ceramic tile.
  - 3. Remove laitance and form-release agents from concrete.
  - 4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
    - a. Metal.
    - b. Glass.
    - c. Porcelain enamel.
    - d. Glazed surfaces of ceramic tile.
- C. Do not cut or damage joint edges.
- D. Apply masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
  - 1. Do not leave gaps between ends of sealant backings.
  - 2. Do not stretch, twist, puncture, or tear sealant backings.
  - 3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.

- E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions.
  - 1. Apply primer prior to installation of back-up rod or bond breaker tape.
  - 2. Use brush or other approved means that will reach all parts of joints.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

**3.3 BACKING INSTALLATION:**

- A. Install back-up material, to form joints enclosed on three sides as required for specified depth of sealant.
- B. Where deep joints occur, install filler to fill space behind the back-up rod and position the rod at proper depth.
- C. Cut fillers installed by others to proper depth for installation of back-up rod and sealants.
- D. Install back-up rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.
- E. Where space for back-up rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

**3.4 SEALANT DEPTHS AND GEOMETRY:**

- A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.
- B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

**3.5 INSTALLATION:**

- A. General:
  - 1. Apply sealants and caulking only when ambient temperature is between 5° C and 38° C (40° and 100° F).
  - 2. Do not use polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
  - 3. Do not use sealant type listed by manufacture as not suitable for use in locations specified.
  - 4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.

5. Avoid dropping or smearing compound on adjacent surfaces.
  6. Fill joints solidly with compound and finish compound smooth.
  7. Tool joints to concave surface unless shown or specified otherwise.
  8. Finish paving or floor joints flush unless joint is otherwise detailed.
  9. Apply compounds with nozzle size to fit joint width.
  10. Test sealants for compatibility with each other and substrate. Use only compatible sealant.
- B. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise.
- C. Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.
1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
  2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
  3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.
  4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cut-outs to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
  5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

### **3.7 CLEANING:**

- A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by the caulking or sealant manufacturer.
- B. After filling and finishing joints, remove masking tape.
- C. Leave adjacent surfaces in a clean and unstained condition.

### **3.8 LOCATIONS:**

- A. Exterior Building Joints, Horizontal and Vertical:
  1. Metal to Metal: Type S-1, S-2

2. Metal to Masonry or Stone: Type S-1
  3. Masonry to Masonry or Stone: Type S-1
  4. Stone to Stone: Type S-1
  5. Cast Stone to Cast Stone: Type S-1
  6. Threshold Setting Bed: Type S-1, S-3, S-4
  7. Masonry Expansion and Control Joints: Type S-6
  8. Wood to Masonry: Type S-1
- B. Metal Reglets and Flashings:
1. Flashings to Wall: Type S-6
  2. Metal to Metal: Type S-6
- C. Sanitary Joints:
1. Walls to Plumbing Fixtures: Type S-9
  2. Counter Tops to Walls: Type S-9
  3. Pipe Penetrations: Type S-9
- :
- F. Interior Caulking:
1. Typical Narrow Joint 6 mm, (1/4 inch) or less at Walls and Adjacent Components: Types C-1 and C-2.
  2. Perimeter of Doors, Windows, Access Panels which Adjoin Concrete or Masonry Surfaces: Types C-1 and C-2.
  3. Joints at Masonry Walls and Columns, Piers, Concrete Walls or Exterior Walls: Types C-1 and C-2.
  5. Exposed Isolation Joints at Top of Full Height Walls: Types C-1 and C-2.
  6. Exposed Acoustical Joint at Sound Rated Partitions Type C-2.
  7. Concealed Acoustic Sealant Types S-4, C-1 and C-2.

- - - E N D - - -

**SECTION 08 11 13  
HOLLOW METAL DOORS AND FRAMES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies steel doors, steel frames and related components.
- B. Terms relating to steel doors and frames as defined in ANSI A123.1 and as specified.

**1.2 RELATED WORK**

- A. Door Hardware: Section 08 71 00, DOOR HARDWARE.
- B. Card readers: Section 28 13 00, ACCESS CONTROL.

**1.3 TESTING**

An independent testing laboratory shall perform testing.

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturers Literature and Data:
  - 1. Fire rated doors and frames, showing conformance with NFPA 80 and Underwriters Laboratory, Inc., or Intertek Testing Services or Factory Mutual fire rating requirements.
  - 2. Sound rated doors, including test report from Testing Laboratory.

**1.5 SHIPMENT**

- A. Prior to shipment label each door and frame to show location, size, door swing and other pertinent information.
- B. Fasten temporary steel spreaders across the bottom of each door frame.

**1.6 STORAGE AND HANDLING**

- A. Store doors and frames at the site under cover.
- B. Protect from rust and damage during storage and erection until completion.

**1.7 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):
  - L-S-125B.....Screening, Insect, Nonmetallic

- C. Door and Hardware Institute (DHI):
  - A115 Series.....Steel Door and Frame Preparation for Hardware, Series A115.1 through A115.17 (Dates Vary)
- D. Steel Door Institute (SDI):
  - 113-01 (R2006).....Thermal Transmittance of Steel Door and Frame Assemblies
  - 128-09.....Acoustical Performance for Steel Door and Frame Assemblies
- E. American Society for Testing and Materials (ASTM):
  - A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
  - A568/568-M-11.....Steel, Sheet, Carbon, and High-Strength, Low-alloy, Hot-Rolled and Cold-Rolled
  - A1008-10.....Steel, sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy and High Strength Low Alloy with Improved Formability
  - B209/209M-10.....Aluminum and Aluminum-Alloy Sheet and Plate
  - B221/221M-12.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles and Tubes
  - D1621-10.....Compressive Properties of Rigid Cellular Plastics
  - D3656-07.....Insect Screening and Louver Cloth Woven from Vinyl Coated Glass Yarns
  - E90-09.....Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions
- F. The National Association Architectural Metal Manufacturers (NAAMM):
  - Metal Finishes Manual (AMP 500-06)
- G. National Fire Protection Association (NFPA):
  - 80-13.....Fire Doors and Fire Windows
- H. Underwriters Laboratories, Inc. (UL):
  - Fire Resistance Directory
- I. Intertek Testing Services (ITS):
  - Certifications Listings...Latest Edition
- J. Factory Mutual System (FM):
  - Approval Guide

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

- A. Stainless Steel: ASTM A167, Type 302 or 304; finish, NAAMM Number 4.

B. Anchors, Fastenings and Accessories: Fastenings anchors, clips connecting members and sleeves from zinc coated steel.

C. Prime Paint: Paint that meets or exceeds the requirements of A250.8.

## **2.2 FABRICATION GENERAL**

### **A. GENERAL:**

1. Follow ANSI A250.8 for fabrication of standard steel doors, except as specified otherwise. Doors to receive hardware specified in Section 08 71 00, DOOR HARDWARE. Tolerances as per ANSI A250.8. Thickness, 44 mm (1-3/4 inches), unless otherwise shown.

2. When vertical steel stiffeners are used for core construction, fill spaces between stiffeners with mineral fiber insulation.

B. Standard Duty Doors: ANSI A250.8, Level 1, Full flush seamless design of size and design shown. Use for interior locations only. Do not use for stairwell doors, security doors and detention doors.

C. Heavy Duty Doors: ANSI A250.8, Level 2, Full flush seamless design of size and design shown. Core construction types a, d, or f, for interior doors.

### **D. Smoke Doors:**

1. Close top and vertical edges flush.

2. Provide seamless vertical edges.

3. Apply Steel astragal to the meeting stile at the active leaf of pair of doors or double egress doors.

4. Provide clearance at head, jamb and sill as specified in NFPA 80.

### **E. Fire Rated Doors (Labeled):**

1. Conform to NFPA 80 when tested by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual for the class of door or door opening shown.

2. Fire rated labels of metal, with raised or incised markings of approving laboratory shall be permanently attached to doors.

3. Close top and vertical edges of doors flush. Vertical edges shall be seamless. Apply steel astragal to the meeting stile of the active leaf of pairs of fire rated doors, except where vertical rod exit devices are specified for both leaves swinging in the same direction.

4. Construct fire rated doors in stairwell enclosures for maximum transmitted temperature rise of 230 °C (450 °F) above ambient

temperature at end of 30 minutes of fire exposure when tested in accordance with ASTM E152.

### **2.3 METAL FRAMES**

#### **A. General:**

1. ANSI A250.8, 1.3 mm (0.053 inch) thick sheet steel, types and styles as shown or scheduled.
2. Frames for exterior doors: Fabricate from 1.7 mm (0.067 inch) thick galvanized steel conforming to ASTM A525.
3. Frames for labeled fire rated doors.
  - a. Comply with NFPA 80. Test by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual.
  - b. Fire rated labels of approving laboratory permanently attached to frames as evidence of conformance with these requirements. Provide labels of metal or engraved stamp, with raised or incised markings.
4. Frames for doors specified to have automatic door operators; Security doors (Type 36); service window: minimum 1.7 mm (0.067 inch) thick.
5. Knocked-down frames are not acceptable.

#### **B. Reinforcement and Covers:**

1. ANSI A250.8 for, minimum thickness of steel reinforcement welded to back of frames.
2. Provide mortar guards securely fastened to back of hardware reinforcements except on lead-lined frames.

#### **C. Frame Anchors:**

1. Floor anchors:
  - a. Where floor fills occur, provide extension type floor anchors to compensate for depth of fill.
  - b. At bottom of jamb use 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive two 6 mm (1/4 inch) floor bolts. Use 50 mm x 50 mm (2 inch by 2 inch) 9 mm by (3/8 inch) clip angle for lead lined frames, drilled for 9 mm (3/8 inch) floor bolts.
  - c. Where mullions occur, provide 2.3 mm (0.093 inch) thick steel channel anchors, drilled for two 6 mm (1/4 inch) floor bolts and frame anchor screws.

- d. Where sill sections occur, provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for 6 mm (1/4 inch) floor bolts and frame anchor screws. Space floor bolts at 50 mm (24 inches) on center.
- 2. Jamb anchors:
  - a. Locate anchors on jambs near top and bottom of each frame, and at intermediate points not over 600 mm (24 inches) apart.
  - b. Form jamb anchors of not less than 1 mm (0.042 inch) thick steel unless otherwise specified.
  - c. Anchors for stud partitions: Either weld to frame or use lock-in snap-in type. Provide tabs for securing anchor to the sides of the studs.
  - d. Anchors for observation windows and other continuous frames set in stud partitions.
    - 1) In addition to jamb anchors, weld clip anchors to sills and heads of continuous frames over 1200 mm (4 feet) long.
    - 2) Anchors spaced 600 mm (24 inches) on centers maximum.
  - e. Modify frame anchors to fit special frame and wall construction and provide special anchors where shown or required.

## **2.4 LOUVERS**

- A. General:
  - 1. Sight proof type with stationary blades the full thickness of the door.
  - 2. Design lightproof louvers to exclude passage of light but permit free ventilation.
  - 3. Provide insect screen and wire guards at exterior doors, except where doors are located below completely enclosed areaways, the wire guard is not required.
- B. Fabrication:
  - 1. Steel louvers 0.8 mm (0.032 inch) thick for interior doors, and 1.3 mm (0.053 inch) inch thick for exterior doors.
  - 2. Fabricate louvers as complete units. Install in prepared cutouts in doors.
  - 3. Weld stationary blades to frames. Weld louvers into door openings.
- C. Screen frames:
  - 1. Frame of either extruded aluminum or tubular aluminum.
  - 2. Fabricate frame to hold wire fabric in a channel with a retaining bar anchor and to mount on surface of door with screws.

3. Do not lap frame over louver opening.
4. Miter corners of frame members and join by concealed mechanical fastenings extending about 57 mm (2-1/4 inches) into ends of each member.
5. Drill frame and doors for screw attachment. Space screws 50 mm (2 inches) from end of each leg of frame and not over 300 mm (12 inches) on center between end screws.
6. Finish: Clear anodized finish, 0.4 mils thick.
7. Insect Screens: Fasten insect screens to interior side of doors with retaining bar against door and not exposed to view.
8. Wire Guards:
  - a. Wire fabric shall be wire guard screen as specified.
  - b. Fasten wire guard to exterior side of door with retaining bar against door and not exposed to view.

## **2.5 SHOP PAINTING**

ANSI A250.8.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION**

- A. Plumb, align and brace frames securely until permanent anchors are set.
  1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.
  2. Use wood spreaders at bottom of frame if the shipping spreader is removed.
  3. Protect frame from accidental abuse.
  4. Where construction will permit concealment, leave the shipping spreaders in place after installation, otherwise remove the spreaders after the frames are set and anchored.
  5. Remove wood spreaders and braces only after the walls are built and jamb anchors are secured.
- B. Floor Anchors:
  1. Anchor the bottom of door frames to floor with two 6 mm (1/4 inch) diameter expansion bolts. Use 9 mm (3/8 inch) bolts on lead lined frames.
  2. Power actuated drive pins may be used to secure frame anchors to concrete floors.
- C. Jamb Anchors:
  1. Secure anchors to sides of studs with two fasteners through anchor tabs. Use steel drill screws to steel studs.

### 3.2 INSTALLATION OF DOORS AND APPLICATION OF HARDWARE

Install doors and hardware as specified in Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, Section 08 14 00, WOOD DOORS, and Section 08 71 00, DOOR HARDWARE.

- - - E N D - - -

**SECTION 08 14 00**  
**INTERIOR WOOD DOORS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies interior flush doors with prefinish, prefit option.
- B. Section includes fire rated doors, doors.

**1.2 RELATED WORK**

- A. Metal door frames: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.
- E. Door hardware including hardware location (height): Section 08 71 00, DOOR HARDWARE.
- F. Installation of doors and hardware: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, Section 08 14 00, WOOD DOORS, or Section 08 71 00, DOOR HARDWARE.
- G. Glazing : Section 08 80 00, GLAZING.
- H. Finish: Section 09 06 00, SCHEDULE FOR FINISHES.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
  - 1. Corner section of flush veneered door 300 mm (12 inches) square, showing details of construction, labeled to show grade and type number and conformance to specified standard.
  - 2. Veneer sample 200 mm (8 inch) by 275 mm (11 inch) by 6 mm (1/4 inch) showing specified wood species sanded to receive a painted finish and a transparent finish. Factory finish veneer sample where the prefinished option is accepted.
- C. Shop Drawings:
  - 1. Show every door in project and schedule location in building.
  - 2. Indicate type, grade, finish and size; include detail of glazing and pertinent details.
  - 3. Provide information concerning specific requirements not included in the manufacturer's literature and data submittal.
- D. Manufacturer's Literature and Data:
  - 1. Sound rated doors, including test report indicating STC rating per ASTM E90 from test laboratory.
  - 2. Labeled fire rated doors showing conformance with NFPA 80.

E. Laboratory Test Reports:

- 1. Screw holding capacity test report in accordance with WDMA T.M.10.
- 2. Split resistance test report in accordance with WDMA T.M.5.
- 3. Cycle/Slam test report in accordance with WDMA T.M.7.
- 4. Hinge-Loading test report in accordance with WDMA T.M.8.

**1.4 WARRANTY**

A. Doors are subject to terms of Article titled "Warranty of Construction", FAR clause 52.246-21, except that warranty shall be as follows:

- 1. For interior doors, manufacturer's warranty for lifetime of original installation.
- 2. Specified STC RATING for sound retardant rated door assembly in place.

**1.5 DELIVERY AND STORAGE**

- A. Factory seal doors and accessories in minimum of 6 mill polyethylene bags or cardboard packages which shall remain unbroken during delivery and storage.
- B. Store in accordance with WDMA I.S.1-A, Job Site Information.
- C. Label package for door opening where used.

**1.6 APPLICABLE PUBLICATIONS**

Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

- B. Window and Door Manufacturers Association (WDMA):
  - I.S.1A-11.....Architectural Wood Flush Doors
  - I.S.4-09.....Water-Repellent Preservative Non-Pressure Treatment for Millwork
  - I.S.6A-11.....Architectural Wood Stile and Rail Doors
  - T.M.6-08.....Adhesive (Glue Bond) Durability Test Method
  - T.M.7-08.....Cycle-Slam Test Method
  - T.M.8-08.....Hinge Loading Test Method
  - T.M.10-08.....Screwholding Test Method
- C. National Fire Protection Association (NFPA):
  - 80-10.....Protection of Buildings from Exterior Fire
  - 252-08.....Fire Tests of Door Assemblies
- D. ASTM International (ASTM):

E90-09.....Laboratory Measurements of Airborne Sound  
Transmission Loss

**PART 2 - PRODUCTS**

**2.1 FLUSH DOORS**

A. General:

1. Meet requirements of WDMA I.S.1-A, Extra Heavy Duty.
2. Adhesive: Type II
3. Thickness: 45 mm (1-3/4 inches) unless otherwise shown or specified.

B. Face Veneer:

1. In accordance with WDMA I.S.1-A.
2. One species throughout the project unless scheduled or otherwise shown.
3. For transparent finishes: Premium Grade. rotary cut, white oak .
  - a. A grade face veneer standard optional.
  - b. AA grade face veneer
  - c. Match face veneers for doors for uniform effect of color and grain at joints.
  - d. Door edges shall be same species as door face veneer except maple may be used for stile face veneer on birch doors.
  - e. In existing buildings, where doors are required to have transparent finish, use wood species and grade of face veneers to match adjacent existing doors.
4. For painted finishes: Custom Grade, mill option close grained hardwood, premium or medium density overlay. Do not use Lauan.
5. Factory sand doors for finishing.

C. Wood for stopsof flush doors required to have transparent finish:

1. Solid Wood of same species as face veneer, except maple may be used on birch doors.
2. Glazing:
  - a. On non-labeled doors use applied wood stops nailed tight on room side and attached on opposite side with flathead, countersunk wood screws, spaced approximately 125 mm (5 inches) on centers.

E. Fire rated wood doors:

1. Fire Performance Rating:
  - a. "B" label, 1-1/2 hours.
  - b. "C" label, 3/4 hour.

2. Labels:
    - a. Doors shall conform to the requirements of ASTM E2074, or NFPA 252, and, carry an identifying label from a qualified testing and inspection agency for class of door or opening shown designating fire performance rating.
    - b. Metal labels with raised or incised markings.
  3. Performance Criteria for Stiles of doors utilizing standard mortise leaf hinges:
    - a. Hinge Loading: WDMA T.M.8. Average of 10 test samples for Extra Heavy Duty doors.
    - b. Direct screw withdrawal: WDMA T.M.10 for Extra Heavy Duty doors. Average of 10 test samples using a steel, fully threaded #12 wood screw.
    - c. Cycle Slam: 1,000,000 cycles with no loose hinge screws or other visible signs of failure when tested in accordance with WDMA T.M.7.
  4. Additional Hardware Reinforcement:
    - a. Provide fire rated doors with hardware reinforcement blocking.
    - b. Size of lock blocks as required to secure hardware specified.
    - c. Top, bottom and intermediate rail blocks shall measure not less than 125 mm (five inches) minimum by full core width.
    - d. Reinforcement blocking in compliance with manufacturer's labeling requirements.
    - e. Mineral material similar to core is not acceptable.
  5. Other Core Components: Manufacturer's standard as allowed by the labeling requirements.
  6. Provide steel frame approved for use in labeled doors for vision panels.
- G. Sound Rated Doors:
1. Fabricated as specified for flush wood doors with additional construction requirements to meet specified sound transmission class (STC).
  2. STC Rating of the door assembly in place when tested in accordance with ASTM E90 by an independent nationally recognized acoustical testing laboratory not less than 36 .
  3. Accessories:
    - a. Frame Gaskets: Continuous closed cell sponge neoprene with stop adjusters.

b. Automatic Door Bottom Seal:

- 1) Steel spring operated, closed cell sponge neoprene metal mounted removable in extruded aluminum housing with a medium matte 0.1 mm (4.0 mil) thick clear Anodized finish.
- 2) Concealed or Surface Mounted.

**2.3 PREFINISH, PREFIT OPTION**

- A. Flush doors may be factory machined to receive hardware, bevels, undercuts, cutouts, accessories and fitting for frame.
- B. Factory fitting to conform to specification for shop and field fitting, including factory application of sealer to edge and routings.
- C. Flush doors to receive transparent finish (in addition to being prefit) may be factory finished as follows:
  1. WDMA I.S.1-A Section F-3 specification for System TR-4, Conversion Varnish or System TR-5, Catalyzed Vinyl.
  2. Use stain when required to produce the finish specified in Section 09 06 00 SCHEDULE FOR FINISHES.

**2.4 IDENTIFICATION MARK:**

- A. On top edge of door.
- B. Either a stamp, brand or other indelible mark, giving manufacturer's name, door's trade name, construction of door, code date of manufacture and quality.
- C. Accompanied by either of the following additional requirements:
  1. An identification mark or a separate certification including name of inspection organization.
  2. Identification of standards for door, including glue type.
  3. Identification of veneer and quality certification.
  4. Identification of preservative treatment for stile and rail doors.

**2.5 SEALING:**

Give top and bottom edge of doors two coats of catalyzed polyurethane or water resistant sealer before sealing in shipping containers.

**PART 3 - EXECUTION**

**3.1 DOOR PREPARATION**

- A. Field, shop or factory preparation: Do not violate the qualified testing and inspection agency label requirements for fire rated doors.

- B. Clearances between Doors and Frames and Floors:
  - 1. Maximum 3 mm (1/8 inch) clearance at the jambs, heads, and meeting stiles, and a 19 mm (3/4 inch) clearance at bottom, except as otherwise specified.
  - 2. Maximum clearance at bottom of sound rated doors, light-proofed doors, doors to operating rooms, and doors designated to be fitted with mechanical seal: 10 mm (3/8 inch).
- C. Provide cutouts for special details required and specified.
- D. Rout doors for hardware using templates and location heights specified in Section, 08 71 00 DOOR HARDWARE.
- E. Fit doors to frame, bevel lock edge of doors 3 mm (1/8 inch) for each 50 mm (two inches) of door thickness undercut where shown.
- F. Immediately after fitting and cutting of doors for hardware, seal cut edges of doors with two coats of water resistant sealer.
- G. Finish surfaces, including both faces, top and bottom and edges of the doors smooth to touch.

### **3.2 INSTALLATION OF DOORS APPLICATION OF HARDWARE**

- A. Install doors in accordance with manufacturer's instructions and specified quality standard.
- B. Field-Finished Doors: Trimming to fit is acceptable.
- C. Use machine tools to cut or drill for hardware.
- D. Use machine tools to cut or drill for hardware.
- E. Coordinate installation of glazing if not pre-installed.

### **3.3 TOLERANCES**

- A. Conform to specified quality standard for fit and clearance tolerances.
- B. Conform to specified quality standard for maximum diagonal distortion.
- C. Maximum Vertical Distortion (Bow): 1/8 inch (3 mm) measured with straight edge or taut string, top to bottom, over an imaginary 36 by 84 inches (915 by 2130 mm) surface area.
- D. Maximum Width Distortion (Cup): 1/8 inch (3 mm) measured with straight edge or taut string, edge to edge, over an imaginary 36 by 84 inches (915 by 2130 mm) surface area.

### **3.4 ADJUSTING**

- A. Adjust doors for smooth and balanced door movement.
- B. Adjust closers for full closure.

### **3.5 DOOR PROTECTION**

- A. As door installation is completed, place polyethylene bag or cardboard shipping container over door and tape in place.

- B. Provide protective covering over knobs and handles in addition to covering door.
- C. Maintain covering in good condition until removal is approved by Resident Engineer.

- - - E N D - - -

**SECTION 08 33 00  
COILING DOORS AND GRILLES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies coiling doors and grilles of sizes shown, complete as specified.

**1.2 RELATED WORK**

- A. Lock cylinders for cylindrical locks: Section 08 71 00, DOOR HARDWARE.
- B. Field painting: Section 09 91 00, PAINTING.
- C. Electric devices and wiring: DIVISION 26, ELECTRICAL.
- D. Deal trays of a Forced Entry/Ballistic Resistant rating: Section 08 56 59, SERVICE AND TELLER WINDOW UNITS.
- E. Guard Booths: Section 13 34 19, METAL BUILDING SYSTEMS.

**1.3 MANUFACTURER'S AND INSTALLER'S QUALIFICATIONS**

- A. Coiling doors and grilles shall be products of manufacturers regularly engaged in manufacturing items of type specified.
- B. Install items under direct supervision of manufacturer's representative or trained personnel.

**1.4 FIRE DOOR REQUIREMENTS**

Where fire doors exceed the size for which testing and labeling is available, submit certificates stating that the doors and hardware is identical in design, materials, and construction to a door that has been tested and meets the requirements for the class indicated.

**1.5 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
  - 1. Each type of door and grille showing details of construction, accessories and hardware, electrical and mechanical items supporting brackets for motors, location, and ratings of motors, and safety devices.
  - 2. Wiring diagrams for motors and controls, including wiring diagram for door and grille, showing electrical interlock of motor with manually operated dead lock, electrical rough-in.
- C. Manufacturer's Literature and Data:
  - 1. Brochures or catalog cuts, each type door or grille.
  - 2. Manufacturer's installation procedures and instructions.

3. Maintenance instructions, parts lists.

D. Certificates:

1. Attesting doors, anchors and hardware will withstand the horizontal loads specified.
2. Attesting oversize fire doors and hardware are identical in design, material, and construction to doors that meet the requirements for the class specified.

**1.6 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

A36/A36M-08.....Structural Steel

A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel  
Steel Plate, Sheet and Strip

A653/A653M-10.....Steel Sheet, Zinc-Coated (Galvanized) Zinc-Iron  
Alloy-Coated (Galvannealed) by the Hot-Dip  
Process

B209/209M-07.....Aluminum and Aluminum-Alloy Sheet and Plate

B221/B221M-08.....Aluminum-Alloy Extruded Bars, Rods, Wire,  
Shapes, and Tubes

C. National Electrical Manufacturers Association (NEMA):

ICS 1-00(R2008).....Industrial Control and Systems General  
Requirements

ICS 2-00(R2005).....Industrial Control, and Systems, Controllers,  
Contactors, and Overload Relays

ICS 6-93 (R2006).....Industrial Control and Systems Enclosures

MG 1-10.....Motors and Generators

ST 20-92 (R1997).....Dry-Type Transformers for General Applications

D. Master Painters Institute (MPI):

MPI #35.....Exterior Bituminous Coating

MPI #76.....Quick Drying Alkyd Metal Primer

E. National Fire Protection Association (NFPA):

70-11.....National Electrical Code 1999 Edition

80-10.....Fire Doors and Fire Windows

F. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500 Series.....Metal Finishes Manual

G. Underwriters Laboratories, Inc. (UL):

2010.....Fire Resistance Directory

## **PART 2 - PRODUCTS**

### **2.1 MATERIAL**

- A. Steel: A653 for forming operation. ASTM A36 for structural sections.
- B. Stainless Steel: ASTM A167, Type 302 or 304.
- C. Aluminum, Plate and Sheet: ASTM B209/B209M
- D. Aluminum, Extruded: ASTM B221/B221M
- E. Alkyd Metal Primer: MPI No. 76.
- F. Bituminous Coating: MPI No. 35.

### **2.2 DESIGN REQUIREMENTS**

- A. Coiling doors and grilles shall be spring counter balanced, overhead coiling type, inside face mounted with guides at jambs set back a sufficient distance to provide a clear opening when door is in open position.
- B. All motor operators shall have manual emergency mechanical operators.
- C. Where doors // or grilles // in excess of 7.4 m<sup>2</sup> (80 sf) are indicated to be manually operated, provision shall be made in the design and construction that will permit future installation of electric-power operation.

### **2.3 FABRICATION**

- A. Curtains:
  - 1. Form of interlocking slats of aluminum of shapes standard with the manufacturer, except that slats for exterior doors shall be flat type.
  - 2. Thickness of slats shall be as required to resist loads specified except not less than the following:
    - a. For doors less than 4500 mm (15 feet) wide: 0.75 mm (0.0299 inch).
    - b. For doors from 4530 mm (15 feet 1 inch) to 6300 mm (21 feet wide): 0.90 mm (0.0359 inch).
    - c. For doors wider than 6330 mm (21 feet 1 inch): 1.20 mm (0.0478 inch).
  - 3. Thickness of aluminum slats shall be as follows:
    - a. For doors less than 4500 mm (15 feet wide): 1 mm (0.040 inch).
    - b. For doors from 4530 mm (15 feet 1 inch) to 6300 mm (21 feet wide): 1.45 mm (0.057 inch).

c. For doors wider than 6330 mm (21 feet 1 inch): 1.65 mm (0.064 inch).

B. Grilles:

1. Form of aluminum.
2. Horizontal rods, 8 mm (5/16 inch) minimum diameter spaced not over 50 mm (two inches) on center with hinged vertical connecting links. Links shall be spaced not over 225 mm (nine inches) apart.
3. Provide tubular bottom rail at bottom end of grille.

C. Endlocks and Windlocks:

1. Manufacturer's stock design of galvanized malleable iron or galvanized steel or stamped cadmium steel for grilles.
2. The ends of each slat for exterior doors and each alternate slat for grilles and interior doors shall have endlocks.
3. Doors shall have windlocks at ends of at least every sixth slat. Windlocks shall prevent curtain from leaving guide because of deflection from wind pressure or other forces.

D. Bottom Bar:

1. Two angles of equal weight, one on each side, standard extruded aluminum members not less than 3 mm (0.125 inch) thick.
2. Bottom bar designed to receive weather-stripping and safety device, and be securely fastened to bottom of curtain or grille.

E. Barrel and Spring Counterbalance:

1. Curtain shall coil on a barrel supported at end of opening on brackets and be balanced by helical springs.
2. Barrel fabricated of steel pipe or commercial welded steel tubing of proper diameter and thickness for the size of curtain, to limit deflection with curtain rolled up, not to exceed 1 in 400 (0.03 inch per foot) of span.
3. Close ends of barrel with cast iron plugs, machined to fit the opening.
4. Within the barrel, install an oil-tempered, helical, counter balancing steel spring, capable of producing sufficient torque to assure easy operation of the door curtain from any position.
5. At least 80 percent of the door weight shall be counter balanced at any position.
6. Spring-tension shall be adjustable from outside of bracket without removing the hood or motor operator.

## F. Brackets:

1. Steel plate designed to form end closure and support for hood and the end of the barrel assembly.
2. End of barrel or shaft shall screw into bracket hubs fabricated of cast iron or steel.
3. Equip bracket hubs or barrel plugs with prelubricated ball bearings, shielded or sealed.

## G. Hoods:

1. Aluminum, not less than 1 mm (0.040 inch) thick.
2. Form hood to fit contour of end brackets.
3. Reinforce at top and bottom edges with rolled beads, rods or angles. Hoods more than 3600 mm (12 feet) in length shall have intermediate supporting brackets.
4. Fasten to brackets with screws or bolts and provide for attachment to wall with bolts.
5. Provide a weather baffle at the lintel or inside the hood of each exterior door to minimize seepage of air through the hood enclosure.

## H. Guides:

1. Manufacturer's standard formed sections or angles of steel or aluminum.
  - a. Steel sections not less than 5 mm (3/16 inch) thick.
  - b. Aluminum sections not less than 5 mm (0.1875 inch) thick.
2. Form a channel pocket of sufficient depth to retain the curtain in place under the horizontal pressure specified, and prevent ends of curtain from slipping out of guide slots.
3. Top sections flared for smooth entry of curtain to vertical sections that will facilitate entry of curtain.
4. Provide stops to limit curtain travel above top of guides.
5. Provide guide of aluminum with replaceable wear strips to prevent metal to metal contact.
6. Mounting brackets shall provide closure between guides and jambs.

## I. Weather-stripping:

1. Manually Operated Doors: Exterior doors shall have a compressible and replaceable rubber, neoprene, or vinyl weather seal attached to bottom bar.

2. Motor Operated Doors: Bottom bar safety device shall be a combination compressible seal and safety device as specified in paragraph, ELECTRIC MOTOR OPERATORS.
3. At exterior doors provide replaceable sweep type continuous vinyl or neoprene weather seals on guides and across head on exterior to seal against wind infiltration.

J. Locking:

1. Cylinder locks shall receive standard screw in cylinders furnished under Section, 08 71 00 DOOR HARDWARE.
2. For motor operated doors and grilles provide manufacturer's standard cylinder dead lock type locking device on the inside, key operated from both sides, interlocked with motor to prevent motor from operating when locks are activated.

**2.4 MANUAL OPERATORS**

A. Push-up Operation:

1. Provide one lifting handle on each side of door and counterbalance in a manner to provide easy operation while raising or lowering the curtain by hand.
2. The maximum exertion or pull required for lift handle operation shall not exceed 1197 Pa (25 psf).

**2.6 FINISHES**

A. Aluminum: Finish exposed metal surfaces as follows:

1. Mill finish, as fabricated.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

- A. Install doors and grilles in accordance with approved shop drawings and manufacturer's instructions.
- B. Locate anchors and inserts for guides, brackets, motors, switches, hardware, and other accessories accurately.
- C. Securely attach guides to adjoining construction with not less than 9 mm (3/8 inch) diameter bolts, near each end and spaced not over 600 mm (24 inches) apart.
- D. Locate control switches where shown.

**3.2 REPAIR**

- A. Repair prime painted zinc-coated surfaces and bare zinc-coated surfaces that are damaged by the application of galvanizing repair compound. Spot prime all damaged shop prime painted surfaces including repaired prime painted zinc-coated surfaces.
- B. Coiling Doors and grilles shall be lubricated, properly adjusted, and demonstrated to operate freely.

**3.3 PROTECTION**

- A. Isolate aluminum in contact with or fastened to dissimilar metals other than stainless steel, white bronze or other metals not compatible with aluminum by one of the following:
  - 1. Paint the dissimilar metal with a prime coat of zinc-Molybdate or other suitable primer, followed by two coats of aluminum paint.
  - 2. Place an approved caulking compound, or a non-absorptive tape, or gasket between the aluminum and the dissimilar metal.

**3.4 INSPECTION**

Upon completion, doors shall be weathertight and doors and grilles shall be free from warp, twist, or distortion.

- - - E N D - - -

**SECTION 08 56 19**  
**PASS WINDOWS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies sliding glass counter mounted pass windows.

**1.2 RELATED WORK**

- A. Color of factory finish: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Pass window opening: Section 08 33 13, COILING COUNTER DOORS.
- C. Glass and Glazing: Section 08 80 00, GLAZING.

**1.3 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extend referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - B221/221M-08.....Aluminum and Aluminum- Alloy Extruded Bars, Rods, Wire, Shapes and Tubes (Metric)
  - C509-06.....Elastomeric Cellular Preformed Gasket and Sealing Material
- C. American Society of Mechanical Engineers (ASME):
  - B18.6.4-98(R2005).....Thread Forming and Thread Cutting Tapping Screws and Metallic Drive Screws
- D. Master Painters Institute (MPI):
  - MPI #18.....Organic Zinc Rich Coating
- E. National Association of Architectural Metal Manufacturers (NAAMM):
  - AMP 500 Series.....Metal Finishes Manual
  - AMP 500.....Introduction to Metal Finishing
  - AMP 501.....Finishes for Aluminum

**PART 2 - PRODUCTS**

**2.1 MATERIAL**

- A. Aluminum Extrusions:
  - 1. ASTM B 221 M.
  - 2. Alloy and temper recommended by window manufacturer for strength, corrosion resistance, and application of required finish, but not less than 150 MPa (22,000 psi) ultimate tensile strength, and yield of 110 MPa (16,000 psi).
  - 3. Aluminum alloy used for colored anodic coating as required to produce specified color.

- B. Paint: MPI #18.
- C. Glazing Gaskets: ASTM C 509.

### **2.1 SLIDING GLASS PASS WINDOWS, COUNTER MOUNTED**

- A. Fabricate sliding glass sash and frames of extruded aluminum with corners mitered.
- B. Fabricate sash to receive 6 mm (1/4 inch) thick glass.
- C. Fabricate sliding sash of "H" channel molding at bottom edges including concealed nylon rollers at bottom set on track and guides at top set into track.
- D. Provide sash with pin tumbler lock and two keys.
- E. Provide sash with finger slot on vertical edge.
- F. Fabricate frame with channel sash slot, bottom roller track, and top guides.
- G. Sash may be factory or field glazed using glazing gaskets.
- H. Use concealed screws in assembly.
- I. Finish:
  1. Comply with NAAMM AMP 500 Series.
  2. Clear anodic coating, Class II Architectural 0.4 mills thick, AA-C22A41.
  3. Colored anodic coating, Class II, Architectural, 0.4 mills thick, AA-C22A42.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION**

- A. Install in pass window opening level and plumb.
- B. Secure with screws to opening; ASME B18.6.4.
  1. Screw within 100 mm (4 inches) of ends.
  2. Space screws not over 600 mm (24 inches) between end screws.
- C. Coat aluminum in contact with steel with one coat of MPI No. 18.
- D. Clean unit of dust and markings.

### **3.2 OPERATION**

- A. Adjust to roll smoothly and stay in position where stopped.
- B. Demonstrate to Resident Engineer operation and locking.
- C. Turn keys with key tags over to Resident Engineers.

- - E N D - - -

**SECTION 08 71 00**  
**DOOR HARDWARE**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Door hardware and related items necessary for complete installation and operation of doors.

**1.2 RELATED WORK**

- A. Caulking: Section 07 92 00 JOINT SEALANTS.
- B. Application of Hardware: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES; Section 08 14 00, WOOD DOORS; Section 08 17 10, Section 08 71 13, AUTOMATIC DOOR OPERATORS.
- C. Finishes: Section 09 06 00, SCHEDULE FOR FINISHES.
- D. Painting: Section 09 91 00, PAINTING.
- E. Card Readers: Section 28 13 11, PHYSICAL ACCESS CONTROL SYSTEMS.
- F. Electrical: Division 26, ELECTRICAL.
- G. Fire Detection: Section 28 31 00, FIRE DETECTION AND ALARM.

**1.3 GENERAL**

- A. All hardware shall comply with UFAS, (Uniform Federal Accessible Standards) unless specified otherwise.
- B. Provide rated door hardware assemblies where required by most current version of the International Building Code (IBC).
- C. Hardware for Labeled Fire Doors and Exit Doors: Conform to requirements of NFPA 80 for labeled fire doors and to NFPA 101 for exit doors, as well as to other requirements specified. Provide hardware listed by UL, except where heavier materials, large size, or better grades are specified herein under paragraph HARDWARE SETS. In lieu of UL labeling and listing, test reports from a nationally recognized testing agency may be submitted showing that hardware has been tested in accordance with UL test methods and that it conforms to NFPA requirements.
- D. Hardware for application on metal and wood doors and frames shall be made to standard templates. Furnish templates to the fabricator of these items in sufficient time so as not to delay the construction.
- E. The following items shall be of the same manufacturer, except as otherwise specified:
  - 1. Mortise locksets.
  - 2. Hinges for hollow metal and wood doors.
  - 3. Surface applied overhead door closers.
  - 4. Exit devices.

5. Floor closers.

**1.4 WARRANTY**

A. Automatic door operators shall be subject to the terms of FAR Clause 52.246-21, except that the Warranty period shall be two years in lieu of one year for all items except as noted below:

- 1. Locks, latchsets, and panic hardware: 5 years.
- 2. Door closers and continuous hinges: 10 years.

**1.5 MAINTENANCE MANUALS**

A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on all door hardware. Provide installation instructions with the submittal documentation.

**1.6 SUBMITTALS**

A. Submittals shall be in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. Submit 6 copies of the schedule per Section 01 33 23. Submit 2 final copies of the final approved schedules to the VA Project Manager as record copies.

B. Hardware Schedule: Prepare and submit hardware schedule in the following form:

Hardware Item	Quantity	Size	Reference Publication Type No.	Finish	Mfr. Name and Catalog No.	Key Control Symbols	UL Mark (if fire rated and listed)	ANSI/BHMA Finish Designation

C. Samples and Manufacturers' Literature:

- 1. Samples: All hardware items (proposed for the project) that have not been previously approved by Builders Hardware Manufacturers Association shall be submitted for approval. Tag and mark all items with manufacturer's name, catalog number and project number.
- 2. Samples are not required for hardware listed in the specifications by manufacturer's catalog number, if the contractor proposes to use the manufacturer's product specified.

D. Certificate of Compliance and Test Reports: Submit certificates that hardware conforms to the requirements specified herein. Certificates

shall be accompanied by copies of reports as referenced. The testing shall have been conducted either in the manufacturer's plant and certified by an independent testing laboratory or conducted in an independent laboratory, within four years of submittal of reports for approval.

#### **1.7 DELIVERY AND MARKING**

- A. Deliver items of hardware to job site in their original containers, complete with necessary appurtenances including screws, keys, and instructions. Tag one of each different item of hardware and deliver to Resident Engineer for reference purposes. Tag shall identify items by Project Specification number and manufacturer's catalog number. These items shall remain on file in Resident Engineer's office until all other similar items have been installed in project, at which time the Resident Engineer will deliver items on file to Contractor for installation in predetermined locations on the project.

#### **1.8 PREINSTALLATION MEETING**

- A. Convene a preinstallation meeting not less than 30 days before start of installation of door hardware. Require attendance of parties directly affecting work of this section, including Contractor and Installer, Architect, Project Engineer and VA Locksmith, Hardware Consultant, and Hardware Manufacturer's Representative. Review the following:
  - 1. Inspection of door hardware.
  - 2. Job and surface readiness.
  - 3. Coordination with other work.
  - 4. Protection of hardware surfaces.
  - 5. Substrate surface protection.
  - 6. Installation.
  - 7. Adjusting.
  - 8. Repair.
  - 9. Field quality control.
  - 10. Cleaning.

#### **1.9 INSTRUCTIONS**

- A. Hardware Set Symbols on Drawings: Except for protective plates, door stops, mutes, thresholds and the like specified herein, hardware requirements for each door are indicated on drawings by symbols. Symbols for hardware sets consist of letters (e.g., "HW") followed by a number. Each number designates a set of hardware items applicable to a door type.

- B. Keying: Provide Medeco removable core cylinders that are removable only with a special key or tool without disassembly of knob or lockset. Cylinders shall be 6 pin type. Keying information shall be furnished at a later date by the Resident Engineer.

#### 1.10 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. In text, hardware items are referred to by series, types, etc., listed in such specifications and standards, except as otherwise specified.
- B. American Society for Testing and Materials (ASTM):
- F883-04.....Padlocks
- E2180-07.....Standard Test Method for Determining the  
Activity of Incorporated Antimicrobial Agent(s)  
In Polymeric or Hydrophobic Materials
- C. American National Standards Institute/Builders Hardware Manufacturers Association (ANSI/BHMA):
- A156.1-06.....Butts and Hinges
- A156.2-03.....Bored and Pre-assembled Locks and Latches
- A156.3-08.....Exit Devices, Coordinators, and Auto Flush  
Bolts
- A156.4-08.....Door Controls (Closers)
- A156.5-01.....Auxiliary Locks and Associated Products
- A156.6-05.....Architectural Door Trim
- A156.8-05.....Door Controls-Overhead Stops and Holders
- A156.12-05 .....Interconnected Locks and Latches
- A156.13-05.....Mortise Locks and Latches Series 1000
- A156.14-07 .....Sliding and Folding Door Hardware
- A156.15-06.....Release Devices-Closer Holder, Electromagnetic  
and Electromechanical
- A156.16-08.....Auxiliary Hardware
- A156.17-04 .....Self-Closing Hinges and Pivots
- A156.18-06.....Materials and Finishes
- A156.20-06 .....Strap and Tee Hinges, and Hasps
- A156.21-09.....Thresholds
- A156.22-05.....Door Gasketing and Edge Seal Systems
- A156.23-04.....Electromagnetic Locks

- A156.24-03.....Delayed Egress Locking Systems
- A156.25-07 .....Electrified Locking Devices
- A156.26-06.....Continuous Hinges
- A156.28-07 .....Master Keying Systems
- A156.29-07 .....Exit Locks and Alarms
- A156.30-03 .....High Security Cylinders
- A156.31-07 .....Electric Strikes and Frame Mounted Actuators
- A250.8-03.....Standard Steel Doors and Frames
- D. National Fire Protection Association (NFPA):
  - 80-10.....Fire Doors and Fire Windows
  - 101-09.....Life Safety Code
- E. Underwriters Laboratories, Inc. (UL):
  - Building Materials Directory (2008)

## **PART 2 - PRODUCTS**

### **2.1 BUTT HINGES**

- A. ANSI A156.1. Provide only three-knuckle hinges, except five-knuckle where the required hinge type is not available in a three-knuckle version (e.g., some types of swing-clear hinges). The following types of butt hinges shall be used for the types of doors listed, except where otherwise specified:
  1. Exterior Doors: Type A2112/A5112 for doors 900 mm (3 feet) wide or less and Type A2111/A5111 for doors over 900 mm (3 feet) wide. Hinges for exterior outswing doors shall have non-removable pins. Hinges for exterior fire-rated doors shall be of stainless steel material.
  2. Interior Doors: Type A8112/A5112 for doors 900 mm (3 feet) wide or less and Type A8111/A5111 for doors over 900 mm (3 feet) wide. Hinges for doors exposed to high humidity areas (shower rooms, toilet rooms, kitchens, janitor rooms, etc. shall be of stainless steel material.
- B. Provide quantity and size of hinges per door leaf as follows:
  1. Doors up to 1210 mm (4 feet) high: 3 hinges.
  2. Doors 1210 mm (4 feet) to 2260 mm (7 feet 5 inches) high: 3 hinges minimum.
  3. Doors greater than 2260 mm (7 feet 5 inches) high: 4 hinges.
  4. Doors up to 900 mm (3 feet) wide, standard weight: 114 mm x 114 mm (4-1/2 inches x 4-1/2 inches) hinges.

5. Doors over 900 mm (3 feet) to 1065 mm (3 feet 6 inches) wide, standard weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
  6. Doors over 1065 mm (3 feet 6 inches) to 1210 mm (4 feet), heavy weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
  7. Provide heavy-weight hinges where specified.
    8. At doors weighing 330 kg (150 lbs.) or more, furnish 127 mm (5 inch) high hinges.
- C. See Articles "MISCELLANEOUS HARDWARE" and "HARDWARE SETS" for pivots and hinges other than butts specified above and continuous hinges specified below.

## **2.2 CONTINUOUS HINGES**

- A. ANSI/BHMA A156.26, Grade 1-150.
  1. Listed under Category N in BHMA's "Certified Product Directory."
- B. Continuous, Gear-Type Hinges: Extruded-aluminum, pinless, geared hinge leaves; joined by a continuous extruded-aluminum channel cap; with concealed, self-lubricating thrust bearings.
  1. Manufacturers:
    - a. Hager Companies.
    - b. Ives Manufacturing Co.
    - c. Select Products Limited.

## **2.3 DOOR CLOSING DEVICES**

- A. Closing devices shall be LCN (match existing standard) products.

## **2.4 OVERHEAD CLOSERS**

- A. Conform to ANSI A156.4, Grade 1.
- B. Closers shall conform to the following:
  1. The closer shall have minimum 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
  2. Where specified, closer shall have hold-open feature.
  3. Size Requirements: Provide multi-size closers, sizes 1 through 6, except where multi-size closer is not available for the required application.
  4. Material of closer body shall be forged or cast.
  5. Arm and brackets for closers shall be steel, malleable iron or high strength ductile cast iron.
  6. Where closers are exposed to the exterior or are mounted in rooms that experience high humidity, provide closer body and arm assembly of stainless steel material.

7. Closers shall have full size metal cover; plastic covers will not be accepted.
8. Closers shall have adjustable hydraulic back-check, separate valves for closing and latching speed, adjustable back-check positioning valve, and adjustable delayed action valve.
9. Provide closers with any accessories required for the mounting application, including (but not limited to) drop plates, special soffit plates, spacers for heavy-duty parallel arm fifth screws, bull-nose or other regular arm brackets, longer or shorter arm assemblies, and special factory templating. Provide special arms, drop plates, and templating as needed to allow mounting at doors with overhead stops and/or holders.
10. Closer arms or backcheck valve shall not be used to stop the door from overswing, except in applications where a separate wall, floor, or overhead stop cannot be used.
11. Provide parallel arm closers with heavy duty rigid arm.
12. Where closers are to be installed on the push side of the door, provide parallel arm type except where conditions require use of top jamb arm.
13. Provide all surface closers with the same body attachment screw pattern for ease of replacement and maintenance.
14. All closers shall have a 1 ½" (38mm) minimum piston diameter.

## **2.6 DOOR STOPS**

- A. Conform to ANSI A156.16.
- B. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use lead expansion shields for mounting door stops.
- C. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.
- D. Wall bumpers, where used, must be installed to impact the trim or the door within the leading half of its width.
- E. Where drywall partitions occur, use Type L02121.
- F. Provide stop Type L02011, as applicable for exterior doors. At outswing doors where stop can be installed in concrete, provide stop

mated to concrete anchor set in 76mm (3-inch) core-drilled hole and filled with quick-setting cement.

- G. Omit stops where floor mounted door holders are required and where automatic operated doors occur.
- H. Provide appropriate roller bumper for each set of doors (except where closet doors occur) where two doors would interfere with each other in swinging.
- I. Provide appropriate door mounted stop on doors in individual toilets where floor or wall mounted stops cannot be used.
- J. Provide door stops on doors where combination closer magnetic holders are specified, except where wall stops cannot be used or where floor stops cannot be installed within 4-inches of the wall.
- K. Where the specified wall or floor stop cannot be used, provide concealed overhead stops (surface-mounted where concealed cannot be used).

#### **2.7 OVERHEAD DOOR STOPS AND HOLDERS**

- A. Conform to ANSI Standard A156.8. Overhead holders shall be of sizes recommended by holder manufacturer for each width of door. Set overhead holders for 110 degree opening, unless limited by building construction or equipment. Provide Grade 1 overhead concealed slide type: stop-only at rated doors and security doors, hold-open type with exposed hold-open on/off control at all other doors requiring overhead door stops.

#### **2.8 LOCKS AND LATCHES**

- A. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1-3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not less than six pins. Cylinders for all locksets shall be Medeco, 6-pin large format (sargent type) with removable core type to match existing keying system. Cylinders shall be furnished with construction removable cores and construction master keys. Cylinder shall be removable by special key or tool. Construct all cores so that they will be interchangeable into the core housings of all mortise locks, rim locks, cylindrical locks, and any other type lock included in the Grand Master Key System. Disassembly of lever or lockset shall not be required to remove core from lockset. All locksets or latches on double doors with fire label shall have latch bolt with 19 mm (3/4 inch) throw. Provide temporary keying device or construction core of allow opening and

closing during construction and prior to the installation of final cores.

- B. In addition to above requirements, locks and latches shall comply with following requirements:
1. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13 Mortise locksets shall be Sargent series 8200. All locksets and latchsets, shall have lever handles similar to Sargent L-lever Design. Lever handle shall be fabricated from wrought stainless steel. No substitute lever design or material shall be accepted. All locks and latchsets shall be furnished with curved lip strike and wrought box. Lock function F02 shall be furnished with key plates similar to Russwin's No. A70. All lock cases installed on lead lined doors shall be lead lined before applying final hardware finish. Furnish armored fronts for all mortise locks.
  2. Cylindrical Lock and Latch Sets: levers shall meet ADA (Americans with Disabilities Act) requirements.
  3. Auxiliary locks shall be as specified under hardware sets and conform to ANSI A156.5.

#### **2.10 PUSH-BUTTON COMBINATION LOCKS**

- A. ANSI/BHMA A156.13, Grade 1. Battery operated pushbutton entry.
- B. Construction: Heavy duty mortise lock housing conforming to ANSI/BHMA A156.13, Grade 1. Lever handles and operating components in compliance with the UFAS and the ADA Accessibility Guidelines. Match lever handles of locks and latchsets on adjacent doors.
- C. Special Features: Key override to permit a master keyed security system and a pushbutton security code activated passage feature to allow access without using the entry code.

#### **2.11 KEYS**

- A. Stamp all keys with change number and key set symbol. Furnish keys in quantities as follows:

<b>Locks/Keys</b>	<b>Quantity</b>
Cylinder locks	2 keys each

**2.12 ARMOR PLATES, KICK PLATES, MOP PLATES AND DOOR EDGING**

- A. Conform to ANSI Standard A156.6.
- B. Provide protective plates and door edging as specified below:
  - 1. Kick plates, mop plates and armor plates of metal, Type J100 series.
  - 2. Provide kick plates and mop plates where specified. Kick plates shall be 254 mm (10 inches) or 305 mm (12 inches) high. Mop plates shall be 152 mm (6 inches) high. Both kick and mop plates shall be minimum 1.27 mm (0.050 inches) thick. Provide kick and mop plates beveled on all 4 edges (B4E). On push side of doors where jamb stop extends to floor, make kick plates 38 mm (1-1/2 inches) less than width of door, except pairs of metal doors which shall have plates 25 mm (1 inch) less than width of each door. Extend all other kick and mop plates to within 6 mm (1/4 inch) of each edge of doors. Kick and mop plates shall butt astragals. For jamb stop requirements, see specification sections pertaining to door frames.
  - 3. Kick plates and/or mop plates are not required on following door sides:
    - a. Armor plate side of doors;
    - b. Exterior side of exterior doors;
    - c. Closet side of closet doors;
    - d. Both sides of aluminum entrance doors.
  - 4. Armor plates for doors are listed under Article "Hardware Sets". Armor plates shall be thickness as noted in the hardware set, 875 mm (35 inches) high and 38 mm (1-1/2 inches) less than width of doors, except on pairs of metal doors. Provide armor plates beveled on all 4 edges (B4E). Plates on pairs of metal doors shall be 25 mm (1 inch) less than width of each door. Where top of intermediate rail of door is less than 875 mm (35 inches) from door bottom, extend armor plates to within 13 mm (1/2 inch) of top of intermediate rail. On doors equipped with panic devices, extend armor plates to within 13 mm (1/2 inch) of panic bolt push bar.
  - 5. Where louver or grille occurs in lower portion of doors, substitute stretcher plate and kick plate in place of armor plate. Size of stretcher plate and kick plate shall be 254 mm (10 inches) high.
  - 6. Provide stainless steel edge guards where so specified at wood doors. Provide mortised type instead of surface type except where door construction and/or ratings will not allow. Provide edge guards of bevel and thickness to match wood door. Provide edge

guards with factory cut-outs for door hardware that must be installed through or extend through the edge guard. Provide full-height edge guards except where door rating does not allow; in such cases, provide edge guards to height of bottom of typical lockset armor front. Forward edge guards to wood door manufacturer for factory installation on doors.

#### **2.13 EXIT DEVICES**

- A. Conform to ANSI Standard A156.3. Exit devices shall be Grade 1; type and function are specified in hardware sets. Provide flush with finished floor strikes for vertical rod exit devices in interior of building. Trim shall have cast satin stainless steel lever handles of design similar to locksets, unless otherwise specified.
- B. Exit devices for fire doors shall comply with Underwriters Laboratories, Inc., requirements for Fire Exit Hardware. Submit proof of compliance.
- C. At non-rated openings with panic hardware, provide panic hardware with key cylinder dogging feature.

#### **2.14 FLUSH BOLTS (LEVER EXTENSION)**

- A. Conform to ANSI A156.16. Flush bolts shall be Type L24081 unless otherwise specified. Furnish proper dustproof strikes conforming to ANSI A156.16, for flush bolts required on lower part of doors. Modify flush bolts to fit stiles of aluminum doors on double-acting
- B. Face plates for cylindrical strikes shall be rectangular and not less than 25 mm by 63 mm (1 inch by 2-1/2 inches).
- C. Friction-fit cylindrical dustproof strikes with circular face plate may be used only where metal thresholds occur.

#### **2.15 FLUSH BOLTS (AUTOMATIC)**

- A. Conform to ANSI A156.3. Dimension of flush bolts shall conform to ANSI A115. Bolts shall conform to Underwriters Laboratories, Inc., requirements for fire door hardware. Flush bolts shall automatically latch and unlatch. Furnish dustproof strikes conforming to ANSI A156.16 for bottom flushbolt. Face plates for dustproof strike shall be rectangular and not less than 38 mm by 90 mm (1-1/2 by 3-1/2 inches).
- B. At interior doors, provide auto flush bolts less bottom bolt, unless otherwise specified, except at wood pairs with fire-rating greater than 20 minutes; provide fire pins as required by auto flush bolt and door fire labels.

**2.16 DOOR PULLS WITH PLATES**

- A. Conform to ANSI A156.6. Pull plate Type J302, 90 mm by 350 mm (3-1/2 inches by 14 inches), unless otherwise specified. Cut plates of door pull plate for cylinders, or turn pieces where required.

**2.17 PUSH PLATES**

- A. Conform to ANSI A156.6. Metal, Type J302, 200 mm (8 inches) wide by 350 mm (14 inches) high. Provide metal Type J302 plates 100 mm (4 inches wide by 350 mm (14 inches) high) where push plates are specified for doors with stiles less than 200 mm (8 inches) wide. Cut plates for cylinders, and turn pieces where required.

**2.18 COMBINATION PUSH AND PULL PLATES**

- A. Conform to ANSI 156.6. Type J303, stainless steel 3 mm (1/8 inch) thick, 80 mm (3-1/3 inches) wide by 800 mm (16 inches) high), top and bottom edges shall be rounded. Secure plates to wood doors with 38 mm (1-1/2 inch) long No. 12 wood screws. Cut plates for turn pieces, and cylinders where required. Pull shall be mounted down.

**2.19 COORDINATORS**

- A. Conform to ANSI A156.16. Coordinators, when specified for fire doors, shall comply with Underwriters Laboratories, Inc., requirements for fire door hardware. Coordinator may be omitted on exterior pairs of doors where either door will close independently regardless of the position of the other door. Coordinator may be omitted on interior pairs of non-labeled open where open back strike is used. Open back strike shall not be used on labeled doors. Paint coordinators to match door frames, unless coordinators are plated. Provide bar type coordinators, except where gravity coordinators are required at acoustic pairs. For bar type coordinators, provide filler bars for full width and, as required, brackets for push-side surface mounted closers, overhead stops, and vertical rod panic strikes.

**2.20 THRESHOLDS**

- A. Conform to ANSI A156.21, mill finish extruded aluminum, except as otherwise specified. In existing construction, thresholds shall be installed in a bed of sealant with ¼-20 stainless steel machine screws and expansion shields. In new construction, embed aluminum anchors coated with epoxy in concrete to secure thresholds. Furnish thresholds for the full width of the openings.

- B. Provide with miter returns where threshold extends more than 12 mm (0.5 inch) from fame face.

## 2.21 FINISHES

- A. Exposed surfaces of hardware shall have ANSI A156.18, finishes as specified below. Finishes on all hinges, pivots, closers, thresholds, etc., shall be as specified below under "Miscellaneous Finishes." For field painting (final coat) of ferrous hardware, see Section 09 91 00, PAINTING.
- B. 626 or 630: All surfaces on exterior and interior of buildings, except where other finishes are specified.
- C. Miscellaneous Finishes:
1. Hinges --exterior doors: 626 or 630.
  2. Hinges --interior doors: 652 or 630.
  3. Pivots: Match door trim.
  4. Door Closers: Factory applied paint finish. Dull or Satin Aluminum color.
  5. Thresholds: Mill finish aluminum.
  6. Other primed steel hardware: 600. Per Hardware Sets Specified in Paragraph 3.5.
- D. Hardware Finishes for Existing Buildings: U.S. Standard finishes shall match finishes of hardware in (similar) existing spaces except where otherwise specified.
- E. Special Finish: Exposed surfaces of hardware for dark bronze anodized aluminum doors shall have oxidized oil rubbed bronze finish (dark bronze) finish on door closers shall closely match doors.
- F. Anti-microbial Coating: All hand-operated hardware (levers, pulls, push bars, push plates, paddles, and panic bars) shall be provided with an anti-microbial/anti-fungal coating that has passed ASTM E2180 tests. Coating to consist of ionic silver (Ag+). Silver ions surround bacterial cells, inhibiting growth of bacteria, mold, and mildew by blockading food and respiration supplies.

## 2.22 BASE METALS

- A. Apply specified U.S. Standard finishes on different base metals as following:

Finish	Base Metal
652	Steel

626	Brass or bronze
628	Anodized Dull Aluminum
630	Stainless steel

### **PART 3 - EXECUTION**

#### **3.1 HARDWARE HEIGHTS**

- A. For existing buildings locate hardware on doors at heights to match existing hardware. The Contractor shall visit the site, verify location of existing hardware and submit locations to VA Resident Engineer for
- B. Hardware Heights from Finished Floor:
1. Exit devices centerline of strike (where applicable) 1024 mm (40-5/16 inches).
  2. Locksets and latch sets centerline of strike 1024 mm (40-5/16 inches).
  3. Deadlocks centerline of strike 1219 mm (48 inches).
  4. Hospital arm pull 1168 mm (46 inches) to centerline of bottom supporting bracket.
  5. Centerline of door pulls to be 1016 mm (40 inches).
  6. Push plates and push-pull shall be 1270 mm (50 inches) to top of plate.
  7. Push-pull latch to be 1024 mm (40-5/16 inches) to centerline of strike.
  8. Locate other hardware at standard commercial heights. Locate push and pull plates to prevent conflict with other hardware.

#### **3.2 INSTALLATION**

- A. Closer devices, including those with hold-open features, shall be equipped and mounted to provide maximum door opening permitted by building construction or equipment. Closers shall be mounted on side of door inside rooms, inside stairs, and away from corridors.

B. Hinge Size Requirements:

<b>Door Thickness</b>	<b>Door Width</b>	<b>Hinge Height</b>
45 mm (1-3/4 inch)	900 mm (3 feet) and less	113 mm (4-1/2 inches)
45 mm (1-3/4 inch)	Over 900 mm (3 feet) but not more than 1200 mm (4 feet)	125 mm (5 inches)
35 mm (1-3/8 inch)	Not over 1200 mm (4 feet)	113 mm (4-1/2 inches)

(hollow core wood doors)		
--------------------------	--	--

- C. Hinge leaves shall be sufficiently wide to allow doors to swing clear of door frame trim and surrounding conditions.
- D. Where new hinges are specified for new doors in existing frames or existing doors in new frames, sizes of new hinges shall match sizes of existing hinges; or, contractor may reuse existing hinges provided hinges are restored to satisfactory operating condition as approved by Resident Engineer. Existing hinges shall not be reused on door openings having new doors and new frames. Coordinate preparation for hinge cut-outs and screw-hole locations on doors and frames.
- E. Hinges Required Per Door:

Doors 1500 mm (5 ft) or less in height	2 butts
Doors over 1500 mm (5 ft) high and not over 2280 mm (7 ft 6 in) high	3 butts
Doors over 2280 mm (7 feet 6 inches) high	4 butts
Dutch type doors	4 butts
Doors with spring hinges 1370 mm (4 feet 6 inches) high or less	2 butts
Doors with spring hinges over 1370 mm (4 feet 6 inches)	3 butts

- F. Fastenings: Suitable size and type and shall harmonize with hardware as to material and finish. Provide machine screws and lead expansion shields to secure hardware to concrete, ceramic or quarry floor tile, or solid masonry. Fiber or rawl plugs and adhesives are not permitted. All fastenings exposed to weather shall be of nonferrous metal.
- G. After locks have been installed; show in presence of Resident Engineer that keys operate their respective locks in accordance with keying requirements. (All keys, Master Key level and above shall be sent Registered Mail to the Medical Center Director along with the bitting list. Also a copy of the invoice shall be sent to the Resident Engineer for his records.) Installation of locks which do not meet specified keying requirements shall be considered sufficient justification for rejection and replacement of all locks installed on project.

### 3.3 FINAL INSPECTION

- A. Installer to provide letter to VA Project Engineer that upon completion, installer has visited the Project and has accomplished the following:

1. Re-adjust hardware.
2. Evaluate maintenance procedures and recommend changes or additions, and instruct VA personnel.
3. Identify items that have deteriorated or failed.
4. Submit written report identifying problems.

#### **3.4 DEMONSTRATION**

- A. Demonstrate efficacy of mechanical hardware and electrical, and electronic hardware systems, including adjustment and maintenance procedures, to satisfaction of Resident/Project Engineer and VA Locksmith.

#### **3.5 HARDWARE SETS**

- A. Following sets of hardware correspond to hardware symbols shown on drawings. Only those hardware sets that are shown on drawings will be required. Disregard hardware sets listed in specifications but not shown on drawings.
- B. Hardware Consultant working on a project will be responsible for providing additional information regarding these hardware sets. The numbers shown in the following sets come from BHMA standards.

**ELECTRIC HARDWARE ABBREVIATIONS LEGEND:**

ADO = Automatic Door Operator

EMCH = Electro-Mechanical Closer-Holder

MHO = Magnetic Hold-Open (wall- or floor-mounted)

#### **INTERIOR SINGLE DOORS**

HW-1Each Door to Have:NON-RATED

1	Continuous Hinge	
1	Door Pull w/ Plate	J401 x J302
1	Push Plate	J302
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J103
1	Closer	C02011/C02021
1	Floor Stop	L02121 x 3 FASTENERS
3	Silencers	L03011

HW-3EEach Door to Have:NON-RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Office Lock	F04
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0Y154
1	Coat Hook	L03121

OMIT COAT HOOK WHERE GLASS LITE PREVENTS INSTALLATION.

HW-4KEach Door to Have:NON-RATED

1	Continuous Hinge	x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Utility Lock	F09
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0Y154

HW-5BEach Door to Have:RATED

1	Continuous Hinge	x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Storeroom Lock	F07
1	Closer	C02011/C02021
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0Y154

## SECURITY HARDWARE ABBREVIATIONS LEGEND:

AC = Access Control Device (Card reader, biometric reader, keypad, etc.)  
 ADO = Automatic Door Operator  
 DEML = Delayed Egress Magnetic Lock  
 DEPH = Delayed Egress Panic Exit Device  
 DPS = Door Position Switch (Door or Alarm Contact)  
 EL = Electric Lock or Electric Lever Exit Device  
 PB = Push-button Combination Lock (stand-alone)  
 RR = Remote Release Button  
 ELR = Electric Latch Retraction Exit Device  
 REX = Request-to-Exit Switch in Latching Device Inside Trim

HW-SH-4B

Each [ADO, AC, EL, REX, DPS] Door to Have:

RATED

1	Continuous Transfer Hinge	x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 12-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1	Electrified Exit Device	TYPE 1 (E01-REX, E06) F13 LEVER
1	Key Cylinder	TYPE AS REQUIRED
1	Power Supply	TYPE REQUIRED BY PANIC MANUFACTURER X ADO BOARD
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0Y154

POWER TRANSFER **SHARED BY ELECTRIC PANIC AND** RE-ACTIVATION SENSOR WIRING  
 (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

AUTOMATIC DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR  
 OPERATORS.

HW-SH-9Each [AC, EL, REX, DPS] Pair to Have:RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Transfer Hinge	4-WIRE TYPE AS REQUIRED
1 Set Auto Flush Bolts	TYPE 25
1 Dust Proof Strike	L04021
1 Electrified Lock	F07 (E01-REX, E06) 24VDC
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1 Coordinator	TYPE 21A
1 Overlapping Astragal with Self-Adhesive Seal	R0Y634 x R0Y154 x THRU-BOLTS
2 Closers	C02011/C02021
2 Kick Plates	J102 (@ STORAGE ROOMS ONLY)
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0Y154
2 Alarm Contacts	

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.  
CARD READER BY DIVISION 28.

HW-SH-10Each [AC, EL, REX, DPS] Pair Integrated Doors to Have:RATED

1 Key Cylinder	TYPE AS REQUIRED
----------------	------------------

BALANCE OF HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES

- - - E N D - - -

**SECTION 08 71 13  
AUTOMATIC DOOR OPERATORS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies equipment, controls and accessories for automatic operation of swing and sliding doors.

**1.2 RELATED WORK**

- A. Door hardware; Section 08 71 00, DOOR HARDWARE.
- B. Section 28 13 00, PHYSICAL ACCESS CONTROL SYSTEMS.
- C. Glass and glazing of doors and frames; Section 08 80 00, GLAZING.
- D. Electric general wiring, connections and equipment requirements; Division 26, ELECTRICAL.
- E. Section 28 31 00, FIRE DETECTION AND ALARM.

**1.3 QUALITY ASSURANCE**

- A. Automatic door operators, controls and other equipment shall be products of a manufacturer regularly engaged in manufacturing such equipment for a minimum of three years.
- B. One type of automatic door equipment shall be used throughout the building.
- C. Equipment installer shall have specialized experience and shall be approved by the manufacturer.

**1.4 WARRANTY**

- A. Automatic door operators shall be subject to the terms of the "Warranty of Construction", FAR clause 52.246-21, except that the Warranty period shall be two years in lieu of one year.

**1.5 MAINTENANCE MANUALS**

- A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on automatic door operators.

**1.6 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's literature and data describing operators, power units, controls, door hardware and safety devices.
- C. Shop Drawings:
  - 1. Showing location of controls and safety devices in relationship to each automatically operated door.

- 2. Showing layout, profiles, product components, including anchorage, accessories, as applicable.
- 3. Submit templates, wiring diagrams, fabrication details and other information to coordinate the proper installation of the automatic door operators.
- D. Submit in writing to Resident Engineer that items listed in Article 1.3 are in compliance.

**1.7 DESIGN CRITERIA**

- A. As a minimum, automatic door equipment shall comply with the requirements of BHMA 156.10. Except as otherwise noted on drawings, provide operators which will move the doors from the fully closed to fully opened position in seven seconds maximum time interval, when speed adjustment is at maximum setting.
- B. Equipment: Conforming to UL 325. Provide key operated power disconnect wall switch for each door installation.
- C. Electrical Wiring, Connections and Equipment: Provide all motor, starter, controls, associated devices, and interconnecting wiring required for the installation. Equipment and wiring shall be as specified in Division 26, ELECTRICAL.

**1.8 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Builders Hardware Manufacturers Association, Inc. (BHMA):  
A156.10-05.....Power Operated Pedestrian Doors (BHMA 1601)
- C. National Fire Protection Association (NFPA):  
101-09.....Life Safety Code
- D. Underwriters Laboratory (UL):  
325-10.....Door, Drapery, Gate, Louver, and Window  
Operators and Systems

**1.9 DELIVERY AND STORAGE**

- A. Delivery shall be in factory's original, unopened, undamaged container with identification labels attached.

**PART 2 - PRODUCTS****2.1 SWING DOOR OPERATORS**

- A. General: Swing door operators shall be of institutional type, door panel size 600 mm to 1250 mm width, weight not to exceed 300 kg (600 pounds), electric operated for overhead mounting within the header or transom. Furnish metal mounting supports, brackets and other accessories necessary for the installation of operators at the head of the door frames. The motor on automatic door operator shall be provided with an interlock so that the motor will not operate when doors are electrically locked from opening.
- B. Operators shall have checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle. Operators shall be capable of recycling doors instantaneously to full open position from any point in the closing cycle when control switch is activated. Operators shall, when automatic power is interrupted or shut-off, permit doors to easily open manually without damage to automatic operator system.
- C. Operator, enclosed in housing, shall open door by energizing motor and shall stop by electrically reducing voltage and stalling motor against mechanical stop. Door shall close by means of spring energy, and close force shall be controlled by gear system and motor being used as dynamic break without power, or controlled by hydraulic closer in electro-hydraulic operators. System shall operate as manual door control in event of power failure. Opening and closing speeds shall be adjustable:
1. Operator Housing: Housing shall be a minimum of 112 mm (4-1/2 inches) wide by 140 mm (5.5 inches) high aluminum extrusions with enclosed end caps for application to 100 mm (4 inches) and larger frame systems. All structural sections shall have a minimum thickness of 3.2 mm (0.125 inch) and be fabricated of a minimum of 6063-T5 aluminum alloy.
  2. Power Operator: Completely assembled and sealed unit which shall include gear drive transmission, mechanical spring and bearings, all located in aluminum case and filled with special lubricant for extreme temperature conditions. Complete unit shall be rubber mounted with provisions for easy maintenance and replacement, without removing door from pivots or frame.

3. Connecting hardware shall have drive arm attached to door with a pin linkage rotating in a self-lubricating bearing. Door shall not pivot on shaft of operator.
4. Electrical Control: Operator shall have a self contained electrical control unit, including necessary transformers, relays, rectifiers, and other electronic components for proper operation and switching of power operator. All connecting harnesses shall have interlocking plugs.

## **2.2 MICROPROCESSOR CONTROLS**

- A. The system shall include a multi-function microprocessor control providing adjustable hold open time (1-30 seconds), LED indications for sensor input signals and operator status and power assist close options. Control shall be capable of receiving activation signals from any device with normally open dry contact output. All activation modes shall provide fully adjustable opening speed:
- B. The door shall be held open by low voltage applied to the continuous duty motor. The control shall include an adjustable safety circuit that monitors door operation and stops the opening direction of the door if an obstruction is sensed. The motor shall include a recycle feature that reopens the door if an obstruction is sensed at any point during the closing cycle. The control shall include a standard three position key switch with functions for ON, OFF, and HOLD OPEN, mounted on operator enclosure, door frame, or wall, as indicated in the architectural drawings.

## **2.3 POWER UNITS**

Each power unit shall be self-contained, electric operated and independent of the door operator. Capacity and size of power circuits shall be in accordance with automatic door operator manufacturer's specifications and Division 26 - ELECTRICAL.

## **2.4 DOOR CONTROLS**

- A. Opening and closing actions of doors shall be actuated by controls and safety devices specified, and conform to ANSI 156.10. Controls shall cause doors to open instantly when control device is actuated; hold doors in open positions; then, cause doors to close, unless safety device or reactivated control interrupts operation.
- B. Manual Controls:
  1. Push Plate Wall Switch: Recess type, stainless steel push plate minimum 100 mm by 100 mm (four-inch by four-inch), with 13 mm (1/2-

inch) high letters "To Operate Door--Push" engraved on face of plate.

- C. Motion Detector: The motion detector may be surface mounted or concealed, to provide a signal to actuate the door operator, and monitor the immediate zone, to detect intrusion by persons, carts or similar objects. The zone which the detector monitors shall be 1500 mm (five feet) deep and 1500 mm (five feet) across, plus or minus 150 mm (six inches) on all dimensions. The maximum response time shall be no less than 25 milliseconds. Unit shall be designed to operate on 24 volts AC. The control shall not be affected by cleaning material, solvents, dust, dirt and outdoor weather conditions.

## **2.6 SAFETY DEVICES**

- A. General: Area over which doors swing or slide shall be a safety section and anyone standing in path of door's movement shall be protected by a safety device.
- B. At sliding doors, provide two photoelectric beams mounted at heights of 600 mm (24 inches) and 1200 mm (48 inches) in the door frame on sliding doors. Provide overhead safety presence sensors at door head on each side of the opening. Beams shall parallel door openings to prevent doors from closing when anyone is in the center of the door or doors. When beams are activated, doors shall recycle to full open position. Actuation shall include a motion detector mounted on each side of the door for detection of traffic in each direction.
- C. Each swing door shall have installed on the pull side a presence sensor to detect any person standing in the door swing path and prevent the door from opening.
- D. Time delay switches shall be adjustable between 3 to 60 seconds and shall control closing cycle of doors.
- E. Decals with sign "In" or "Do Not Enter" shall be installed on both faces of each door where shown.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION**

- A. Coordinate installation of equipment with other related work. Manual controls and power disconnect switches shall be recessed or semi-flush mounted in partitions. Secure operator components to adjacent construction with suitable fastenings. Conceal conduits, piping, and electric equipment, in finish work.

- B. Install power units in locations shown. Where units are to be mounted on walls, provide metal supports or shelves for the units. All equipment, including time delay switches, shall be accessible for maintenance and adjustment.
- C. Operators shall be adjusted and must function properly for the type of traffic (pedestrians, carts, stretchers and wheelchairs) expected to pass through doors. Each door leaf of pairs of doors shall open and close in synchronization. On pairs of doors, operators shall allow either door to be opened manually without the other door opening.
- D. Install controls at positions shown and make them convenient for particular traffic expected to pass through openings. Maximum height of push plate wall switches from finished floors shall be 40 inches unless otherwise approved by the Resident Engineer.

**3.2 INSTRUCTIONS**

- A. Following the installation and final adjustments of the door operators, the installer shall fully instruct VA personnel the operating, servicing and safety requirements for the swing and sliding automatic door operators.
- B. Coordinate instruction to VA personnel with VA Resident Engineer.

- - - E N D - - -

**SECTION 08 71 13.11**  
**LOW ENERGY POWER ASSIST DOOR OPERATORS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies low energy power assisted automatic operation of swing doors. The door operator system shall be complete including operator, controls, door arm and operator enclosure (header and cover).

**1.2 RELATED WORK**

- A. Sealants; Section 07 92 00, JOINT SEALANTS.
- B. Steel doors; Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.
- C. Wood doors; Section 08 14 00, INTERIOR WOOD DOORS.
- D. Door hardware; Section 08 71 00, DOOR HARDWARE.
- E. Glass and glazing of doors and frames; Section 08 80 00, GLAZING.
- F. Finish Color, Section 09 06 00, SCHEDULE FOR FINISHES.
- G. Smoke detectors for control of fire/smoke doors to be wired per Section 28 31 00, FIRE DETECTION AND ALARM.
- H. Electric general wiring, connections and equipment requirements; Division 26, ELECTRICAL.

**1.3 MANUFACTURER'S QUALIFICATIONS**

- A. Power assisted door operators, controls and other equipment shall be products of a manufacturer regularly engaged in manufacturing such equipment for a minimum of three years.
- B. One manufacturer of automatic door equipment shall be used throughout the building project .

**1.4 WARRANTY**

Power assisted door operators, controls and other related equipment shall be subject to the terms of the "Warranty of Construction", FAR clause 52.246-21, except that the warranty period shall be two years in lieu of one year.

**1.5 MAINTENANCE MANUALS**

In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS," furnish two copies of maintenance manuals and instructions on automatic door operators.

**1.6 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

- B. Manufacturer's literature and data describing operators, power units, controls, door hardware and safety devices.
- C. Shop Drawings:  
Showing location of controls and safety devices in relationship to each automatically operated door. This includes templates, wiring diagrams, fabrication details, anchorage and other information to providers of related work to coordinate the proper installation of the door operators.

#### **1.7 DESIGN CRITERIA**

- A. Power assisted automatic door equipment shall accommodate normal traffic as well as the weight of the doors.
- B. Equipment: UL approved and comply with applicable codes. Motors shall be rated minimum one-quarter horsepower and shall be single phase and 115 volts.
- C. Electrical Wiring; Provide wiring so that only a single power supply is required. Equipment and wiring shall be as specified in Division 26, ELECTRICAL.

#### **1.8 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standards Institute (ANSI):  
ICC/ANSI A117.1-03.....Guideline for Accessible and Usable Buildings and Facilities-Providing Accessibility and Usability for Physically Handicapped People
- B. Builders Hardware Manufacturers Association, Inc. (BHMA):  
156.19-07.....Power Assist and Low Energy Power Operated Doors

### **PART 2 - PRODUCTS**

#### **2.1 OPERATORS**

- A. Automatic door operators shall be for commercial doors and shall be electromechanical and surface mounted above the door to the header or transom bar. The opening force shall be generated by a permanent magnet DC motor driving a combination spiral bevel/spur gear reducer and transmitted to the door through an arm linkage. Opening speed shall be adjustable and feature dual backcheck control allowing adjustment of backcheck speed and position. Closing shall be by spring force

generated by a metal compression spring. The spring shall reduce manual opening force to not more than 67 N (15 lbf). The minimum diameter of spring wire shall be .007mm (172 in.). Under the specified design load of the door, the spring shall be capable of performing 2,000,000 cycles before fracture. Adjustable closing speed and fixed latch speed shall control the door in the closing cycle. The doors shall be operated manually at any time without damage to the operator or components.

- B. All operators shall have checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle.

Operators shall recycle doors instantaneously to full open position from any point in closing cycle when control switch is reactivated.

- C. Operator shall be swinging type enclosed in housing. Operator shall open door by energizing motor and shall stop by electrically reducing voltage and stalling motor against mechanical stop. Door shall close by means of spring energy, and close force shall be controlled by gear system and motor being used as dynamic break without power. System shall operate as manual door control in event of power failure. Opening and closing speeds shall be adjustable:

1. Swing Operator Housing: Housing shall be 140 mm (5-1/2 inches) wide by 150 mm (6 inches) high aluminum extrusions with enclosed end caps for application to 100 mm (4 inch) and larger frame systems. All structural sections shall have a minimum thickness of 3.7 mm (0.146 inch) and be fabricated of 6063-T5 aluminum alloy.
2. Swing Power Operator: Completely assembled and sealed unit which shall include helical gear drive transmission, mechanical spring and bearings, all located in cast aluminum case and filled with special lubricant for extreme temperature conditions. A "DC" shunt-wound permanent magnet motor with sealed ball bearings shall be attached to transmission system. Complete unit shall be rubber mounted with provisions for easy maintenance and replacement, without removing door from pivots or frame.
3. Connecting hardware for swing overhead concealed type power operator shall have drive arm attached to door with a pin linkage rotating in a self-lubricating bearing and adjustable slide block, traveling in an interconnected track and top pivot assembly. Top track and pivot assembly shall be fabricated of steel. Door shall not pivot on shaft of operator.

4. Electrical Control: Operator shall have a self contained electrical control unit, including necessary transformers, relays, rectifiers, and other electronic components for proper operation and switching of power operator. Relays shall be plug-in type for individual replacement and all connecting harnesses shall have interlocking plugs. Control shall also include time delay for normal cycle. Swing door control shall include safe-swing circuit with optional switching which automatically limits power and slows door when approached from the doors swing area.
5. On pairs of doors, operators shall allow either door to be opened manually without the other door opening.

## **2.2 MICROPROCESSOR CONTROLS**

- A. The system shall include a multi-function microprocessor control providing adjustable hold open time (1 - 30 sec.), LED indications for actual position unknown, system status, open obstruction shutdown, activation signal, safety mat/sensor signal, Stop-and-Hold signal, and mode selector switches providing a means for easy field selection of the following functions: push-to-operate, latch assist and stack pressure. Control shall be capable of receiving activation signals from any device with normally open dry contact output.
  1. With push-to-operate function enabled, the control shall provide a means of initiating a self-start activation circuit by slightly pushing the door open at any point in the door swing.
  2. Latch Assist shall provide a two second impulse in the close direction to overcome restrictions with locking devices of pressure differentials, allowing the unit to operate in standard time delay mode, and permitting the door to close from the full open position after the hold time is satisfied. All activation modes shall provide fully adjustable opening speed.
- B. The door shall be held open by low voltage applied to the continuous duty motor. The control shall include an adjustable safety circuit that monitors door operation and shuts the motor off if an open obstruction is sensed. The control shall include a recycle feature that reopens the door if an obstruction is sensed at any point during its closing cycle. The control shall include a standard three position toggle switch with functions for ON, OFF, and HOLD OPEN.

### 2.3 ENCLOSURE

Operator shall be completely self-contained within an extruded aluminum housing (alloy 6063-T6) to conceal operator mechanism and mounting brackets and with removable access cover with an overall maximum size of 140 mm (5-1/2 inches) wide by 150 mm (6 inches) deep. Header color shall be integral color anodized/painted to match adjacent storefront/frame finish.

### 2.4 ACTIVATION DEVICES

- A. Automatic: Opening cycle shall be activated by pressing switches with international symbol of accessibility and "PRESS TO OPERATE DOOR" engraved on the faceplate. Switches shall be installed in a standard 2-gang electrical wall box and placed in a location in compliance with ANSI A117.1. Switches may be wall mounted or mounted on a free standing post or guard rail.
- B. Manual: Push-to-operate; manually pushing the door shall activate the automatic opening cycle. Door shall automatically close after timer delay expires.
- C. Opening and closing force, measured 25 mm (1 inch) out from the lock stile of the door, shall not exceed 67 N (15 lbf) to stop the door when operating in either direction or cycle.
- D. Opening Time: Doors shall be field adjusted so that opening time to back check or 80 degrees, whichever occurs first, shall be 3 seconds or longer as required in Table 1. Backcheck shall not occur before 60 degrees opening.  
Total opening time to fully open shall be as in Table II.
- E. Closing Time:
  - Doors shall be field adjusted to close from 90 degrees to 10 degrees in 3 seconds or longer as required in Table 1.
  - 1. Doors shall be field adjusted to close from 10 degrees to fully close position in not less than 1.5 seconds.
  - 2. Doors shall be field adjusted to remain fully open for not less than 5 seconds.
  - 3. Table 1 provides speed settings for various widths and weights of doors for obtaining results complying with this paragraph.
- F. Cycle Tests:
  - 1. Low Energy Power Operated, Low Energy Power Open and Power Assist Operators shall be cycle tested for 300,000 cycles.

2. Use the widest and heaviest door specified as a test specimen.  
Narrower or lighter doors of the same configurations shall then be considered to meet the cycle test requirements.

SPEC WRITERS NOTE: Check requirements of NFPA-101 for clear width requirements in means of egress.

**Table 1**

Minimum Opening Time to Backcheck or 80 degrees, which ever occurs first and the Minimum Closing Time from 90 degrees to Latch Check or 10 degrees.

"D" Door Leaf Width- mm (inches)	"W" Door Weight in kg (pounds)				
	Matrix Values are in seconds				
	(100) 45.4	(56.7) 125	(68.0) 150	(79.4) 175	(90.7) 200
(762) 30	3.0	3.0	3.0	3.0	3.5
(914) 36	3.0	3.5	3.5	4.0	4.0
(1067) 42	3.5	4.0	4.0	4.5	4.5

Doors of other weights and widths can be calculated using the formula;

$$T = DvW/133 \text{ in US units} \quad T = DvW/2260 \text{ in SI (metric) units}$$

Where: T= Time, seconds

D= Door width, mm (inches)

W= Door weight, kg (lbs)

The values for "T" time have been rounded up to the nearest half second. These values are based on a kinetic energy of (1.25 lbf-ft).

**Table II**

Total Opening Time to Full Open Position

Backcheck at 60 degrees	Backcheck at 70 degrees	Backcheck at 80 degrees
Table 1 plus 2 seconds	Table 1 plus 1.5 seconds	Table 1 plus 1 second

Note: To determine maximum times from close to full open, the operator shall be adjusted as shown in the chart. Backcheck occurring at a point between positions in Table II shall use the lowest setting. For example, if the backcheck occurs at 75 degrees, the full open shall be the time shown in Table 1 plus 1.5 seconds.

## 2.5 POWER UNITS

Provide separate self-contained electric circuits for automatic operators located on each floor of the building. Interruption or failure of power circuits for operators located on one floor of the building shall not interfere with continuous performance of automatic operated doors located on other floors. Capacity and size of power circuits shall be in accordance with automatic operator manufacturer's specifications.

## 2.6 SAFETY DEVICES

- A. Time delay switches shall be adjustable between 5 to 60 seconds and shall control closing cycle of doors.
- B. Decals with sign "In" or "Do Not Enter" shall be installed on both faces of each door where shown and shall conform to the requirements of ANSI/BHMA A156.19.
- C. Each swing door shall have installed a motion sensor to detect any person standing in the door swing path and prevent the door from opening.
- D. Motion sensors shall consist of detection modules, factory prepared to be attached to each side of the lock/strike stile, an armored flex link power cable and bracket assembly, factory prepared for attachment to the pivot stile; a logic board and a position encoder which shall mount to the operator. The detection modules shall contain transmitting and receiving diodes and sense multidimensional zones for detection of people and/or objects in the door area. Detection modules shall be high impact, shock resistant zinc castings with tinted lenses. The swing door sensor system shall provide complete operate and safety zone coverage. These zones shall be fully adjusted to meet specific jobsite conditions (sidewalls, adjacent panels, etc.) The system shall not be affected by ultrasonic, ambient light or radios frequencies within the vicinity of the swing door.
- E. Each swing door shall have installed a re-activation sensor mounted on the push-side door face near the top detect any person standing in the door swing path and prevent the door from closing. Wiring for the re-activation sensor between the door and frame shall be concealed in a power transfer device, hinge or pivot provided under Section 08 71 00; wire chase in door provided under door section.

**PART 3 - EXECUTION****3.1 INSTALLATION**

- A. Coordinate installation of equipment with other related work. Manual controls and power disconnect switches shall be recessed or semi-flush mounted in partitions. Secure operator components to adjacent construction with suitable fastenings. Conceal conduits, piping, and electric equipment in finish work.
- B. Install power units in locations shown. Where units are to be mounted on walls, provide metal supports or shelves for the units. All equipment, including time delay switches, shall be accessible for maintenance and adjustment.
- C. Operators shall be adjusted and must function properly for the type of traffic (pedestrians) expected to pass through doors. Each door leaf of pairs of doors shall open and close in synchronization. On pairs of doors, operators shall allow either door to be opened manually without the other door opening.
- D. Install controls at positions shown and make them convenient for particular traffic expected to pass through openings. Maximum height of push plate wall switches from finished floors shall be 40 inches unless otherwise approved by the // Resident Engineer // Project Manager //.

---- END ----

**SECTION 08 80 00**  
**GLAZING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies glass, related glazing materials and accessories.  
Glazing products specified apply to factory or field glazed items.

**1.2 RELATED WORK**

A. Factory glazed by manufacturer in following units:

1. Sound resistant doors: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, and Section 08 14 00, WOOD DOORS.

**1.3 LABELS**

A. Temporary labels:

1. Provide temporary label on each light of glass identifying manufacturer or brand and glass type, quality and nominal thickness.
2. Label in accordance with NFRC (National Fenestration Rating Council) label requirements.
3. Temporary labels shall remain intact until glass is approved by Resident Engineer.

B. Permanent labels:

1. Locate in corner for each pane.
2. Label in accordance with ANSI Z97.1 and SGCC (Safety Glass Certification Council) label requirements.
  - a. Tempered glass.
  - b. Laminated glass or have certificate for panes without permanent label.
  - c. Organic coated glass.

**1.4 PERFORMANCE REQUIREMENTS**

A. Building Enclosure Vapor Retarder and Air Barrier:

1. Utilize the inner pane of multiple pane sealed units for the continuity of the air barrier and vapor retarder seal.
2. Maintain a continuous air barrier and vapor retarder throughout the glazed assembly from glass pane to heel bead of glazing sealant.

B. Glass Thickness:

1. Select thickness of exterior glass to withstand dead loads and wind loads acting normal to plane of glass at design pressures calculated in accordance with ASCE 7 and applicable code.

2. Test in accordance with ASTM E 1300.
3. Thicknesses listed are minimum. Coordinate thicknesses with framing system manufacturers.

#### **1.5 SUBMITTALS**

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Certificates:
  1. Certificates stating that wire glass, meets requirements for safety glazing material as specified in ANSI Z97.1.
  2. Certificate on shading coefficient.
  3. Certificate on "R" value when value is specified.
- C. Warranty: Submit written guaranty, conforming to General Condition requirements, and to "Warranty of Construction" Article in this Section.
- D. Manufacturer's Literature and Data:
  1. Glass, each kind required.
  2. Insulating glass units.
  4. Elastic compound for metal sash glazing.
  6. Glazing cushion.
  7. Sealing compound.
- E. Samples:
  1. Size: 150 mm by 150 mm (6 inches by 6 inches).
  2. Tinted glass.
- F. Preconstruction Adhesion and Compatibility Test Report: Submit glazing sealant manufacturer's test report indicating glazing sealants were tested for adhesion to glass and glazing channel substrates and for compatibility with glass and other glazing materials.

#### **1.6 DELIVERY, STORAGE AND HANDLING**

- A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.
- B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.
- C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each.

**1.7 PROJECT CONDITIONS**

Field Measurements: Field measure openings before ordering tempered glass products. Be responsible for proper fit of field measured products.

**1.8 WARRANTY**

- A. Warranty: Conform to terms of "Warranty of Construction", FAR clause 52.246-21, except extend warranty period for the following:
1. Insulating glass units to remain sealed for 10 years.
  2. Laminated glass units to remain laminated for 5 years.
  3. Polycarbonate to remain clear and ultraviolet light stabilized for 5 years.
  4. Insulating plastic to not have more than 6 percent decrease in light transmission and be ultraviolet light stabilized for 10 years.

**1.9 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
- Z97.1-09.....Safety Glazing Material Used in Building -  
Safety Performance Specifications and Methods  
of Test.
- C. American Society for Testing and Materials (ASTM):
- C542-05.....Lock-Strip Gaskets
- C716-06.....Installing Lock-Strip Gaskets and Infill  
Glazing Materials.
- C794-10.....Adhesion-in-Peel of Elastomeric Joint Sealants
- C864-05.....Dense Elastomeric Compression Seal Gaskets,  
Setting Blocks, and Spacers
- C920-11.....Elastomeric Joint Sealants
- C964-07.....Standard Guide for Lock-Strip Gasket Glazing
- C1036-06.....Flat Glass
- C1048-12.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated  
and Uncoated Glass.
- C1376-10.....Pyrolytic and Vacuum Deposition Coatings on  
Flat Glass
- D635-10.....Rate of Burning and/or Extent and Time of  
Burning of Self-Supporting Plastic in a  
Horizontal Position

- D4802-10.....Poly (Methyl Methacrylate) Acrylic Plastic Sheet
- E84-10.....Surface Burning Characteristics of Building Materials
- E119-10.....Standard Test Methods for Fire Test of Building Construction and Material
- E2190-10.....Insulating Glass Unit
- D. Commercial Item Description (CID):
  - A-A-59502.....Plastic Sheet, Polycarbonate
- E. Code of Federal Regulations (CFR):
  - 16 CFR 1201 - Safety Standard for Architectural Glazing Materials; 2010
- F. National Fire Protection Association (NFPA):
  - 80-13.....Fire Doors and Windows.
  - 252-12.....Standard Method of Fire Test of Door Assemblies
  - 257-12.....Standard on Fire Test for Window and Glass Block Assemblies
- G. National Fenestration Rating Council (NFRC)
- H. Safety Glazing Certification Council (SGCC) 2012:
  - Certified Products Directory (Issued Semi-Annually).
- I. Underwriters Laboratories, Inc. (UL):
  - 752-11.....Bullet-Resisting Equipment.
- J. Unified Facilities Criteria (UFC):
  - 4-010-01-2012.....DOD Minimum Antiterrorism Standards for Buildings
- K. Glass Association of North America (GANA):
  - Glazing Manual (Latest Edition)
  - Sealant Manual (2009)
- L. American Society of Civil Engineers (ASCE):
  - ASCE 7-10.....Wind Load Provisions

**PART 2 - PRODUCT**

**2.1 GLASS**

- A. Use thickness stated unless specified otherwise in assemblies.
- B. Clear Glass:
  - 1. ASTM C1036, Type I, Class 1, Quality q3.
  - 2. Thickness, 6 mm (1/4 inch).
- 3. Coordinate color/tint/coating to accommodate required security monitoring.

C. Tinted Heat reflective and low emissivity coated glass:

1. ASTM C1036, Type I, Class 2, Quality q3.
2. Color:
3. Thickness, 6 mm (1/4 inch).

## 2.2 HEAT-TREATED GLASS

C. Clear Tempered Glass:

1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.
2. Thickness, 6 mm (1/4 inch) as indicated.

## 2.3 LAMINATED GLASS

A. Two or more lites of glass bonded with an interlayer material for use in building glazing

B. Colored Interlayer:

1. Use color interlayer ultraviolet light color stabilization.
2. Option: Use colored interlayer with clear glass in lieu of tinted glass and clear interlayer.
4. The interlayer assembly shall have uniform color presenting same appearance as tinted glass assembly.

C. Use 1.5 mm (0.060 inch) thick interlayer for:

1. Horizontal or Sloped glazing.
2. Acoustical glazing.
3. Heat strengthened or fully tempered glass assemblies.

D. Use min. 0.75 mm (0.030 inch) thick interlayer for vertical glazing where 1.5 mm (0.060 inch) interlayer is not otherwise shown or required.

## 2.4 LAMINATED GLAZING ASSEMBLIES

A. Clear Tempered Glazing:

1. Both panes ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.
2. Thickness: Each pane 3 mm (1/8 inch) .

B. Tinted Tempered Glazing:

1. Exterior pane ASTM C1036, Type I, Class 3, Quality q3, 3 mm (1/8 inch) thick.
2. Interior pane ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3, 3 mm (1/8 inch) thick.

**2.13 GLAZING ACCESSORIES**

- A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work shall have a finish that will not corrode or stain while in service.
- B. Setting Blocks: ASTM C864:
  - 1. Channel shape; having 6 mm (1/4 inch) internal depth.
  - 2. Shore a hardness of 80 to 90 Durometer.
  - 3. Block lengths: 50 mm (two inches) except 100 to 150 mm (four to six inches) for insulating glass.
  - 4. Block width: Approximately 1.6 mm (1/16 inch) less than the full width of the rabbet.
  - 5. Block thickness: Minimum 4.8 mm (3/16 inch). Thickness sized for rabbet depth as required.
- C. Spacers: ASTM C864:
  - 1. Channel shape having a 6 mm (1/4 inch) internal depth.
  - 2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.
  - 3. Lengths: One to 25 to 76 mm (one to three inches).
  - 4. Shore a hardness of 40 to 50 Durometer.
- D. Sealing Tapes:
  - 1. Semi-solid polymeric based material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
  - 2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.
- H. Glazing Gaskets: ASTM C864:
  - 1. Firm dense wedge shape for locking in sash.
  - 2. Soft, closed cell with locking key for sash key.
  - 3. Flanges may terminate above the glazing-beads or terminate flush with top of beads.
- J. Glazing Sealants: ASTM C920, silicone neutral cure:
  - 1. Type S.
  - 2. Class 25

3. Grade NS.
4. Shore A hardness of 25 to 30 Durometer.

M. Color:

1. Color of glazing compounds, gaskets, and sealants used for aluminum color frames shall match color of the finished aluminum and be nonstaining.
2. Color of other glazing compounds, gaskets, and sealants which will be exposed in the finished work and unpainted shall be black, .

**PART 3 - EXECUTION**

**3.1 EXAMINATION**

A. Verification of Conditions:

1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.
2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer's approved shop drawings.

B. Advise Contractor of conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation: Do not proceed with installation until unsatisfactory conditions have been corrected.

C. Verify that wash down of adjacent masonry is completed prior to erection of glass and glazing units to prevent damage to glass and glazing units by cleaning materials.

**3.2 PREPARATION**

- A. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.
- B. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.
- C. Verify that components used are compatible.
- D. Clean and dry glazing surfaces.
- E. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

**3.3 INSTALLATION - GENERAL**

- A. Install in accordance with GANA-01 Glazing Manual and GANA-02 Sealant Manual unless specified otherwise.

- B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.
- C. Set glazing without bending, twisting, or forcing of units.
- D. Do not allow glass to rest on or contact any framing member.
- E. Glaze doors and operable sash, in a securely fixed or closed and locked position, until sealant, glazing compound, or putty has thoroughly set.
- F. Laminated Glass:
  - 1. Tape edges to seal interlayer and protect from glazing sealants.
  - 2. Do not use putty or glazing compounds.
- G. Insulating Glass Units:
  - 1. Glaze in compliance with glass manufacturer's written instructions.
  - 2. When glazing gaskets are used, they shall be of sufficient size and depth to cover glass seal or metal channel frame completely.
  - 3. Do not use putty or glazing compounds.
  - 4. Do not grind, nip, cut, or otherwise alter edges and corners of fused glass units after shipping from factory.
  - 5. Install with tape or gunnable sealant in wood sash.

#### **3.4 REPLACEMENT AND CLEANING**

- A. Clean new glass surfaces removing temporary labels, paint spots, and defacement after approval by Resident Engineer.
- B. Replace cracked, broken, and imperfect glass, or glass which has been installed improperly.
- C. Leave glass, putty, and other setting material in clean, whole, and acceptable condition.

#### **3.5 PROTECTION**

Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.

#### **3.13 GLAZING SCHEDULE**

- B. Tempered Glass:
  - 1. Install in full and half glazed doors unless indicated otherwise.
  - 2. Install in door sidelights adjacent to doors.
  - 3. Use clear tempered glass on interior side lights and doors, and on exterior doors and sidelights unless otherwise indicated or specified.

G. Laminated Glass: Install as specified in doors and where indicated.

1. If laminated glass is required for double glazed windows, provide it for interior panes only.

- - - E N D - - -

**SECTION 09 06 00  
SCHEDULE FOR FINISHES**

**SECTION 09 06 00-SCHEDULE FOR FINISHES**

VAMC: William S. Middleton VAH

Location: 2500 Overlook Terrace

Project no. and Name: Expand Clinical Lab Project Number 607-13-106

100% Bid Set Deliverable

Date: 10 February 2014

**SECTION 09 06 00  
SCHEDULE FOR FINISHES**

**PART I - GENERAL**

**1.1 DESCRIPTION**

This section contains a coordinated system in which requirements for materials specified in other sections shown are identified by abbreviated material names and finish codes in the room finish schedule or shown for other locations.

**1.2 MANUFACTURERS**

Manufacturer's trade names and numbers used herein are only to identify colors, finishes, textures and patterns. Products of other manufacturer's equivalent to colors, finishes, textures and patterns of manufacturers listed that meet requirements of technical specifications will be acceptable upon approval in writing by contracting officer for finish requirements.

**1.3 SUBMITALS**

Submit in accordance with SECTION 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES—provide quadruplicate samples for color approval of materials and finishes specified in this section.

**1.4 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.
- B. MASTER PAINTING INSTITUTE: (MPI)  
2001.....Architectural Painting Specification Manual

**PART 2- PRODUCTS**

- B. SECTION 06 20 00, FINISH CARPENTRY

1. THROUGH - WALL COUNTER OR PASS THROUGH COUNTER (TYPE B)		
Room No. and Name	Component	Finish/Color
DB1-247 Waiting	Countertop	T.B.D

**2.8 DIVISION 08 - OPENINGS**

A. SECTION 08 11 13, HOLLOW METAL DOORS AND FRAMES

Paint both sides of door and frames same color including ferrous metal louvers, and hardware attached to door	
Component	Color of Paint Type and Gloss
Door	T.B.D.
Frame	T.B.D.

B. SECTION 08 14 00, WOOD DOORS

Component	Finish/Color
Doors	T.B.D.
Frames	T.B.D.

C. SECTION 08 33 13, COILING COUNTER DOORS

Location	Material	Finish	Manufacturer	Manufacturer Color Name/No.
	Aluminum			T.B.D.

**2.9 DIVISION 09 - FINISHES**

**A. SECTION 09 30 13, CERAMIC TILING**

SECTION 09 30 13, CERAMIC TILING		
Finish code	Manufacturer	Mfg. Color Name/No
Patch to Match Existing in Corridor		

**B. SECTION 09 51 00, ACOUSTICAL CEILINGS**

Finish Code	Component	Color Pattern	Manufacturer	Mfg Name/No.
AC-1	Exposed Suspension System		CertainTeed	#CM-454

**C. SECTION 09 65 16, VINYL SHEET FLOORING (VSF)**

Finish Code	Pattern name	Manufacturer	Mfg. Color Name/No.
SV-1	Field	Marmoleum	#3146 Serene Grey
SV-2	Accent Bands	Marmoleum	#3139 Lava

**D. SECTION 09 65 13, RESILIENT BASE STAIR TREADS AND ACCESSORIES**

Finish Code	Item	Height	Manufacturer	Mfg Name/No.
WB1(Wall Base - Wall & Casework)	Rubber Base (RB)	4"	Johnsonite	Color T.B.D.

E. SECTION 09 68 00, CARPET (CP)

Finish Code	Pattern	Manufacture	Mfg. Color Name/No.
			T.B.D.

1. SECTION 09 68 00, CARPET EDGE STRIP

Finish Code	Material	Manufacturer	Mfg. Color Name/No.
	<del>Metal</del> / Vinyl		T.B.D.

F. SECTION 09 91 00, PAINT AND COATINGS

1. MPI Gloss and Sheen Standards

		Gloss @60	Sheen @85
Gloss Level 1	a traditional matte finish-flat	max 5 units, and	max 10 units
Gloss Level 2	a high side sheen flat-"a velvet-like" finish	max 10 units, and	10-35 units
Gloss Level 3	a traditional "egg-shell like" finish	10-25 units, and	10-35 units
Gloss Level 4	a "satin-like" finish	20-35 units, and	min. 35 units
Gloss Level 5	a traditional semi-gloss	35-70 units	
Gloss Level 6	a traditional gloss	70-85 units	
Gloss level 7	a high gloss	more than 85 units	

2. Paint code	Gloss	Manufacturer	Mfg. Color Name/No.
P1	Level 3	Sherman Williams	Pro Mar 200 / Zero VOC Interior Latex / Color T.B.D.
P2	Level 3	Sherman Williams	Pro Mar 200 / Zero VOC Interior Latex / Color T.B.D.

**2.10 DIVISION 10 - SPECIALTIES**

A. SECTION 10 26 00, WALL GUARDS AND CORNER GUARDS

Item	Material	Manufacturer	Mfg. Color Name/No.
Corner Guards	<u>Acrovyn</u>		T.B.D.

~~B. SECTION 10 13 00 / 10 14 00, INTERIOR SIGNS~~

<del>Sign Type</del>	<del>Component</del>	<del>Manufacturer</del>	<del>Mfg. Color Name/No.</del>
			<del>T.B.D.</del>

~~CB.~~ SECTION 10 44 13, FIRE EXTINGUISHER CABINETS

Component	Material	Finish
		Match Existing

**PART III EXECUTION**

**3.1 FINISH SCHEDULES & MISCELLANEOUS ABBREVIATIONS**

FINISH SCHEDULE & MISCELLANEOUS ABBREVIATIONS	
Term	Abbreviation
Access Flooring	AF
Accordion Folding Partition	AFP
Acoustical Ceiling	AT
Acoustical Ceiling, Special Faced	AT (SP)
Acoustical Metal Pan	AMP

Ceiling	
Acoustical Wall Panel	AWP
Acoustical Wall Treatment	AWT
Acoustical Wallcovering	AWF
Anodized Aluminum Colored	AAC
Anodized Aluminum Natural Finish	AA
Baked On Enamel	BE
Brick Face	BR
Brick Flooring	BF

Brick Paving	BP
Carpet	CP
Carpet Athletic Flooring	CAF
Carpet Module Tile	CPT
Ceramic Glazed Facing Brick	CGFB
Ceramic Mosaic Tile	FTCT
Concrete	C
Concrete Masonry Unit	CMU
Divider Strips Marble	DS MB
Epoxy Coating	EC
Epoxy Resin Flooring	ERF
Existing	E
Exposed Divider Strips	EXP
Exterior	EXT
Exterior Finish System	EFS
Exterior Paint	EXT-P
Exterior Stain	EXT-ST
Fabric Wallcovering	WF
Facing Tile	SCT
Feature Strips	FS
Floor Mats & Frames	FM
Floor Tile, Mosaic	FT
Fluorocarbon	FC
Folding Panel Partition	FP
Foot Grille	FG
Glass Masonry Unit	GUMU
Glazed Face CMU	GCMU
Glazed Structural Facing Tile	SFTU
Granite	GT
Gypsum Wallboard	GWB
High Glazed Coating	SC
Latex Mastic Flooring	LM
Linear Metal Ceiling	LMC
Linear Wood Ceiling	LWC
Marble	MB
Material	MAT
Mortar	M

Multi-Color Coating	MC
Natural Finish	NF
Paint	P
Paver Tile	PVT
Perforated Metal Facing (Tile or Panels)	PMF
Plaster	PL
Plaster High Strength	HSPL
Plaster Keene Cement	KC
Plastic Laminate	HPDL
Polypropylene Fabric Wallcovering	PFW
Porcelain Paver Tile	PPT
Quarry Tile	QT
Radiant Ceiling Panel System	RCP
Resilient Stair Tread	RST
Rubber Base	RB
Rubber Tile Flooring	RT
Spandrel Glass	SLG
Stain	ST
Stone Flooring	SF
Structural Clay	SC
Suspension Decorative Grids	SDG
Terrazzo Portland Cement	PCT
Terrazzo Tile	TT
Terrazzo, Thin Set	
Textured Gypsum Ceiling Panel	TGC
Textured Metal Ceiling Panel	TMC
Thin set Terrazzo	TST
Veneer Plaster	VP
Vinyl Base	VB
Vinyl Coated Fabric Wallcovering	W
Vinyl Composition Tile	VCT

Vinyl Sheet Flooring	VSF
Vinyl Sheet Flooring (Welded Seams)	WSF

Wall Border	WB
Wood	WD

**3.2 ROOM FINISH SCHEDULE**

- A. Match adjoining or existing similar surfaces colors, textures or patterns where disturbed or damaged by alterations or new work when not scheduled.
  
- B. ROOM FINISH SCHEDULE: Refer to Room Finish Schedule as shown on Sheet A600.

--- E N D---

**SECTION 09 22 16**  
**NON-STRUCTURAL METAL FRAMING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies steel studs wall systems, shaft wall systems, ceiling or soffit suspended or furred framing, wall furring, fasteners, and accessories for the screw attachment of gypsum board, plaster bases or other building boards.

**1.2 RELATED WORK**

- A. Ceiling suspension systems for acoustical tile or panels and lay in gypsum board panels: Section 09 51 00, ACOUSTICAL CEILINGS and Section 09 29 00, GYPSUM BOARD.

**1.3 TERMINOLOGY**

- A. Description of terms shall be in accordance with ASTM C754, ASTM C11, ASTM C841 and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, or bar joists. In interstitial spaces with walk-on floors the underside of the walk-on floor is the underside of structure overhead.
- C. Thickness of steel specified is the minimum bare (uncoated) steel thickness.

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
1. Studs, runners and accessories.
  2. Hanger inserts.
  3. Channels (Rolled steel).
  4. Furring channels.
  5. Screws, clips and other fasteners.
- C. Shop Drawings:
1. Typical ceiling suspension system.
  2. Typical metal stud and furring construction system including details around openings and corner details.
  3. Typical shaft wall assembly
  4. Typical fire rated assembly and column fireproofing showing details of construction same as that used in fire rating test.
- D. Test Results: Fire rating test designation, each fire rating required for each assembly.

**1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE**

In accordance with the requirements of ASTM C754.

**1.6 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society For Testing And Materials (ASTM)
- A641-09.....Zinc-Coated (Galvanized) Carbon Steel Wire
- C11-10.....Terminology Relating to Gypsum and Related Building Materials and Systems
- C635-07.....Manufacture, Performance, and Testing of Metal Suspension System for Acoustical Tile and Lay-in Panel Ceilings
- C636-08.....Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels
- C645-09.....Non-Structural Steel Framing Members
- C754-11.....Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products
- C841-03(R2008).....Installation of Interior Lathing and Furring
- C954-10.....Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness
- E580-11.....Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Moderate Seismic Restraint.

**PART 2 - PRODUCTS****2.1 PROTECTIVE COATING**

Galvanize steel studs, runners (track), rigid (hat section) furring channels, "Z" shaped furring channels, and resilient furring channels, with coating designation of G-60 minimum, per ASTM 123.

**2.2 STEEL STUDS AND RUNNERS (TRACK)**

- A. ASTM C645, modified for thickness specified and sizes as shown.
1. Use ASTM A525 steel, 0.8 mm (0.0329-inch) thick bare metal (33 mil).
  2. Runners same thickness as studs.
- B. Provide not less than two cutouts in web of each stud, approximately 300 mm (12 inches) from each end, and intermediate cutouts on approximately 600 mm (24-inch) centers.
- C. Doubled studs for openings and studs for supporting concrete backer-board.

- D. Studs 3600 mm (12 feet) or less in length shall be in one piece.
- E. Shaft Wall Framing:
  1. Conform to rated wall construction.
  2. C-H Studs.
  3. E Studs.
  4. J Runners.
  5. Steel Jamb-Strut.

### **2.3 FURRING CHANNELS**

- A. Rigid furring channels (hat shape): ASTM C645.
- B. Resilient furring channels:
  1. Not less than 0.45 mm (0.0179-inch) thick bare metal.
  2. Semi-hat shape, only one flange for anchorage with channel web leg slotted on anchorage side, channel web leg on other side stiffens fastener surface but shall not contact anchorage surface other channel leg is attached to.

### **2.4 FASTENERS, CLIPS, AND OTHER METAL ACCESSORIES**

- A. ASTM C754, except as otherwise specified.
- B. For fire rated construction: Type and size same as used in fire rating test.
- C. Fasteners for steel studs thicker than 0.84 mm (0.033-inch) thick. Use ASTM C954 steel drill screws of size and type recommended by the manufacturer of the material being fastened.
- D. Clips: ASTM C841 (paragraph 6.11), manufacturer's standard items. Clips used in lieu of tie wire shall have holding power equivalent to that provided by the tie wire for the specific application.
- E. Concrete ceiling hanger inserts (anchorage for hanger wire and hanger straps): Steel, zinc-coated (galvanized), manufacturers standard items, designed to support twice the hanger loads imposed and the type of hanger used.
- F. Tie Wire and Hanger Wire:
  1. ASTM A641, soft temper, Class 1 coating.
  2. Gage (diameter) as specified in ASTM C754 or ASTM C841.
- G. Attachments for Wall Furring:
  1. Manufacturers standard items fabricated from zinc-coated (galvanized) steel sheet.
  2. For concrete or masonry walls: Metal slots with adjustable inserts or adjustable wall furring brackets. Spacers may be fabricated from 1 mm (0.0396-inch) thick galvanized steel with corrugated edges.

- H. Power Actuated Fasteners: Type and size as recommended by the manufacturer of the material being fastened.

### **PART 3 - EXECUTION**

#### **3.1 INSTALLATION CRITERIA**

- A. Where fire rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, the construction shall be same as that used in fire rating test.
- B. Construction requirements for fire rated assemblies and materials shall be as shown and specified, the provisions of the Scope paragraph (1.2) of ASTM C754 and ASTM C841 regarding details of construction shall not apply.

#### **3.2 INSTALLING STUDS**

- A. Install studs in accordance with ASTM C754, except as otherwise shown or specified.
- B. Space studs not more than 610 mm (24 inches) on center.
- C. Cut studs 6 mm to 9 mm (1/4 to 3/8-inch) less than floor to underside of structure overhead when extended to underside of structure overhead.
- D. Where studs are shown to terminate above suspended ceilings, provide bracing as shown or extend studs to underside of structure overhead.
- E. Extend studs to underside of structure overhead for fire, rated partitions, smoke partitions, shafts, and sound rated partitions // and insulated exterior wall furring. //
- F. Openings:
1. Frame jambs of openings in stud partitions and furring with two studs placed back to back or as shown.
  2. Fasten back to back studs together with 9 mm (3/8-inch) long Type S pan head screws at not less than 600 mm (two feet) on center, staggered along webs.
  3. Studs fastened flange to flange shall have splice plates on both sides approximately 50 X 75 mm (2 by 3 inches) screwed to each stud with two screws in each stud. Locate splice plates at 600 mm (24 inches) on center between runner tracks.
- G. Fastening Studs:
1. Fasten studs located adjacent to partition intersections, corners and studs at jambs of openings to flange of runner tracks with two screws through each end of each stud and flange of runner.
  2. Do not fasten studs to top runner track when studs extend to underside of structure overhead.
- H. Form control joint, with double studs spaced 13 mm (1/2-inch) apart.

**3.3 INSTALLING WALL FURRING FOR FINISH APPLIED TO ONE SIDE ONLY**

- A. In accordance with ASTM C754, or ASTM C841 except as otherwise specified or shown.
- B. Wall furring-Stud System:
  - 1. Framed with 63 mm (2-1/2 inch) or narrower studs, 600 mm (24 inches) on center.
  - 2. Brace as specified in ASTM C754 for Wall Furring-Stud System or brace with sections or runners or studs placed horizontally at not less than three foot vertical intervals on side without finish.
  - 3. Securely fasten braces to each stud with two Type S pan head screws at each bearing.
- C. Direct attachment to masonry or concrete; rigid channels or "Z" channels:
  - 1. Install rigid (hat section) furring channels at 600 mm (24 inches) on center, horizontally or vertically.
  - 2. Install "Z" furring channels vertically spaced not more than 600 mm (24 inches) on center.
  - 3. At corners where rigid furring channels are positioned horizontally, provide mitered joints in furring channels.
  - 4. Ends of spliced furring channels shall be nested not less than 200 mm (8 inches).
  - 5. Fasten furring channels to walls with power-actuated drive pins or hardened steel concrete nails. Where channels are spliced, provide two fasteners in each flange.
  - 6. Locate furring channels at interior and exterior corners in accordance with wall finish material manufacturers printed erection instructions. Locate "Z" channels within 100 mm (4 inches) of corner.
- D. Installing Wall Furring-Bracket System: Space furring channels not more than 400 mm (16 inches) on center.

**3.4 INSTALLING SUPPORTS REQUIRED BY OTHER TRADES**

- A. Provide for attachment and support of electrical outlets, plumbing, laboratory or heating fixtures, recessed type plumbing fixture accessories, access panel frames, wall bumpers, wood seats, toilet stall partitions, dressing booth partitions, urinal screens, chalkboards, tackboards, wall-hung casework, handrail brackets, recessed fire extinguisher cabinets and other items like auto door buttons and auto door operators supported by stud construction.
- B. Provide additional studs where required. Install metal backing plates, or special metal shapes as required, securely fastened to metal studs.

**3.5 INSTALLING SHAFT WALL SYSTEM**

- A. Conform to UL Design No. U438 for two-hour fire rating.

- B. Position J runners at floor and ceiling with the short leg toward finish side of wall. Securely attach runners to structural supports with power driven fasteners at both ends and 600 mm (24 inches) on center.
- C. After liner panels have been erected, cut C-H studs and E studs, from 9 mm (3/8-inch) to not more than 13 mm (1/2-inch) less than floor-to-ceiling height. Install C-H studs between liner panels with liner panels inserted in the groove.
- D. Install full-length steel E studs over shaft wall line at intersections, corners, hinged door jambs, columns, and both sides of closure panels.
- E. Suitably frame all openings to maintain structural support for wall:
  - 1. Provide necessary liner fillers and shims to conform to label frame requirements.
  - 2. Frame openings cut within a liner panel with E studs around perimeter.
  - 3. Frame openings with vertical E studs at jambs, horizontal J runner at head and sill.

### **3.6 INSTALLING FURRED AND SUSPENDED CEILINGS OR SOFFITS**

- A. Install furred and suspended ceilings or soffits in accordance with ASTM C754 or ASTM C841 except as otherwise specified or shown for screw attached gypsum board ceilings and for plaster ceilings or soffits.
  - 1. Space framing at 600 mm (24-inch) centers for gypsum board anchorage.
- B. Existing concrete construction exposed or concrete on steel decking:
  - 1. Use power actuated fasteners either eye pin, threaded studs or drive pins for type of hanger attachment required.
- C. Installing suspended ceiling system for gypsum board (ASTM C635 Option):
  - 1. Install only for ceilings to receive screw attached gypsum board.
  - 2. Install in accordance with ASTM C636.
    - a. Install main runners spaced 1200 mm (48 inches) on center.
    - b. Install 1200 mm (four foot) tees not over 600 mm (24 inches) on center; locate for edge support of gypsum board.
    - c. Install wall track channel at perimeter.
- H. Installing Ceiling Bracing System:
  - 1. Construct bracing of 38 mm (1-1/2 inch) channels for lengths up to 2400 mm (8 feet) and 50 mm (2 inch) channels for lengths over 2400 mm (8 feet) with ends bent to form surfaces for anchorage to carrying channels and over head construction. Lap channels not less than 600 mm (2 feet) at midpoint back to back. Screw or bolt lap together with two fasteners.

2. Install bracing at an approximate 45 degree angle to carrying channels and structure overhead; secure as specified to structure overhead with two fasteners and to carrying channels with two fasteners or wire ties.

**3.7 TOLERANCES**

- A. Fastening surface for application of subsequent materials shall not vary more than 3 mm (1/8-inch) from the layout line.
- B. Plumb and align vertical members within 3 mm (1/8-inch.)
- C. Level or align ceilings within 3 mm (1/8-inch.)

- - - E N D - - -

**SECTION 09 29 00**  
**GYPSUM BOARD**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies installation and finishing of gypsum board.

**1.2 RELATED WORK**

- A. Installation of steel framing members for walls, partitions, furring, soffits, and ceilings: 09 22 16, NON-STRUCTURAL METAL FRAMING.
- B. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS.
- C. Lay in gypsum board ceiling panels: Section 09 51 00, ACOUSTICAL CEILING.

**1.3 TERMINOLOGY**

- A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.
- C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Cornerbead and edge trim.
  - 2. Finishing materials.
  - 3. Laminating adhesive.
  - 4. Gypsum board, each type.
- C. Shop Drawings:
  - 1. Typical gypsum board installation, showing corner details, edge trim details and the like.
  - 2. Typical sound rated assembly, showing treatment at perimeter of partitions and penetrations at gypsum board.
  - 3. Typical shaft wall assembly.
  - 4. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.
- D. Samples:
  - 1. Cornerbead.
  - 2. Edge trim.

3. Control joints.

E. Test Results:

1. Fire rating test, each fire rating required for each assembly.
2. Sound rating test.

**1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE**

In accordance with the requirements of ASTM C840.

**1.6 ENVIRONMENTAL CONDITIONS**

In accordance with the requirements of ASTM C840.

**1.7 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing And Materials (ASTM):

- C11-08.....Terminology Relating to Gypsum and Related Building Materials and Systems
- C475-02.....Joint Compound and Joint Tape for Finishing Gypsum Board
- C840-08.....Application and Finishing of Gypsum Board
- C919-08.....Sealants in Acoustical Applications
- C954-07.....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness
- C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
- C1047-05.....Accessories for Gypsum Wallboard and Gypsum Veneer Base
- C1177-06.....Glass Mat Gypsum Substrate for Use as Sheathing
- C1658-06.....Glass Mat Gypsum Panels
- C1396-06.....Gypsum Board
- E84-08.....Surface Burning Characteristics of Building Materials

C. Underwriters Laboratories Inc. (UL):

Latest Edition.....Fire Resistance Directory

D. Inchcape Testing Services (ITS):

Latest Editions.....Certification Listings

**PART 2 - PRODUCTS**

## **2.1 GYPSUM BOARD**

- A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise. Shall contain a minimum of 20 percent recycled gypsum.
- B. Coreboard or Shaft Wall Liner Panels.
  - 1. ASTM C1396, Type X.
  - 2. ASTM C1658: Glass Mat Gypsum Panels,
  - 3. Coreboard for shaft walls 300, 400, 600 mm (12, 16, or 24 inches) wide by required lengths 25 mm (one inch) thick with paper faces treated to resist moisture.
- C. Water Resistant Gypsum Backing Board: ASTM C620, Type X, 16 mm (5/8 inch) thick.
- D. Gypsum cores shall contain maximum percentage of post industrial recycled gypsum content available in the area (a minimum of 95 percent post industrial recycled gypsum content). Paper facings shall contain 100 percent post-consumer recycled paper content.

## **2.2 GYPSUM SHEATHING BOARD**

- A. ASTM C1396, Type X, water-resistant core, 16 mm (5/8 inch) thick.
- B. ASTM C1177, Type X.

## **2.3 ACCESSORIES**

- A. ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.
- B. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.

## **2.4 FASTENERS**

- A. ASTM C1002 and ASTM C840, except as otherwise specified.
- B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).
- C. Select screws of size and type recommended by the manufacturer of the material being fastened.
- D. For fire rated construction, type and size same as used in fire rating test.
- E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

## **2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE**

ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/l.

## **PART 3 - EXECUTION**

### **3.1 GYPSUM BOARD HEIGHTS**

- A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring:
  - 1. Two sides of partitions:
    - a. Fire rated partitions.
    - b. Smoke partitions.
    - c. Sound rated partitions.
    - d. Full height partitions shown (FHP).
  - 2. One side of partitions or furring:
    - a. Inside of exterior wall furring or stud construction.
    - b. Room side of room without suspended ceilings.
    - c. Furring for pipes and duct shafts, except where fire rated shaft wall construction is shown.
  - 3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.
- B. In locations other than those specified, extend gypsum board from floor to heights as follows:
  - 1. Not less than 100 mm (4 inches) above suspended acoustical ceilings.
  - 2. At ceiling of suspended gypsum board ceilings.
  - 3. At existing ceilings.

### **3.2 INSTALLING GYPSUM BOARD**

- A. Coordinate installation of gypsum board with other trades and related work.
- B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.
- C. Moisture and Mold-Resistant Assemblies: Provide and install moisture and mold-resistant glass mat gypsum wallboard products with moisture-resistant surfaces complying with ASTM C1658 where shown and in locations which might be subject to moisture exposure during construction.
- D. Use gypsum boards in maximum practical lengths to minimize number of end joints.
- E. Bring gypsum board into contact, but do not force into place.
- F. Ceilings:
  - 1. For single-ply construction, use perpendicular application.
  - 2. For two-ply assemblies:
    - a. Use perpendicular application.

- b. Apply face ply of gypsum board so that joints of face ply do not occur at joints of base ply with joints over framing members.

G. Walls (Except Shaft Walls):

1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
3. Stagger screws on abutting edges or ends.
4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to minimize number of joints except gypsum board shall be applied vertically over "Z" furring channels.
5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in facelayer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.
6. For three-ply gypsum board assemblies, apply plies in same manner as for two-ply assemblies, except that heads of fasteners need only be driven flush with surface for first and second plies. Apply third ply of wallboard in same manner as second ply of two-ply assembly, except use fasteners of sufficient length enough to have the same penetration into framing members as required for two-ply assemblies.
7. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.

H. Acoustical or Sound Rated Partitions, Fire and Smoke Partitions:

1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.
2. Coordinate for application of caulking or sealants to space prior to taping and finishing.
3. For sound rated partitions, use sealing compound (ASTM C919) to fill the annular spaces between all receptacle boxes and the partition finish material through which the boxes protrude to seal all holes and/or openings on the back and sides of the boxes. STC minimum values as shown.

I. Electrical and Telecommunications Boxes:

1. Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.

J. Accessories:

1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.
2. Install in one piece, without the limits of the longest commercially available lengths.
3. Corner Beads:
  - a. Install at all vertical and horizontal external corners and where shown.
  - b. Use screws only. Do not use crimping tool.
4. Edge Trim (casings Beads):
  - a. At both sides of expansion and control joints unless shown otherwise.
  - b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
  - c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.
  - d. Where shown.

**3.3 INSTALLING GYPSUM SHEATHING**

- A. Install in accordance with ASTM C840, except as otherwise specified or shown.
- B. Use screws of sufficient length to secure sheathing to framing.
- C. Space screws 9 mm (3/8 inch) from ends and edges of sheathing and 200 mm (8 inches) on center. Space screws a maximum of 200 mm (8 inches) on center on intermediate framing members.
- D. Apply 600 mm by 2400 mm (2 foot by 8 foot) sheathing boards horizontally with tongue edge up.
- E. Apply 1200 mm by 2400 mm or 2700 mm (4 ft. by 8 ft. or 9 foot) gypsum sheathing boards vertically with edges over framing.

**3.4 CAVITY SHAFT WALL**

- A. Coordinate assembly with Section 09 22 16, NON-STRUCTURAL METAL FRAMING, for erection of framing and gypsum board.
- B. Conform to UL Design No. U438 or FM WALL CONSTRUCTION 12-2/HR Nonbearing for two-hour fire rating. Conform to FM WALL CONSTRUCTION 25-1/HR (Non-loadbearing) for one-hour fire rating where shown.
- C. Cut coreboard (liner) panels 25 mm (one inch) less than floor-to-ceiling height, and erect vertically between J-runners on shaft side.

1. Where shaft walls exceed 4300 mm (14 feet) in height, position panel end joints within upper and lower third points of wall.
  2. Stagger joints top and bottom in adjacent panels.
  3. After erection of J-struts of opening frames, fasten panels to J-struts with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.
- D. Gypsum Board:
1. One hour wall with one layer on finish side of wall: Apply face layer of gypsum board vertically. Attach to studs with screws of sufficient length to secure to framing, spaced 300 mm (12 inches) on center in field and along edges.
- E. Treat joints, corners, and fasteners in face layer as specified for finishing of gypsum board.

### **3.5 FINISHING OF GYPSUM BOARD**

- A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 4 finish for all finished areas open to public view.
- B. Before proceeding with installation of finishing materials, assure the following:
  1. Gypsum board is fastened and held close to framing or furring.
  2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.
- C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings to seal surface of non decorated gypsum board construction. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain the integrity of the construction. Sanding is not required of non decorated surfaces.

### **3.6 REPAIRS**

- A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.
- B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.
- C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.
- D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non decorated surface to provide fire

protection equivalent to the fire rated construction and STC equivalent to the sound rated construction.

- - E N D - - -

**SECTION 09 30 13**  
**CERAMIC PORCELAIN TILING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies ceramic and porcelain tile, waterproofing membranes for thin-set applications, crack isolation membranes, tile backer board and transition strips.

**1.2 RELATED WORK**

- A. Sealing of joints where specified: Section 07 92 00, JOINT SEALANTS.
- B. Color, texture and pattern of field tile and trim shapes, size of field tile, trim shapes, and color of grout specified: Section 09 06 00, SCHEDULE FOR FINISHES.
- D. Metal and resilient edge strips at joints with new adjacent flooring, :  
Section 09 65 19, RESILIENT TILE FLOORING Section 09 68 00, CARPETING.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
  - 1. Base tile, each type, each color, each size.
  - 2. Porcelain tile, each type, color, patterns and size.
  - 3. Wall (or wainscot) tile, each color, size and pattern.
  - 4. Trim shapes, bullnose cap and cove including bullnose cap and base pieces at internal and external corners of vertical surfaces, each type, color, and size.
  - 5. Metal floor-to-wall transition strips.
- C. Product Data:
  - 1. Ceramic and porcelain tile, marked to show each type, size, and shape required.
  - 2. Chemical resistant mortar and grout (Epoxy and Furan).
  - 3. Cementitious backer unit.
  - 4. Dry-set Portland cement mortar and grout.
  - 5. Divider strip.
  - 6. Elastomeric membrane and bond coat.
  - 7. Reinforcing tape.
  - 8. Leveling compound.
  - 9. Latex-Portland cement mortar and grout.
  - 10. Commercial Portland cement grout.

- 11. Organic adhesive.
- 12. Slip resistant tile.
- 13. Waterproofing isolation membrane.
- 14. Fasteners.
- 15. Metal edge and transition strips.

D. Certification:

- 1. Master grade, ANSI A137.1.
- 2. Manufacturer's certificates indicating that the following materials comply with specification requirements:
  - a. Chemical resistant mortar and grout (epoxy and furan).
  - b. Modified epoxy emulsion.
  - c. Commercial Portland cement grout.
  - d. Cementitious backer unit.
  - e. Dry-set Portland cement mortar and grout.
  - f. Elastomeric membrane and bond coat.
  - g. Reinforcing tape.
  - h. Latex-Portland cement mortar and grout.
  - i. Leveling compound.
  - j. Organic adhesive.
  - k. Waterproof isolation membrane.
  - l. Factory mounted tile suitability for application in wet area specified under 2.1, A, 3 with list of successful in-service performance locations.
  - m. Metal edge and transition strips.

**1.4 DELIVERY AND STORAGE**

- A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.
- B. Store material to prevent damage or contamination.

**1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
  - A108.1A-11.....Installation of Ceramic Tile in the Wet-Set Method with Portland Cement Mortar

- A108.1B-11.....Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with dry-Set or latex-Portland Cement Mortar
- A108.1C-11.....Contractors Option; Installation of Ceramic Tile in the Wet-Set method with Portland Cement Mortar or Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar
- A137.1-08.....Ceramic Tile
- C. American Society For Testing And Materials (ASTM):
- A185-07.....Steel Welded Wire Fabric, Plain, for Concrete Reinforcing
- C109/C109M-11.....Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2 inch. or [50-mm] Cube Specimens)
- C241-09.....Abrasion Resistance of Stone Subjected to Foot Traffic
- C348-08.....Standard Test Method for Flexural Strength of Hydraulic-Cement Mortars
- C627-10.....Evaluating Ceramic Floor Tile Installation Systems Using the Robinson-Type Floor Tester
- C954-11.....Steel Drill Screws for the Application of Gypsum Board on Metal Plaster Base to Steel Studs from 0.033 in (0.84 mm) to 0.112 in (2.84 mm) in thickness
- C979-10.....Pigments for Integrally Colored Concrete
- C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Panel Products
- C1027-09.....Determining "Visible Abrasion Resistance on Glazed Ceramic Tile"
- C1028-07.....Determining the Static Coefficient of Friction of Ceramic Tile and Other Like Surfaces by the Horizontal Dynamometer Pull Meter Method
- C1127-09.....Standard Guide for Use of High Solids Content, Cold Liquid-Applied Elastomeric Waterproofing Membrane with an Integral Wearing Surface
- C1178/C1178M-11.....Standard Specification for Coated Glass Mat Water-Resistant Gypsum Backing Panel
- C1325-08.....Non-Asbestos Fiber-Mat Reinforced Cementitious Backer Units

D4397-10.....Standard Specification for Polyethylene Sheeting  
for Construction, Industrial and Agricultural  
Applications

D5109-99(R2004).....Standard Test Methods for Copper-Clad  
Thermosetting Laminates for Printed Wiring  
Boards

D. Marble Institute of America (MIA): Design Manual III-2007

E. Tile Council of America, Inc. (TCA):  
2007.....Handbook for Ceramic Tile Installation

## **PART 2 - PRODUCTS**

### **2.1 TILE**

A. Comply with ANSI A137.1, Standard Grade, except as modified:

1. Inspection procedures listed under the Appendix of ANSI A137.1.
  2. Abrasion Resistance Classification:
    - a. Tested in accordance with values listed in Table 1, ASTM C 1027.
    - b. Class V, 12000 revolutions for floors in Corridors, Kitchens,  
Storage including Refrigerated Rooms
    - c. Class IV, 6000 revolutions for remaining areas.
  3. Slip Resistant Tile for Floors:
    - a. Coefficient of friction, when tested in accordance with ASTM  
C1028, required for level of performance:
      - 1) Not less than 0.7 (wet condition) for bathing areas.
  4. Mosaic tile may be mounted or joined together by a resinous bonding  
material along tile edges.
  6. Factory Blending: For tile with color variations, within the ranges  
selected during sample submittals blend tile in the factory and  
package so tile units taken from one package show the same range in  
colors as those taken from other packages and match approved samples.
  7. Factory-Applied Temporary Protective Coating:
    - a. Protect exposed face surfaces (top surface) of tile against  
adherence of mortar and grout by pre-coating with a continuous  
film of petroleum paraffin wax, applied hot.
    - b. Do not coat unexposed tile surfaces.
    - c. Pre-wax tiles set or grouted with furan or epoxy or latex  
modified mortars.
- E. Porcelain Paver Tile: Nominal 8 mm (5/16 inch) thick, with cushion  
edges. Porcelain tile produced by the dust pressed method shall be made  
of approximately 50% feldspar; the remaining 50% shall be made up of

various high-quality light firing ball clays yielding a tile with a water absorption rate of 0.5% or less and a breaking strength of between 390 to 400 pounds.

**F. Trim Shapes:**

1. Conform to applicable requirements of adjoining floor and wall tile.
2. Use slip resistant trim shapes for horizontal surfaces of showers, shower curbs, drying area curbs, and seats.
3. Use trim shapes sizes conforming to size of adjoining field wall tile including existing spaces unless detailed or specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.
4. Internal and External Corners:
  - a. Square internal and external corner joints are not acceptable.
  - b. External corners including edges: Use bullnose shapes.
  - c. Internal corners: Use cove shapes.
  - d. Base to floor internal corners: Use special metal transition shapes providing integral cove vertical and horizontal joint.
  - e. Base to floor external corners: Use special metal transition shapes providing bullnose vertical edge with integral cove horizontal joint. Use stop at bottom of openings having bullnose return to wall.
  - f. Wall top edge internal corners: Use special shapes providing integral cove vertical joint with bullnose top edge.
  - g. Wall top edge external corners: Use special shapes providing bullnose vertical and horizontal joint edge.
  - j. For quarry tile work, use cove and bullnose shapes as applicable.

**2.2 CEMENTITIOUS BACKER UNITS**

- A. Use in showers or wet areas.
- B. ASTM C1325.
- C. Use Cementitious backer units in maximum available lengths.

**2.3 JOINT MATERIALS FOR CEMENTITIOUS BACKER UNITS**

- A. Reinforcing Tape: Vinyl coated woven glass fiber mesh tape, open weave, 50 mm (2 inches) wide. Tape with pressure sensitive adhesive backing will not be permitted.
- B. Tape Embedding Material: Latex-Portland cement mortar complying with ANSI A108.1.
- C. Joint material, including reinforcing tape, and tape embedding material, shall be as specifically recommended by the backer unit manufacturer.

**2.4 FASTENERS**

- A. Screws for Cementitious Backer Units.

1. Standard screws for gypsum board are not acceptable.
  2. Minimum 11 mm (7/16 inch) diameter head, corrosion resistant coated, with washers.
  3. ASTM C954 for steel 1 mm (0.033 inch) thick.
  4. ASTM C1002 for steel framing less than 0.0329 inch thick.
- B. Washers: Galvanized steel, 13 mm (1/2 inch) minimum diameter.

## 2.5 SETTING MATERIALS OR BOND COATS

- A. Conform to TCA Handbook for Ceramic Tile Installation.
- B. Portland Cement Mortar: ANSI A108.1.
- D. Dry-Set Portland Cement Mortar: ANSI A108.1. For wall applications, provide non-sagging, latex-Portland cement mortar complying with ANSI A108.4.
- G. Elastomeric Waterproofing Membrane and Bond Coat:
1. TCA F122-02.
  2. ANSI A108.1.
  3. One component polyurethane, liquid applied material having the following additional physical properties:
    - a. Hardness: Shore "A" between 40-60.
    - b. Elongation: Between 300-600 percent.
    - c. Tensile strength: Between 40-60 psig.
    - d. No volatile compounds.
  4. Coal tar modified urethanes are not acceptable.
- H. Waterproofing Isolation Membrane:
1. Sheet System TCA F122-02.
  2. Optional System to elastomeric waterproof membrane.
  3. Composite sheet consisting of ASTM D5109, Type II, Grade I Chlorinated Polyethylene (CM) sheet reinforced on both sides with a non-woven polyester fiber.
  4. Designed for use in wet areas as an isolation and positive waterproofing membranes for thin-set bonding of sheet to substrate and thin-set bonding of ceramic and porcelain tile or marble to sheet. Suited for both horizontal and vertical applications.
  5. Conform to the following additional physical properties:

Property	Units	Results	Test Method
Hardness Shore A	Points	70-80	ASTM D2240 (10 Second Reading)
Shrinkage	Percent	5 maximum	ASTM D1204
Brittleness		No crack remains	ASTM D2497 13 mm

		flexible at temperature-37 degrees C (-25 degrees F)	(1/2- inch) Mandrel Bend
Retention of Properties after Heat Aging	Percent of original	80 Tensile 80 Breaking 80 Elongation	ASTM D3045, 90 degrees C (194 degrees F) for 168 hours

6. Manufacturer's standard sheet size with prefabricated or preformed inside and outside corners.
7. Sheet manufacturer's solvent welding liquid or xylene and edge sealant.

## 2.7 GROUTING MATERIALS

### A. Coloring Pigments:

1. Pure mineral pigments, limeproof and nonfading, complying with ASTM C979.
2. Add coloring pigments to grout by the manufacturer.
3. Job colored grout is not acceptable.
4. Use is required in Commercial Portland Cement Grout, Dry-Set Grout, and Latex-Portland Cement Grout.

### F. Chemical-Resistant Grout:

1. Epoxy grout, ANSI A108.1.

## 2.8 PATCHING AND LEVELING COMPOUND

- A. Portland cement base, polymer-modified, self-leveling compound, manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.
- B. Shall have minimum following physical properties:
  1. Compressive strength - 25 MPa (3500 psig) per ASTM C109/C109M.
  2. Flexural strength - 7 MPa (1000 psig) per ASTM C348 (28 day value).
  3. Tensile strength - 600 psi per ANSI 118.7.
  4. Density - 1.9.
- C. Capable of being applied in layers up to 38 mm (1-1/2 inches) thick without fillers and up to 100 mm (four inches) thick with fillers, being brought to a feather edge, and being trowelled to a smooth finish.
- D. Primers, fillers, and reinforcement as required by manufacturer for application and substrate condition.
- E. Ready for use in 48 hours after application.

## 2.10 METAL TRANSITION STRIPS

- A. Floor-to-Wall transition strip. Single-piece anodized aluminum, 90 degree angle strip, with perforated floor leg for securing into mortar

bond coat, a 3/8" radius coved visible surface and vertical wall leg profiled to receive lowest course of wall tile.

#### **2.11 WATER**

Clean, potable and free from salts and other injurious elements to mortar and grout materials.

#### **2.12 CLEANING COMPOUNDS**

- A. Specifically designed for cleaning masonry and concrete and which will not prevent bond of subsequent tile setting materials including patching and leveling compounds and elastomeric waterproofing membrane and coat.
- B. Materials containing acid or caustic material not acceptable.

#### **2.14 POLYETHYLENE SHEET**

- A. Polyethylene sheet conforming to ASTM D4397.
- B. Nominal thickness: 0.15 mm (six mils).
- C. Use sheet width to minimize joints.

### **PART 3 - EXECUTION**

#### **3.1 ENVIRONMENTAL REQUIREMENTS**

- A. Maintain ambient temperature of work areas at not less than 16 degree C (60 degrees F), without interruption, for not less than 24 hours before installation and not less than three days after installation.
- B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation and ANSI Specifications for installation.
- C. Do not install tile when the temperature is above 38 degrees C (100 degrees F).
- D. Do not install materials when the temperature of the substrate is below 16 degrees C (60 degrees F).
- E. Do not allow temperature to fall below 10 degrees C (50 degrees F) after fourth day of completion of tile work.

#### **3.2 ALLOWABLE TOLERANCE**

- A. Variation in plane of sub-floor, including concrete fills leveling compounds and mortar beds:
  - 1. Not more than 1 in 500 (1/4 inch in 10 feet) from required elevation where Portland cement mortar setting bed is used.
  - 2. Not more than 1 in 1000 (1/8 inch in 10 feet) where dry-set Portland cement, and latex-Portland cement mortar setting beds and chemical-resistant bond coats are used.
- B. Variation in Plane of Wall Surfaces:
  - 1. Not more than 1 in 400 (1/4 inch in eight feet) from required plane where Portland cement mortar setting bed is used.

2. Not more than 1 in 800 (1/8 inch in eight feet) where dry-set or latex-Portland cement mortar or organic adhesive setting materials is used.

### 3.3 SURFACE PREPARATION

- A. Cleaning New Concrete or Masonry:
  1. Chip out loose material, clean off all oil, grease dirt, adhesives, curing compounds, and other deterrents to bonding by mechanical method, or by using products specifically designed for cleaning concrete and masonry.
  2. Use self-contained power blast cleaning systems to remove curing compounds and steel trowel finish from concrete slabs where ceramic tile will be installed directly on concrete surface with thin-set materials.
  3. Steam cleaning or the use of acids and solvents for cleaning will not be permitted.
- B. Patching and Leveling:
  1. Mix and apply patching and leveling compound in accordance with manufacturer's instructions.
  2. Fill holes and cracks and align concrete floors that are out of required plane with patching and leveling compound.
    - a. Thickness of compound as required to bring finish tile system to elevation shown.
    - b. Float finish except finish smooth for elastomeric waterproofing.
    - c. At substrate expansion, isolation, and other moving joints, allow joint of same width to continue through underlayment.
  3. Apply patching and leveling compound to concrete and masonry wall surfaces that are out of required plane.
  4. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.
- D. Additional preparation of concrete floors for tile set with epoxy, or furan-resin shall be in accordance with the manufacturer's printed instructions.
- F. Walls:
  1. In showers or other wet areas cover studs with polyethylene sheet.
  2. Apply patching and leveling compound to concrete and masonry surfaces that are out of required plane.

3. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.

G. Existing Floors and Walls:

1. Remove existing composition floor finishes and adhesive. Prepare surface by grinding, chipping, self-contained power blast cleaning or other suitable mechanical methods to completely expose uncontaminated concrete or masonry surfaces. Follow safety requirements of ANSI A10.20.

### **3.4 CEMENTITIOUS BACKER UNITS**

- A. Remove polyethylene wrapping from cementitious backer units and separate to allow for air circulation. Allow moisture content of backer units to dry down to a maximum of 35 percent before applying joint treatment and tile.
- B. Install in accordance with ANSI A108.1 except as specified otherwise.
- C. Install units horizontally or vertically to minimize joints with end joints over framing members. Units with rounded edges; face rounded edge away from studs to form a V joint for joint treatment.
- D. Secure cementitious backer units to each framing member with screws spaced not more than 200 mm (eight inches) on center and not closer than 13 mm (1/2 inch) from the edge of the backer unit or as recommended by backer unit manufacturer. Install screws so that the screw heads are flush with the surface of the backer unit.
- E. Where backer unit joins shower pans or waterproofing, lap backer unit over turned up waterproof system. Install fasteners only through top one-inch of turned up waterproof systems.
- F. Do not install joint treatment for seven days after installation of cementitious backer unit.
- G. Joint Treatment:
  1. Fill horizontal and vertical joints and corners with latex-Portland cement mortar. Apply fiberglass tape over joints and corners and embed with same mortar.
  2. Leave 6 mm (1/4 inch) space for sealant at lips of tubs, sinks, or other plumbing receptors.

### **3.8 CERAMIC TILE - GENERAL**

- A. Comply with ANSI A108 series of tile installation standards in "Specifications for Installation of Ceramic Tile" applicable to methods of installation.

## B. Comply with TCA Installation Guidelines:

4. Set floor tile in elastomeric bond coat over elastomeric membrane ANSI 108. 13, TCA System F122 where shown.
5. Set wall tile installed over masonry in dry-set Portland cement mortar, , ANSI 108.1B.and TCA System W211-02, W221-02 or W222-02.
9. Set tile installed over gypsum board in organic adhesive, ANSI A108.1, TCA System W242-02.
10. Set trim shapes in same material specified for setting adjoining tile.

## E. Workmanship:

1. Lay out tile work so that no tile less than one-half full size is used. Make all cuts on the outer edge of the field. Align new tile work scheduled for existing spaces to the existing tile work unless specified otherwise.
2. Set tile firmly in place with finish surfaces in true planes. Align tile flush with adjacent tile unless shown otherwise.
3. Form intersections and returns accurately.
4. Cut and drill tile neatly without marring surface.
5. Cut edges of tile abutting penetrations, finish, or built-in items:
  - a. Fit tile closely around electrical outlets, piping, fixtures and fittings, so that plates, escutcheons, collars and flanges will overlap cut edge of tile.
  - b. Seal tile joints water tight as specified in Section 07 92 00, JOINT SEALANTS, around electrical outlets, piping fixtures and fittings before cover plates and escutcheons are set in place.
6. Completed work shall be free from hollow sounding areas and loose, cracked or defective tile.
7. Remove and reset tiles that are out of plane or misaligned.
8. Floors:
  - a. Extend floor tile beneath casework and equipment, except those units mounted in wall recesses.
  - b. Align finish surface of new tile work flush with other and existing adjoining floor finish where shown.
  - c. In areas where floor drains occur, slope to drains where shown.
  - d. Shove and vibrate tiles over 200 mm (8 inches) square to achieve full support of bond coat.

## 9. Walls:

- a. Cover walls and partitions, including pilasters, furred areas, and freestanding columns from floor to ceiling, or from floor to nominal wainscot heights shown with tile.
- b. Finish reveals of openings with tile, except where other finish materials are shown or specified.
- c. At window openings, provide tile stools and reveals, except where other finish materials are shown or specified.
- d. Finish wall surfaces behind and at sides of casework and equipment, except those units mounted in wall recesses, with same tile as scheduled for room proper.

## 10. Joints:

- a. Keep all joints in line, straight, level, perpendicular and of even width unless shown otherwise.
- b. Make joints 2 mm (1/16 inch) wide for glazed wall tile and mosaic tile work.
- c. Make joints in quarry tile work not less than 6 mm (1/4 inch) nor more than 9 mm (3/8 inch) wide. Finish joints flush with surface of tile.
- d. Make joints in Paver tile, porcelain type; maximum 3 mm (1/8 inch) wide.

**3.9 CERAMIC TILE INSTALLED WITH PORTLAND CEMENT MORTAR**

- A. Mortar Mixes for Floor, Wall And Base Tile ANSI A108.1. except specified otherwise.
- B. Installing Wall and Base Tile: ANSI A108.1, except specified otherwise.
- C. Installing Floor Tile: ANSI A108.1, except as specified otherwise. Slope mortar beds to floor drains a minimum of 1 in 100 (1/8 inch per foot).

**3.11 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH DRY-SET PORTLAND CEMENT AND LATEX-PORTLAND CEMENT MORTAR**

- A. Installation of Tile: ANSI A108.1, except as specified otherwise.
- B. Slope tile work to drains not less than 1 in 100 (1/8 inch per foot).

**3.15 GROUTING**

## A. Grout Type and Location:

- 1. Grout for glazed wall and base tile, paver tile - Portland cement grout, latex-Portland cement grout, dry-set grout, or commercial Portland cement grout.

## B. Workmanship:

- 1. Install and cure grout in accordance with the applicable standard.
- 2. Portland Cement grout: ANSI A108.1.

3. Epoxy Grout: ANSI A108.1.
4. Furan and Commercial Portland Cement Grout: ANSI A108.1 and in accordance with the manufacturer's printed instructions.
5. Dry-set grout: ANSI A108.1.

### **3.16 MOVEMENT JOINTS**

- A. Prepare tile expansion, isolation, construction and contraction joints for installation of sealant. Refer to Section 07 92 00, JOINT SEALANTS.
- B. TCA details EJ 171-02.
- C. At expansion joints, rake out joint full depth of tile and setting bed and mortar bed. Do not cut waterproof or isolation membrane.
- D. Rake out grout at joints between tile, at toe of base, and where shown not less than 6 mm (1/4 inch) deep.

### **3.17 CLEANING**

- A. Thoroughly sponge and wash tile. Polish glazed surfaces with clean dry cloths.
- B. Methods and materials used shall not damage or impair appearance of tile surfaces.
- C. The use of acid or acid cleaners on glazed tile surfaces is prohibited.
- D. Clean tile grouted with epoxy, furan and commercial Portland cement grout and tile set in elastomeric bond coat as recommended by the manufacturer of the grout and bond coat.

### **3.18 PROTECTION**

- A. Keep traffic off tile floor, until grout and setting material is firmly set and cured.
- B. Where traffic occurs over tile floor, cover tile floor with not less than 9 mm (3/8 inch) thick plywood, wood particle board, or hardboard securely taped in place. Do not remove protective cover until time for final inspection. Clean tile of any tape, adhesive and stains.

### **3.19 TESTING FINISH FLOOR**

- A. Test floors in accordance with ASTM C627 to show compliance with codes 1 through 10.

- - - E N D - - -

**SECTION 09 51 00  
ACOUSTICAL CEILINGS**

**PART 1- GENERAL**

**1.1 DESCRIPTION**

- A. Metal ceiling suspension system for acoustical ceilings.
- B. Acoustical units.
- C. Adhesive application.

**1.2 RELATED WORK**

- A. Color, pattern, and location of each type of acoustical unit:  
Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Access doors : Section 08 31 13, ACCESS DOORS AND FRAMES.

**1.3 SUBMITTAL**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
  - 1. Acoustical units, each type, with label indicating conformance to specification requirements, .
  - 2. Colored markers for units providing access.
- C. Manufacturer's Literature and Data:
  - 1. Ceiling suspension system, each type, showing complete details of installation .
  - 2. Acoustical units, each type
- D. Manufacturer's Certificates: Acoustical units, each type, in accordance with specification requirements.

**1.4 DEFINITIONS**

- A. Standard definitions as defined in ASTM C634.
- B. Terminology as defined in ASTM E1264.

**1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A641/A641M-03.....Zinc-coated (Galvanized) Carbon Steel Wire
  - A653/A653M-07.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-coated (Galvannealed) by the Hot-Dip Process
  - C423-07.....Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method

C634-02 (E2007).....	Standard Terminology Relating to Environmental Acoustics
C635-04.....	Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings
C636-06.....	Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels
E84-07.....	Surface Burning Characteristics of Building Materials
E119-07.....	Fire Tests of Building Construction and Materials
E1264-(R2005).....	Classification for Acoustical Ceiling Products

## **PART 2- PRODUCTS**

### **2.1 METAL SUSPENSION SYSTEM**

- A. Exposed grid suspension system for support of lay-in panels:
  1. Exposed grid width not less than 22 mm (7/8 inch) with not less than 8 mm (5/16 inch) panel bearing surface.
  2. Fabricate wall molding and other special molding from the same material with same exposed width and finish as the exposed grid members.
  3. On exposed metal surfaces apply baked-on enamel flat texture finish in color to match adjacent acoustical units unless specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.

### **2.2 PERIMETER SEAL**

- A. Vinyl, polyethylene or polyurethane open cell sponge material having density of 1.3 plus or minus 10 percent, compression set less than 10 percent with pressure sensitive adhesive coating on one side.
- B. Thickness as required to fill voids between back of wall molding and finish wall.
- C. Not less than 9 mm (3/8 inch) wide strip.

### **2.3 WIRE**

- A. ASTM A641.
- B. For wire hangers: Minimum diameter 2.68 mm (0.1055 inch).
- C. For bracing wires: Minimum diameter 3.43 mm (0.1350 inch).

### **2.4 ANCHORS AND INSERTS**

- A. Use anchors or inserts to support twice the loads imposed by hangers attached thereto.
- B. Hanger Inserts:
  1. Fabricate inserts from steel, zinc-coated (galvanized after fabrication).

3. Flush ceiling insert type:
  - a. Designed to provide a shell covered opening over a wire loop to permit attachment of hangers and keep concrete out of insert recess.
  - b. Insert opening inside shell approximately 16 mm (5/8 inch) wide by 9 mm (3/8 inch) high over top of wire.
  - c. Wire 5 mm (3/16 inch) diameter with length to provide positive hooked anchorage in concrete.

C. Clips:

1. Galvanized steel.
2. Designed to clamp to steel beam or bar joists, or secure framing member together.
3. Designed to rigidly secure framing members together.
4. Designed to sustain twice the loads imposed by hangers or items supported.

D. Tile Splines: ASTM C635.

**2.5 CARRYING CHANNELS FOR SECONDARY FRAMING**

- A. Fabricate from cold-rolled or hot-rolled steel, black asphaltic paint finish, free of rust.
- B. Weighing not less than the following, per 300 m (per thousand linear feet):

Size mm	Size Inches	Cold-rolled		Hot-rolled	
		Kg	Pound	Kg	Pound
38	1 1/2	215.4	475	508	1120
50	2	267.6	590	571.5	1260

**2.6 ADHESIVE**

- A. ASTM D1779, having flame spread index of 25 or less when tested in accordance with ASTM E84.
- B. Developing minimum strength of 7 kg/m<sup>2</sup> (one psi) of contact surface 48 hours after installation in temperature of 21 °C (70 °F).

**2.7 ACOUSTICAL UNITS**

A. General:

1. Ceiling Tile shall meet minimum 37% bio-based content in accordance with USDA Bio-Preferred Product requirements.
2. ASTM E1264, weighing 3.6 kg/m<sup>2</sup> (3/4 psf) minimum for mineral fiber panels or tile.
3. Class A Flame Spread: ASTM 84
4. Minimum NRC (Noise Reduction Coefficient): 0.55 unless specified otherwise: ASTM C423.

5. Minimum CAC (Ceiling Attenuation Class): 40-44 range unless specified otherwise: ASTM E413.
  6. Manufacturers standard finish, minimum Light Reflectance (LR) coefficient of 0.75 on the exposed surfaces, except as specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.
  7. Lay-in panels: Sizes as shown, with reveal edges.
- B. Type III Units - Mineral base with water-based painted finish less than 10 g/l VOC, Form 2 - Water felted, minimum 16 mm (5/8 inch) thick. Mineral base to contain minimum 65 percent recycled content.
  - C. Type IV Units - Mineral base with membrane-faced overlay, Form 2 - Water felted, minimum 16 mm (5/8 inch) thick. Apply over the paint coat on the face of the unit a poly (vinyl) chloride overspray having a flame spread index of 25 or less when tested in accordance with ASTM E84.

## **2.9 ACCESS IDENTIFICATION**

- A. Markers:
  1. Use colored markers with pressure sensitive adhesive on one side.
  2. Make colored markers of paper or plastic, 6 to 9 mm (1/4 to 3/8 inch) in diameter.
- B. Use markers of the same diameter throughout building.
- C. Color Code: Use following color markers for service identification:
 

Color.....	Service
Red.....	Sprinkler System: Valves and Controls
Green.....	Domestic Water: Valves and Controls
Yellow.....	Chilled Water and Heating Water
Orange.....	Ductwork: Fire Dampers
Blue.....	Ductwork: Dampers and Controls
Black.....	Gas: Laboratory, Medical, Air and Vacuum

## **PART 3 EXECUTION**

### **3.1 CEILING TREATMENT**

- A. Treatment of ceilings shall include sides and soffits of ceiling beams, furred work 600 mm (24 inches) wide and over, and vertical surfaces at changes in ceiling heights unless otherwise shown. Install acoustic tiles after wet finishes have been installed and solvents have cured.
- B. Lay out acoustical units symmetrically about center lines of each room or space unless shown otherwise on reflected ceiling plan.
- C. Moldings:
  1. Install metal wall molding at perimeter of room, column, or edge at vertical surfaces.

2. Install special shaped molding at changes in ceiling heights and at other breaks in ceiling construction to support acoustical units and to conceal their edges.

D. Perimeter Seal:

1. Install perimeter seal between vertical leg of wall molding and finish wall, partition, and other vertical surfaces.
2. Install perimeter seal to finish flush with exposed faces of horizontal legs of wall molding.

E. Existing ceiling:

1. Where extension of existing ceilings occur, match existing.
2. Where acoustical units are salvaged and reinstalled or joined, use salvaged units within a space. Do not mix new and salvaged units within a space which results in contrast between old and new acoustic units.
3. Comply with specifications for new acoustical units for new units required to match appearance of existing units.

F. Fire-Rated System:

1. Total assembly, consisting of the ceiling suspension system, acoustical units, penetrations, structural components and floor or roof construction above, shall have a fire rating based on tests conducted in conformance with ASTM E119.
2. Provide concealed fire protection around penetrations in ceilings for electric and mechanical work, and other penetrations as required to maintain the integrity of the fire-rated assembly.
3. Install fire rated ceiling systems to conform to tested assembly.

### 3.2 CEILING SUSPENSION SYSTEM INSTALLATION

A. General:

1. Install metal suspension system for acoustical tile and lay-in panels in accordance with ASTM C636, except as specified otherwise.
2. Use direct or indirect hung suspension system or combination thereof as defined in ASTM C635.
3. Support a maximum area of 1.48 m<sup>2</sup> (16 sf) of ceiling per hanger.
4. Prevent deflection in excess of 1/360 of span of cross runner and main runner.
5. Provide extra hangers, minimum of one hanger at each corner of each item of mechanical, electrical and miscellaneous equipment supported by ceiling suspension system not having separate support or hangers.
6. Provide not less than 100 mm (4 inch) clearance from the exposed face of the acoustical units to the underside of ducts, pipe, conduit,

secondary suspension channels, concrete beams or joists; and steel beam or bar joist unless furred system is shown,

7. Use main runners not less than 1200 mm (48 inches) in length.
8. Install hanger wires vertically. Angled wires are not acceptable except for seismic restraint bracing wires.

B. Anchorage to Structure:

1. Concrete:

- a. Install hanger inserts and wire loops required for support of hanger and bracing wire in concrete forms before concrete is placed. Install hanger wires with looped ends through steel deck if steel deck does not have attachment device.
- b. Use eye pins or threaded studs with screw-on eyes in existing or already placed concrete structures to support hanger and bracing wire. Install in sides of concrete beams or joists at mid height.

2. Steel:

- a. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels for attachment of hanger wires.
  - (1) Size and space carrying channels to insure that the maximum deflection specified will not be exceeded.
  - (2) Attach hangers to steel carrying channels, spaced four feet on center, unless area supported or deflection exceeds the amount specified.
- b. Attach carrying channels to the bottom flange of steel beams spaced not 1200 mm (4 feet) on center before fire proofing is installed. Weld or use steel clips to attach to beam to develop full strength of carrying channel.
- c. Attach hangers to bottom chord of bar joists or to carrying channels installed between the bar joists when hanger spacing prevents anchorage to joist. Rest carrying channels on top of the bottom chord of the bar joists, and securely wire tie or clip to joist.

B. Direct Hung Suspension System:

1. As illustrated in ASTM C635.
2. Support main runners by hanger wires attached directly to the structure overhead.
3. Maximum spacing of hangers, 1200 mm (4 feet) on centers unless interference occurs by mechanical systems. Use indirect hung suspension system where not possible to maintain hanger spacing.

C. Indirect Hung Suspension System:

1. As illustrated in ASTM C635.

2. Space carrying channels for indirect hung suspension system not more than 1200 mm (4 feet) on center. Space hangers for carrying channels not more than 2400 mm (8 feet) on center or for carrying channels less than 1200 mm (4 feet) on center so as to insure that specified requirements are not exceeded.
3. Support main runners by specially designed clips attached to carrying channels.

### **3.3 ACOUSTICAL UNIT INSTALLATION**

- A. Cut acoustic units for perimeter borders and penetrations to fit tight against penetration for joint not concealed by molding.
- B. Install lay-in acoustic panels in exposed grid with not less than 6 mm (1/4 inch) bearing at edges on supports.
  1. Install tile to lay level and in full contact with exposed grid.
  2. Replace cracked, broken, stained, dirty, or tile not cut for minimum bearing.
- E. Markers:
  1. Install markers of color code specified to identify the various concealed piping, mechanical, and plumbing systems.
  2. Attach colored markers to exposed grid on opposite sides of the units providing access.
  3. Attach marker on exposed ceiling surface of upward access acoustical unit.

### **3.5 CLEAN-UP AND COMPLETION**

- A. Replace damaged, discolored, dirty, cracked and broken acoustical units.
- B. Leave finished work free from defects.

- - - E N D - - -

**SECTION 09 65 13  
RESILIENT BASE AND ACCESSORIES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies the installation of vinyl or rubber base for all cabinets and walls.

**1.2 RELATED WORK**

A. Color and texture: Section 09 06 00, SCHEDULE FOR FINISHES.

**1.3 SUBMITTALS**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Base material manufacturer's recommendations for adhesives.
3. Application and installation instructions.

C. Samples:

1. Base: 150 mm (6 inches) long, each type and color.
2. Adhesive: Literature indicating each type.

**1.4 DELIVERY**

A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.

B. Materials from containers which have been distorted, damaged or opened prior to installation will be rejected.

**1.5 STORAGE**

A. Store materials in weather tight and dry storage facility.

B. Protect material from damage by handling and construction operations before, during, and after installation.

**1.6 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

- F1344-10.....Rubber Floor Tile  
 F1859-10.....Rubber Sheet Floor Covering without Backing  
 F1860-10.....Rubber Sheet Floor Covering with Backing

F1861-08.....Resilient Wall Base

C. Federal Specifications (Fed. Spec.):

RR-T-650E.....Treads, Metallic and Non-Metallic, Nonskid

**PART 2 - PRODUCTS**

**2.1 GENERAL**

Use only products by the same manufacturer and from the same production run.

**2.2 RESILIENT BASE**

- A. ASTM F1861, 3 mm (1/8 inch) thick, 100 mm (4 inches) high, Thermoplastics, Group 2-layered. Style B-cove.
- B. Where carpet occurs, use Style A-straight.
- C. Use only one type of base throughout.
- D. Use roll stock, not section lengths.

**2.3 PRIMER (FOR CONCRETE FLOORS)**

As recommended by the adhesive and tile manufacturer.

**2.4 LEVELING COMPOUND (FOR CONCRETE FLOORS)**

Provide products with latex or polyvinyl acetate resins in the mix.

**2.5 ADHESIVES**

- A. Use products recommended by the material manufacturer for the conditions of use.
- B. Use low-VOC adhesive during installation. Water based adhesive with low VOC is preferred over solvent based adhesive.

**PART 3 - EXECUTION**

**3.1 PROJECT CONDITIONS**

- A. Maintain temperature of materials above 21° C (70 °F), for 48 hours before installation.
- B. Maintain temperature of rooms where work occurs, between 21° C and 27° C (70°F and 80°F) for at least 48 hours, before, during, and after installation.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.

**3.2 INSTALLATION REQUIREMENTS**

- A. The respective manufacturer's instructions for application and installation will be considered for use when approved by the Resident Engineer.

- B. Submit proposed installation deviation from this specification to the Resident Engineer indicating the differences in the method of installation.
- C. The Resident Engineer reserves the right to have test portions of material installation removed to check for non-uniform adhesion and spotty adhesive coverage.

### 3.3 PREPARATION

- A. Examine surfaces on which material is to be installed.
- B. Fill cracks, pits, and dents with leveling compound.
- C. Level to 3 mm (1/8 inch) maximum variations.
- D. Do not use adhesive for leveling or filling.
- E. Grind, sand, or cut away protrusions; grind high spots.
- F. Clean substrate area of oil, grease, dust, paint, and deleterious substances.
- G. Substrate area dry and cured. Perform manufacturer's recommended bond and moisture test.
- H. Preparation of existing installation:
  - 1. Remove existing base and stair treads including adhesive.
  - 2. Do not use solvents to remove adhesives.
  - 3. Prepare substrate as specified.

### 3.4 BASE INSTALLATION

- A. Location:
  - 1. Unless otherwise specified or shown, where base is scheduled, install base over toe space of base of casework, lockers, laboratory, island cabinets and where other equipment occurs.
  - 2. Extend base scheduled for room into adjacent closet, alcoves, and around columns.
  - 3. Install all wall base prior to casework installation.
- B. Application:
  - 1. Apply adhesive uniformly with no bare spots.
  - 2. Set base with joints aligned and butted to touch for entire height.
  - 3. Before starting installation, layout base material to provide the minimum number of joints with no strip less than 600 mm (24 inches) length.
    - a. Short pieces to save material will not be permitted.
    - b. Locate joints as remote from corners as the material lengths or the wall configuration will permit.
- C. Form corners and end stops as follows:

1. Score back of outside corner.
2. Score face of inside corner and notch cove.

D. Roll base for complete adhesion.

### **3.5 CLEANING AND PROTECTION**

- A. Clean all exposed surfaces of base and adjoining areas of adhesive spatter before it sets.
- B. Keep traffic off resilient material for at least 72 hours after installation.
- C. Clean and polish materials in the following order:
  1. After two weeks, scrub resilient base, sheet rubber and treads materials with a minimum amount of water and a mild detergent. Leave surfaces clean and free of detergent residue. Polish resilient base to a gloss finish.
  2. Do not polish tread and sheet rubber materials.
- D. When construction traffic is anticipated, cover tread materials with reinforced kraft paper and plywood or hardboard properly secured and maintained until removal is directed by the Resident Engineer.
- E. Where protective materials are removed and immediately prior to acceptance, replace damaged materials and re-clean resilient materials. Damaged materials are defined as having cuts, gouges, scrapes or tears and not fully adhered.

- - - E N D - - -

**SECTION 09 65 16**  
**RESILIENT SHEET FLOORING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This Section specifies the installation of sheet flooring with backing and integral cove base.
- B. Grades of resilient sheet vinyl floor covering without backing having vinyl plastic wearlayer with backing.
- C. Installation of sheet flooring including following:
  - 1. Heat welded seams.
  - 2. Integral cove base: Installed at intersection of floor and vertical surfaces.

**1.2 RELATED WORK**

- A. Concrete floors: Section 03 30 53, (SHORT FORM) CAST-IN-PLACE CONCRETE.
- B. Color, pattern and texture: Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Resilient base required over metal base of casework: Section 12 31 00, MANUFACTURED METAL CASEWORK.
- D. Resilient base over base of lockers, equipment and casework: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.
- E. Unbacked vinyl (homogenous) sheet flooring with welded seams: Section 09 65 16, RESILIENT SHEET FLOORING.

**1.3 QUALITY CONTROL-QUALIFICATIONS:**

- A. The Contracting Officer shall approve products or service of proposed manufacturer, suppliers, and installers, and the Contractor shall submit certification that:
  - 1. Heat welded seaming is manufacturer's prescribed method of installation.
  - 2. Installer is approved by manufacturer of materials and has technical qualifications, experience, trained personnel, and facilities to install specified items.
  - 3. Manufacturer's product submitted has been in satisfactory operation, on three installations similar and equivalent in size to this project for three years. Submit list of installations.
- B. The sheet vinyl floor coverings shall meet fire performance characteristics as determined by testing products, per ASTM test method, indicated below by Underwriters Laboratories, Inc. (UL) or another recognized testing and inspecting agency acceptable to authorities having jurisdiction.
  - 1. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E648.

2. Smoke Density: Less than 450 per ASTM E662.
- C. The floor covering manufacturer shall certify that products supplied for installation comply with local regulations controlling use of volatile organic compounds (VOC's).

#### **1.4 SUBMITTALS**

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, submit following:
- B. Manufacturer's Literature and Data:
  1. Description of resilient material and accessories to be provided.
  2. Resilient material manufacturer's recommendations for adhesives, weld rods, sealants, and underlayment.
  3. Application and installation instructions.
- C. Samples:
  1. Sheet material, 38 mm by 300 mm (1-1/2 inch by 12 inch), of each color and pattern with a welded seam using proposed welding rod // 300 mm (12 inches) square for each type, pattern and color//.
  2. Cap strip and fillet strip, 300 mm (12 inches) for integral base.
  3. Shop Drawings and Certificates: Layout of joints showing patterns where joints are expressed, and type and location of obscure type joints. Indicate orientation of directional patterns.
  4. Certificates: Quality Control Certificate Submittals and lists specified in paragraph, QUALIFICATIONS.
  5. Edge strips: 150 mm (6 inches) long each type.
  6. Adhesive, underlayment and primer: Pint container, each type.

#### **1.5 PROJECT CONDITIONS**

- A. Maintain temperature of floor materials and room, where work occurs, above 18 ° C (65 °F) and below 38 ° C (100 °F) for 48 hours before, during and for 48 hours after installation. After above period, room temperature shall not fall below 13 ° C (55 °F).
- B. Construction in or near areas to receive flooring work shall be complete, dry and cured. Do not install resilient flooring over slabs until they have been cured and are sufficiently dry to achieve a bond with adhesive. Follow flooring manufacturer's recommendations for bond and moisture testing.
- C. Building shall be permanently enclosed. Schedule construction so that floor receives no construction traffic when completed.

#### **1.6 DELIVERY, STORAGE AND HANDLING**

- A. Deliver materials to site in original sealed packages or containers; labeled for identification with manufacturer's name and brand.

- B. Deliver sheet flooring full width roll, completely enclosed in factory wrap, clearly marked with the manufacturer's number, type and color, production run number and manufacture date.
- C. Store materials in weathertight and dry storage facility. Protect from damage due to handling, weather, and construction operations before, during and after installation. Store sheet flooring on end with ambient temperatures maintained as recommended by manufacturer.
- D. Store sheet flooring on end.
- E. Move sheet vinyl floor coverings and installation accessories into spaces where they will be installed at least 48 hours in advance of installation.

#### **1.7 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society For Testing Materials (ASTM):
  - E648-10.....Critical Radiant Flux of Floor-Covering Systems  
Using a Radiant Energy Source.
  - E662-12.....Specific Optical Density of Smoke Generated by  
Solid Materials.
  - F710-08.....Practice for Preparing Concrete Floors and Other  
Monolithic Floors to Receive Resilient Flooring.
  - F1303-04(2009).....Sheet Vinyl Floor Covering with Backing.
  - F1869-10.....Moisture Vapor Emission Rate of Concrete  
Subfloor using Anhydrous Calcium Chloride
  - F1913-04(2010).....Sheet Vinyl Flooring without Backing
  - F2170-09.....Determining Relative Humidity in Concrete Floor  
Slabs using In-situ Probes
- C. Resilient Floor Covering Institute (RFCI):
  - Recommended Work Practices for Removal of Resilient Floor Coverings.

#### **1.8 SCHEDULING**

Interior finish work such as plastering, drywall finishing, concrete, terrazzo, ceiling work, and painting work shall be complete and dry before installation. Mechanical, electrical, and other work above ceiling line shall be completed. Heating, ventilating, and air conditioning systems shall be installed and operating in order to maintain temperature and humidity requirements.

#### **1.9 WARRANTY:**

Submit written warranty, in accordance with FAR clause 52.246-21, Warranty of Construction requirements except that warranty period shall be extended to include two (2) years.

**PART 2 - PRODUCTS****2.1 SHEET VINYL FLOOR COVERINGS**

- A. Sheet Vinyl Floor Coverings: Smooth face, minimum thickness nominal 2 mm (0.08 inch). Sheet flooring shall conform to ASTM F1913 and material requirements specified in ASTM F1303, Type II, Grade 1, backing classification not applicable. Foam backed sheet flooring is not acceptable.
- B. Size: Provide maximum size sheet vinyl material produced by manufacturer to provide minimum number of joints. Minimum size width acceptable - 1200 mm (48 inches).
- C. Each color and pattern of sheet flooring shall be of same production run.

**2.2 WELDING ROD:**

Product of floor covering manufacturer in color shall match field color of sheet vinyl covering.

**2.3 APPLICATION MATERIALS AND ACCESSORIES**

- A. Floor and Base Adhesive: Type recommended by sheet flooring material manufacturer for conditions of use.
- B. Mastic Underlayment (for concrete floors): Provide products with latex or polyvinyl acetate resins in mix. Condition to be corrected shall determine type of underlayment selected for use.
- C. Base Accessories:
  - 1. Fillet Strip: 19 mm (3/4 inch) radius fillet strip compatible with resilient sheet material.
  - 2. Cap Strip: Extruded flanged zero edge vinyl reducer strip approximately 25 mm (one inch) exposed height with 13 mm (1/2 inch) flange.

**2.4 SHEET FLOORING**

- A. ASTM F1303, Type II, Grade 1, except for backing requirements. Foam backed sheet flooring is not acceptable.
- B. Minimum nominal thickness 2 mm (0.08 inch); 1800 mm (6 ft) minimum width.
- C. Critical Radiant Flux: 0.45 watts per sq.cm or more, Class I, per ASTM E648.
- D. Smoke density: less than 450 per ASTM E662.
- E. Color and pattern of sheet flooring of the same production run.

**2.5 ADHESIVES**

Water resistant type recommended by the sheet flooring manufacturer for the conditions of use. VOC not to exceed 50g/L

**2.6 BASE CAP STRIP AND COVE STRIP**

- A. Extruded vinyl compatible with the sheet flooring.
- B. Cap strip "J" shape with feathered edge flange approximately 25 mm (one inch) wide; top designed to receive sheet flooring with 13 mm (1/2 inch) flange lapping top of flooring
- C. Cove strip 70 mm (2-3/4 inch) radius.

**2.7 LEVELING COMPOUND (FOR CONCRETE FLOORS)**

Provide cementitious products with latex or polyvinyl acetate resins in the mix.

**2.8 PRIMER (FOR CONCRETE SUBFLOORS)**

As recommended by the adhesive or sheet flooring manufacturer.

**2.9 EDGE STRIPS**

- A. Extruded aluminum, mill finish, mechanically cleaned.
- B. 28 mm (1-1/8 inch) wide, 6 mm (1/4 inch) thick, bevel one edge to 3 mm (1/8 inch) thick.
- C. Drill and counter sink edge strips for flat head screws. Space holes near ends and approximately 225 mm (9 inches) on center in between.

**2.10 SEALANT**

- A. As specified in Section 07 92 00, JOINT SEALANTS.
- B. Compatible with sheet flooring.

**PART 3 - EXECUTION****3.1 PROJECT CONDITIONS**

- A. Maintain temperature of sheet flooring above 36 °C (65 °F), for 48 hours before installation.
- B. Maintain temperature of rooms where sheet flooring work occurs above 36 °C (65 °F), for 48 hours, before installation and during installation.
- C. After installation, maintain temperature at or above 36 °C (65 °F.)
- D. Building is permanently enclosed.
- E. Wet construction in or near areas to receive sheet flooring is complete, dry and cured.

**3.2 SUBFLOOR PREPARATION**

- A. Concrete Subfloors: Verify that concrete slabs comply with ASTM F710.
  - 1. Installer shall examine surfaces on which resilient sheet flooring is to be installed, and shall advise Contractor, in writing, of areas which are unacceptable for installation of flooring material. Installer shall advise Contractor which methods are to be used to correct conditions that will impair proper installation. Installation shall not proceed until unsatisfactory conditions have been corrected.

2. Slab substrates dry, free of curing compounds, sealers, hardeners, and other materials which would interfere with bonding of adhesive. Determine adhesion and dryness characteristics by performing bond and moisture tests recommended by Resilient Floor Covering Institute recommendations in manual RFCI-MRP.
- B. Broom or vacuum clean substrates to be covered by sheet vinyl floor coverings immediately before installation. Following cleaning, examine substrates to determine if there is visually any evidence of moisture, alkaline salts, carbonation, or dust.
  - C. Primer: If recommended by flooring manufacturer, prior to application of adhesive, apply concrete slab primer in accordance with manufacturer's directions.
  - D. Correct conditions which will impair proper installation, including trowel marks, pits, dents, protrusions, cracks or joints.
  - E. Fill cracks, joints, depressions, and other irregularities in concrete with leveling compound.
    1. Do not use adhesive for filling or leveling purposes.
    2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
    3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joint lines.
  - F. Clean floor of oil, paint, dust and deleterious substances. Leave floor dry and cured free of residue from existing curing or cleaning agents.
  - G. Preparation shall include the removal of existing resilient floor and existing adhesive. Do not use solvents to remove adhesives. Coordinate with Asbestos Abatement Section if asbestos abatement procedures will be involved.
  - H. Remove existing resilient flooring and adhesive completely in accordance with Resilient Floor Covering Institute recommendations in manual RFCI-WP. Solvents shall not be used.

### **3.3 INSTALLATION OF FLOORING**

- A. Install work in strict compliance with manufacturer's instructions and approved layout drawings.
- B. Maintain uniformity of sheet vinyl floor covering direction and avoid cross seams.
- C. Arrange for a minimum number of seams and place them in inconspicuous and low traffic areas, but in no case less than 150 mm (6 inches) away from parallel joints in flooring substrates.
- D. Match edges of resilient floor coverings for color shading and pattern at seams.

- E. Where resilient sheet flooring abuts other flooring material floors shall finish level.
- F. Extend sheet vinyl floor coverings into toe spaces, door reveals, closets, and similar openings.
- G. Inform the Resident Engineer of conflicts between this section and the manufacturer's instructions or recommendations for auxiliary materials, or installation methods, before proceeding.
- H. Install sheet in full coverage adhesives.
  - 1. Air pockets or loose edges will not be accepted.
  - 2. Trim sheet materials to touch in the length of intersection at pipes and vertical projections; seal joints at pipe with waterproof cement or sealant.
- I. Keep joints to a minimum; avoid small filler pieces or strips.
- J. Follow manufacturer's recommendations for seams at butt joints. Do not leave any open joints that would be readily visible from a standing position.
- K. Follow manufacturer's recommendations regarding pattern match, if applicable.
- L. Installation of Edge Strips:
  - 1. Locate edge strips under center lines of doors unless otherwise indicated.
  - 2. Set aluminum strips in adhesive, anchor with lead anchors and stainless steel Phillips screws.
- M. Integral Cove Base Installation:
  - 1. Set preformed fillet strip to receive base.
  - 2. Install the base with adhesive, terminate exposed edge with the cap strip.
  - 3. Form internal and external corners to the geometric shape generated by the cove at either straight or radius corners.
  - 4. Solvent weld joints as specified for the flooring. Seal cap strip to wall with an adhesive type sealant.
  - 5. Unless otherwise specified or shown where sheet flooring is scheduled, provide integral base at intersection of floor and vertical surfaces. Provide sheet flooring and base scheduled for room on floors and walls under and behind areas where casework, laboratory and pharmacy furniture and other equipment occurs, except where mounted in wall recesses.

#### **3.4 INSTALLATION OF INTEGRAL COVERED BASE**

- A. Set preformed cove to receive base. Install base material with adhesive and terminate exposed edge with cap strip. Integral base shall be // 100 mm (4 inches) // 150 mm (6 inches) // high.

- B. Internal and external corners shall be formed to geometric shape generated by cove at either square or radius corners.

### **3.5 WELDING**

- A. Heat weld all joints of flooring and base using equipment and procedures recommended by flooring manufacturer.
- B. Welding shall consist of routing joint, inserting a welding rod into routed space, and terminally fusing into a homogeneous joint.
- C. Upon completion of welding, surface across joint shall finish flush, free from voids, and recessed or raised areas.
- D. Fusion of Material: Joint shall be fused a minimum of 65 percent through thickness of material, and after welding shall meet specified characteristics for flooring.

### **3.6 CLEANING**

- A. Clean small adhesive marks during application of sheet flooring and base before adhesive sets, excessive adhesive smearing will not be accepted.
- B. Remove visible adhesive and other surface blemishes using methods and cleaner recommended by floor covering manufacturers.
- C. Clean and polish materials per flooring manufacturer's written recommendations.
- D. Vacuum floor thoroughly.
- E. Do not wash floor until after period recommended by floor covering manufacturer and then prepare in accordance with manufacturer's recommendations.
- F. Upon completion, Resident Engineer shall inspect floor and base to ascertain that work was done in accordance with manufacturer's printed instructions.
- G. Perform initial maintenance according to flooring manufacturer's written recommendations.

### **3.7 PROTECTION:**

- A. Protect installed flooring as recommended by flooring manufacturer against damage from rolling loads, other trades, or placement of fixtures and furnishings.
- B. Keep traffic off sheet flooring for 24 hours after installation.
- C. Where construction traffic is anticipated, cover sheet flooring with reinforced kraft paper properly secured and maintained until removal is authorized by the Resident Engineer.
- D. Where protective materials are removed and immediately prior to acceptance, repair any damage, re-clean sheet flooring, lightly re-apply polish and buff floor.

- - - E N D - - -

**SECTION 09 91 00**  
**PAINTING**

**PART 1-GENERAL**

**1.1 DESCRIPTION**

- A. Section specifies field painting.
- B. Section specifies prime coats which may be applied in shop under other sections.
- C. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.

**1.2 RELATED WORK**

- A. Shop prime painting of steel and ferrous metals: Division 08 - OPENINGS, Division 12 - FURNISHINGS, Division 21 - FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 - HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, Division 27 - COMMUNICATIONS, and Division 28 - ELECTRONIC SAFETY AND SECURITY sections.
- B. Contractor option: Prefinished flush doors with transparent finishes: Section 08 14 00, WOOD DOORS.
- C. Type of Finish, Color, and Gloss Level of Finish Coat: Section 09 06 00, SCHEDULE FOR FINISHES.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:  
Before work is started, or sample panels are prepared, submit manufacturer's literature, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.
- C. Sample Panels:
  - 1. After painters' materials have been approved and before work is started submit sample panels showing each type of finish and color specified.
  - 2. Panels to show color: Composition board, 100 by 250 by 3 mm (4 inch by 10 inch by 1/8 inch).
  - 3. Panel to show transparent finishes: Wood of same species and grain pattern as wood approved for use, 100 by 250 by 3 mm (4 inch by 10 inch

- face by 1/4 inch) thick minimum, and where both flat and edge grain will be exposed, 250 mm (10 inches) long by sufficient size, 50 by 50 mm (2 by 2 inch) minimum or actual wood member to show complete finish.
4. Attach labels to panel stating the following:
    - a. Federal Specification Number or manufacturers name and product number of paints used.
    - b. Specification code number specified in Section 09 06 00, SCHEDULE FOR FINISHES.
    - c. Product type and color.
    - d. Name of project.
  5. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.
- D. Sample of identity markers if used.
- E. Manufacturers' Certificates indicating compliance with specified requirements:
1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.
  2. High temperature aluminum paint.
  3. Epoxy coating.
  4. Intumescent clear coating or fire retardant paint.
  5. Plastic floor coating.

#### **1.4 DELIVERY AND STORAGE**

- A. Deliver materials to site in manufacturer's sealed container marked to show following:
  1. Name of manufacturer.
  2. Product type.
  3. Batch number.
  4. Instructions for use.
  5. Safety precautions.
- B. In addition to manufacturer's label, provide a label legibly printed as following:
  1. Federal Specification Number, where applicable, and name of material.
  2. Surface upon which material is to be applied.
  3. If paint or other coating, state coat types; prime, body or finish.
- C. Maintain space for storage, and handling of painting materials and equipment in a neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.
- D. Store materials at site at least 24 hours before using, at a temperature between 18 and 30 degrees C (65 and 85 degrees F).

**1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. American Conference of Governmental Industrial Hygienists (ACGIH):  
 ACGIH TLV-BKLT-2012.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)  
 ACGIH TLV-DOC-2012.....Documentation of Threshold Limit Values and Biological Exposure Indices, (Seventh Edition)
- C. American National Standards Institute (ANSI):  
 A13.1-07.....Scheme for the Identification of Piping Systems
- D. American Society for Testing and Materials (ASTM):  
 D260-86.....Boiled Linseed Oil
- E. Commercial Item Description (CID):  
 A-A-1555.....Water Paint, Powder (Cementitious, White and Colors) (WPC) (cancelled)  
 A-A-3120.....Paint, For Swimming Pools (RF) (cancelled)
- F. Federal Specifications (Fed Spec):  
 TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For Waterproofing Concrete and Masonry Walls) (CEP)
- G. Master Painters Institute (MPI):  
 No. 1-12.....Aluminum Paint (AP)  
 No. 4-12.....Interior/ Exterior Latex Block Filler  
 No. 5-12.....Exterior Alkyd Wood Primer  
 No. 7-12.....Exterior Oil Wood Primer  
 No. 8-12.....Exterior Alkyd, Flat MPI Gloss Level 1 (EO)  
 No. 9-12.....Exterior Alkyd Enamel MPI Gloss Level 6 (EO)  
 No. 10-12.....Exterior Latex, Flat (AE)  
 No. 11-12.....Exterior Latex, Semi-Gloss (AE)  
 No. 18-12.....Organic Zinc Rich Primer  
 No. 22-12.....Aluminum Paint, High Heat (up to 590° - 1100F) (HR)  
 No. 26-12.....Cementitious Galvanized Metal Primer  
 No. 27-12.....Exterior / Interior Alkyd Floor Enamel, Gloss (FE)  
 No. 31-12.....Polyurethane, Moisture Cured, Clear Gloss (PV)  
 No. 36-12.....Knot Sealer  
 No. 43-12.....Interior Satin Latex, MPI Gloss Level 4  
 No. 44-12.....Interior Low Sheen Latex, MPI Gloss Level 2  
 No. 45-12.....Interior Primer Sealer  
 No. 46-12.....Interior Enamel Undercoat

- No. 47-12.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5 (AK)
- No. 48-12.....Interior Alkyd, Gloss, MPI Gloss Level 6 (AK)
- No. 49-12.....Interior Alkyd, Flat, MPI Gloss Level 1 (AK)
- No. 50-12.....Interior Latex Primer Sealer
- No. 51-12.....Interior Alkyd, Eggshell, MPI Gloss Level 3
- No. 52-12.....Interior Latex, MPI Gloss Level 3 (LE)
- No. 53-12.....Interior Latex, Flat, MPI Gloss Level 1 (LE)
- No. 54-12.....Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)
- No. 59-12.....Interior/Exterior Alkyd Porch & Floor Enamel, Low  
Gloss (FE)
- No. 60-12.....Interior/Exterior Latex Porch & Floor Paint, Low  
Gloss
- No. 66-12.....Interior Alkyd Fire Retardant, Clear Top-Coat (ULC  
Approved) (FC)
- No. 67-12.....Interior Latex Fire Retardant, Top-Coat (ULC  
Approved) (FR)
- No. 68-12.....Interior/ Exterior Latex Porch & Floor Paint,  
Gloss
- No. 71-12.....Polyurethane, Moisture Cured, Clear, Flat (PV)
- No. 74-12.....Interior Alkyd Varnish, Semi-Gloss
- No. 77-12.....Epoxy Cold Cured, Gloss (EC)
- No. 79-12.....Marine Alkyd Metal Primer
- No. 90-12.....Interior Wood Stain, Semi-Transparent (WS)
- No. 91-12.....Wood Filler Paste
- No. 94-12.....Exterior Alkyd, Semi-Gloss (EO)
- No. 95-12.....Fast Drying Metal Primer
- No. 98-12.....High Build Epoxy Coating
- No. 101-12.....Epoxy Anti-Corrosive Metal Primer
- No. 108-12.....High Build Epoxy Coating, Low Gloss (EC)
- No. 114-12.....Interior Latex, Gloss (LE) and (LG)
- No. 119-12.....Exterior Latex, High Gloss (acrylic) (AE)
- No. 135-12.....Non-Cementitious Galvanized Primer
- No. 138-12.....Interior High Performance Latex, MPI Gloss Level 2  
(LF)
- No. 139-12.....Interior High Performance Latex, MPI Gloss Level 3  
(LL)
- No. 140-12.....Interior High Performance Latex, MPI Gloss Level 4
- No. 141-12.....Interior High Performance Latex (SG) MPI Gloss  
Level 5

H. Steel Structures Painting Council (SSPC):

SSPC SP 1-04 (R2004)....Solvent Cleaning

SSPC SP 2-04 (R2004)....Hand Tool Cleaning  
 SSPC SP 3-04 (R2004)....Power Tool Cleaning

## **PART 2 - PRODUCTS**

### **2.1 MATERIALS**

- A. Interior Eg-Shel Satin Latex: MPI 43.
- B. Interior Latex Primer Sealer: MPI 50.

### **2.2 PAINT PROPERTIES**

- A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.
- B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

### **2.3 REGULATORY REQUIREMENTS/QUALITY ASSURANCE**

- A. Paint materials shall conform to the restrictions of the local Environmental and Toxic Control jurisdiction.
  - 1. Volatile Organic Compounds (VOC): VOC content of paint materials shall not exceed 10g/l for interior latex paints/primers and 50g/l for exterior latex paints and primers.
  - 2. Lead-Base Paint:
    - a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
    - b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
    - c. For lead-paint removal, see Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
  - 3. Asbestos: Materials shall not contain asbestos.
  - 4. Chromate, Cadmium, Mercury, and Silica: Materials shall not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
  - 5. Human Carcinogens: Materials shall not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
  - 6. Use high performance acrylic paints in place of alkyd paints, where possible.

7. VOC content for solvent-based paints shall not exceed 250g/l and shall not be formulated with more than one percent aromatic hydro carbons by weight.

### **PART 3 - EXECUTION**

#### **3.1 JOB CONDITIONS**

- A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.
  1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
  2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each days work.
- B. Atmospheric and Surface Conditions:
  1. Do not apply coating when air or substrate conditions are:
    - a. Less than 3 degrees C (5 degrees F) above dew point.
    - b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the Contracting Officer and the product manufacturer. Under no circumstances shall application conditions exceed manufacturer recommendations.
  2. Maintain interior temperatures until paint dries hard.
  3. Apply only on clean, dry and frost free surfaces except as follows:
    - a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces where allowed by manufacturer's printed instructions.
    - b. Dampened with a fine mist of water on hot dry days concrete and masonry surfaces to which water thinned acrylic and cementitious paints are applied to prevent excessive suction and to cool surface.

#### **3.2 SURFACE PREPARATION**

- A. Method of surface preparation is optional, provided results of finish painting produce solid even color and texture specified with no overlays.
- B. General:
  1. Remove prefinished items not to be painted such as lighting fixtures, escutcheon plates, hardware, trim, and similar items for reinstallation after paint is dried.
  2. Remove items for reinstallation and complete painting of such items and adjacent areas when item or adjacent surface is not accessible or finish is different.
  3. See other sections of specifications for specified surface conditions and prime coat.

4. Clean surfaces for painting with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry.

C. Wood:

1. Sand to a smooth even surface and then dust off.
2. Sand surfaces showing raised grain smooth between each coat.
3. Wipe surface with a tack rag prior to applying finish.
4. Surface painted with an opaque finish:
  - a. Coat knots, sap and pitch streaks with MPI 36 (Knot Sealer) before applying paint.
  - b. Apply two coats of MPI 36 (Knot Sealer) over large knots.
5. After application of prime or first coat of stain, fill cracks, nail and screw holes, depressions and similar defects with wood filler paste. Sand the surface to make smooth and finish flush with adjacent surface.
6. Before applying finish coat, reapply wood filler paste if required, and sand surface to remove surface blemishes. Finish flush with adjacent surfaces.
7. Fill open grained wood such as oak, walnut, ash and mahogany with MPI 91 (Wood Filler Paste), colored to match wood color.
  - a. Thin filler in accordance with manufacturer's instructions for application.
  - b. Remove excess filler, wipe as clean as possible, dry, and sand as specified.

D. Ferrous Metals:

1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning). Exception: where high temperature aluminum paint is used, prepare surface in accordance with paint manufacturer's instructions.
3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
  - a. This includes flat head countersunk screws used for permanent anchors.

- b. Do not fill screws of item intended for removal such as glazing beads.
  - 4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
  - 5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.
- E. Zinc-Coated (Galvanized) Metal, Surfaces Specified Painted:
- 1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion in accordance with SSPC-SP 1 (Solvent Cleaning).
  - 2. Spot coat abraded and damaged areas of zinc-coating which expose base metal on hot-dip zinc-coated items with MPI 18 (Organic Zinc Rich Coating). Prime or spot prime with MPI 134 (Waterborne Galvanized Primer) or MPI 135 (Non-Cementitious Galvanized Primer) depending on finish coat compatibility.
- F. Masonry:
- 1. Clean and remove dust, dirt, oil, grease efflorescence, form release agents, laitance, and other deterrents to paint adhesion.
  - 2. Use emulsion type cleaning agents to remove oil, grease, paint and similar products. Use of solvents, acid, or steam is not permitted.
  - 3. Remove loose mortar in masonry work.
  - 4. Replace mortar and fill open joints, holes, cracks and depressions with new mortar specified in Section 04 05 13, MASONRY MORTARING. Do not fill weep holes. Finish to match adjacent surfaces.
  - 5. Neutralize Concrete floors to be painted by washing with a solution of 1.4 Kg (3 pounds) of zinc sulfate crystals to 3.8 L (1 gallon) of water, allow to dry three days and brush thoroughly free of crystals.
  - 6. Repair broken and spalled concrete edges with concrete patching compound to match adjacent surfaces as specified in CONCRETE Sections. Remove projections to level of adjacent surface by grinding or similar methods.
- G. Gypsum Board:
- 1. Remove efflorescence, loose and chalking plaster or finishing materials.
  - 2. Remove dust, dirt, and other deterrents to paint adhesion.
  - 3. Fill holes, cracks, and other depressions with CID-A-A-1272A [Plaster, Gypsum (Spackling Compound) finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

### 3.3 PAINT PREPARATION

- A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
- B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
- C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
- D. Mix two component and two part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.
- E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

### 3.4 APPLICATION

- A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.
- B. Unless otherwise specified, apply paint in three coats; prime, body, and finish. When two coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.
- C. Apply each coat evenly and cover substrate completely.
- D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by Resident Engineer.
- E. Finish surfaces to show solid even color, free from runs, lumps, brushmarks, laps, holidays, or other defects.
- F. Apply by brush, roller or spray, except as otherwise specified.
- G. Do not spray paint in existing occupied spaces unless approved by Resident Engineer, except in spaces sealed from existing occupied spaces.
  - 1. Apply painting materials specifically required by manufacturer to be applied by spraying.
  - 2. In areas, where paint is applied by spray, mask or enclose with polyethylene, or similar air tight material with edges and seams continuously sealed including items specified in WORK NOT PAINTED, motors, controls, telephone, and electrical equipment, fronts of sterilizes and other recessed equipment and similar prefinished items.
- I. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

### 3.5 PRIME PAINTING

- A. After surface preparation prime surfaces before application of body and finish coats, except as otherwise specified.

- B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.
- C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.
- D. Prime rebates for stop and face glazing of wood, and for face glazing of steel.
- E. Gypsum Board:
  - 1. Primer: MPI 50 (Interior Latex Primer Sealer).
- F. Concrete Masonry Units except glazed or integrally colored and decorative units:
  - 1. MPI 4 (Block Filler) on interior surfaces.
- G. Concrete Floors: MPI 60 (Interior/ Exterior Latex Porch & Floor Paint, Low Gloss).

### **3.6 INTERIOR FINISHES**

- A. Apply following finish coats over prime coats in spaces or on surfaces specified in Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Gypsum Board:
  - 1. One coat of MPI 45 (Interior Primer Sealer) plus one coat of MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)).
- C. Masonry and Concrete Walls:
  - 1. Over MPI 4 (Interior/Exterior Latex Block Filler) on CMU surfaces.
- D. Concrete Floors: One coat of MPI 68 (Interior/ Exterior Latex Porch & Floor Paint, Gloss (FE)).
- E. Miscellaneous:
  - 1. Apply where specified in Section 09 06 00, SCHEDULE FOR FINISHES.

### **3.7 REFINISHING EXISTING PAINTED SURFACES**

- A. Clean, patch and repair existing surfaces as specified under surface preparation.
- B. Remove and reinstall items as specified under surface preparation.
- C. Remove existing finishes or apply separation coats to prevent non compatible coatings from having contact.
- D. Patched or Replaced Areas in Surfaces and Components: Apply spot prime and body coats as specified for new work to repaired areas or replaced components.
- E. Except where scheduled for complete painting apply finish coat over plane surface to nearest break in plane, such as corner, reveal, or frame.
- F. In existing rooms and areas where alterations occur, clean existing stained and natural finished wood retouch abraded surfaces and then give entire surface one coat of MPI 71 (Polyurethane, Moisture Cured, Clear Flat (PV)).

- G. Refinish areas as specified for new work to match adjoining work unless specified or scheduled otherwise.
- H. Coat knots and pitch streaks showing through old finish with MPI 36 (Knot Sealer) before refinishing.
- I. Sand or dull glossy surfaces prior to painting.
- J. Sand existing coatings to a feather edge so that transition between new and existing finish will not show in finished work.

### **3.9 PAINT COLOR**

- A. Color and gloss of finish coats is specified in Section 09 06 00, SCHEDULE FOR FINISHES.
- B. For additional requirements regarding color see Articles, REFINISHING EXISTING PAINTED SURFACE and MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE.
- C. Coat Colors:
  - 1. Color of priming coat: Lighter than body coat.
  - 2. Color of body coat: Lighter than finish coat.
  - 3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.
- D. Painting, Caulking, Closures, and Fillers Adjacent to Casework:
  - 1. Paint to match color of casework where casework has a paint finish.
  - 2. Paint to match color of wall where casework is stainless steel, plastic laminate, or varnished wood.

### **3.10 MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE**

- A. Field painting of mechanical and electrical consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.
- B. In spaces not scheduled to be finish painted in Section 09 06 00, SCHEDULE FOR FINISHES paint as specified under paragraph H, colors.
- C. Paint various systems specified in Division 21 - FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 - HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, Division 27 - COMMUNICATIONS, and Division 28 - ELECTRONIC SAFETY AND SECURITY.
- D. Paint after tests have been completed.
- E. Omit prime coat from factory prime-coated items.
- F. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more.

G. Omit field painting of items specified in paragraph, Building and Structural WORK NOT PAINTED.

H. Color:

1. Paint items having no color specified in Section 09 06 00, SCHEDULE FOR FINISHES to match surrounding surfaces.

2. Paint colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES except for following:

a. White .....Exterior unfinished surfaces of enameled plumbing fixtures.

b. Gray: .....Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces.

c. Federal Safety Red: Exposed fire protection piping hydrants, post indicators, electrical conduits containing fire alarm control wiring, and fire alarm equipment.

I. Apply paint systems on properly prepared and primed surface as follows:

1. Interior Locations:

a. Apply two coats of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) to following items:

1) Metal under 94 degrees C (200 degrees F) of items such as bare piping, fittings, hangers and supports.

2) Equipment and systems such as hinged covers and frames for control cabinets and boxes, cast-iron radiators, electric conduits and panel boards.

3) Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.

2. Other exposed locations:

a. Cloth jackets of insulation of ducts and pipes in connection with plumbing, air conditioning, ventilating refrigeration and heating systems: One coat of MPI 50 (Interior Latex Primer Sealer) and one coat of MPI 119 (Exterior Latex, High Gloss (acrylic)(AE)) .

**3.10 IDENTITY PAINTING SCHEDULE**

A. Identify designated service in accordance with ANSI A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels.

1. Legend may be identified using 2.1 G options or by stencil applications.

2. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories such as valves, regulators, strainers and cleanouts a minimum of 12 000 mm (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.
3. Locate Legends clearly visible from operating position.
4. Use arrow to indicate direction of flow.
5. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert working pressure shown on drawings where asterisk appears for High, Medium, and Low Pressure designations as follows:
  - a. High Pressure - 414 kPa (60 psig) and above.
  - b. Medium Pressure - 104 to 413 kPa (15 to 59 psig).
  - c. Low Pressure - 103 kPa (14 psig) and below.
  - d. Add Fuel oil grade numbers.
6. Legend name in full or in abbreviated form as follows:

PIPING	COLOR OF EXPOSED PIPING	COLOR OF BACKGROUND	COLOR OF LETTERS	LEGEND BBREVIATIONS
Blow-off		Yellow	Black	Blow-off
Boiler Feedwater		Yellow	Black	Blr Feed
A/C Condenser Water Supply		Green	White	A/C Cond Wtr Sup
A/C Condenser Water Return		Green	White	A/C Cond Wtr Ret
Chilled Water Supply		Green	White	Ch. Wtr Sup
Chilled Water Return		Green	White	Ch. Wtr Ret
Shop Compressed Air		Yellow	Black	Shop Air
Air-Instrument Controls		Green	White	Air-Inst Cont
Drain Line		Green	White	Drain
Emergency Shower		Green	White	Emg Shower
High Pressure Steam		Yellow	Black	H.P. _____*
High Pressure Condensate Return		Yellow	Black	H.P. Ret _____*
Medium Pressure Steam		Yellow	Black	M. P. Stm _____*
Medium Pressure Condensate Return		Yellow	Black	M.P. Ret _____*
Low Pressure Steam		Yellow	Black	L.P. Stm _____*
Low Pressure Condensate Return		Yellow	Black	L.P. Ret _____*
High Temperature Water Supply		Yellow	Black	H. Temp Wtr Sup
High Temperature Water Return		Yellow	Black	H. Temp Wtr Ret
Hot Water Heating Supply		Yellow	Black	H. W. Htg Sup
Hot Water Heating Return		Yellow	Black	H. W. Htg Ret

Gravity Condensate Return		Yellow	Black	Gravity Cond Ret
Pumped Condensate Return		Yellow	Black	Pumped Cond Ret
Vacuum Condensate Return		Yellow	Black	Vac Cond Ret
Fuel Oil - Grade		Green	White	Fuel Oil-Grade ___*
Boiler Water Sampling		Yellow	Black	Sample
Chemical Feed		Yellow	Black	Chem Feed
Continuous Blow-Down		Yellow	Black	Cont. B D
Pumped Condensate		Black		Pump Cond
Pump Recirculating		Yellow	Black	Pump-Recirc.
Vent Line		Yellow	Black	Vent
Alkali		Yellow	Black	Alk
Bleach		Yellow	Black	Bleach
Detergent		Yellow	Black	Det
Liquid Supply		Yellow	Black	Liq Sup
Reuse Water		Yellow	Black	Reuse Wtr
Cold Water (Domestic)	White	Green	White	C.W. Dom
Hot Water (Domestic)				
Supply	White	Yellow	Black	H.W. Dom
Return	White	Yellow	Black	H.W. Dom Ret
Tempered Water	White	Yellow	Black	Temp. Wtr
Ice Water				
Supply	White	Green	White	Ice Wtr
Return	White	Green	White	Ice Wtr Ret
Reagent Grade Water		Green	White	RG
Reverse Osmosis		Green	White	RO
Sanitary Waste		Green	White	San Waste
Sanitary Vent		Green	White	San Vent
Storm Drainage		Green	White	St Drain
Pump Drainage		Green	White	Pump Disch
Chemical Resistant Pipe				
Waste		Yellow	Black	Acid Waste
Vent		Yellow	Black	Acid Vent
Atmospheric Vent		Green	White	ATV
Silver Recovery		Green	White	Silver Rec
Oral Evacuation		Green	White	Oral Evac
Fuel Gas		Yellow	Black	Gas
Fire Protection Water				
Sprinkler		Red	White	Auto Spr
Standpipe		Red	White	Stand



Floor Enamel FE (MPI 27 - gloss/MPI 59 - eggshell)  
 Heat Resistant Paint HR (MPI 22)  
 Latex Emulsion LE (MPI 53, flat/MPI 52, eggshell/MPI 54, semigloss/MPI  
 114, gloss Level 6)  
 Latex Flat LF (MPI 138)  
 Latex Gloss LG (MPI 114)  
 Latex Semigloss SG (MPI 141)  
 Latex Low Luster LL (MPI 139)  
 Plastic Floor Coating PL  
 Polyurethane Varnish PV (MPI 31 - gloss/MPI 71 - flat)  
 Rubber Paint RF (CID-A-A-3120 - Paint for Swimming Pools (RF)).  
 Water Paint, Cement WPC (CID-A-A-1555 - Water Paint, Powder).  
 Wood Stain WS (MPI 90)

Verify abbreviations used in the following coating sections:

Section 09 96 59, HIGH-BUILD GLAZED COATINGS GC  
 Section 09 94 19, MULTICOLOR INTERIOR FINISHING MC

- - - E N D - - -

**SECTION 10 26 00  
WALL AND DOOR PROTECTION**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies wall guards (crash rails or bumper guards), handrail/wall guard combinations, corner guards and door/door frame protectors.

**1.2 RELATED WORK**

- A. Armor plates and kick plates not specified in this section: Section 08 71 00, DOOR HARDWARE.
- C. Color and texture of aluminum and resilient material: Section 09 06 00, SCHEDULE FOR FINISHES.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Show design and installation details.
- C. Manufacturer's Literature and Data:
  - 1. Handrail/Wall Guard Combinations.
  - 2. Wall Guards.
  - 3. Corner Guards.
  - 4. Door/Door Frame Protectors.
- D. Test Report: Showing that resilient material complies with specified fire and safety code requirements.

**1.4 DELIVERY AND STORAGE**

- A. Deliver materials to the site in original sealed packages or containers marked with the name and brand, or trademark of the manufacturer.
- B. Protect from damage from handling and construction operations before, during and after installation.
- C. Store in a dry environment of approximately 21° C (70 degrees F) for at least 48 hours prior to installation.

**1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
  - B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes

- D256-06.....Impact Resistance of Plastics
- D635-06.....Rate of Burning and/or Extent and Time of  
Burning of Self-Supporting Plastics in a  
Horizontal Position
- E84-09.....Surface Burning Characteristics of Building  
Materials
- C. The National Association of Architectural Metal Manufacturers (NAAMM):  
AMP 500-06.....Metal Finishes Manual
- D. National Fire Protection Association (NFPA):  
80-10.....Standard for Fire Doors and Windows
- E. Society of American Automotive Engineers (SAE):  
J 1545-05.....Instrumental Color Difference Measurement for  
Exterior Finishes.
- F. Underwriters Laboratories Inc. (UL):  
Annual Issue.....Building Materials Directory

## **PART 2 - PRODUCTS**

### **2.1 MATERIALS**

- A. Stainless Steel: ASTM A167, Type 302B.
- B. Aluminum Extruded: ASTM B221, Alloy 6063, Temper T5 or T6. Aluminum alloy used for colored anodizing coating shall be as required to produce specified color.
- C. Resilient Material:
1. Extruded and injection molded acrylic vinyl or extruded polyvinyl chloride meeting following requirements:
    - a. Minimum impact resistance of 1197 ps (25 ft lbs per sq.ft) when tested in accordance with ASTM D256 (Izod impact, ft.lbs. per inch notch).
    - b. Class 1 fire rating when tested in accordance with ASTM E84, having a maximum flame spread of 25 and a smoke developed rating of 450 or less.
    - c. Rated self extinguishing when tested in accordance with ASTM D635.
    - d. Material shall be labeled and tested by Underwriters Laboratories or other approved independent testing laboratory.
    - e. Integral color with all colored components matched in accordance with SAE J 1545 to within plus or minus 1.0 on the CIE-LCH scales.
    - f. Same finish on exposed surfaces.

### **2.2 CORNER GUARDS**

- A. Resilient, Shock-Absorbing Corner Guards: Surface mounted type of 30 mm (1-1/4 inch radius) 6 mm 1/4-inch corner) formed to profile shown.

1. Snap-on corner guard formed from resilient material, minimum 2 mm (0.078-inch) thick, free floating on a continuous 1.6 mm (0.063-inch) thick extruded aluminum retainer. // Design retainer used for flush mounted type to act as a stop for adjacent wall finish material. Provide appropriate mounting hardware, cushions and base plates as required.
2. Provide factory fabricated end closure caps at top and bottom of surface mounted corner guards.

B. Stainless Steel Corner Guards: Fabricate of 1.6 mm (0.0625-inch) thick stainless steel. Form guards of dimensions and to contour shown.

#### **2.4 DOOR AND DOOR FRAME PROTECTION**

- A. Fabricate door and door frame protection items from vinyl acrylic or polyvinyl chloride resilient material, minimum 1.5 mm (0.060-inch) thick, for doors and 0.9 mm (0.035-inch) thick for door frames, as shown.
- B. Coordinate door and door frame protection material requirements with door and frame suppliers to insure fit for all components, and color as specified.
- C. Provide adhesive as recommended by resilient material manufacturer.

#### **2.5 FASTENERS AND ANCHORS**

- A. Provide fasteners and anchors as required for each specific type of installation.
- B. Where type, size, spacing or method of fastening is not shown or specified, submit shop drawings showing proposed installation details.

#### **2.6 FINISH**

- A. In accordance with NAAMM AMP 500 series.
- B. Aluminum:
  1. Exposed aluminum: AAC22A31 chemically etched medium matte, with clear anodic coating, Class II Architectural, 0.4 mil thick. AA-C22A32
  2. Concealed aluminum: Mill finish as fabricated, uniform in color and free from surface blemishes.
- C. Stainless Steel: NAAMM finish Number 4.
- D. Resilient Material: Embossed texture and color in accordance with SAE J 1545 and as specified in Section 09 06 00, SCHEDULE FOR FINISHES.

**PART 3 - INSTALLATION****3.1 RESILIENT CORNER GUARDS**

Install corner guards on walls in accordance with manufacturer's instructions.

**3.2 STAINLESS STEEL CORNER GUARDS**

Mount guards on external corners of interior walls, partitions and columns as shown.

- B. Where corner guards are installed on walls, partitions or columns finished with plaster or ceramic tile, // anchor corner guards as shown on drawings. // Provide continuous 16 gage perforated, galvanized Z-shape steel anchors welded to back edges of corner guards and // wired to metal studs // expansion bolted to concrete or masonry with four 9.5 mm (3/8-inch) diameter bolts, spaced 400 mm (16 inches) on centers //. Coat back surfaces of corner guards, where shown, with a non-flammable, sound deadening material. Corner guards shall overlap finish plaster surfaces.
1. Where corner guards are installed on exposed structural glazed facing tile units or masonry wall, partitions or columns, // anchor corner guards as shown on the drawings // anchor corner guards to existing walls with 6 mm (1/4-inch) oval head stainless steel countersunk expansion or toggle bolts // anchor corner guards with four nominal 1.3 mm (0.0516-inch) thick, adjustable galvanized steel anchors, spaced as shown. // Grout spaces solid between guards and backing with Portland cement and sand mortar.
  2. Where corner guards are installed on gypsum board, clean surface and anchor guards with a neoprene solvent-type contact adhesive specifically manufactured for use on gypsum board construction. Remove excess adhesive from around edge of guard and allow to cure undisturbed for 24 hours.

**3.6 DOOR, DOOR FRAME PROTECTION AND HIGH IMPACT WALL COVERING**

- A. Surfaces to receive protection shall be clean, smooth and free of obstructions.
- B. Install protectors after frames are in place but preceding installation of doors in accordance with approved shop drawings and manufacturers specific instructions.
- C. Apply with adhesive in controlled environment according to manufacture's recommendations.
- D. Protection installed on fire rated doors and frames shall be installed according to NFPA 80 and installation procedures listed in UL Building

Materials Directory; or, equal listing by other approved independent testing laboratory establishing the procedures.

- - - E N D - - -

**SECTION 10 44 13  
FIRE EXTINGUISHER CABINETS**

**SPEC WRITER NOTE:**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section covers recessed fire extinguisher cabinets.

**1.2 RELATED WORK**

- A. Acrylic glazing: Section 08 80 00, GLAZING.
- B. Field Painting: Section 09 91 00, PAINTING.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data: Fire extinguisher cabinet including installation instruction and rough opening required.

**1.4 APPLICATION PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Testing and Materials (ASTM):  
D4802-10.....Poly (Methyl Methacrylate) Acrylic Plastic Sheet

**PART 2 - PRODUCTS**

**2.1 FIRE EXTINGUISHER CABINET**

Recessed type with flat trim of size and design shown.

**2.2 FABRICATION**

- A. Form body of cabinet from 0.9 mm (0.0359 inch) thick sheet steel.
- B. Fabricate door and trim from 1.2 mm (0.0478 inch) thick sheet steel with all face joints fully welded and ground smooth.
  - 1. Glaze doors with 6 mm (1/4 inch) thick ASTM D4802, clear acrylic sheet, Category B-1, Finish 1.
  - 2. Design doors to open 180 degrees.
  - 3. Provide continuous hinge, pull handle, and adjustable roller catch.

**2.3 FINISH**

- A. Finish interior of cabinet body with baked-on semigloss white enamel.
- B. Finish door, frame with manufacturer's standard baked-on prime coat suitable for field painting.

**PART 3 - EXECUTION**

- A. Install fire extinguisher cabinets in prepared openings and secure in accordance with manufacturer's instructions.

B. Install cabinet so that bottom of cabinet is 975 mm (39 inches) above finished floor.

- - - E N D - - -

**SECTION 12 31 00****METAL LABORATORY CASEWORK****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Section includes:
1. Metal laboratory casework, base cabinets & accessories
  2. Casework tops (Epoxy), backboards, and end splashes
  3. Sinks installed in casework tops
  4. Cup Sinks
  5. Vertical Utility Chases (Umbilical's)
  6. Overhead Service Trunk
  7. Pegboard
  8. Metal channel pipe supports for support of piping in casework service chases
  9. Wall Shelving - Adjustable
  10. Mobile Work Tables
- B. Related Sections:
1. Division 06 Section Rough Carpentry
  2. Division 06 Section Finish Carpentry
  3. Division 07 Section Joint Sealants
  4. Division 09 Section Resilient Base & Accessories
  5. Division 22 - Plumbing
  6. Division 26 - Electrical

**1.2 PERFORMANCE REQUIREMENTS**

- A. Metal Finish performance
1. Abrasion
    - a. Finish shall have high abrasion resistance with maximum weight loss of 5.5 mg per 100 cycles as tested on a Taber Abrasion Tester #E4010 with 1000 gm wheel pressure and Calibrase #CD10 wheels.
  2. Hardness:
    - a. Finish shall have hardness equivalent to 4H or 5H pencil lead.
  3. Humidity Resistance:
    - a. Finish shall withstand 1000 hr. exposure in saturated humidity at 100 degrees F.
  4. Moisture Resistance:
    - a. Finish shall resist boiling water trickled over the test panel surface inclined at a 45-degree angle for 5 minutes.
      - 1) At the end of the test, the surface shall be dried and upon examination shall show no visible effect.

- b. Finish shall resist application of a cellulose sponge soaked with water placed on the test surface for a period of 100 hours.
  - 1) The sponge shall be maintained in a wet condition throughout the test period.
  - 2) At the end of the test, the surface shall be dried and upon examination show no visible effect.
- 5. Adhesion:
  - a. Finish shall withstand chipping in accordance with the following procedure:
    - 1) Using a razor blade on a finish test panel, score 11 parallel lines 1/16" apart in two sets 90 degrees apart, to provide 100 segments 1/16" x 1/16" in size.
    - 2) Cuts shall be deep enough to go completely through the finish, but with minimum penetration of the substrate.
    - 3) Brush away particles with a soft brush.
    - 4) 95 squares shall maintain their finish.
- 6. Finish shall withstand a 200-hour minimum salt spray test.

### 1.3 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A36/A36M-08. . . . . Carbon Structural Steel
  - A167-99(R 2009). . . . . Stainless and Heat-Resisting Chromium Steel Plate Sheet and Strip
  - A283/A283M-03(R 2007).. Low and Intermediate Tensile Strength Carbon Steel Plates
  - A568/A568M-09. . . . . Steel, Sheet, Carbon and High-Strength, Low-Alloy Hot-Rolled and Cold-Rolled, General Requirements
  - A794/A794M-09. . . . . Standard Specification for Commercial Steel (CS), Sheet, Carbon (0.16% Maximum to 0.25% Maximum) Cold Rolled
  - B456-03(R2009). . . . . Electrodeposited Coatings of Copper Plus Nickel Plus Chromium and Nickel Plus Chromium
  - C1036-06. . . . . Flat Glass
- C. American National Standard Institute:
  - Z97.1-09 Safety Glazing Material used In Buildings
- D. Builders Hardware Manufacturers Association (BHMA):
  - A156.1-06 Butts and Hinges
  - A156.9-10 Cabinet Hardware
  - A156.5-10 Auxiliary Locks and Associated Products

A156.16-02 Auxiliary Hardware

- E. American Welding Society (AWS):  
 D1.1-10 Structural Welding Code Steel  
 D1.3-08 Structural Welding Code Sheet Steel
- F. National Association of Architectural Metal Manufacturers (NAAMM):  
 AMP 500-505-06 Series Metal Finishes Manual
- G. U.S. Department of Commerce, Product Standard (PS):  
 PS 1-95 Construction and Industrial Plywood
- H. Federal Specifications (Fed. Spec.):  
 FF-N-836D Nut, Square, Hexagon Cap, Slotted, Castle  
 Knurled, Welding and Single Ball Seat  
 A-A-55615 Shield, Expansion; Nail Expansion (Wood  
 Screw and Lag Bolt Self-Threading Anchors)

#### 1.4 SUBMITTALS

- A. Product Data:  
 1. Materials list: List all items proposed to be furnished and installed under this Section.  
 2. Product Data: Provide manufacturer's literature describing all items furnished under this section.
- B. Shop drawings:  
 1. Submit shop drawings showing plan view and elevations at ½ scale, mounting details, rough-in locations, and sections. Include manufacturer's current specifications.
- C. Samples:  
 1. Submit specified color samples to the Architect/Engineer for approval.
- D. Certificates:  
 1. Provide manufacturer's certification or test results indicating compliance with metal finish performance requirements.

#### 1.5 QUALITY ASSURANCE

- A. All products under this Section shall be the product of one manufacturer. Provide laboratory casework by company with minimum of 10 years' experience in the manufacture of laboratory casework of the type specified for this project.
- B. Product Standard: Comply with SEFA 8, "Laboratory Furniture--Casework, Shelving and Tables--Recommended Practices."
- C. All products shall be delivered to the site in original factory shipping containers.

- D. Installer of metal laboratory casework shall be trained and certified by the manufacturer of the casework.
- E. Protect finished surfaces from soiling and damage during handling and installation. Cover with polyethylene film or other protective covering.
- F. Furnish supervision of installation at construction site by a qualified technician regularly employed by casework installer.

**1.6 WARRANTY**

- A. Special Project Warranty: Submit a written warranty for 2 years after the date of Substantial Completion, executed by the manufacturer, agreeing to repair or replace laboratory casework that fails in materials or workmanship within the specified warranty period. This warranty shall be in addition to and not a limitation of other rights the Owner may have against the Contractor under the Contract Documents.

**1.7 PHASING**

- A. This is a Phased project. Verify the Phasing Schedule as listed on the Drawings and Specification Section 01 00 00. Casework Manufacturer and Installer shall coordinate with the General, Plumbing & Electrical Contractors the Project Phasing schedule and all delivery and installation of casework and utilities as detail in the Phasing schedule. Hematology, Coagulation and Urinalysis tables involve partial installation to allow for Phase 1b barrier.

**PART 2 - PRODUCTS**

**2.1 MANUFACTURERS**

- A. Acceptable manufacturers: Or approved equal.
  - 1. Mott Manufacturing Limited
  - 2. Jamestown Metal Products
  - 3. Kewaunee Scientific Corp.

**Alternate Product as follows:**

Bidding On:  
 Manufacturer Name: \_\_\_\_\_  
 Brand: \_\_\_\_\_  
 No.: \_\_\_\_\_

## 2.2 MANUFACTURED UNITS

- A. Metal casework shall be of modern design and shall be constructed in accordance with the best practices of the metal casework industry.
1. High quality of casework shall be established by use of proper machinery, tools, dies, fixtures and skilled workmen, and shall be evidenced by uniform clearance around doors and drawers.
  2. Each unit shall have a completely welded shell assembly and shall not require additional parts as applied panels at ends, backs or bottoms.
    - a. All cases shall be rigid and self-supporting for use interchangeably in a group of cases for single unit use.
  3. Front surfaces of all doors, drawers, and panels shall be flush with cabinet front, and shall not overlap case ends or top and bottom rails.
    - a. At intersection of vertical and horizontal case shell members, such as end panels, top rails and bottoms, all parts shall be in the same place, without overlap, secured by spot and arc welding.
    - b. Front corners shall have heavy back up gusset reinforcements.
    - c. Cracks and crevices not acceptable.
    - d. Case openings shall be rabbetted on all four sides for hinged doors and on two sides for sliding doors, to provide a dust resistant case.
  4. All units shall have easily cleanable flush interiors.
  5. Front width of end panels shall be 3/4" and front height of top and bottom members shall be no greater than 1" to maintain slim-line styling.
    - a. All members shall be designed, formed, welded and reinforced for rigid construction.
- B. Materials:
1. All units shall be constructed of cold rolled steel of the following minimum gauges:
    - a. Solid door interior panels, drawer fronts, scribing strips, filler panels, enclosures, drawer bodies, shelves, security panels and sloping tops: 20 gauge
    - b. Case tops, ends, bottoms, bases, backs, vertical posts, uprights, glazed door members, door exterior panels and access panels: 18 gauge
    - c. Top front rails, top rear gussets intermediate horizontal rails, table legs and frames, leg rails and stretchers: 16 gauge
    - d. Drawer suspensions, door and case hinge reinforcements and front corner reinforcements: 14 gauge
    - e. Table leg corner brackets and gusset for leveling screw: 11 gauge

## 2.3 FABRICATION - METAL CASEWORK

- A. Base units:
1. Units shall have a completely welded assembly with full sides, back and bottom.

2. Front posts shall be fully closed and shall have a full height reinforcing upright containing shelf adjustment holes and providing vertical rabbet for doors and drawers.
  3. Rear internal posts shall contain shelf clip adjustment holes.
  4. Removable backs:
    - a. Backs of cupboard base unit shall have access panels removable with the use of common tools.
    - b. Backs of sink cabinets shall accommodate plumbing connections.
  5. Bottom:
    - a. Bottoms of all units shall be one-piece construction, fixed, and shall have front edge formed into rabbet design for swinging doors and drawers, and front flange shall be formed into lower front rail.
      - 1) Bottom panels of sink cabinets to be powder-coated galvanized steel to minimize corrosion.
    - b. Sliding door case bottom shall be of same construction, but shall be flush design.
  6. Top rail:
    - a. Top rail to have full width rabbet for swinging doors and drawers.
  7. Horizontal intermediate rails:
    - a. All horizontal intermediate cross rails shall be recessed behind doors and drawer fronts and shall be provided where necessary for locking of doors and drawers.
  8. Base:
    - a. Integral toe space on base cabinets and tall cases shall be 4" high x 3" deep.
    - b. Base corners shall have die formed gussets.
    - c. Leveling screw for each corner shall be 3/8" diameter and have integral bottom flange having an area not less than 0.56 square inches to provide adequate support and minimize damage to floor.
  9. Base cabinets with double doors:
    - a. Three and four foot base cabinets with double swinging doors shall provide full access to cupboard interior.
    - b. Vertical center support posts are not acceptable.
- B. Drawers:
1. Fronts:
    - a. Drawer front shall be steel double wall construction, sound deadened.
    - b. All interior surfaces shall be painted before assembly.
    - c. Top front corners shall be welded and ground smooth.
  2. Drawer bodies:
    - a. Drawer bodies shall be of one-piece construction including the bottom, two sides, back and inner front.
    - b. Interior bottom shall be coved on all four sides for easy cleaning.
    - c. All top edges shall be formed for maximum strength.
  3. Drawer suspension:
    - a. Drawer suspensions shall be heavy-duty full extension type with coved raceways for self-centering of drawer. Glides to be Accuride, Fulterer, or similar.
    - b. Drawers shall be removable without the use of tools.

- c. Drawers shall be provided with rubber bumpers for cushioned closing.
    - 1) Rubber bumpers must be securely locked in place.
  - d. Friction centering devices not acceptable.
  - e. Security panels shall be supplied when drawers are keyed.
  - f. File drawers:
    - 1) File drawers shall have full extension slides for full access and operation.
    - 2) Minimum 100# capacity rating.
- C. Doors:
- 1. General:
    - a. Doors shall be double wall telescoping box steel construction, with front panel and inner liner.
    - b. All interior surfaces shall be painted for protection from corrosion.
    - c. Door shall be sound deadened on interior.
    - d. Hinges shall be removable and shall be fastened to door and case with screws mounting through door panels and case to 14 gauge inner reinforcements.
    - e. Hinges welded to door or to case are not acceptable.
    - f. Door closing action shall be against rubber bumpers.
      - 1) Rubber bumpers must be securely locked in place.
      - 2) Rubber bumpers attached by adhesives are not acceptable.
    - g. Doors up to 36" high to have two hinges, and doors over 36" to have three hinges.
    - h. All corners of outer door panel shall be welded and ground smooth.
- D. Shelves:
- 1. Removable shelves:
    - a. Removable shelves shall be adjustable.
    - b. Shelves shall have four sides formed and front and back returned formed.
    - c. Shelves over 36" long shall have welded full width reinforcement.
  - 2. Pull-out shelves:
    - a. Pull-out shelves shall have same mechanism as drawers and shall be furnished where specified or shown.
- E. Finishes
- 1. General:
    - a. Shop finish all casework components after fabrication.
    - b. Reagent resistant epoxy coating finish on all steel surfaces.
    - c. Color shall be selected by the Architect/Engineer from the manufacturer's complete line of standard colors.
  - 2. Preparation:
    - a. All steel surfaces shall be spray cleaned with a heated cleaner/phosphate solution, and pretreated with iron phosphate spray followed by a neutral final seal prior to application of final finish.
      - 1) The strength of each cleaning and pretreatment solution shall be monitored by titration to ensure consistent quality.

- b. All treated parts shall be immediately dried in heated ovens and gradually cooled before application of the finish.
  - c. Treated metal parts shall be clean and properly prepared to provide optimum adhesion of finish and resistance to corrosion.
3. Finish:
- a. Finish for all steel surfaces shall be a high-grade laboratory furniture quality, chemical resistant baked epoxy of color selected from the manufacturer's standard colors.
  - b. Pretreatment: After assembly, thoroughly clean surfaces of grease, dirt, oil, flux, and other foreign matter by physical and chemical means. Treat entire unit with metallic phosphate process leaving surfaces with uniform, fine-grained, crystalline phosphate coating providing excellent bond for subsequent finish.
  - c. Coating shall be baked in controlled high temperature continuous oven, assuring uniform curing to a smooth, hard satin finish that complies with chemical and physical resistance requirements specified.
  - d. All surfaces, exterior or interior, exposed to view, shall achieve a minimum 1.5 mil film thickness and shall have a smooth satin luster.
  - e. Backs of cabinets, surfaces not exposed to view and concealed interior parts shall achieve a minimum 1.0 mil film thickness.
  - f. All drawer bodies shall be finished in matching or harmonizing color, as selected by the Architect/Engineer.
  - g. Finish shall be free of runs, orange peel, or other defects.
  - h. Touch-Up Kit: Furnish complete touch-up kit for each type and color of laboratory casework provided. Include touch-up paint and other materials necessary to perform permanent spot repairs to damaged casework finish.

#### **2.4 HARDWARE: ANSI BHMA A156.9**

- A. Drawer and hinged door pulls:
  - 1. Recessed plastic.
- B. Solid and framed sliding door pulls:
  - 1. Recessed plastic, style and sized to harmonize with door and drawer pulls.
- C. File drawers:
  - 1. File drawers shall have full extension slides for full access and operation.
  - 2. Minimum 100# capacity rating.
- D. Hinges:
  - 1. Institutional type with five knuckles, not less than 2-1/2" long, with each leaf drilled for three attachment screws.
  - 2. Hinge shall be of 302 or 304 stainless steel with hinge barrel only projecting beyond face of cabinet.

- E. Door catches:
  - 1. Spring actuated with nylon roller and adjustable for controlled opening or closing action.
- F. Elbow catches:
  - 1. Spring type of cadmium plated steel, with strike of suitable design.
- G. Shelf clips:
  - 1. Die formed steel, zinc plated, designed to engage in shelf adjustment holes on nominal 1/2" centers.
- H. Leg Shoes: Provide extruded vinyl or rubber, black, open bottom type.

## 2.5 CHEMICAL AND PHYSICAL RESISTANCE OF LABORATORY CASEWORK FINISH

- A. Provide metal laboratory casework with a factory-applied finish that is capable of withstanding the tests specified in this article with no permanent change in gloss, color, film hardness, adhesion, or film protection.
- B. Acids:
  - 1. Not less than 10 drops (0.50 cc) of the following reagents applied to finish surface, covered with watch glass, convex side down, for 60 minutes, then washed and dried.
  - 2. Hydrochloric acid (37 percent), sulfuric acid (85 percent), nitric acid (25 percent), phosphoric acid (75 percent), acetic acid (98 percent).
- C. Solvent:
  - 1. Not less than 10 drops (0.5 cc) of the following reagents applied to finish surface, covered with watch glass, convex side up, for 60 minutes, then washed and dried.
  - 2. Ethyl alcohol, butyl alcohol, methyl alcohol, toluene, acetone, benzene, carbon tetrachloride, formaldehyde (37 percent), gasoline, ethyl acetate, ethyl ether, methyl ethyl ketone, naphtha, kerosene, xylene, glycerin, furfural.
- D. Bases and Salts:
  - 1. Not less than 5 drops (0.25 cc) of the following reagents applied to finish surface, covered with watch glass, convex side up, for 60 minutes, then washed and dried.
  - 2. Sodium hydroxide (25 percent), ammonium hydroxide (28 percent), potassium hydroxide (40 percent), saturated zinc chloride, saturated sodium chloride, saturated sodium sulphide, saturated sodium carbonate, poultice of "Tide" laundry detergent and water.
- E. Salt Spray: Withstand 200 hours salt spray exposure conforming to ASTM-B117-59T procedure.
- F. Moisture Resistance: No visible effect when finish surface exposed to the following:

1. Hot water at a temperature of 190 degrees F (91 degrees C) to 205 degrees F (96 degrees C), trickled down surface at 45-degree angle for 5 minutes.
  2. Constant moisture using a 2" by 3" by 1" cellulose sponge, soaked with water, in contact with surface for 100 hours.
- G. Cold Crack: No effect when subjected to 10 cycles of temperature change from 20 degrees F (14 degrees C) for 60 minutes to 125 degrees F (52 degrees C) for 60 minutes.
- H. Adhesion and Flexibility: No peeling or cracking or exposure of metal when metal is bent 180 degrees over a 1/2" diameter mandrel.
- I. Abrasion: Maximum weight loss of 5.5 mg. per 100 cycles as tested on a Taber abrasion tester #E4010 with 1000 GM wheel pressure and calibrate #CS10 wheels.
- J. Hardness: Hard surface equivalent to 6H pencil lead.
- K. Impact: Withstand forward impact of 64 pounds without chipping or crazing using a Gardner #167 Impact Tester with a 5/8" diameter spherical punch.
- L. Humidity Resistance: Withstand 1000 hours exposure in saturated humidity at 100 degrees Fahrenheit.

## 2.6 EPOXY RESIN CUP SINKS

- A. Cup sinks shall be as manufactured by Prime Industries, Durcon, Epoxyn or equal.
1. Cup sink shall be 3" x 9" oval high with a minimum wall thickness of 3/8".
  2. Provide a sink strainer with each sink.

### Alternate Product as follows:

Bidding On:

Manufacturer Name: \_\_\_\_\_

Brand: \_\_\_\_\_

No.: \_\_\_\_\_

## 2.7 VERTICAL UTILITY CHASES (UMBILICALS)

- A. General:
1. Assemble and finish at point of manufacture. Perform unit assembly on precision jigs to provide units which are square and fully reinforced. Exposed fasteners are not acceptable. Paint interior surfaces before assembly.
  2. Dimensions and configuration of utility chases are indicated on Drawings.
- B. Fabrication

1. Material: 16 gauge steel sheet identical to that used in fabrication of metal casework.
  2. Fixed Panel: Form sides and back of utility chase as one-piece, wrap-around design with rear internal reinforcing channels. Return edges to form lip.
  3. Removable Panel: Fabricate one-piece front panel, with edges returned on four sides to form lip for rigidity. Reinforce internally with channels. Furnish fasteners that provide easy removal of panel and ready access to utility chase interior.
  4. Ceiling Shroud: Where required, provide collar at top of chase that projects through finished ceiling; secure to fixed panel.
- C. Finish: Paint utility chase with same finish system and color used for fume hoods.

## 2.8 OVERHEAD SERVICE TRUNK

- A. General:
1. Assemble and finish at point of manufacture. Perform unit assembly on precision jigs to provide units which are square and fully reinforced. Exposed fasteners are not acceptable. Paint interior surfaces before assembly.
  2. Provide cut-outs for utilities as shown on Drawings.
  3. Dimensions and configuration of trunk are 12"x12".
- B. Fabrication
1. Material: 16 gauge steel sheet identical to that used in fabrication of metal casework.
  2. Provide proper structure with angle iron to ensure there is zero movement when hung.
- C. Finish: Paint service trunk with same finish system and color used for the base cabinets.

## 2.9 PEGBOARD

- A. Acceptable manufacturers:
1. Inter Dyne Systems Model: Victoria V2430 w/Integral Drip Trough.
- B. Material:
1. Stainless Steel.

### Alternate Product as follows:

Bidding on: \_\_\_\_\_  
 Manufacturer Name: \_\_\_\_\_  
 Brand: \_\_\_\_\_  
 No.: \_\_\_\_\_

**2.10 METAL CHANNEL PIPE SUPPORTS**

- A. Acceptable manufacturers or equal:
1. Unistrut
  2. B-Line Systems, Inc.

**Alternate Product as follows:**

Bidding on: \_\_\_\_\_  
 Brand: \_\_\_\_\_  
 Manufacturer: \_\_\_\_\_  
 No.: \_\_\_\_\_

- B. Sizes: As shown on drawings.
- C. Provide nuts, bolts, general fittings, and accessories as required for a complete installation.
- D. Finish:
1. Exposed to view channels and part shall have epoxy powder coating.
    - a. Color shall match casework color.
  2. Concealed channels and parts shall have manufacturer's standard green enamel coating, similar to Unistrut Perma-Green coating.

**2.11 EPOXY COUNTERTOPS**

- A. Epoxy Lab work surface:
1. Countertop Fabrication: Fabricate with factory cutouts for sinks, holes for service fittings and accessories, and butt joints assembled with epoxy adhesive and concealed metal splines.
    - a. Countertop Configuration: Flat, 1 inch (25 mm) thick, with beveled edge and corners, and with drip groove and applied backsplash.
    - b. Countertop Construction: Uniform throughout full thickness.
    - c. Fabricate in largest sections practicable.
    - d. Fabricate with joints flush on the top surface.
  2. Fabricate with end splashes where against walls or cabinets.
  3. Splash Backs & End Splashes: Not less the 3/4" thick, 4" high, in max lengths.
  4. Reference Standard: Durcon or Epoxyn. Thickness: 1". All exposed surfaces and edges shall be finished.
  5. Colors: Blood Lab Area - White. All other new lab areas a combination of Gray and/or Green.

**Alternate Product as follows:**

Bidding on: \_\_\_\_\_  
 Brand: \_\_\_\_\_  
 Manufacturer: \_\_\_\_\_  
 No.: \_\_\_\_\_

**2.12 EPOXY RESIN SINKS**

- A. General:
1. Sizes: As shown on Drawing LF001 or manufacturer's closest stock size of equal or greater volume, as acceptable to VA Project Manager.
  2. Drain Outlet and Tail Piece: 1-1/2-inch diameter, 6-inch minimum length, fabricated of same material as sink wherever possible, or as otherwise acceptable to the VA Project Manager.
  3. Overflows: For each sink, except cup sinks, provide overflow of standard beehive or open top design with separate strainer; height 2 inches less than sink depth; same material as sink.
- B. Sink Fabrication: Molded in one piece with smooth surfaces, coved corners, and bottom sloped to outlet; 1/2-inch (13-mm) minimum thickness.
1. Furnish each sink with drain outlet, tailpiece, open end overflow, and gasketed stopper
  2. Provide sinks for under-counter mount installation.
- C. Sinks shall be furnished complete with support straps, sink outlet, tailpiece, and open end overflow.
- D. Provide a swivel sink strainer adapter with gasket, with each sink.
- E. Reference Standard: Durcon or Epoxyn. Thickness: 1". All exposed surfaces and edges shall be finished.

**Alternate Product as follows:**

Bidding on: \_\_\_\_\_  
 Brand: \_\_\_\_\_  
 Manufacturer Name: \_\_\_\_\_  
 No.: \_\_\_\_\_

**2.13 SERVICE FIXTURES AND FITTINGS**

- A. Plumbing fixtures and fittings to be supplied by Plumbing Contractor. Casework supplier/installer to coordinate with the General Contractor & the Plumbing Contractor installation and schedules.
- B. Electrical fixtures and fittings to be supplied by the electrical Contractor. Casework supplier/installer to coordinate with the General Contractor & the electrical Contractor installation and schedules.

**2.14 WALL SHELVING WITH VERTICAL POST STRUCTURE**

- A. Provide one piece vertical post 1-5/8" x 13/16" x 36" or 48" as required.

- B. The vertical post system shall be through secured to the wall material with fasteners to suit wall conditions. Coordinate wall backing with the General Contractor.
- C. The shelf bracket shall be 12" deep powder coated steel construction with reinforcing hat channels. Shelves shall be rated for a load of 180 lbs.
- D. Upper and lower horizontal supports rail on-wall shall span the length of the shelving to add support. Include rail covers for finish trim.

#### **2.15 MOBILE ADJUSTABLE WORK TABLES**

- A. Fabricate tables from metal skirting panels formed into 3" high heavy duty channel sections, and welded into a rigid frame construction. Notch corners and reinforce to receive (2") square metal tubular legs bolted securely in place. Provide leg with (3/8") leveling devices and slip-on type black PVC shoes.
- B. Construct mobile tables the same as the laboratory tables, except for the table legs which shall be designed to receive swivel casters.
- C. Caster tires shall be made of non-marring type urethane tires in gray color.
- D. Table Bracing: Table bracing members shall consist of (1") x (2") removable tube members, installed between legs according to two table bracing configurations. Removable bracing shall be mechanically fixed to concealed "U" shaped mounting tabs that are integral with each leg. Where called for, provide table braces welded to legs as a fixed rigid bracing system. This frame system shall allow for the suspension of future cabinets below the table top.
- E. Table legs Adjustable: The lower telescoping section of each leg shall be 304 16 gauge 2"x 2" tubular stainless steel construction and shall be pin height adjustable from 28-3/4" to 34-3/4".
- F. Table top material to match the casework table top material. Quantity as shown on the drawings.

### **PART 3 - EXECUTION**

#### **3.1 COORDINATION**

- A. Before installing casework, verify wall and floor surfaces covered by casework have been finished.

- B. Verify location and size of mechanical and electrical services as required.
- C. Verify reinforcement of walls and partitions for support and anchorage of casework.
- D. Verify Phasing Plan, install and provide for per the Phasing Plans.
- E. Install per all manufactures recommendations.

### 3.2 FASTENINGS AND ANCHORAGE

- A. Do not anchor to wood ground strips.
- B. Provide hat shape metal spacers where fasteners span gaps or spaces.
- C. Use 6 mm (1/4 inch) diameter toggle or expansion bolts, or other appropriate size and type fastening device for securing casework to walls or floor. Use expansion bolts shields having holding power beyond tensile and shear strength of bolt and breaking strength of bolt head.
- D. Use 6 mm (1/4 inch) diameter hex bolts for securing cabinets together.
- E. Use 6 mm (1/4 inch) by minimum 38 mm (1-1/2 inch) length lag bolt anchorage to wood blocking for concealed fasteners.
- F. Use not less than No. 12 or 14 wood screws with not less than 38 mm (1-1/2 inch) penetration into wood blocking.
- G. Space fastening devices 300 mm (12 inches) on center with minimum of three fasteners in 900 or 1200 mm (three or four foot) unit width.
- H. Anchor floor mounted cabinets with a minimum of four bolts through corner gussets. Anchor bolts may be combined with or separate from leveling device.
- I. Secure cabinets in alignment with hex bolts or other internal fastener devices removable from interior of cabinets without special tools. Do not use fastener devices which require removal of tops for access.
- J. Where units abut end to end anchor together at top and bottom of sides at front and back. Where units are back to back anchor backs together at corners with hex bolts placed inconspicuously inside casework.
- K. Where type, size, or spacing of fastenings is not shown or specified, show on shop drawings proposed fastenings and method of installation.
- L. Before installing countertops verify that wall surfaces have been finished as specified and that mechanical and electrical service locations are as required.

- M. Secure countertops to supporting rails of cabinets with metal fastening devices, or screws through pierced slots in rails. Where types, size or spacing of fastenings is not shown or specified, submit shop drawings showing proposed fastenings and method of installation. Use round head bolts or screws. Use epoxy or silicone to fasten the epoxy resin countertops to the cabinets.
- N. Sinks: Install molded resin sinks with epoxy compound to form watertight seal with underside of molded resin top.
- O. Install sink with not less than two channel supports with threaded rods and nuts at each end, expansion bolted to molded resin top.
- P. Design the sink support for twice the full sink weight.

### **3.3 CLOSURES AND FILLER PLATES**

- A. Close openings larger than 6 mm (1/4 inch) wide between cabinets and adjacent walls with flat, steel closure strips, scribed to required contours, or machined formed steel fillers with returns, and secured with sheet metal screws to tubular or channel members of units, or bolts where exposed on inside.
- B. Where ceilings interfere with installation of sloping tops, omit sloping tops and provide flat steel filler plates.
  1. Secure filler plates to casework top members, unless shown otherwise.
  2. Secure filler plates more than 150 mm (six inches) in width top edge to a continuous 25 by 25 mm (one by one inch) 0.889 mm thick steel formed steel angle with screws.
  3. Anchor angle to ceiling with toggle bolts.
- C. Install closure strips at exposed ends of pipe space and offset opening into concealed space.
- D. Paint closure strips and fillers with same finishes as cabinets.
- E. Caulk and seal laboratory furniture as specified in specs, JOINT SEALANTS.

### **3.4 CABINETS**

- A. Install in available space; arranged for safe and convenient operation and maintenance.
- B. Align cabinets for flush joints except where shown otherwise.
- C. Install all cabinets level with bottom of wall cabinets in alignment and tops of base cabinets aligned.
- D. Install corner cabinets with hinges on corner side with filler or spacers sufficient to allow opening of drawers.

- E. Plug Buttons:
  - 1. Install plug buttons in predrilled or prepunched perforations not used.
  - 2. Use chromium plate plug buttons or buttons finish to match adjacent surfaces.
  
- F. Cabinets: Ground to nearest cold water pipe in accordance with NFPA, Underwriters Laboratories, Inc., or other nationally recognized laboratory approved ground specified system.

**3.5 PROTECTION TO FIXTURES, MATERIALS, AND EQUIPMENT**

- A. Tightly cover and protect cabinets against dirt, water chemical or mechanical injury.
  
- B. Thoroughly clean interior and exterior of cabinets, at completion of all work.

END OF SECTION

**SECTION 14 70 00  
PNEUMATIC TUBE SYSTEMS**

**PART 1 GENERAL**

**1.1 DESCRIPTION**

- A. This work will provide one new VA station, one new transfer station and relocate the existing UW (University of Wisconsin) pneumatic tube station. The work shall provide for a new pneumatic tube station, transfer station and controls, modify the existing VA Laboratory Pevco Pneumatic Tubing System as needed. Relocate and re-utilize the existing UW SwissLog Translogic tube station system's equipment and controls.
- B. Work shall include all wall penetrations and related firestopping, rough-ins, core drilling, station installation, tube modification, transfer station installation, finish kit installation, tuning and testing, insulating (for sound), relocating existing VA pneumatic tubes, new transfer station and training of VA's personnel.
- C. The types and locations of the stations in this specification shall be as indicated on the drawings and shall be in strict accordance with the standards established by the Contractor.
- D. The Contractor shall work with the General Contractor and all trades to ensure coordination for the System right-of-way.
- E. To minimize disruption to the VA Lab. Off tour installation hours are required for the above ceiling tube installation for Phase 1B and transfer station tubing connections.

**1.2 QUALITY ASSURANCE**

- A. The Contractor shall verify the existing on-site material transport system for a minimum of (3) three days to determine anticipated peak hour traffic requirements which the proposed System modifications shall be designed. A riser diagram shall be included with the bid to support the proposed System modifications design plan.
- B. The Contractor shall regularly and presently manufacture, install and warrant the computer controlled material distribution equipment as specified herein as one of their principle products. The equipment furnished shall be the product of the Contractor and shall be installed by skilled mechanics under direct employment and supervision of the Contractor. No third party substitutions shall be involved in design, layout, installation, warranty efforts or service offerings. The Contractor shall have a quality assurance program in place, demonstrable to the VA Project Manager.
- C. The Contractor shall be totally responsible for the manufacture, installation and guarantee of the specified system.

- D. All electrical equipment shall be listed with Underwriter's Laboratory (UL) and all field wiring shall be in conformance with NEC requirements and local codes. UL listing shall be for all assemblies and components of assemblies. UL listing must be current prior to bid.

### **1.3 WORK INCLUDED IN THIS SECTION**

- A. The Contractor shall furnish and install all motor starters with properly sized thermal overload protection in each phase at the blower packages.
- B. The Contractor shall provide and install all low voltage control wiring and connections necessary for the proper operation of the System.

### **1.4 SUBMITTALS**

- A. Shop drawings which show (both new tube station, relocated UW tube station and existing tube station) routings on architectural floor plans, tubing riser diagram, electrical riser diagram, right-of-way, methods of suspending and anchoring tubing, station details, equipment locations and detailed dimensions of all major components. Tube routings shall be shown on VA-supplied architectural floor plan backgrounds in AutoCAD release 14.0 or higher and on full size paper copies.
- B. Contractor's marked literature showing illustrations, data and description of system to be furnished.

### **1.5 WARRANTY**

- A. The Contractor shall guarantee all components to be free from defects in material and workmanship, under normal use, for a period of 18 months.
- B. Defective material shall be repaired or replaced at the discretion of the Contractor, free of charge.
- C. Specifically excluded from this warranty are failures resulting from normal wear, improper operation, improper maintenance or lack of prescribed VA preventive maintenance of the system.
- D. Signed acceptance or use of the System by the VA shall commence the warranty period.
- E. All existing system modifications (VA & UW) and new stations shall be covered under the warranty

## **PART 2 PRODUCTS**

### **2.1 SYSTEM DESCRIPTION**

- A. The VA System includes a computer controlled Pevco pneumatic tube materials distribution system consisting of tubing, stations, transfer units, blower packages, carriers and a control center. The existing UW System includes a SwissLog Translogic tube station.

- B. The VA System shall be modified to include demolition, new and existing stations (zones) connected together by interzone tubes. The new station shall be connected to the System by a single tube to a new transfer unit. The UW and VA systems shall not be connected.
- C. If necessary, each zone shall include a blower and function independently.
- D. The dispatching, routing, and storage of carriers shall be directed by the system control center to provide automatic unattended transmission of carriers between any two stations.
- E. The System shall provide shortest route vacuum-pressure travel. Transactions within a zone shall turn around at the nearest transfer unit common to the origin and destination stations.
- F. To dispatch a carrier from a station, the operator shall place the latched carrier in the dispatcher, select the destination address and press the "Send" push-button at the station.
- G. Systems with more than one zone shall allow multiple carriers to be in transit simultaneously. The System modifications shall allow all station dispatchers to be loaded simultaneously, destinations to be selected and all transactions processed automatically until the System is clear.
- H. The System modifications shall consist of one (1) new, one (1) VA existing station and one (1) UW existing station.
- I. The modular design of the System components shall permit changes in the number of stations and/or zones as VA requirements change.
- J. Individual stations or zones added shall be able to be shut down without affecting the remainder of System.
- K. Destinations which are unavailable (non-existing, full, out-of-service) shall be rejected at the origination station. Prior to dispatch the route to the destination station shall be checked twice to ensure that all sections of the System involved in the transaction are operating properly.
- L. A transaction to a station that becomes unavailable after dispatch shall be rerouted to the origin station.
- M. Transactions in process or pending when any part of the System is signed off shall deliver to their destinations. Any new requests to send shall be rejected.
- N. If a power failure occurs, the system will continue to process carriers under UPS power and an advisory will be posted at the SCC. If UPS voltage drops below a programmable threshold, a second message will be posted at the SCC monitor and the system will automatically switch to

- Quick-off. All in-transit carriers will be processed to their destinations and all pending transactions will be cancelled.
- O. If power fails at a blower, transfer unit or station, the controls will identify that device as unavailable voiding all transactions which involve the affected device.
  - P. Each station shall be able to be individually assigned a schedule of events per day including; on/off times, send and receive priorities, carrier forwarding on/off and quantity of assigned carriers.
  - Q. Station sending and receiving and System priorities shall ensure that carriers are processed to their destinations in the shortest time.
  - R. Closed loop control shall verify via feedback loops that a command to a System component is properly executed before the next segment of the transaction is initiated.
  - S. A 115 VAC duplex receptacle and device on/off switch shall be provided at each station, transfer unit, exchanger and blower package.
  - T. The destinations available at each station shall be individually configurable at the system control center.
  - U. Stations shall be able to be individually scheduled to be able to dispatch but not receive carriers.
  - V. Each station, transfer unit, exchanger and blower shall include diagnostic capability at the unit.

## **2.2 EQUIPMENT**

- A. Line material:
  - 1. Tubing shall be 6" outside diameter, 16 gauge, cold rolled, electric welded steel, flash removed, degreased and hot dip galvanized.
  - 2. Bends shall be formed of same material on a center line radius of not less than 48 inches. The cross-section shall be free from wrinkles and distortions. No expanded bends shall be allowed in the System.
  - 3. All cut ends shall be square, deburred and mandreled round.
  - 4. Solid steel slip sleeves or split steel gasketed bolted sleeves shall be used for tubing joints. Split sleeves shall be used at all connections of serviceable equipment. All sleeves shall be of the same gage as the tubing.
  - 5. Slip joints shall be sealed with a suitable airtight compound.
  - 6. Tubing shall be supported with suitable hangers and supports as follows:
    - a. Minimum every ten (10) feet of straight tubing,
    - b. At every floor of vertical runs,
    - c. At each end of each bend, and

d. At equipment connections

7. Hangers shall be pre-threaded, zinc plated rod attached to the building structure. Tear-drop hangers fastened to the rod shall support the tubing.

B. Transfer Units:

1. Transfer units enable a transmission tube connection from one tube to any one of several tubes, providing the tubing network for routing carriers between stations.
2. Transfer units shall be installed with split sleeves and sway braced against motion.
3. Transfer units shall be located to allow for complete and clear access to service mechanical and electrical components.
4. The offset through the transfer unit shall be gradual using a curved tube section.
5. All transfer units component position sensing and carrier sensing shall be by electronic proximity sensors.
6. All visible metal surfaces shall be galvanized steel, aluminum, or finished with a factory painted electrostatically applied, baked-on, powder coat finish.
7. Transfer unit required to connect the new VA station and the existing VA Lab station.
8. Transfer units shall be provided as required in 1 to 2 ports, 1 to 4 ports and 1 to 6 ports.

C. Stations:

1. Stations shall consist of dispatch equipment; receive equipment and electrical controls enclosed in sheet metal housing.
2. Stations shall be up send, down receive.
3. All mechanical and electrical components shall be front accessible and removable for repair or replacement.
4. Electronic control units shall be solid state plug-in type for fast replacement and shall be interchangeable with units in other stations.
5. All component position sensing and carrier sensing shall be by electronic proximity sensors.
6. All visible metal surfaces shall be factory painted with an electrostatically applied, baked-on, powder coat epoxy. Bright metal finish parts shall be stainless steel, brushed aluminum or chrome plated.
7. The dispatcher shall hold one carrier at a time.
8. The receiver shall be independent of the dispatcher.

9. The dispatcher shall enable a carrier to be staged for dispatch while a carrier is incoming to a station.
10. When station's receiver becomes full, that station's receive and dispatch functions shall be disabled. A message on the station display and at the system control center shall indicate the full condition. The condition shall automatically reset upon carrier removal from receiver.
11. Stations shall provide air-cushioned carrier arrival at the receive slidegate.
12. Stations shall be capable of dispatching a seven pound payload.
13. Multiple address capability:
  - a. Multiple addresses enable a station to be shared by several departments. Each station shall have the capability for up to six discrete addresses.
  - b. Each address shall correspond to a remote personal indicator (RPI). An RPI is a recessed, wall mounted visual and audible signal device with reset switch, located remote from the station.
  - c. Carriers received via the automatic carrier redistribution feature shall not activate RPI's.
  - d. Stations with RPI's shall be located as follows.
    - 1) Station: Blood Bank.
    - 2) Remote indicator location: Lab - 2 places.
14. Station and remote carrier arrival indicators.
  - a. A remote indicator shall alert personnel at a location remote from the station that a carrier has arrived. The indicator shall include a visual indicator, audible signal and reset switch. The switch shall extinguish the light and silence the audible signal.
  - b. A station level indicator shall personnel that a carrier has arrived. The indicator shall include a visual indicator, audible signal and reset switch. The switch shall extinguish the light and silence the audible signal.
  - c. Stations with remote carrier arrival indicators shall be located as directed as follows:
    - 1) Station: Located in Blood Bank.
    - 2) Remote indicator location(s): 1 indicator light locations in the ceiling of the Laboratory on the same reset button.
15. Each station shall be equipped with one modular operator control panel per dispatcher.
  - a. The I.Q. operator control panel shall include:

- 1) A membrane keypad for destination and special function selection.
- 2) A liquid crystal display panel (LCD) with up to 8 lines of 40 characters each for message display. The LCD panel shall display:
  - a) The last destination selected.
  - b) Help menu selections.
  - c) A directory of stations.
  - d) Special functions.
  - e) Operator feedback information.
- 3) "Up" and "Down" arrow keys for scrolling through the LCD displays.
- 4) A "Send/Enter" key to activate the dispatch after destination selection or to enter data for special functions.
- 5) A "Cancel/Clear" key to allow for transaction cancellation or clearing of the display during special function activation.
- 6) An "Empty Send" key for surplus carrier redistribution.
- 7) A "Call Carrier" key to call an empty carrier from the carrier storage system (if equipped)
- 8) A "Track Carrier" key to track a transaction.
- 9) Up to six LED's for RPI visual indication.
- 10) Twelve programmable keys all of which can be used for one button addressing of high traffic stations or up to six of which can be used for resetting RPI's.
  - a) Keys shall be individually programmable per station.
  - b) Programming of keys can be done locally at the station or set at the system control center and download to the station.
    - 1) In addition to the destination, keys may also be programmed with a transaction attribute of "STAT", "SECURE", "PIN SECURE" or "SLOW" (if equipped with variable speed blowers.
  - c) The RPI audible signal can be reset at the RPI. The station and RPI LED's are reset at the station.
- 11) A "Carrier Returned" message and indicator to signal that a transaction was unable to be completed and the carrier was returned to its origin station.
- 12) A "Menu" key for selecting special functions.
  - a) Stat Transaction
  - b) Secure Transaction

- c) PIN Secure Transaction
  - d) Assign Carriers Present
  - e) Traffic Forwarding
  - f) Emergency Shutdown
  - g) Incoming Carrier Query
  - h) Station On/Off
  - i) Carrier Inventory Adjustment
  - j) Station Diagnostics
  - k) Audible Carrier Arrival
  - l) Audible Surplus Carriers
  - m) Audible Full Station
- 13) A "Station Directory" key for displaying a directory of station addresses.
- 14) Instructions for operating the station and special functions.
- 15) Discrete rejection messages to indicate:
- a) Dispatching station off
  - b) Dispatching station not in service
  - c) Selection full - try later
  - d) Selection does not exist
  - e) Selection scheduled off
  - f) Selection signed off
  - g) Selection not in service
  - h) Selection is secured
  - i) Selection not permitted
- 16) LCD message capability for the following conditions:
- a) A carrier is incoming to the station.
  - b) The station carrier count exceeds its assigned number, return surplus carriers.
  - c) The station is full, remove carriers from receiver.
  - d) The station is not receiving carriers; traffic is forwarded to another station.
  - e) Stations with I.Q. station control panels shall be located at locations as determined by the VA Project Manager.

D. Recessed single dispatcher stations:

1. Recessed single dispatcher stations shall include one dispatch chamber and an integral receive bin. The receive bin shall provide open storage nominally for seven carriers.
2. The station shall be designed to be wall recessed enabling all non-operator accessible equipment to be concealed behind walls. A trim

frame shall be provided to conceal the joint between the wall and the station housing.

3. To minimize damage, stations shall be installed in two phases; a housing in the initial stages of construction, and a mechanical/electrical finish kit after construction work in the area is substantially complete.
4. Recessed single dispatcher stations shall be equipped with locking access doors.
  - a. Doors are spring loaded, and self closing.
  - b. Locking action provided by an electromagnet.
  - c. Doors are controlled by the IQ control panel and are locked by default.
  - d. Doors are unlocked by entering an authorized PIN code or by swiping a valid security card (if station is equipped with a reader).
5. Recessed stations shall be located at locations as shown on the drawing (One in the new Blood Bank and one (UW) in the Reagent Storage area).

E. Carriers and liners:

1. Sealed carriers:
  - a. Provide 8 sealed carriers as follows.
    - 1) Clear molded plastic.
    - 2) Full access side opening.
    - 3) Bi-directional.
    - 4) Replaceable wear bands which also serve as the hinges.
    - 5) Easy open positive closure latches.
    - 6) Compression gasket which seals the carrier halves when closed.
    - 7) Capable of carrying: specimens, medications, x-ray film, 1,000 ml IV bags with up to 100 ml's additives.
    - 8) Specifically for use in Pevco's tube system.
    - 9) Carriers shall be equipped with RFID tags.
      - a) Two tags with identical serial numbers installed in each carrier.
      - b) Tags will be passive (batteryless)
      - c) Each carrier shall serial number shall be unique.
2. Provide 50 thin carrier liners for cushioning large items.
3. Provide 50 full carrier liners for cushioning small items.
4. Provide 50 Zip 'n Fold bags for immobilizing carrier contents.

F. Low voltage control cable:

1. Cable for System low voltage controls shall be plenum rated with minimum 22 gauge conductors. Cable shall be strapped to the transmission tubing at minimum 10' intervals.
2. Cable for low voltage System controls shall be minimum 22 gauge conductors and installed in conduit.

G. Existing System control center (SCC):

1. The existing SCC consists of a computer, monitor, keyboard, uninterruptible power supply, printer and software located at Room #B1078 (1<sup>st</sup> Floor, B-wing).

H. Interzone tubing connections in multiple zone systems shall:

1. Provide tube connections between zones, called interzone lines, for temporary storage and transfer of carriers between two (2) zones.
2. Provide for simultaneous carrier storage in interzone lines and independent zone operation.
3. Allow for more than one interzone line between any two zones to facilitate traffic flow.
4. Provide for alternate routing of carriers through intermediate zones.

### **2.3 SOUND DAMPENING**

- A. Provide 1-1/2 inch thick insulation, one-pound density flexible fiberglass with 0.0025-inch foil facing with joints taped on all new, all existing and all revised horizontal tube runs, to and from new and relocated transfer units and the UW station location related to this project.
- B. Install the sound damping on all new and existing tubes on the DB1 level.

## **PART 3 EXECUTION**

### **3.1 INSTALLATION**

- A. The modified System and components shall be assembled and installed in strict accordance with contract documents, applicable codes and regulations, approved shop drawings, and Contractor's recommendations.
- B. The modified System and components shall be anchored and fastened to building construction as required for a stable, secure installation. All exposed parts of the System and finish components shall be closely fit and joined to provide a neat uniform appearance.
- C. Coordinate all work with Phasing schedules, General and all sub-contractors.

### **3.2 SYSTEM TESTING AND ACCEPTANCE**

- A. Prior to a formal modified System performance test, the Contractor shall perform preliminary tests, verifying all components are in fully

operational condition for carrier dispatch and receive between all possible station combinations.

- B. The Contractor shall provide written notification to the Architect/Engineer thirty (30) days in advance of the scheduled modified System performance test. The Contractor shall provide all personnel, equipment and instruments required for such examination.
- C. In the presence of the Architect and the VA Project Manager, the Contractor shall perform all operational tests, inspecting modified System components and verifying that the equipment is installed and operating in proper condition, according to the intent of the contract.
- D. The VA Project Manager shall sign a written statement indicating that the modified System has been turned over and accepted by the VA Project Manager.
- E. The Contractor shall work and coordinate with the University of Wisconsin Hospitals for all work involving the UW Tube Stations' relocation process.

### **3.3 INSTRUCTIONS**

- A. Operator training:
  - 1. The Contractor shall train the VA's training staff on-site in the use and operation of the modified System. Training shall be provided for maintenance staff and well as lab staff.
- B. Maintenance training:
  - 1. Maintenance personnel as assigned by the VA Project Manager shall be trained on the job site in the proper maintenance and trouble shooting of the modified System.
- C. The Contractor shall provide operating and maintenance information in the following formats:
  - 1. One (1) read-only CD ROM.
  - 2. Three (3) paper copy manual.
  - 3. Included in the CD and manual shall be:
    - a. System components and part descriptions.
    - b. Starting and stopping procedures.
    - c. General operating instructions.
    - d. Specific maintenance and troubleshooting instructions.
    - e. Recommended service schedules for adjustment, lubrication and inspection.
    - f. Recommended spare parts inventory.
    - g. Warranty contact information.

D. The Contractor shall provide as-built shop drawings in the latest AutoCAD release and three (3) sets of paper copies for instruction and future reference by the VA Project Manager.

**3.4 EXCEPTIONS:**

A. Exceptions to be specifications shall be clearly identified in a separate proposal section entitled, "Exceptions to Specifications".

- - - E N D - - -



DEPARTMENT OF VETERANS AFFAIRS

# **Wm. S. Middleton Memorial V.A. Hospital**

Expand Clinical Lab / Project Number 607-13-106

**PROJECT MANUAL  
100% DELIVERABLE**

10 February 2014

Volume 2 of 2