



NURSE CALL RISER DIAGRAM  
SCALE : NONE

- NOTES:
1. SYSTEM CONDUITS ARE TO BE INSTALLED AS HIGH AS POSSIBLE ABOVE CORRIDOR CEILINGS AND TO EITHER SIDE OF CORRIDOR.
  2. PROVIDE PLASTIC BUSHING ON EACH CONDUIT TERMINATION.
  3. PROVIDE PULLCORD IN EACH EMPTY CONDUIT.
  4. ALL CABLING SHALL BE PLENUM RATED CABLE.
  5. \*\* INDICATED TO DELETE ROOM IF ALTERNATE IS CHOSEN.

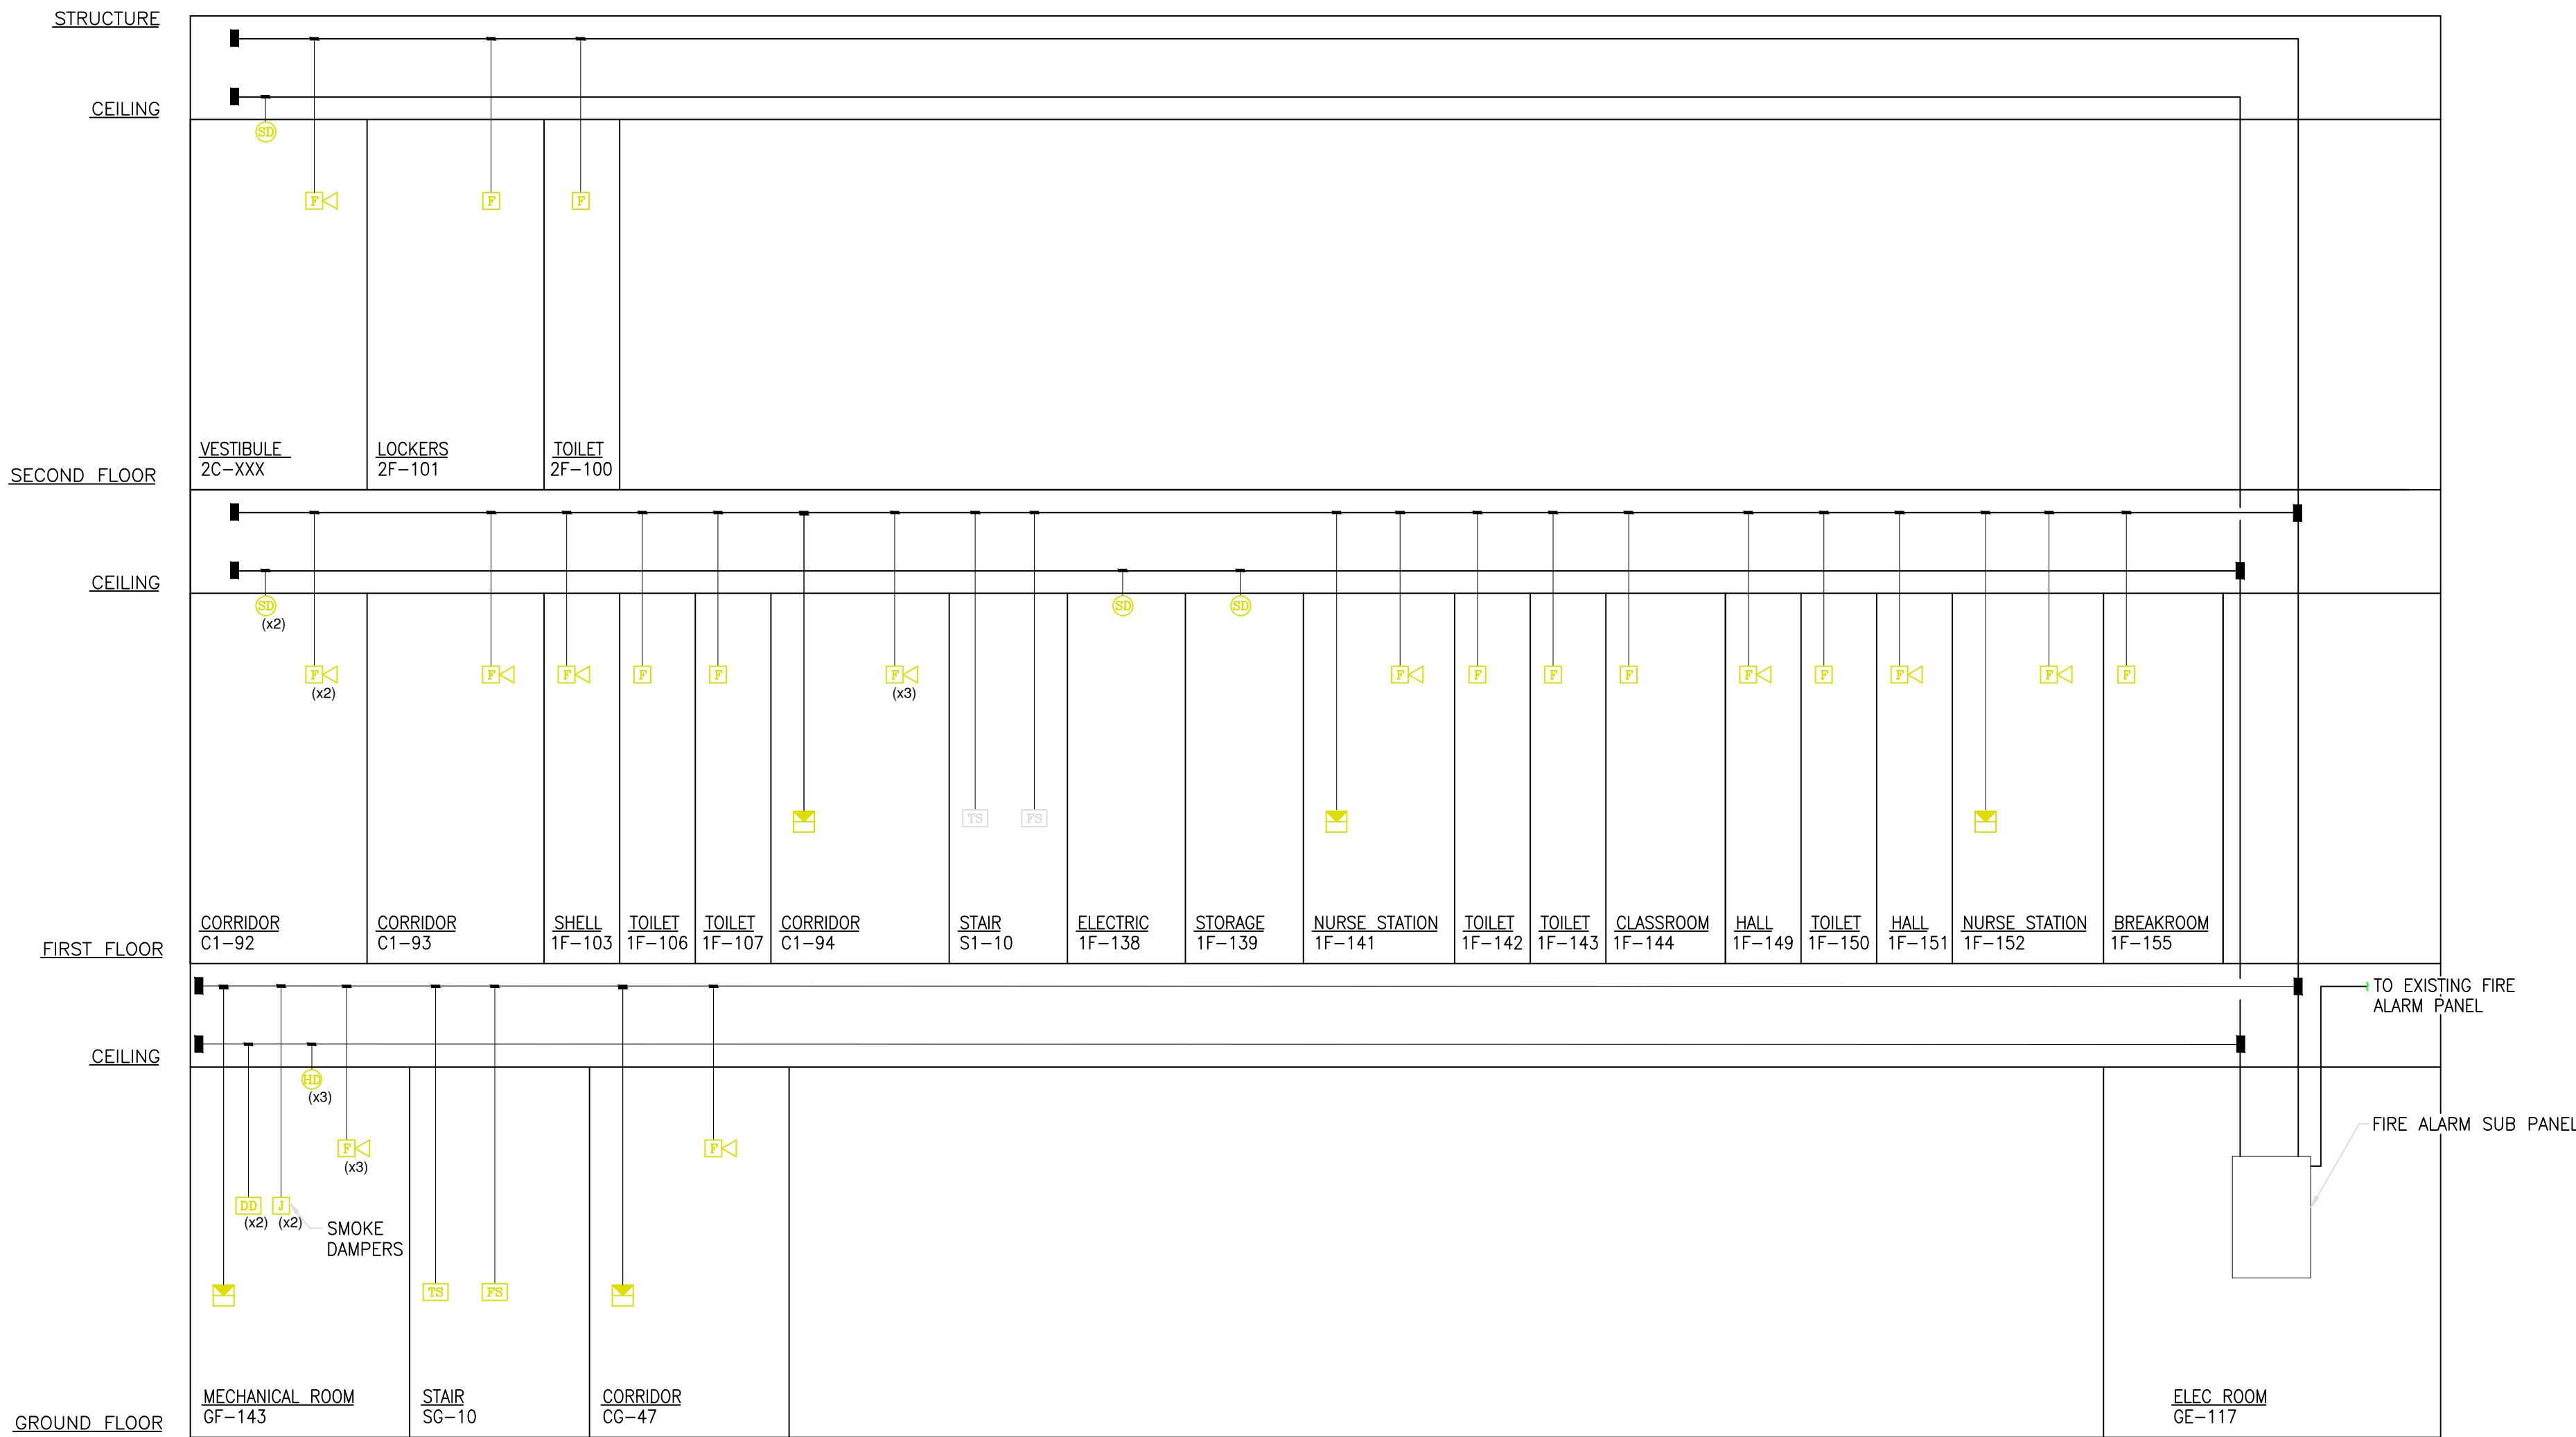

FIRE ALARM RISER DIAGRAM  
SCALE : NONE

- NOTES:
1. SYSTEM CABLES ARE TO BE INSTALLED ON CABLE SUPPORTS AS DETAILED
  2. SYSTEM CONDUITS ARE TO BE INSTALLED AS HIGH AS POSSIBLE ABOVE CORRIDOR CEILINGS AND TO EITHER SIDE OF CORRIDOR. STUB TO WITHIN 2'-0" OF A CABLE SUPPORT
  3. PROVIDE PLASTIC BUSHING ON EACH CONDUIT TERMINATION.
  4. PROVIDE PULLCORD IN EACH EMPTY CONDUIT.
  5. ALL CABLING SHALL BE PLENUM RATED CABLE.
  6. CONTRACTOR SHALL TIE SYSTEM INTO EXISTING FIRE ALARM PANEL. THIS SYSTEM IS MANUFACTURED BY EDWARDS AND IS A TYPE "EST-3" COORDINATE WITH OWNER AND TRIPLE "S" ALARM

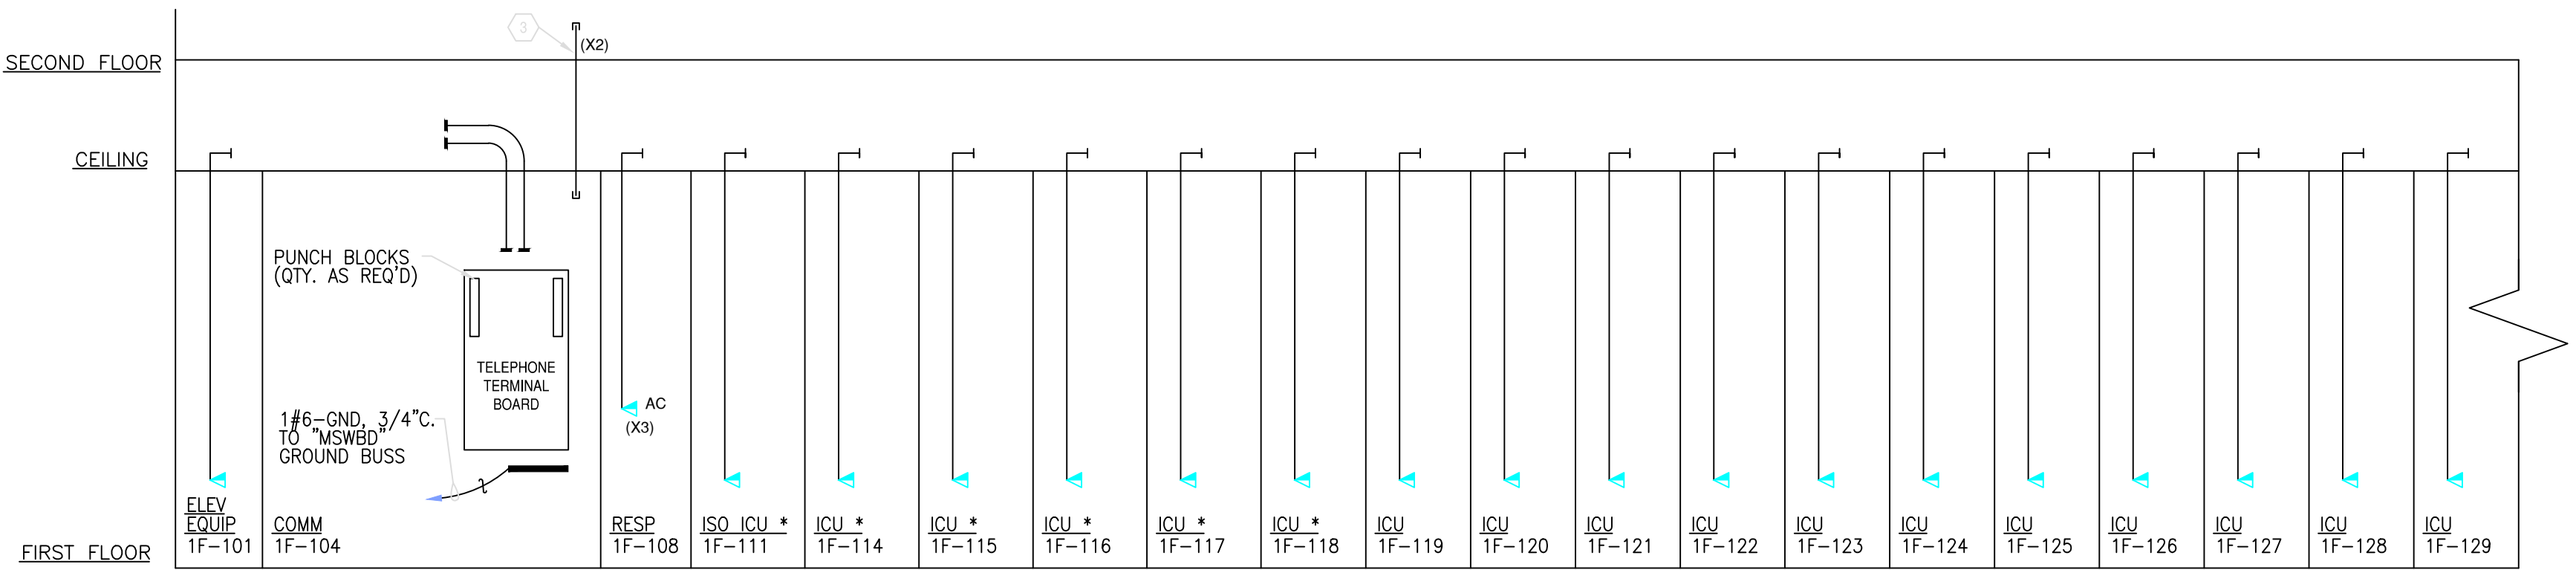


TELE/DATA RISER DIAGRAM  
SCALE : NONE

- RISER NOTES:
1. SYSTEM CABLES ARE TO BE INSTALLED ON SYSTEM CABLE SUPPORTS AS DETAILED.
  2. SYSTEM CONDUITS ARE TO BE INSTALLED AS HIGH AS POSSIBLE ABOVE CORRIDOR CEILINGS AND TO EITHER SIDE OF CORRIDOR. STUB TO WITHIN 2'-0" OF A CABLE SUPPORT.
  3. PROVIDE PLASTIC BUSHING ON EACH CONDUIT TERMINATION.
  4. PROVIDE PULLCORD IN EACH EMPTY CONDUIT.
  5. \*\*\* INDICATED TO DELETE ROOM IF ALTERNATE IS CHOSEN.
  6. HORIZONTAL CABLES AND BACKBONE CABLES BY OWNER.

KEYED NOTES:

- 1 2" SLEEVE IN SLAB FOR DATA CABLES. TAKE DIMENSIONS FROM ARCHITECTURAL PLANS.
- 2 DELETE 3 TELE/DATA OUTLETS IN THIS ROOM IF ALTERNATE IS CHOSEN.
- 3 2" SLEEVE.

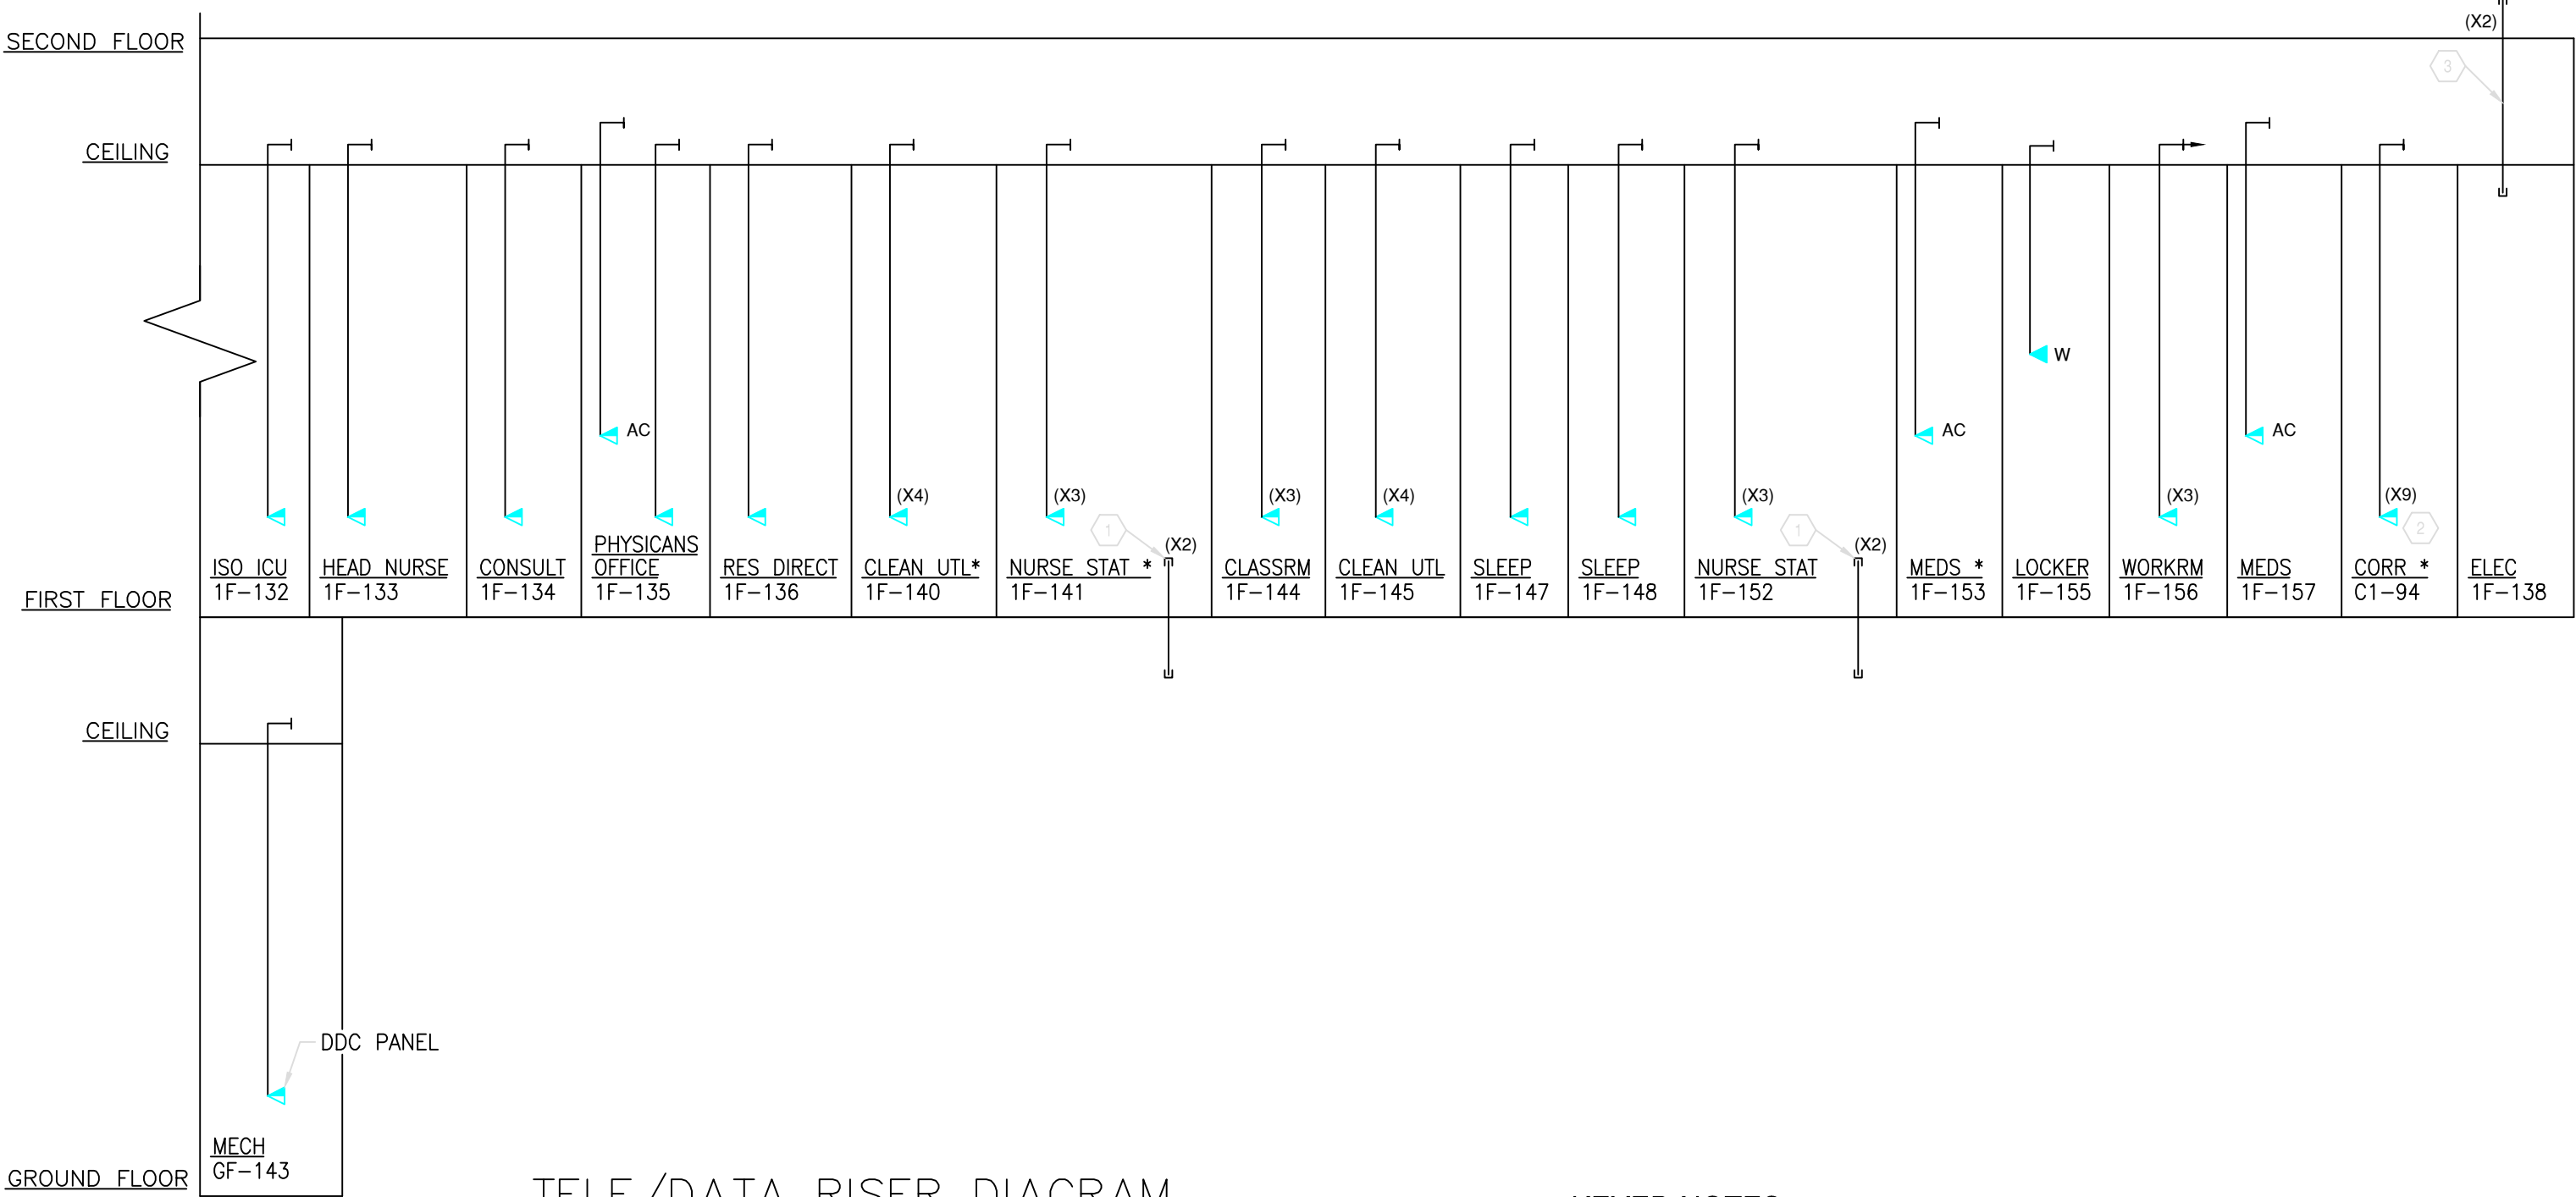

TELEVISION RISER DIAGRAM  
SCALE : NONE

- RISER NOTES:
1. SYSTEM CABLES ARE TO BE INSTALLED ON SYSTEM CABLE SUPPORTS AS DETAILED.
  2. SYSTEM CONDUITS ARE TO BE INSTALLED AS HIGH AS POSSIBLE ABOVE CORRIDOR CEILINGS AND TO EITHER SIDE OF CORRIDOR. STUB TO WITHIN 2'-0" OF A CABLE SUPPORT.
  3. PROVIDE PLASTIC BUSHING ON EACH CONDUIT TERMINATION.
  4. PROVIDE PULLCORD IN EACH EMPTY CONDUIT.
  5. \*\*\* INDICATED TO DELETE ROOM IF ALTERNATE IS CHOSEN.
  6. CONTRACTOR TO SUPPLY AND INSTALL THE DOUBLE FACEPLATE (DUPLEX RECEPTACLE AND F-PIN CONNECTOR FOR FLA CABLE TV CABLE ON SAME FACE PLATE), CABLE BY OWNER.
  7. HORIZONTAL CABLES AND BACKBONE CABLES BY OWNER.

REFERENCE DRAWING

Revisions	Date	Approved: Medical Center Director	Seals	TAGGART FOSTER-CURRENCE GRAY ARCHITECTS, INC. 4500 Burrow Drive North Little Rock, AR 72116 Phone: 501-758-7443 Fax: 501-753-7309 www.taggarch.com	Drawing Title <b>RISER DIAGRAMS - SYSTEMS</b>	Project Title <b>JLM MEMORIAL VETERAN'S HOSPITAL - EXPAND MICU</b>			Date <b>NOV 2013</b>
		Project No. <b>XXXXX</b>				Drawing No. <b>ES-6R</b>			
		Building Number <b>1-JLM</b>				Checked <b>JM</b>	Drawn <b>P&amp;D</b>		
		Location <b>CAVHS LITTLE ROCK, AR</b>				Dwg. 6 Of 7			