

A

I

W

I

C

I

C

I

11

I


11

11

11

L

three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
one quarter inch = one foot
three eighths inch = one foot
one eighth inch = one foot
one eighth inch = one foot

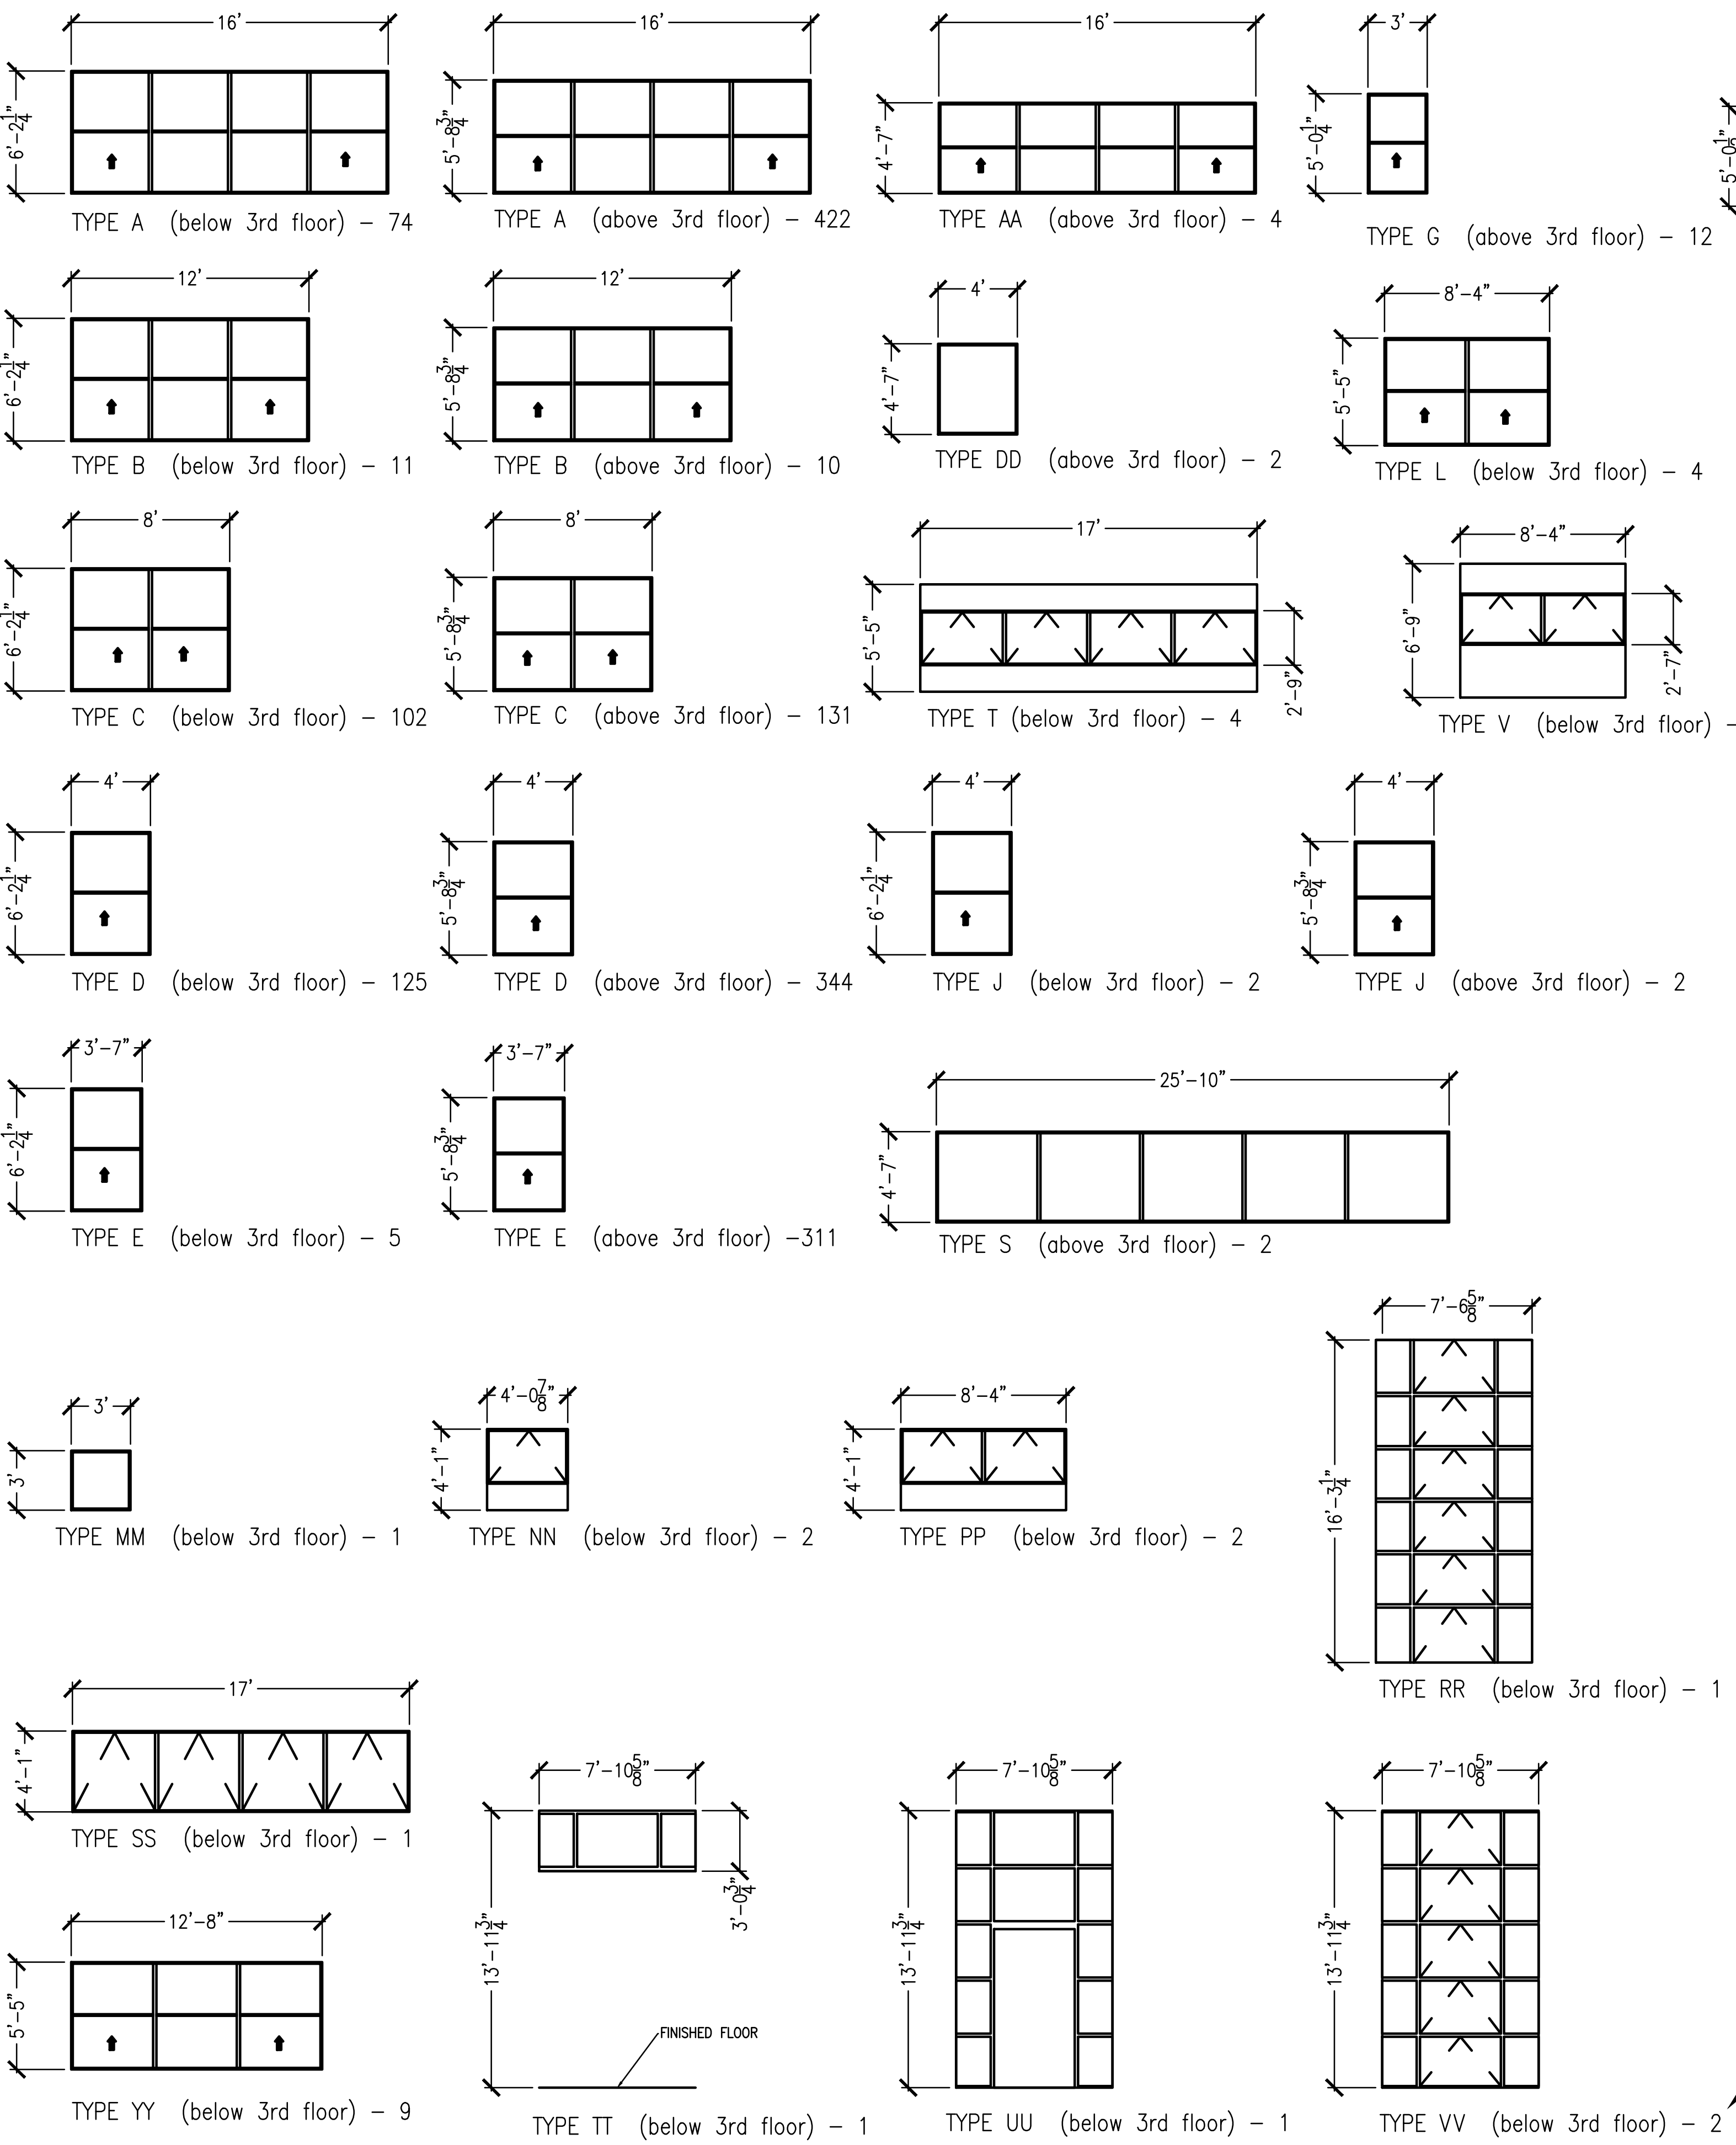


GENERAL NOTES:

1. WINDOW DETAILS SHOWN ARE TAKEN FROM THE STANDARD DETAILS BY THE LITEX WINDOW MANUFACTURING COMPANY. THESE MATERIAL DETAILS ARE FOR THE PURPOSE OF ESTABLISHING THE MINIMUM LEVEL OF QUALITY AND PERFORMANCE ONLY. OTHER MANUFACTURERS MAY BE USED IF THE PRODUCT MEETS OR EXCEEDS THE LITEX PRODUCT REQUIREMENTS AND CHARACTERISTICS, BUT MUST BE APPROVED BY THE CONTRACTING OFFICER OR HIS/HER TECHNICAL REPRESENTATIVE.
2. PROVIDE INSULATED GLAZING UNITS WHICH SHALL HAVE A NOMINAL 1" THICKNESS, SEALED GLASS UNIT CONSISTING OF 1/4" CLEAR ANNEALED EXTERIOR LITE, 1/2" AIRSPACE, AND 1/4" CLEAR ANNEALED INTERIOR LITE; UNLESS OTHERWISE DIRECTED BY THE COTR.
3. THE CONTRACTOR MUST FIELD VERIFY EXISTING CONDITIONS, DIMENSIONS AND QUANTITIES PRIOR TO ORDERING MATERIALS AND START OF WORK.
4. THE CONTRACTOR WILL NOT REMOVE MORE WINDOW UNITS THAN CAN BE REPLACED IN ONE DAY DURING NORMAL DUTY HOURS UNLESS APPROVED BY THE CONTRACTING OFFICER OR HIS/HER TECHNICAL REPRESENTATIVE.
5. WINDOW UNIT TYPES SHOWN INDICATE TYPE CONFIGURATION AND APPROXIMATE SIZES. CONFIRM OPERATION OF WINDOW TYPE PRIOR TO ORDERING MATERIALS.
6. FOR SAFETY, PROVIDE HARDWARE WHICH SECURES THE WINDOW AT A MAXIMUM OPENING OF 150MM (6 IN.) FOR EMERGENCY VENTILATION.
7. PROVIDE SCREENS ON OPERABLE WINDOWS. PROVIDE EXTRUDED ALUMINUM RESCREENABLE FRAMES WITH 18x16 CHARCOAL ANODIZED ALUMINUM MESH.


WINDOW SCHEDULE

NOT TO SCALE

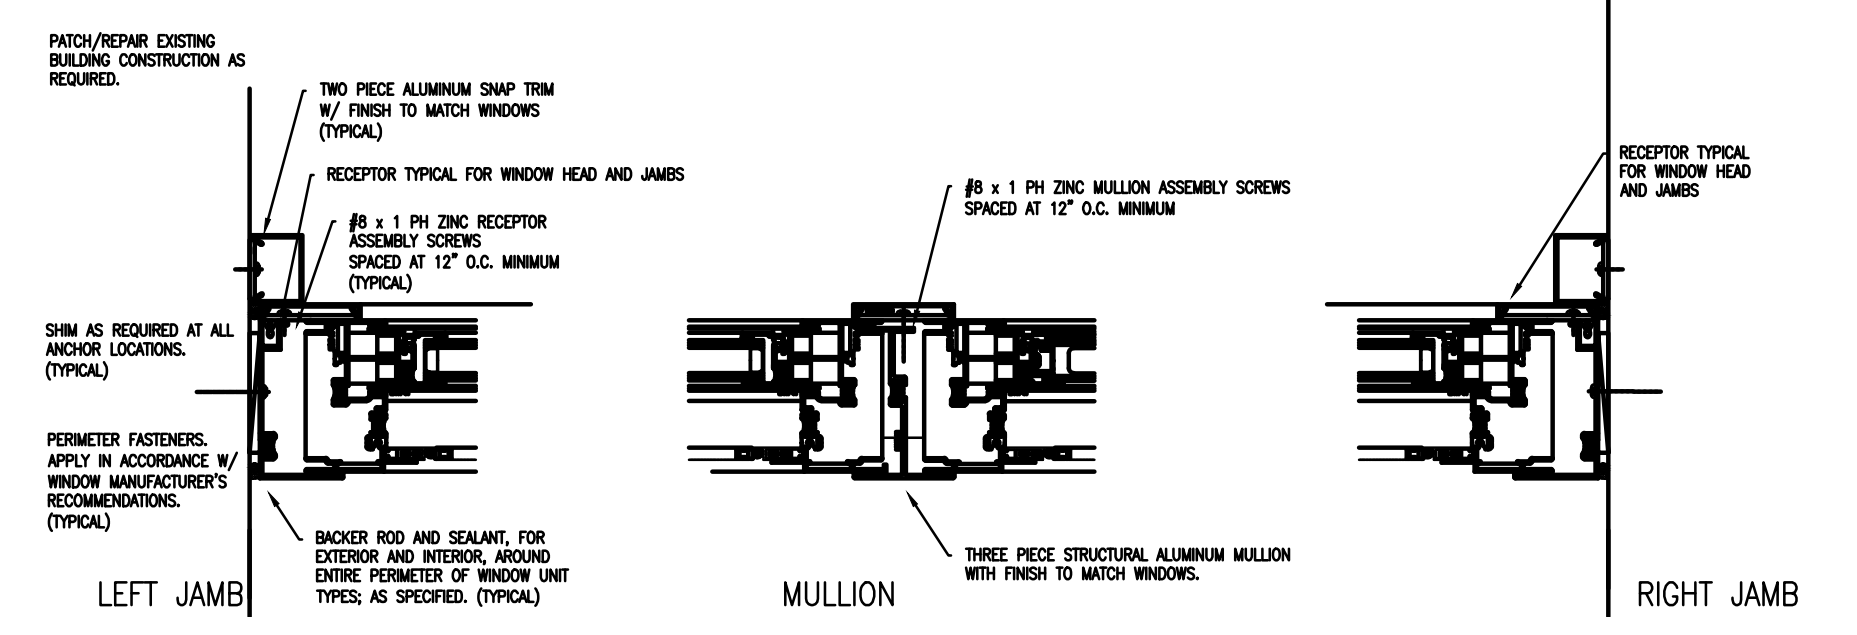


SINGLE HUNG WINDOW UNITS

NOT TO SCALE

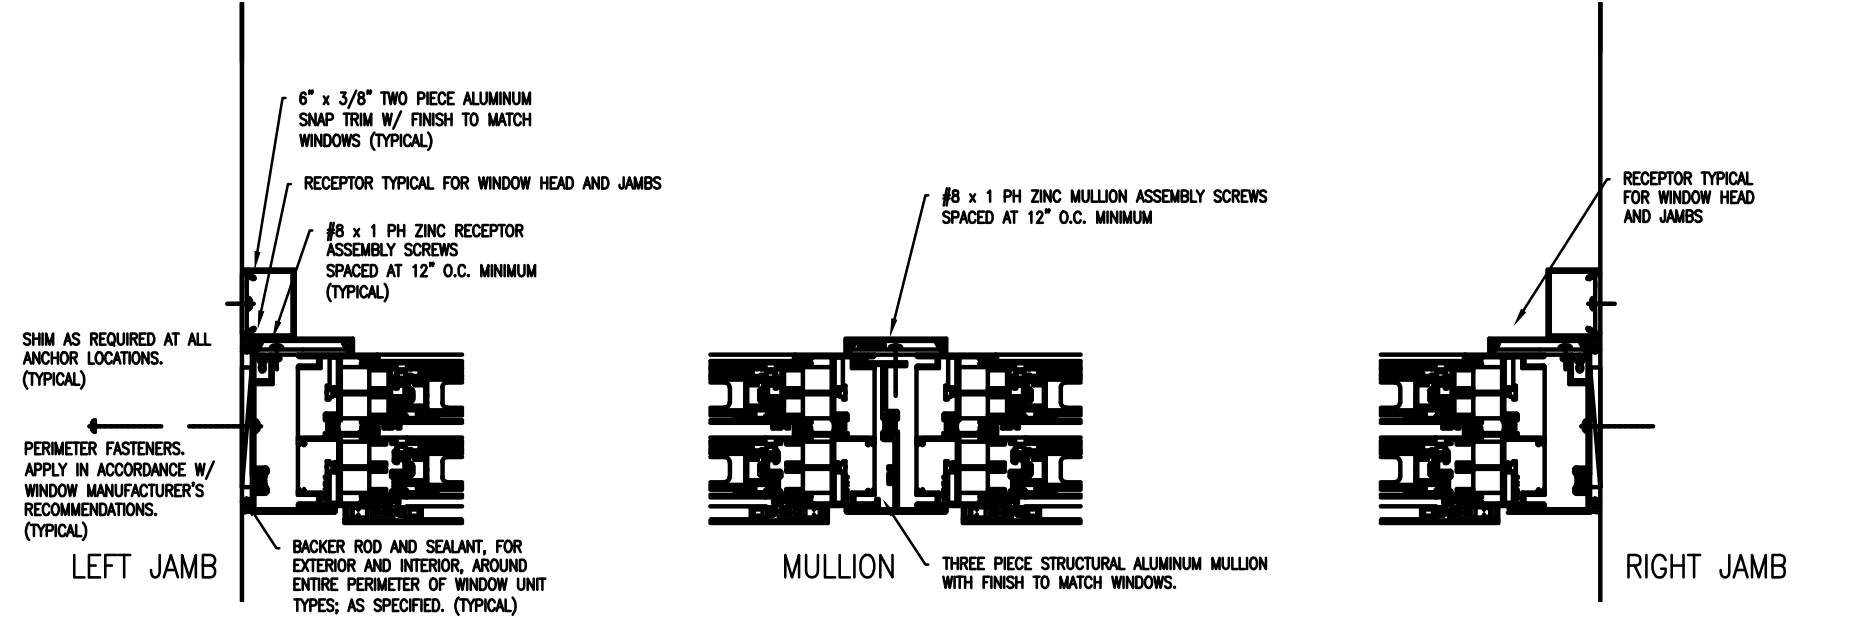


DOUBLE HUNG WINDOW UNITS

NOT TO SCALE

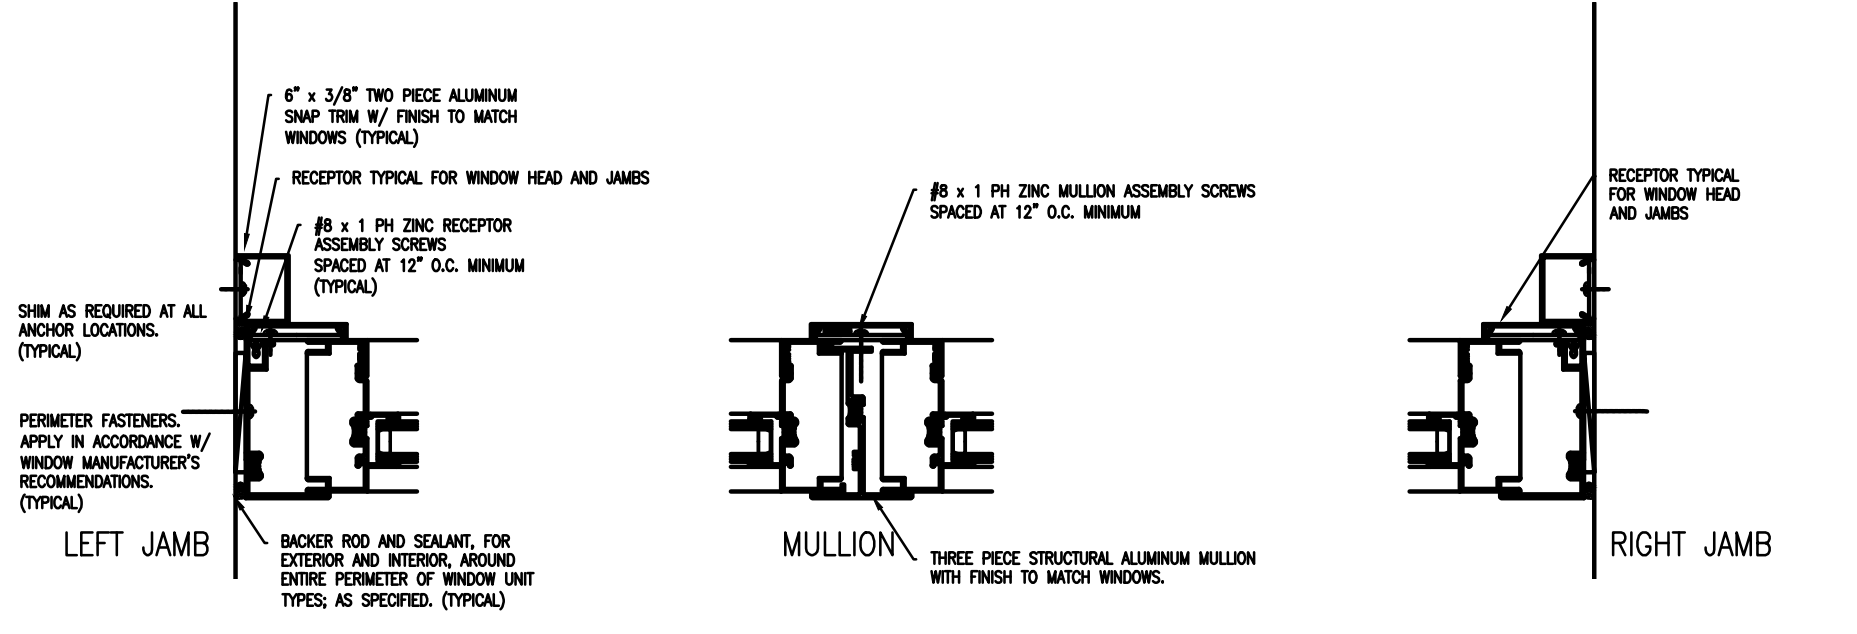

FIXED WINDOW UNITS

NOT TO SCALE

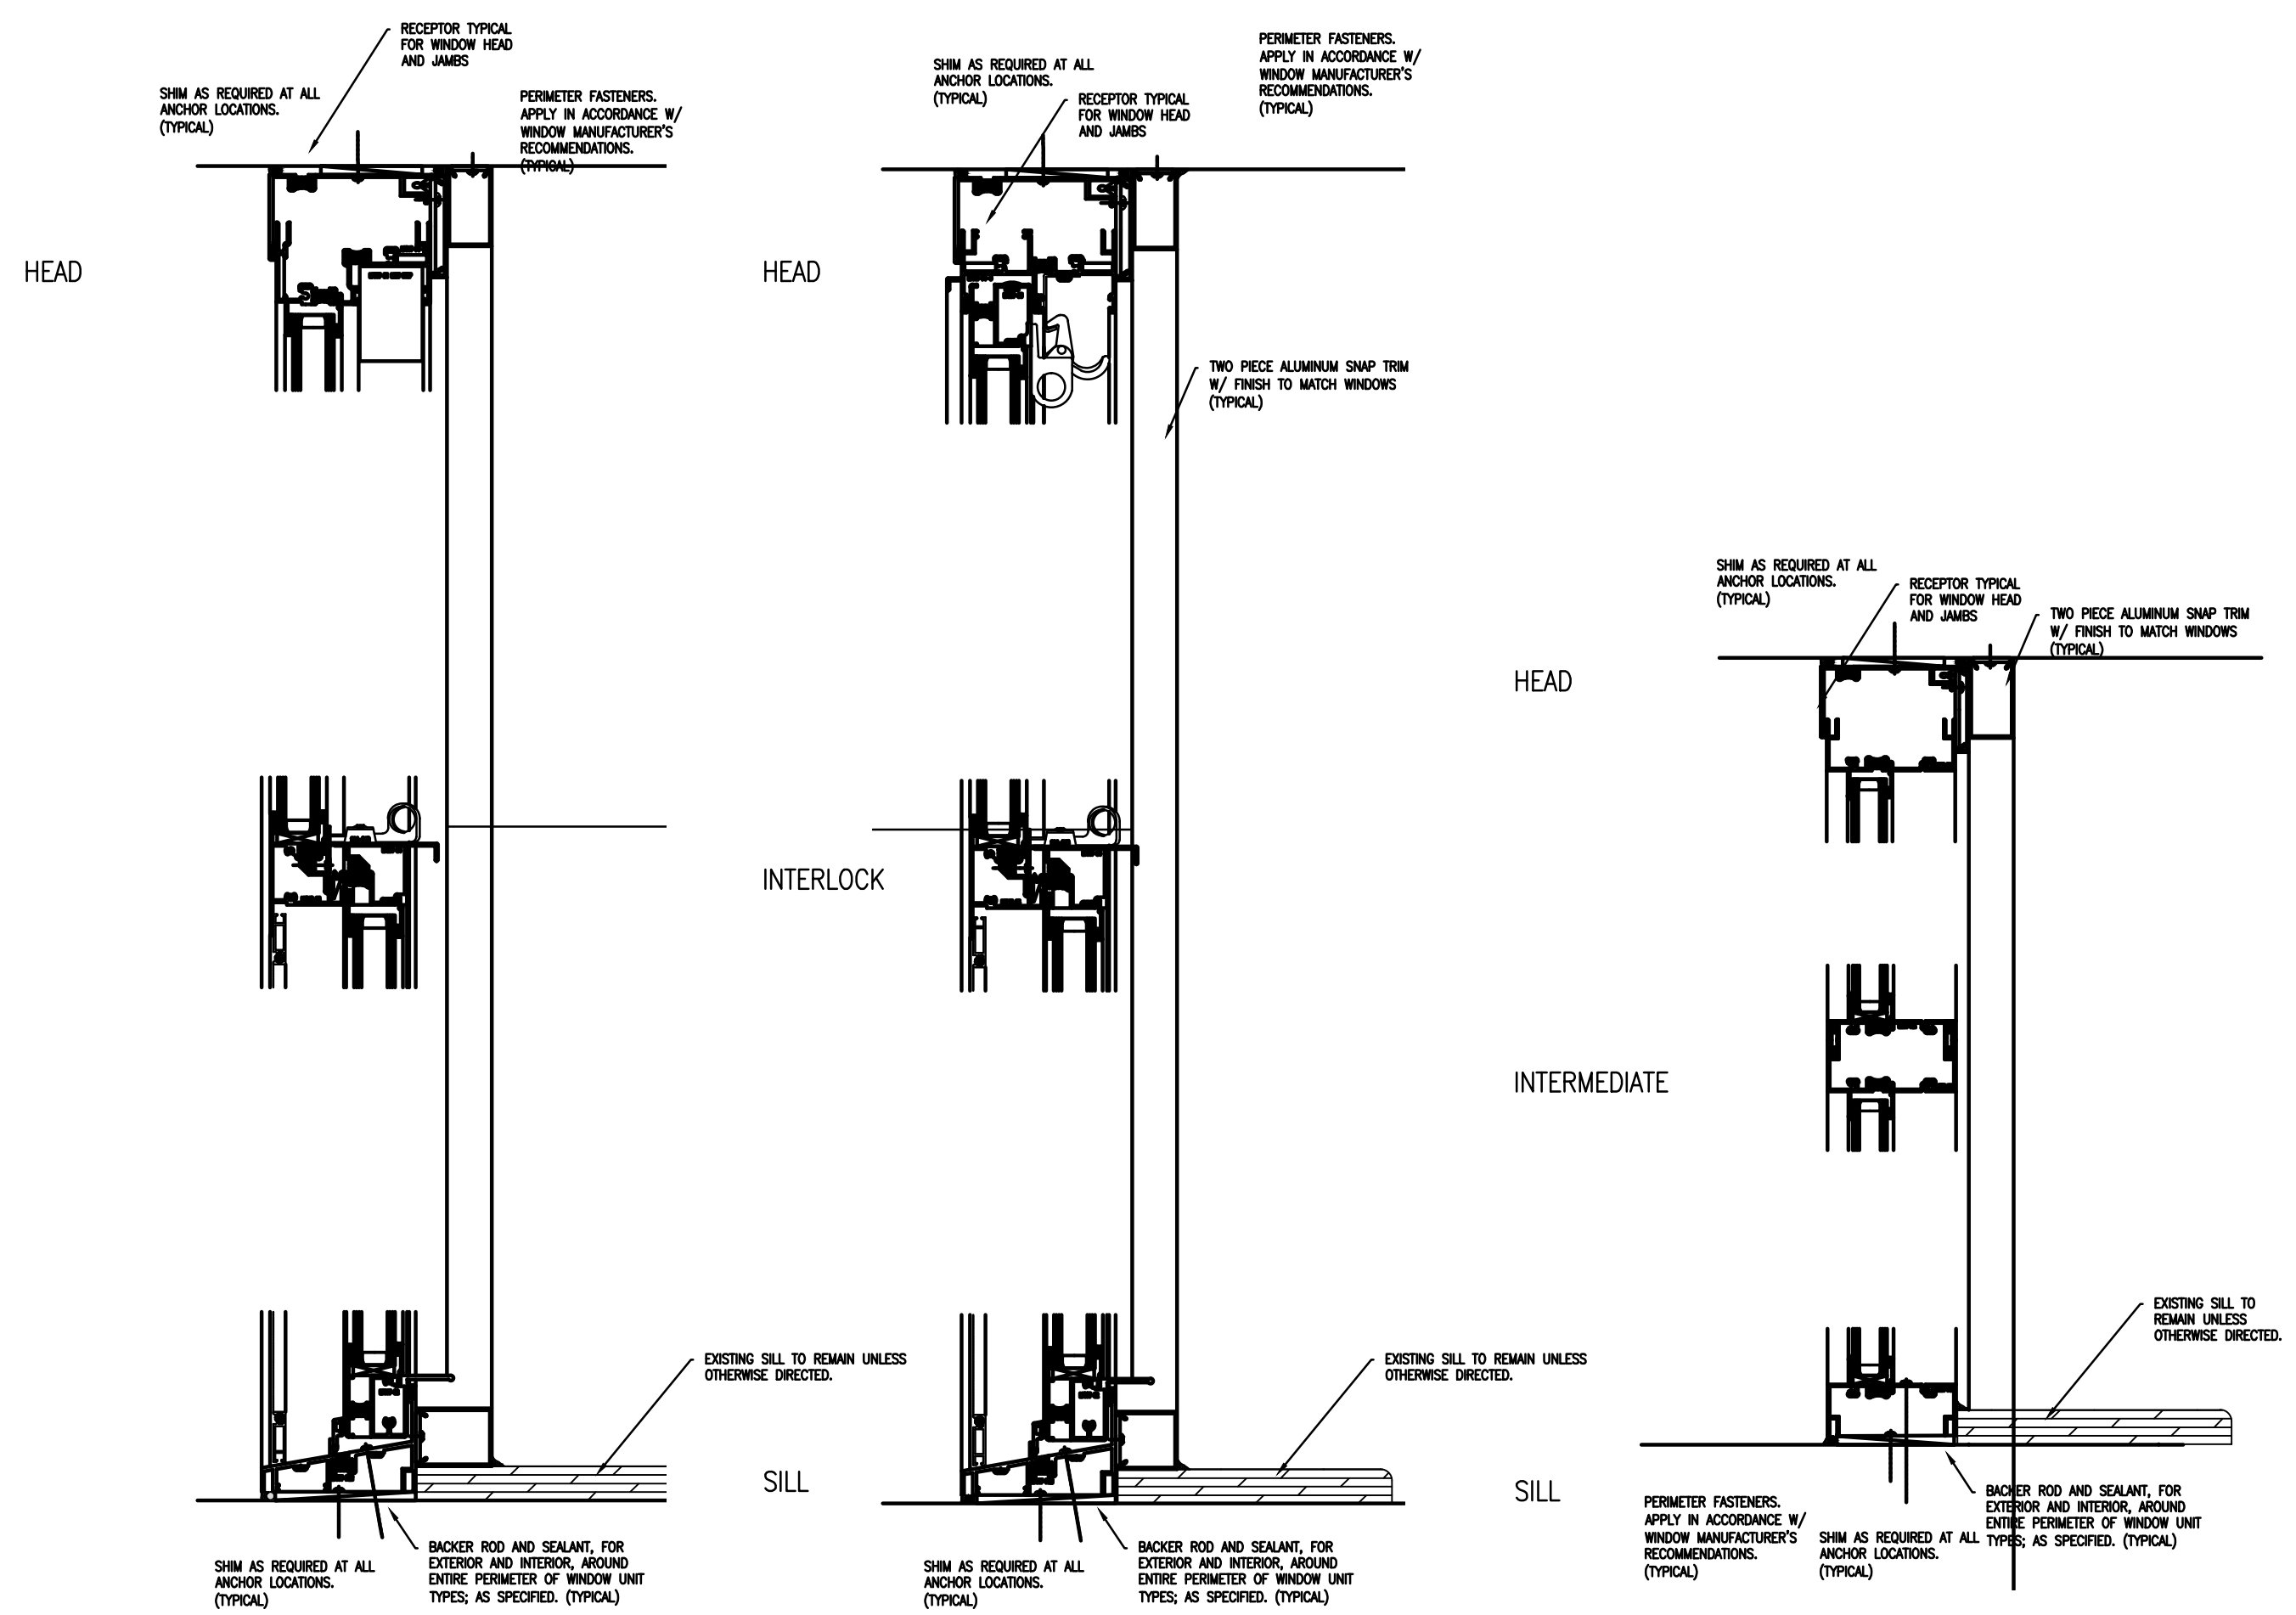

SINGLE HUNG UNITS
WINDOW DETAILS

DOUBLE HUNG UNITS

FIXED UNITS

NOT TO SCALE

ARCHITECT/ENGINEERS:		Stamp	Approved By Signatures	date	Drawing Title	Project Title	Project Number	Office of Construction and Facilities Management Department of Veterans Affairs
			Using Activity Program Manager	Fire Safety Officer	WINDOW TYPES and DETAILS	REPLACE WINDOWS, Phase IV	528A8-13-808	
			CM Manager	Environmental Services	Approved: FMS Manager	Location	Building Number	
			Interior Design	Energy Manager	date	Stratton VA Medical Center - Albany, NY	1	
			Infection Control	Care Service Line Supervisor	date	Date	Drawing Number	
			VA Police	CBM Coordinator	date	March 13, 2014	A-100	
			Information Systems	Industrial Hygiene	date	Checked	Dwg. 2 of 8	
					date	Drawn		
					date	TEL		