




Blanke•Aluminum Terrazzo Strip

Aluminum

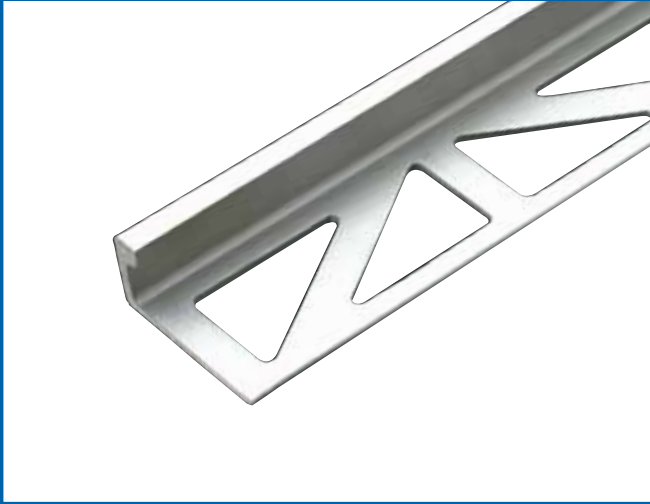

The Blanke•Aluminum Terrazzo Strip is specifically designed for specifications that call for the square top edge of a zinc strip for edging tile installations. Unlike zinc strips, the Blanke•Aluminum Terrazzo Strip is a durable aluminum extrusion designed for tile installation with large perforations in the setting leg thereby providing for adequate bonding of the tile to the substrate. With its right angled back, this versatile piece can also be used to trim installed tile that abuts new carpet.

Advice



- The Blanke•Da Bender, a tool used at the jobsite to bend the Blanke Bend-Ease profiles, is featured on page 73. Brass, aluminum and stainless steel in the length of 8' can be delivered with an extra cut in the setting leg for bending. To order, add a "S" to the end of the Part Number. (ex: 306-400-100S). The price for the Bend-Ease profiles is the standard list price per foot plus \$ 0.78.

Aluminum; natural

Length 8.0 feet

Pack: 10 pieces

h/in.	h/mm	Part No.
5/16	8.0	306-400-08025
3/8	10.0	306-400-10025
1/2	12.5	306-400-12525