


three inches = one foot  
one and one half inches = one foot  
one inch = one foot  
three quarters inch = one foot  
one half inch = one foot  
three eighths inch = one foot  
one quarter inch = one foot  
one eighth inch = one foot

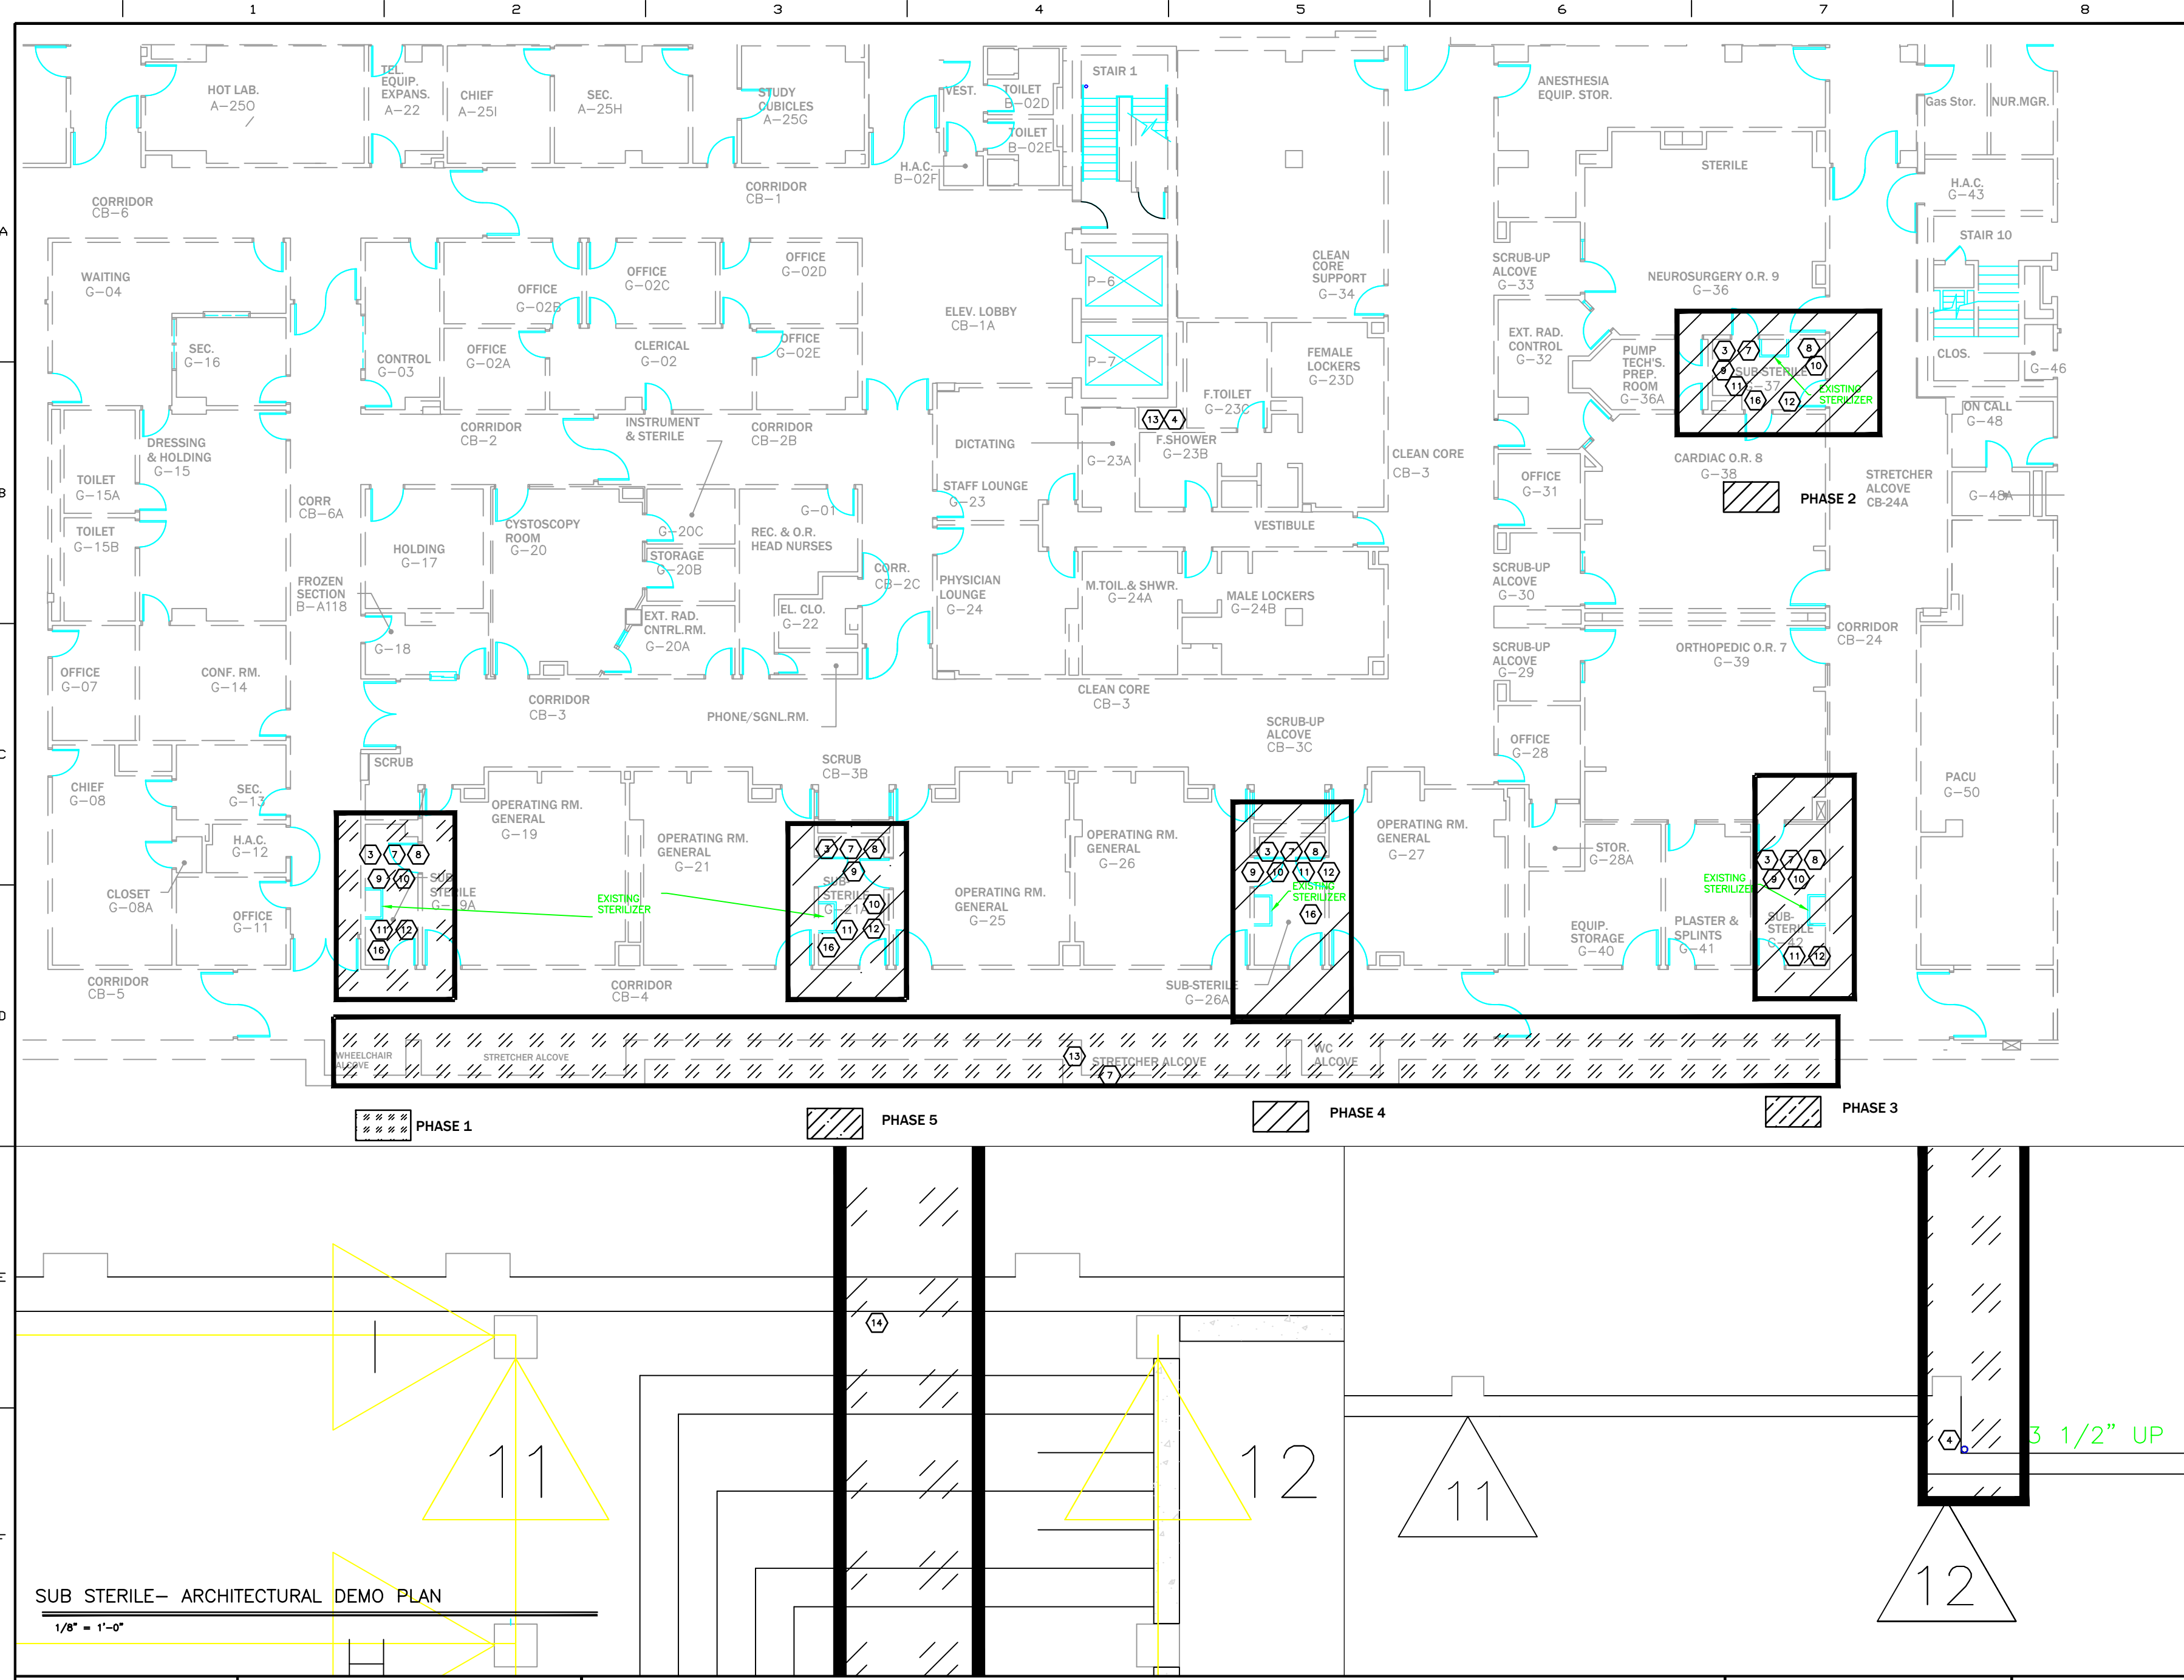

- ### GENERAL CONSTRUCTION NOTES
1. ALL NOTES ON OTHER SHEETS APPLY TO THIS SHEET ALSO.
  2. ALL DIMENSIONS ARE TO BE FIELD VERIFIED PRIOR TO CONSTRUCTION.
  3. INTENT IS THAT ALL EXISTING AND NEW SURFACES INCLUDING WALLS, SOFFITS, FASCIAS, BULK HEADS, AND HARD CEILINGS ARE TO RECEIVE NEW FINISHES, (SEE FINISH SCHEDULE) UNLESS NOTED OTHERWISE. REPAIR, PATCH CLEAN, AND PREPARE SURFACES BEFORE FINISHING. FOLLOW ALL VA SPECIFICATIONS AND MANUFACTURERS REQUIREMENTS AND RECOMMENDATIONS. DISMOUNT ALL WALL MOUNTED SIGNAGE, PLATES, FIXTURES, EQUIPMENT, HANDRAIL, BUMPER GUARDS, MISCELLANEOUS HARDWARE, ETC. AND REINSTALL AFTER PAINTING IS COMPLETE.
  4. PROVIDE BLOCKING BEHIND ALL WALL MOUNTED ITEMS, FIXTURES, GRAB BARS, ETC.
  5. CUT AND PATCH EXISTING WALLS TO CONCEAL ROUTING OF UTILITY SERVICES, PIPES, CONDUIT, ETC. UNLESS PROHIBITED BY CODES.
  6. FURRING OF UTILITIES, PIPES, CONDUIT, ETC. IS TO BE DONE BY THE MINIMUM DEPTH NECESSARY TO CONCEAL PIPES.

- ### ARCHITECTURAL PLAN KEYNOTES
- 1 THE SELECTIVE DEMOLITION WORK AND NEW CONSTRUCTION INCLUDES THE FOLLOWING:
    - 2 THE NOTED REMOVED ITEMS INCLUDE THE DISPOSAL OF THOSE ITEMS, UNLESS OTHERWISE SPECIFIED. THE SITE WORK/SELECTIVE DEMOLITION WORK ELEMENTS WILL BE PERFORMED ONLY TO THE EXTENT NECESSARY FOR THE PRODUCTION OF THE WORK. (TYPICAL)
    - 3 REMOVE THE EXISTING RECESSED FLUORESCENT LIGHTING. JUNCTION BOX TO BE REUSED. (TYPICAL)
    - 4 AT CORE DRILLED LOCATIONS, FILL THE VOIDS AROUND NEW CONDUIT, AND PIPE INSTALLATION WITH GROUT THAT HAS A FIRE RATING CONSISTENT WITH THE FIRE RATING OF THE PENETRATED FLOOR. SLEEVE ALL PENETRATIONS. (TYPICAL)
    - 5 FURNISH AND INSTALL CAULKING AND, WHERE APPLICABLE, FIRE RATED SEALANT COMPOUNDS AT THE WORK PENETRATIONS. THE FIRE RATED MATERIALS WILL BE CONSISTENT WITH THE FIRE RATING OF THE PENETRATED BUILDING COMPONENT. DO NOT USE CLEAR CAULK ABOVE CEILING. (TYPICAL)
    - 6 REPAIR EXISTING WALLS, CEILINGS, FLOOR AND ALL ASSOCIATED COMPONENTS THAT ARE TO REMAIN WHERE DAMAGED BY CONSTRUCTION. THIS INCLUDES DAMAGE DONE TO EXISTING SPACE BELOW. (TYPICAL)
    - 7 CUT AND PATCH EXISTING GYPSUM BOARD PARTITIONS TO CONCEAL ROUTING OF UTILITY SERVICES. PIPES, ETC. UNLESS OTHERWISE PROHIBITED BY CODES. (TYPICAL)
    - 8 LEVEL 5 GYPSUM FINISH IS REQUIRED ON ALL WALL PATCHES. (TYPICAL)
    - 9 WORK IN SUB-STERILE AND SHALL BE DONE ON WEEKENDS. CORRIDORS MUST BE CLEAN AND OPERATIONAL BY START OF BUSINESS ON NEXT MORNING. OR PERSONNEL MAY REQUIRE ADMITTANCE DURING WEEKEND WORK. O.R. WILL REMAIN OPEN DURING THE CONSTRUCTION.
    - 10 TEMPORARILY REMOVE CASEWORK OR EQUIPMENT THAT WILL PREVENT INSTALLATION OF UTILITIES OR NEW STERILIZER AND STORE.
    - 11 DEMO MINIMUM AMOUNT OF GYPSUM WALL BEHIND STERILIZER TO ALLOW FOR CONSTRUCTION.
    - 12 DEMO MINIMUM AMOUNT OF GYPSUM CEILING. ASSOCIATED FRAMING TO REMAIN FOR REUSE.
    - 13 DEMO GYPSUM WALL TO ALLOW FOR VERTICAL PIPE INSTALLATION.
    - 14 CORE DRILL FOUNDATION WALL IN SUB-BASEMENT FOR 3 1/2" PIPE PASS THROUGH.
    - 15 COORDINATE TERMINAL CLEAN UP WITH COR AND EMS FOR DAILY TERMINAL CLEANING FOR COMMON AREAS AND AT THE END OF EACH PHASE IN SUB-STERILE ROOMS.
    - 16 DEMO EXISTING FLOOR DRAIN.
    - 17 BID DEDUCT 2 GASKETED LIGHTS AND FLOOR DEMO

						<p>Project Title: O.R. STERILIZER SITE PREPARATION</p> <p>Drawing Title: ARCHITECTURAL DEMO PLAN</p> <p>Approved By: [Signature]</p> <p>Building Number: BLDG I</p>		<p>Date: 03-17-2014</p> <p>Project No.: 626-14-510</p> <p>Drawing No.: A5-391</p> <p>Page: 2 of 8</p>		<p>Department of Veterans Affairs</p>
<p>Revisions</p>		<p>Date</p>				<p>Location: VAMC, NASHVILLE, TN</p> <p>Checked By: X</p> <p>REN</p>				