






ARCHITECTURAL ABBREVIATIONS

A.F.F.	ABOVE FINISHED FLOOR
ACT	ACOUSTICAL CEILING TILE
ATH	ALUMINUM THRESHOLD
CG	CORNER GUARD
CLO	CEILING
COL	COLUMN
CONC	CONCRETE
CONT.	CONTINUOUS
CORR	CORRIDOR
CPT	CARPET
CT	CERAMIC TILE
ELEC	ELECTRIC (AL)
ELEV	ELEVATOR
ETR	EXISTING TO REMAIN
EWC	ELECTRIC WATER COOLER
EXIST	EXISTING
FIN	FINISHED
FOF	FACE OF FINISH
GT	GLASS TILE
GRT	GROUT
GWB	GYPSUM WALL BOARD
HDWR	HARDWARE
HDW	HARDWARE
HR	HOUR
HT	HEIGHT
L	LENGTH
LVT	LUXURY VINYL TILE
MAX	MAXIMUM
MECH	MECHANICAL
MIN	MINIMUM
MTG	MOUNTING
MTL	METAL
NIC	NOT IN CONTRACT
OFICI	OWNER FURNISHED CONTRACTOR INSTALLED
OFIO	OWNER FURNISHED OWNER INSTALLED
O.H	OVERHEAD
OFCI	CONTRACTOR FURNISHED CONTRACTOR INSTALLED
OFIO	CONTRACTOR FURNISHED OWNER INSTALLED
PLAM	PLASTIC LAMINATE
PNT	PAINT
PTD	PORCELAIN TILE
PT	PAINTED
R	RISER
RA	RETURN AIR
RB	RUBBER BASE
SIM	SIMILAR
SS	SOLID SURFACE
STOR	STORAGE
SUSP	SUSPENDED
SV	SHEET VINYL
T	TREAD
TR	TRIM
TYP	TYPICAL
VCT	VINYL COMPOSITIONAL TILE
VERT	VERTICAL
VP	VINYL PLANK
@	AT
C	CENTERLINE

ARCHITECTURAL LEGEND

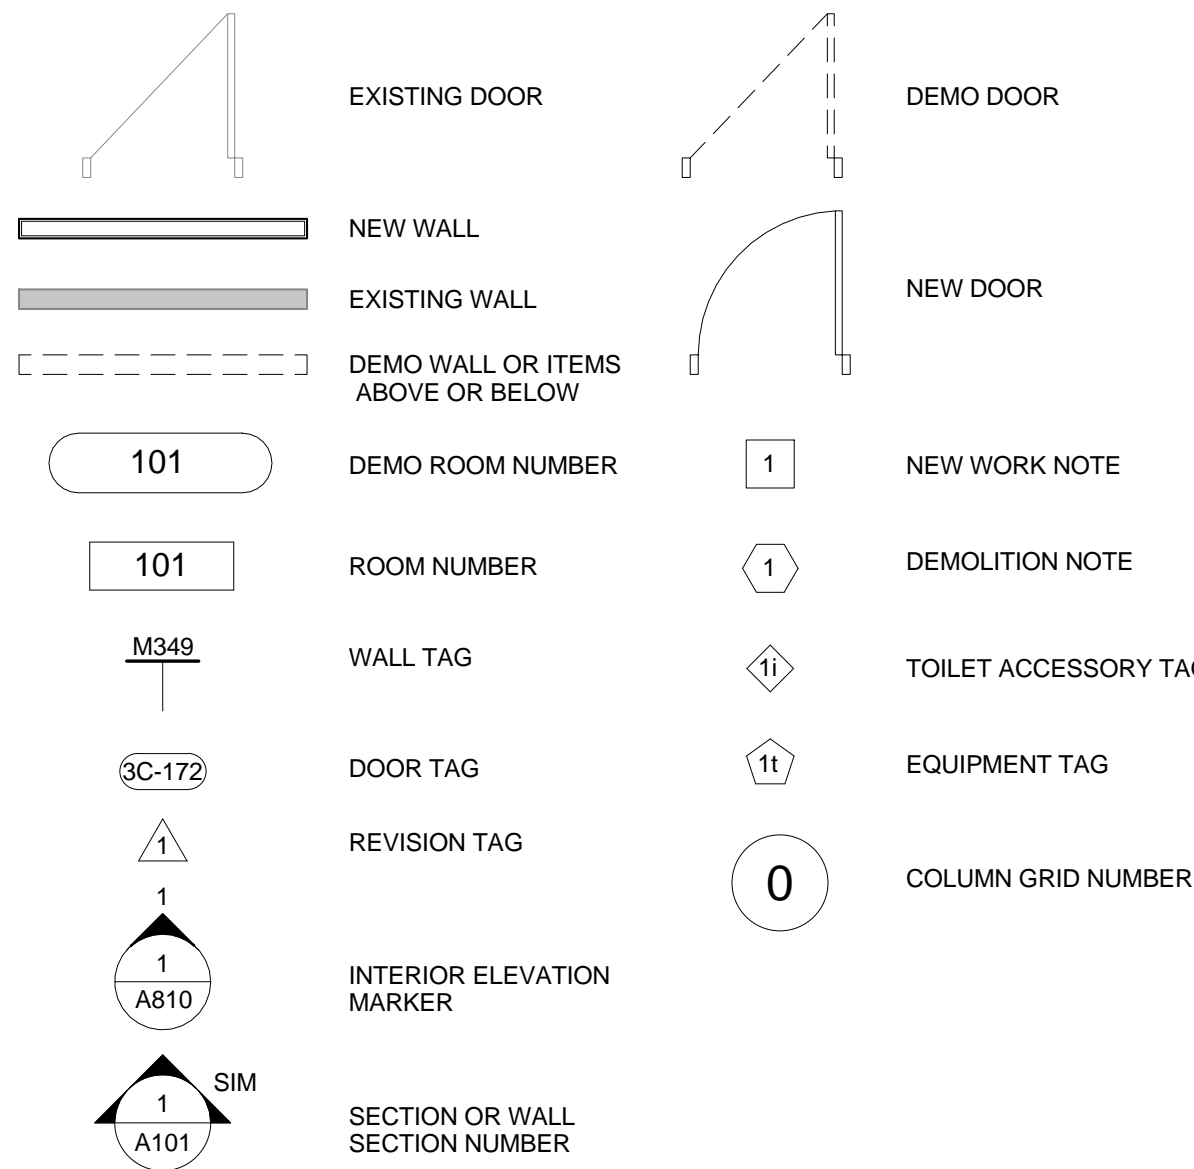

IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROVIDE THE FOLLOWING INFECTION CONTROL PRECAUTIONS DEPENDING UPON THE AREA CLASS DESIGNATION

	DURING CONSTRUCTION PROJECT	UPON COMPLETION OF PROJECT		DURING CONSTRUCTION PROJECT	UPON COMPLETION OF PROJECT
CLASS I	1. EXECUTE WORK BY METHODS TO MINIMIZE RAISING DUST FROM CONSTRUCTION OPERATIONS. 2. IMMEDIATELY REPLACE A CEILING TILE DISPLACED FOR VISUAL INSPECTIONS.		CLASS III	1. REMOVE OR ISOLATE HVAC SYSTEM IN AREA WHERE WORK IS BEING DONE TO PREVENT CONTAMINATION OF DUCT SYSTEM. 2. COMPLETE ALL CRITICAL BARRIERS, I.E. SHEETROCK, PLYWOOD, PLASTIC, TO SEAL AREA FROM NON-WORK AREA OR IMPLEMENT CONTROL CUBE METHOD (CART WITH PLASTIC COVERING AND SEALED CONNECTION TO WORK SITE WITH HEPA VACUUM FOR VACUUMING PRIOR TO EXIT) BEFORE CONSTRUCTION BEGINS. 3. MAINTAIN NEGATIVE AIR PRESSURE WITHIN WORK SITE UTILIZING HEPA EQUIPPED AIR FILTRATION UNITS. 4. CONTAIN CONSTRUCTION WASTE BEFORE TRANSPORT IN TIGHTLY COVERED CONTAINERS. 5. COVER TRANSPORT RECEPTACLES OR CARTS, TAPE COVERING UNLESS SOLID LID.	1. DO NOT REMOVE BARRIERS FROM WORK AREA UNTIL COMPLETED PROJECT IS INSPECTED BY THE ENVIRONMENTAL HEALTH AND SAFETY AND INFECTION CONTROL AND THOROUGHLY CLEANED BY ENVIRONMENTAL SANITATION SECTION. 2. REMOVE BARRIER MATERIALS CAREFULLY TO MINIMIZE SPREADING OF DIRT AND DEBRIS ASSOCIATED WITH CONSTRUCTION. 3. VACUUM WORK AREA WITH HEPA FILTERED VACUUMS. 4. WET MOP AREA WITH DISINFECTANT. 5. REMOVE ISOLATION OF HVAC SYSTEM IN AREAS WHERE WORK IS BEING PERFORMED.
CLASS II	1. PROVIDE ACTIVE MEANS TO PREVENT AIRBORNE DUST FROM DISPERSING INTO ATMOSPHERE. 2. WATER MIST WORK SURFACES TO CONTROL DUST WHILE CUTTING. 3. SEAL UNUSED DOORS WITH DUCT TAPE. 4. BLOCK OFF AND SEAL AIR VENTS. 5. PLACE DUST MAT AT ENTRANCE AND EXIT OF WORK AREA. 6. REMOVE OR ISOLATE HVAC SYSTEM IN AREAS WHERE WORK IS BEING PERFORMED.	1. WIPE WORK SURFACES WITH DISINFECTANT. 2. CONTAIN CONSTRUCTION WASTE BEFORE TRANSPORT IN TIGHTLY COVERED CONTAINERS. 3. WIPE WORK SURFACES WITH DISINFECTANT, WET MOP AND/OR VACUUM WITH HEPA VACUUM BEFORE LEAVING WORK AREA. 4. REMOVE ISOLATION OF HVAC.	CLASS IV	1. OBTAIN INFECTION CONTROL PERMIT BEFORE CONSTRUCTION BEGINS. 2. ISOLATE HVAC SYSTEM IN AREA WHERE WORK IS BEING DONE TO PREVENT CONTAMINATION OF DUCT SYSTEM. 3. COMPLETE ALL CRITICAL BARRIERS OR IMPLEMENT CONTROL CUBE METHOD BEFORE CONSTRUCTION BEGINS. 4. MAINTAIN NEGATIVE AIR PRESSURE WITHIN WORK SITE UTILIZING HEPA EQUIPPED AIR FILTRATION UNITS. 5. SEAL HOLES, PIPES, CONDUITS AND PUNCTURES APPROPRIATELY. 6. CONSTRUCT ANTEROOM AND REQUIRE ALL PERSONNEL TO PASS THROUGH THIS ROOM SO THEY CAN BE VACUUMED USING A HEPA VACUUM CLEANER BEFORE LEAVING WORK SITE OR THEY CAN WEAR CLOTH OR PAPER COVERALLS THAT ARE REMOVED EACH TIME THEY LEAVE THE WORK SITE. 7. ALL PERSONNEL ENTERING WORK SITE ARE REQUIRED TO WEAR SHOE COVERS.	1. DO NOT REMOVE BARRIERS FROM WORK AREA UNTIL COMPLETED PROJECT IS THOROUGHLY CLEANED BY ENVIRONMENTAL MANAGEMENT. 2. VACUUM WORK AREA WITH HEPA FILTERED VACUUMS. 3. WET MOP AREA WITH DISINFECTANT. 4. REMOVE BARRIER MATERIALS CAREFULLY TO MINIMIZE SPREADING OF DIRT AND DEBRIS ASSOCIATED WITH CONSTRUCTION. 5. CONTAIN CONSTRUCTION WASTE BEFORE TRANSPORT IN TIGHTLY COVERED CONTAINERS. 6. COVER TRANSPORT RECEPTACLES OR CARTS, TAPE COVERING. 7. REMOVE ISOLATION OF HVAC SYSTEM IN AREAS WHERE WORK IS BEING PERFORMED.

PATIENT RISK GROUP TABLE

GROUP 1 LOW RISK	GROUP 2 MEDIUM RISK	GROUP 3 HIGH RISK	GROUP 4 HIGHEST RISK
- ADMINISTRATIVE OFFICES - PUBLIC CORRIDORS - ELEVATORS - DAY ROOMS - CANTEN RETAIL STORE - VACANT WARDS OR VACANT ICUS ETC.	- OUTPATIENT, URGENT CARE & PRIMARY CARE CLINICS - LABORATORY - CARDIOLOGY - ECHOCARDIOGRAPHY - ENDOSCOPY - FOOD SERVICES - INTERIM CARE & MEDICAL UNITS - NUCLEAR MEDICINE - PHARMACY - PHYSICAL THERAPY - RADIOLOGY & NUCLEAR MEDICINE - RESPIRATORY THERAPY	- CCU - EMERGENCY ROOM - LABORATORY - OUTPATIENT SURGERY - PHARMACY - POST ANESTHESIA CARE UNIT - SURGICAL UNITS	- ANY AREA CARING FOR IMMUNOCOMPROMISED PATIENTS - SPD STORAGE / STERILIZATION - INTENSIVE CARE UNITS - TB NEGATIVE PRESSURE ISOLATION ROOMS - OPERATING ROOM


INFECTION CONTROL MATRIX - CLASS OF PRECAUTIONS: CONSTRUCTION PROJECT BY PATIENT RISK

	CONSTRUCTION PROJECT TYPE			
PATIENT RISK GROUP	TYPE A	TYPE B	TYPE C	TYPE D
LOW RISK GROUP 1	I	II	II	III/IV
MEDIUM RISK GROUP 2	I	II	II	IV
HIGH RISK GROUP 3	I	II	III/IV	IV
HIGHEST RISK GROUP 4	II	III/IV	III/IV	IV

NOTE: INFECTION CONTROL APPROVAL WILL BE REQUIRED WHEN THE CONSTRUCTION ACTIVITY AND RISK LEVEL INDICATE THAT CLASS III OR CLASS IV CONTROL PROCEDURES ARE NECESSARY.

Infection Control Risk Mitigation Recommendations Matrix of Precautions for Construction and Renovation

Type of Construction / Project Activity Table	
TYPE A	Inspection and Non-Invasive Activities Includes, but is not limited to: -Removal of ceiling tiles for visual inspection limited to 20 Lx Ft tile per 160 sq. ft. space. -Painting (but not sanding). -Wall covering, electrical trim work, minor plumbing, and activities which do not generate dust or require cutting of walls or access to ceilings other than for visual inspection. -Patching walls - not exceeding 8 sq. ft.
TYPE B	Small scale, short duration activities which create minimal dust. Includes, but is not limited to: -Installation of telephone and computer cabling. -Access to chase spaces. -Cutting of walls or ceiling where dust migration can be controlled. -Patching walls - exceeding 8 sq. ft.
TYPE C	Work that generates a moderate to high level of dust or requires demolition or removal of any fixed building components and assemblies or new construction. Includes, but is not limited to: -Sanding of walls for painting or wall covering exceeding 32 sq. ft., or vacant areas. -Removal of floor coverings, ceiling tiles and casework. -New wall construction -Uncontained duct, HVAC or electrical work above ceilings. -Major cabling activities. -Any other project where high levels of dust are generated.
TYPE D	Major demolition and construction projects Includes, but is not limited to: -Activities that require consecutive work shifts -Requires heavy demolition or removal of a complete cabling system. -New Construction.

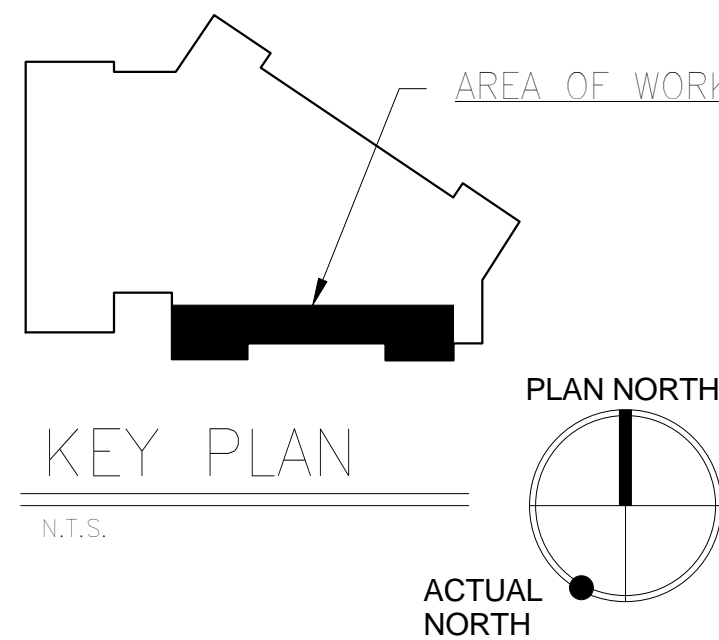

100% CONSTRUCTION DOCUMENTS FULLY SPRINKLERED

CONSULTANTS:			ARCHITECT / ENGINEERS:		Drawing Title <b>Architectural Abbreviations, Notes, and Symbols</b>		Project Title <b>RENOVATE 3W FOR SURGERY ADMINISTRATION</b>		Project Number <b>581-14-103</b>		Office of Construction and Facilities Management Department of Veterans Affairs			
					Approved: Medical Center Director		Location HUNTINGTON, WV		Building Number 1W					
							Date 03-28-2014		Checked jht		Drawn jas		Drawing Number <b>A0.1</b>	
											Dwg. 02 of 40			
NO. DESCRIPTION DATE														












ROOM LEGEND - PHASE 1	
NUMBER	NAME
3C-152	ELECTRICAL
3C-157	SURGEONS
3C-158	RESIDENTS
3C-159	IT
3C-160	TOILET
3C-161	INP. CASE MGR/SW
3C-162	NURSE NAVIGATOR
3C-163	CONFERENCE
3C-164	ACNS SURGERY
3C-165	CLINICAL COORDINATOR
3C-166	H.S.S
3C-167	CHIEF OF SURGERY
3C-168	P.S.A
3C-169	SECRETARY
3C-170	TOILET
4C-101	MECH/PENTHOUSE
C3-24	CORRIDOR
C3-25	CORRIDOR
C3-26	CORRIDOR
C3-28	CORRIDOR

## GENERAL NEW WORK NOTES




- CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED.
- ALL DIMENSIONS ARE REFERENCED FROM FACE OF STUD AT NEW CONSTRUCTION UNLESS OTHERWISE NOTED. DIMENSIONS ARE REFERENCED FROM FACE OF FINISH AT EXISTING CONSTRUCTION.
- ALL DIMENSIONS INDICATED +/- ARE APPROXIMATE AND MUST BE FIELD VERIFIED PRIOR TO THE START OF CONSTRUCTION.
- PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH AND TO INSTALL COMPLETE WITH ALL ACCESSORIES. PARTS AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
- WHERE WORK ABUTS OR ADJOINS EXISTING SURFACES WHICH WILL REMAIN EXPOSED, ALIGN NEW WORK FLUSH WITH EXISTING ADJACENT SURFACES.
- THE CONTRACTOR SHALL MAINTAIN THE EXISTING BUILDING IN A WATER TIGHT CONDITION THROUGHOUT THE ENTIRE CONSTRUCTION PERIOD. REPAIR DAMAGE CAUSED BY CONSTRUCTION OPERATIONS. TAKE ALL PRECAUTIONS NECESSARY TO PROTECT THE BUILDING AND ITS OCCUPANTS DURING THE CONSTRUCTION PERIOD.
- CONTRACTOR SHALL PROVIDE BARRIERS TO PREVENT ENTRY TO THE CONSTRUCTION AREA. BARRIERS SHALL NOT INTERFERE WITH THE OWNERS USE OF THE SITE.
- THE CONTRACTOR SHALL PROVIDE NEGATIVE PRESSURE IN THE AREA OF RENOVATION TO PREVENT THE SPREAD OF DUST TO OCCUPIED AREAS OF THE BUILDING.
- ALL NOTES, REMARKS AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS ONLY UNLESS OTHERWISE NOTED.
- ALL SINKS IN BATHROOMS SHALL BE SOLID SURFACE COUNTERTOPS WITH INTEGRAL BOWL.
- METAL STUDS SHALL BE MINIMUM 20 GAUGE.

## NEW WORK NOTES

- ALIGN GWB OF NEW WALL WITH GWB OF EXISTING WALL.
- OFOI FURNITURE.
- SWITCH FOR ELECTRIC SCREEN.
- NEW 1 1/2" RIGID INSULATION, 1 1/2" METAL STUDS AND 5/8" GWB. TYPICAL ALL EXTERIOR WALLS.
- INDICATES BEAM BELOW TYP.
- COORDINATE PIPING TO MISS BEAM.
- NEW WINDOW SILL SS#3.
- PROVIDE NEW LVT FLOORING AND RUBBER BASE. SEE FINISH PLAN FOR MORE INFORMATION.
- PAINT CEILING GRID WHITE AND PROVIDE NEW CEILING TILES.
- PAINT WALLS.
- PAINT DOOR AND FRAME.
- LOCATION OF WALL WILL BE DETERMINED AFTER EXISTING PIPES ARE FIELD VERIFIED.
- PROVIDE FULL HEIGHT 1 1/2" STAINLESS STEEL CORNER GUARDS.

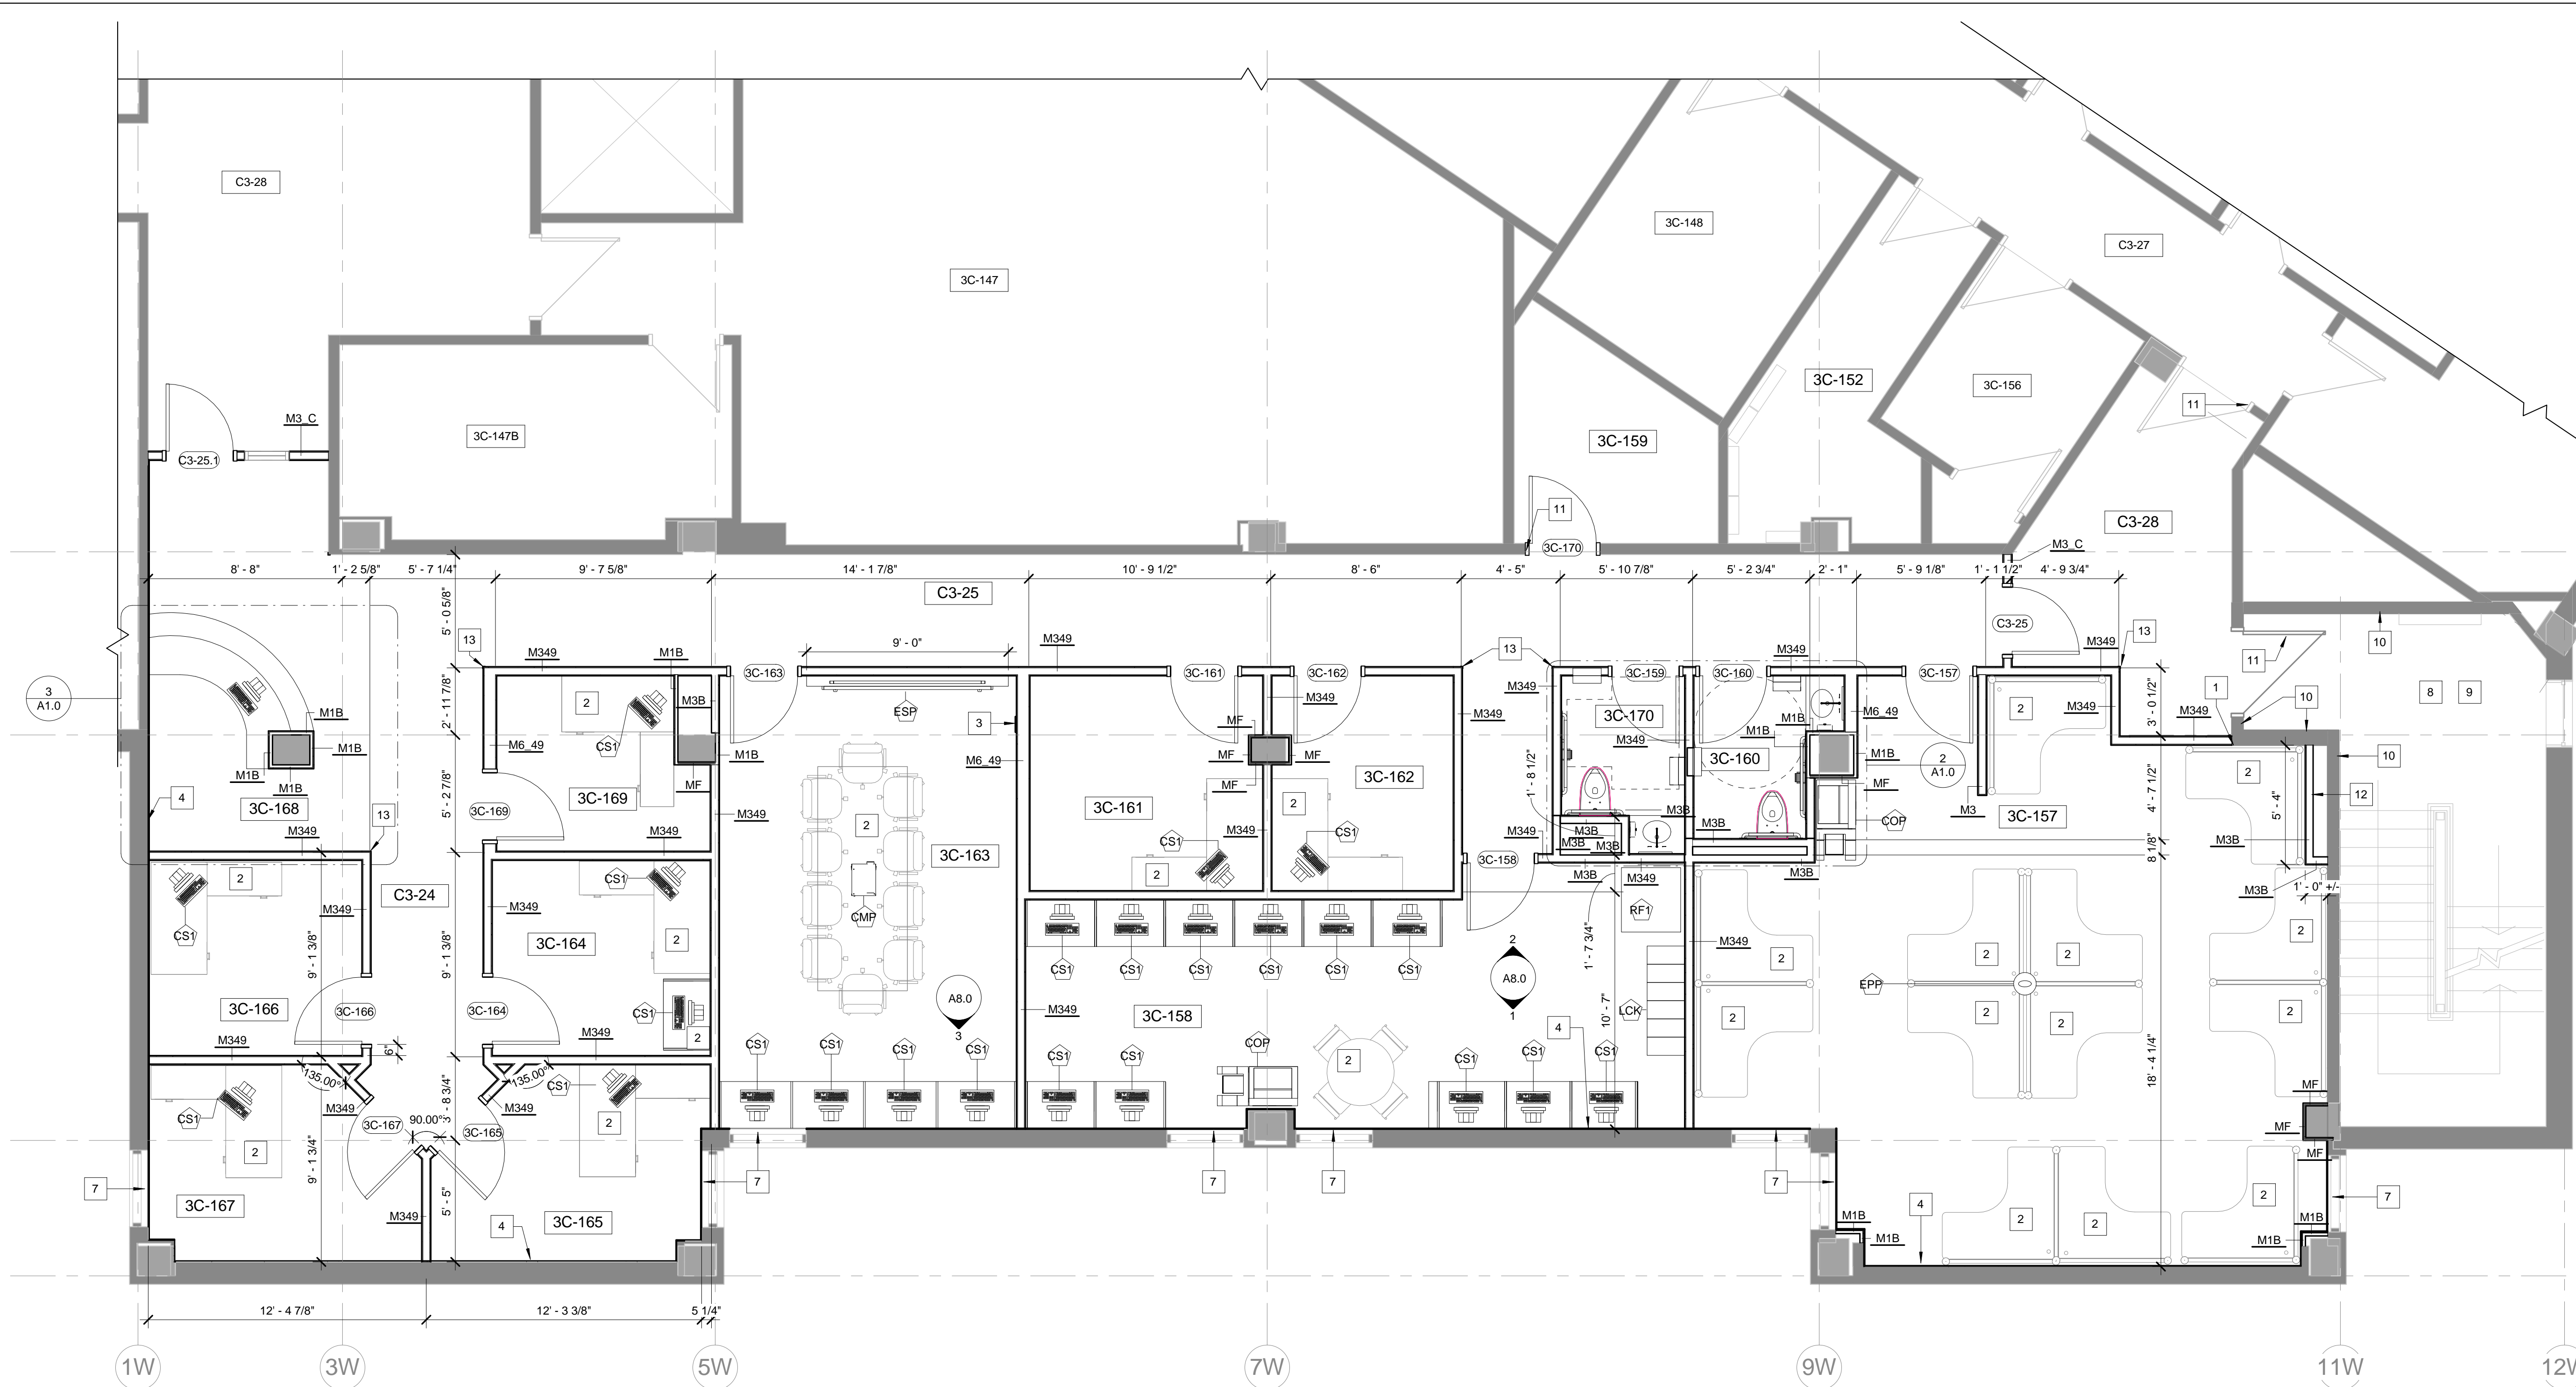



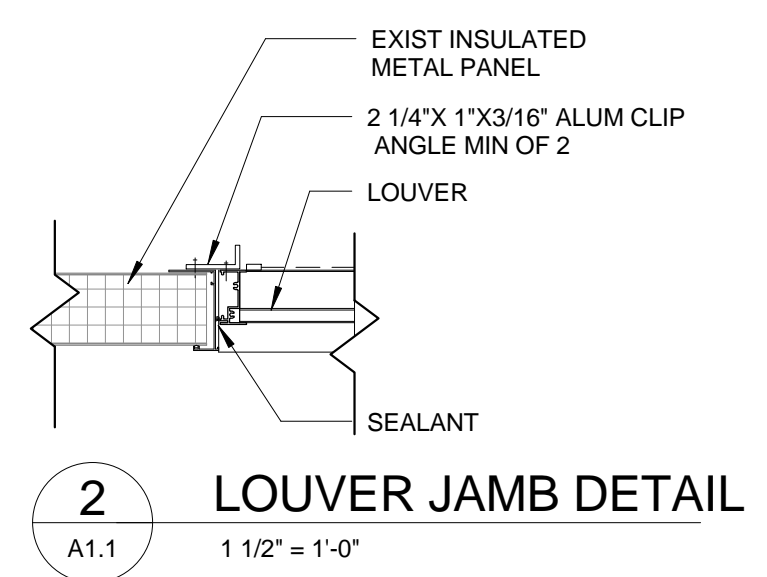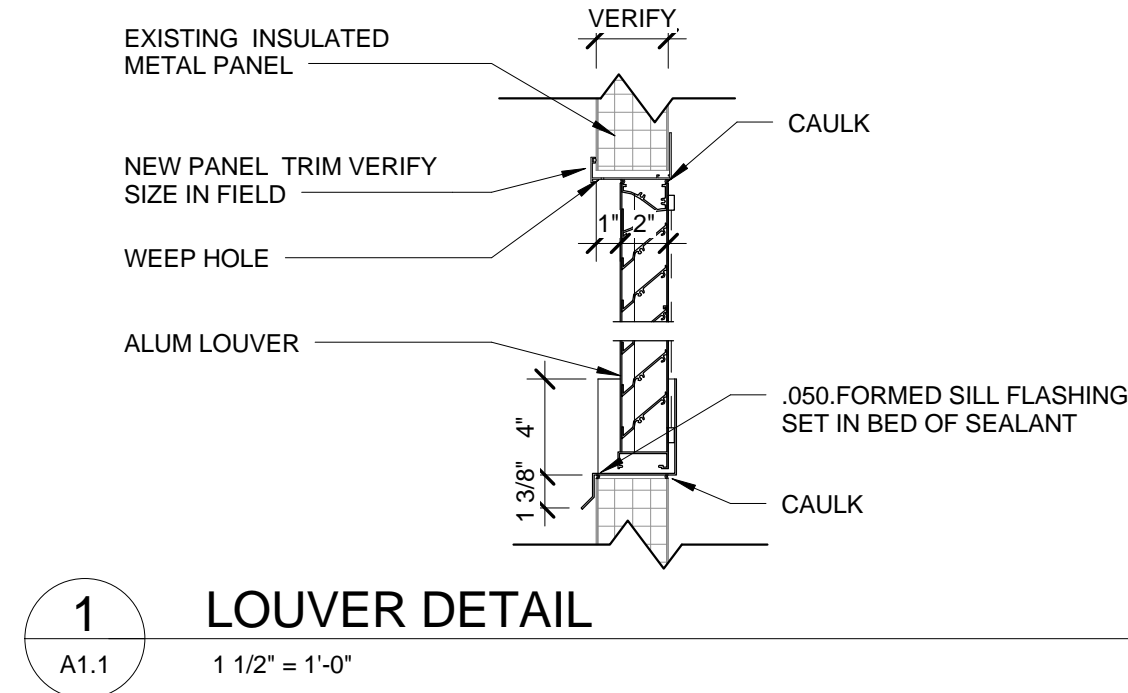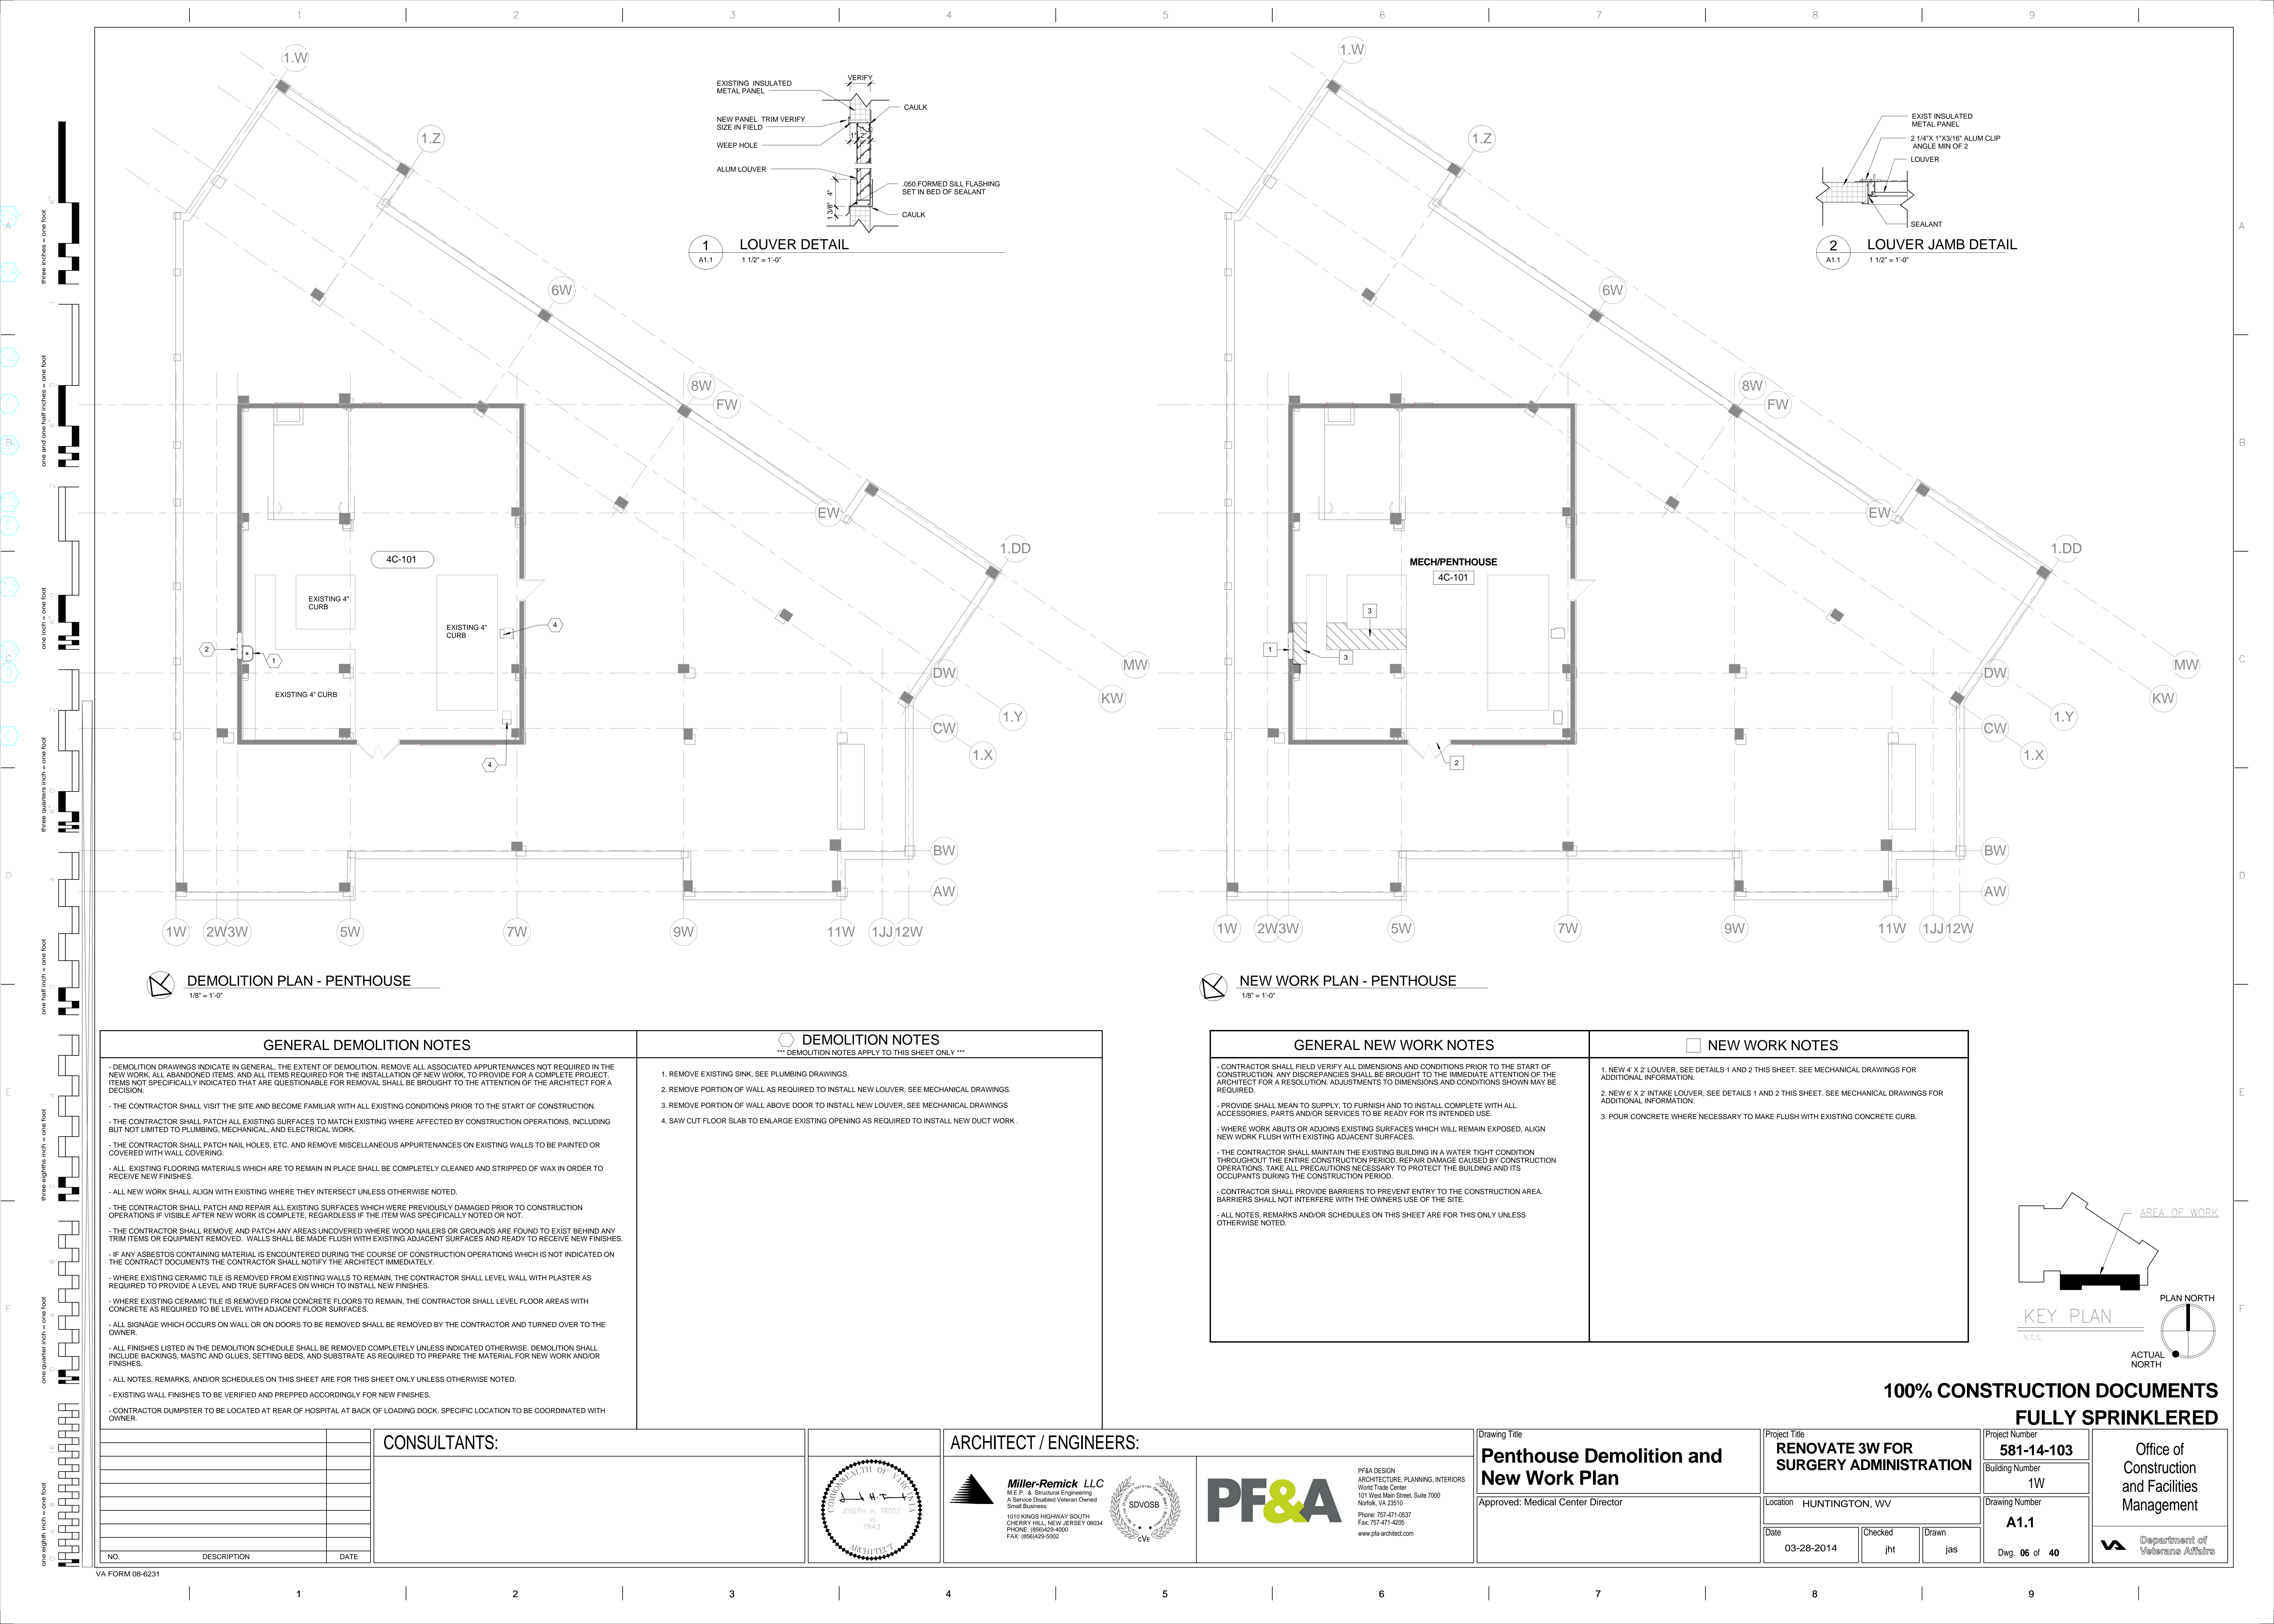

DEMOLITION PLAN - PENTHOUSE  
1/8" = 1'-0"

NEW WORK PLAN - PENTHOUSE  
1/8" = 1'-0"

GENERAL DEMOLITION NOTES

- DEMOLITION DRAWINGS INDICATE IN GENERAL, THE EXTENT OF DEMOLITION. REMOVE ALL ASSOCIATED APPURTENANCES NOT REQUIRED IN THE NEW WORK. ALL ABANDONED ITEMS, AND ALL ITEMS REQUIRED FOR THE INSTALLATION OF NEW WORK, TO PROVIDE FOR A COMPLETE PROJECT. ITEMS NOT SPECIFICALLY INDICATED THAT ARE QUESTIONABLE FOR REMOVAL SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR A DECISION.
- THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILIAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
- THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
- THE CONTRACTOR SHALL PATCH NAIL HOLES, ETC. AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERING.
- ALL EXISTING FLOORING MATERIALS WHICH ARE TO REMAIN IN PLACE SHALL BE COMPLETELY CLEANED AND STRIPPED OF WAX IN ORDER TO RECEIVE NEW FINISHES.
- ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT UNLESS OTHERWISE NOTED.
- THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
- THE CONTRACTOR SHALL REMOVE AND PATCH ANY AREAS UNCOVERED WHERE WOOD NAILERS OR GROUNDS ARE FOUND TO EXIST BEHIND ANY TRIM ITEMS OR EQUIPMENT REMOVED. WALLS SHALL BE MADE FLUSH WITH EXISTING ADJACENT SURFACES AND READY TO RECEIVE NEW FINISHES.
- IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.
- WHERE EXISTING CERAMIC TILE IS REMOVED FROM EXISTING WALLS TO REMAIN, THE CONTRACTOR SHALL LEVEL WALL WITH PLASTER AS REQUIRED TO PROVIDE A LEVEL AND TRUE SURFACES ON WHICH TO INSTALL NEW FINISHES.
- WHERE EXISTING CERAMIC TILE IS REMOVED FROM CONCRETE FLOORS TO REMAIN, THE CONTRACTOR SHALL LEVEL FLOOR AREAS WITH CONCRETE AS REQUIRED TO BE LEVEL WITH ADJACENT FLOOR SURFACES.
- ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND TURNED OVER TO THE OWNER.
- ALL FINISHES LISTED IN THE DEMOLITION SCHEDULE SHALL BE REMOVED COMPLETELY UNLESS INDICATED OTHERWISE. DEMOLITION SHALL INCLUDE BACKINGS, MASTIC AND GLUES, SETTING BEDS, AND SUBSTRATE AS REQUIRED TO PREPARE THE MATERIAL FOR NEW WORK AND/OR FINISHES.
- ALL NOTES, REMARKS, AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY UNLESS OTHERWISE NOTED.
- EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY FOR NEW FINISHES.
- CONTRACTOR DUMPSTER TO BE LOCATED AT REAR OF HOSPITAL AT BACK OF LOADING DOCK. SPECIFIC LOCATION TO BE COORDINATED WITH OWNER.

DEMOLITION NOTES


- 1. REMOVE EXISTING SINK. SEE PLUMBING DRAWINGS.
- 2. REMOVE PORTION OF WALL AS REQUIRED TO INSTALL NEW LOUVER, SEE MECHANICAL DRAWINGS.
- 3. REMOVE PORTION OF WALL ABOVE DOOR TO INSTALL NEW LOUVER, SEE MECHANICAL DRAWINGS.
- 4. SAW CUT FLOOR SLAB TO ENLARGE EXISTING OPENING AS REQUIRED TO INSTALL NEW DUCT WORK.

GENERAL NEW WORK NOTES

- CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT FOR A RESOLUTION. ADJUSTMENTS TO DIMENSIONS AND CONDITIONS SHOWN MAY BE REQUIRED.
- PROVIDE SHALL MEAN TO SUPPLY, TO FURNISH AND TO INSTALL, COMPLETE WITH ALL ACCESSORIES, PARTS AND/OR SERVICES TO BE READY FOR ITS INTENDED USE.
- WHERE WORK ABUTS OR ADJOINS EXISTING SURFACES WHICH WILL REMAIN EXPOSED, ALIGN NEW WORK FLUSH WITH EXISTING ADJACENT SURFACES.
- THE CONTRACTOR SHALL MAINTAIN THE EXISTING BUILDING IN A WATER TIGHT CONDITION THROUGHOUT THE ENTIRE CONSTRUCTION PERIOD. REPAIR DAMAGE CAUSED BY CONSTRUCTION OPERATIONS. TAKE ALL PRECAUTIONS NECESSARY TO PROTECT THE BUILDING AND ITS OCCUPANTS DURING THE CONSTRUCTION PERIOD.
- CONTRACTOR SHALL PROVIDE BARRIERS TO PREVENT ENTRY TO THE CONSTRUCTION AREA. BARRIERS SHALL NOT INTERFERE WITH THE OWNERS USE OF THE SITE.
- ALL NOTES, REMARKS AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS ONLY UNLESS OTHERWISE NOTED.

NEW WORK NOTES


- 1. NEW 4' X 2' LOUVER, SEE DETAILS 1 AND 2 THIS SHEET. SEE MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
- 2. NEW 6' X 2' INTAKE LOUVER, SEE DETAILS 1 AND 2 THIS SHEET. SEE MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
- 3. POUR CONCRETE WHERE NECESSARY TO MAKE FLUSH WITH EXISTING CONCRETE CURB.

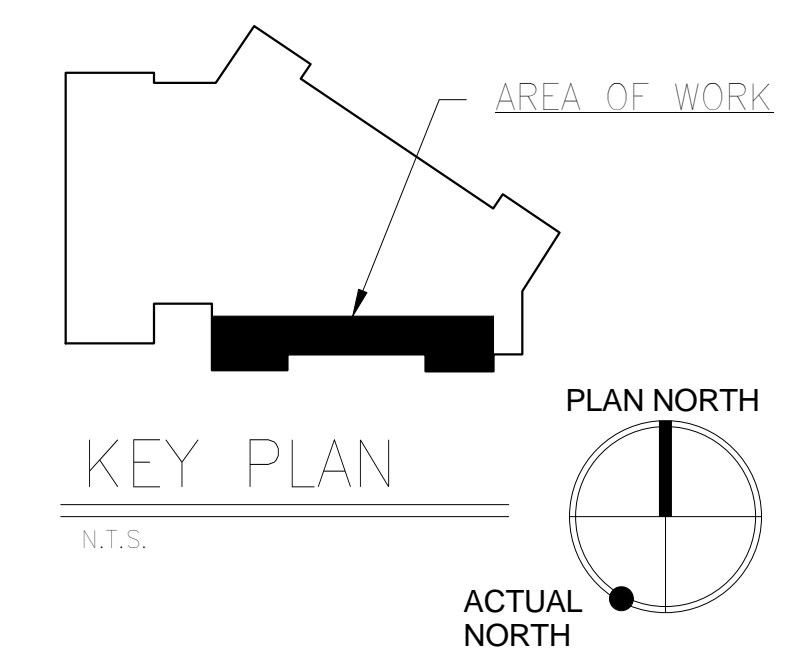

100% CONSTRUCTION DOCUMENTS  
FULLY SPRINKLERED


			CONSULTANTS:			ARCHITECT / ENGINEERS:			Drawing Title <b>Penthouse Demolition and New Work Plan</b>			Project Title <b>RENOVATE 3W FOR SURGERY ADMINISTRATION</b>			Project Number <b>581-14-103</b>			Office of Construction and Facilities Management  Department of Veterans Affairs		
									Approved: Medical Center Director			Location HUNTINGTON, WV			Building Number <b>1W</b>					
									Date <b>03-28-2014</b>			Checked <b>jht</b>			Drawing Number <b>A1.1</b>					
												Drawn <b>jas</b>			Dwg. <b>06</b> of <b>40</b>					
NO. DESCRIPTION DATE																				



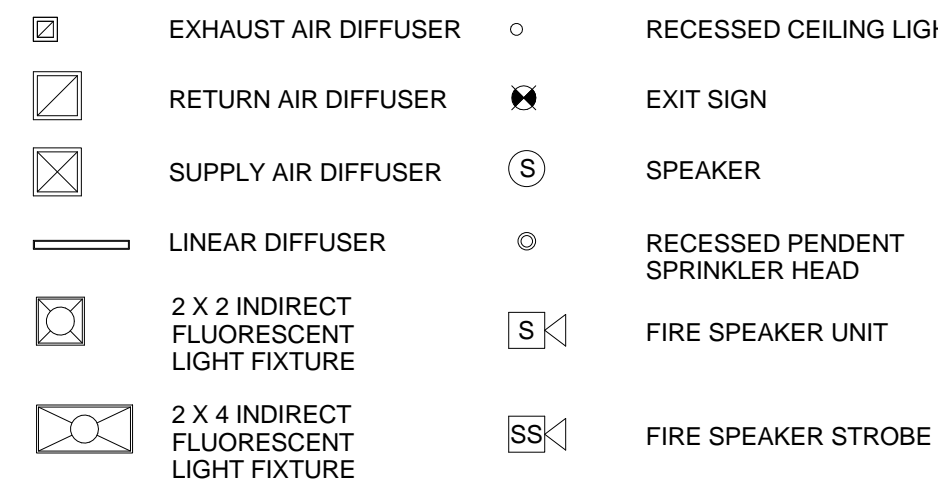



DOOR SCHEDULE											
NUMBER	DOOR				FRAME				FIRE RATING	HARDWARE	REMARKS
	TYPE	WIDTH	HEIGHT	THICKNESS	TYPE	HEAD	JAMB	SILL			
3C-157	FNV	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM	2/A6.0		HW-3E	
3C-158	FNV	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM	2/A6.0		HW-3E	
3C-159	F	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM	3/A6.0		HW-2C	
3C-160	F	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM	3/A6.0		HW-2C	
3C-161	F	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM	2/A6.0		HW-3E	
3C-162	F	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM	2/A6.0		HW-3E	
3C-163	FNV	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM	2/A6.0		HW-3E	
3C-164	F	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM	2/A6.0		HW-3E	
3C-165	F	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM	2/A6.0		HW-3E	
3C-166	F	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM	2/A6.0		HW-3E	
3C-167	F	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM	2/A6.0		HW-3E	
3C-169	FNV	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM	2/A6.0		HW-3E	
3C-170	F	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM	2/A6.0		HW-SH-3	
C3-25	F	3'-0"	7'-0"	0'-1 3/4"	1	1/A6.0	1/A6.0 SIM			HW-SH-3	
C3-25.1	F	3'-0"	7'-0"	0'-1 3/4"	2	1/A6.0	1/A6.0 SIM			HW-SH-3	




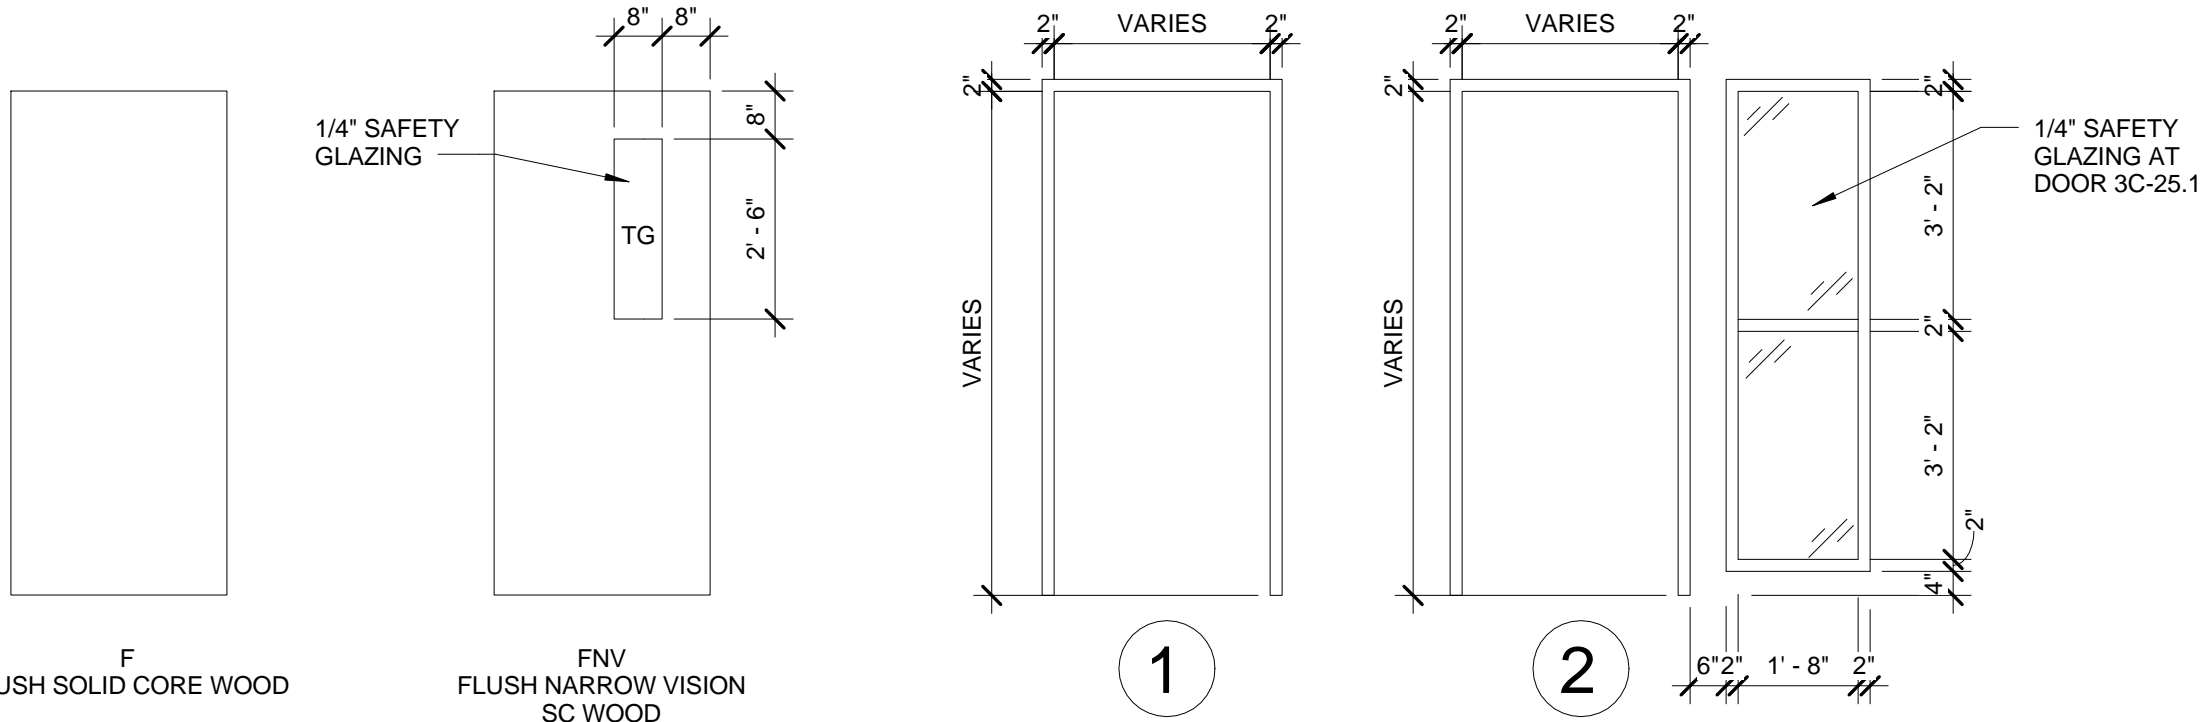


#### DOOR TYPES


3/8" = 1'-0"

#### FRAME TYPES


3/8" = 1'-0"

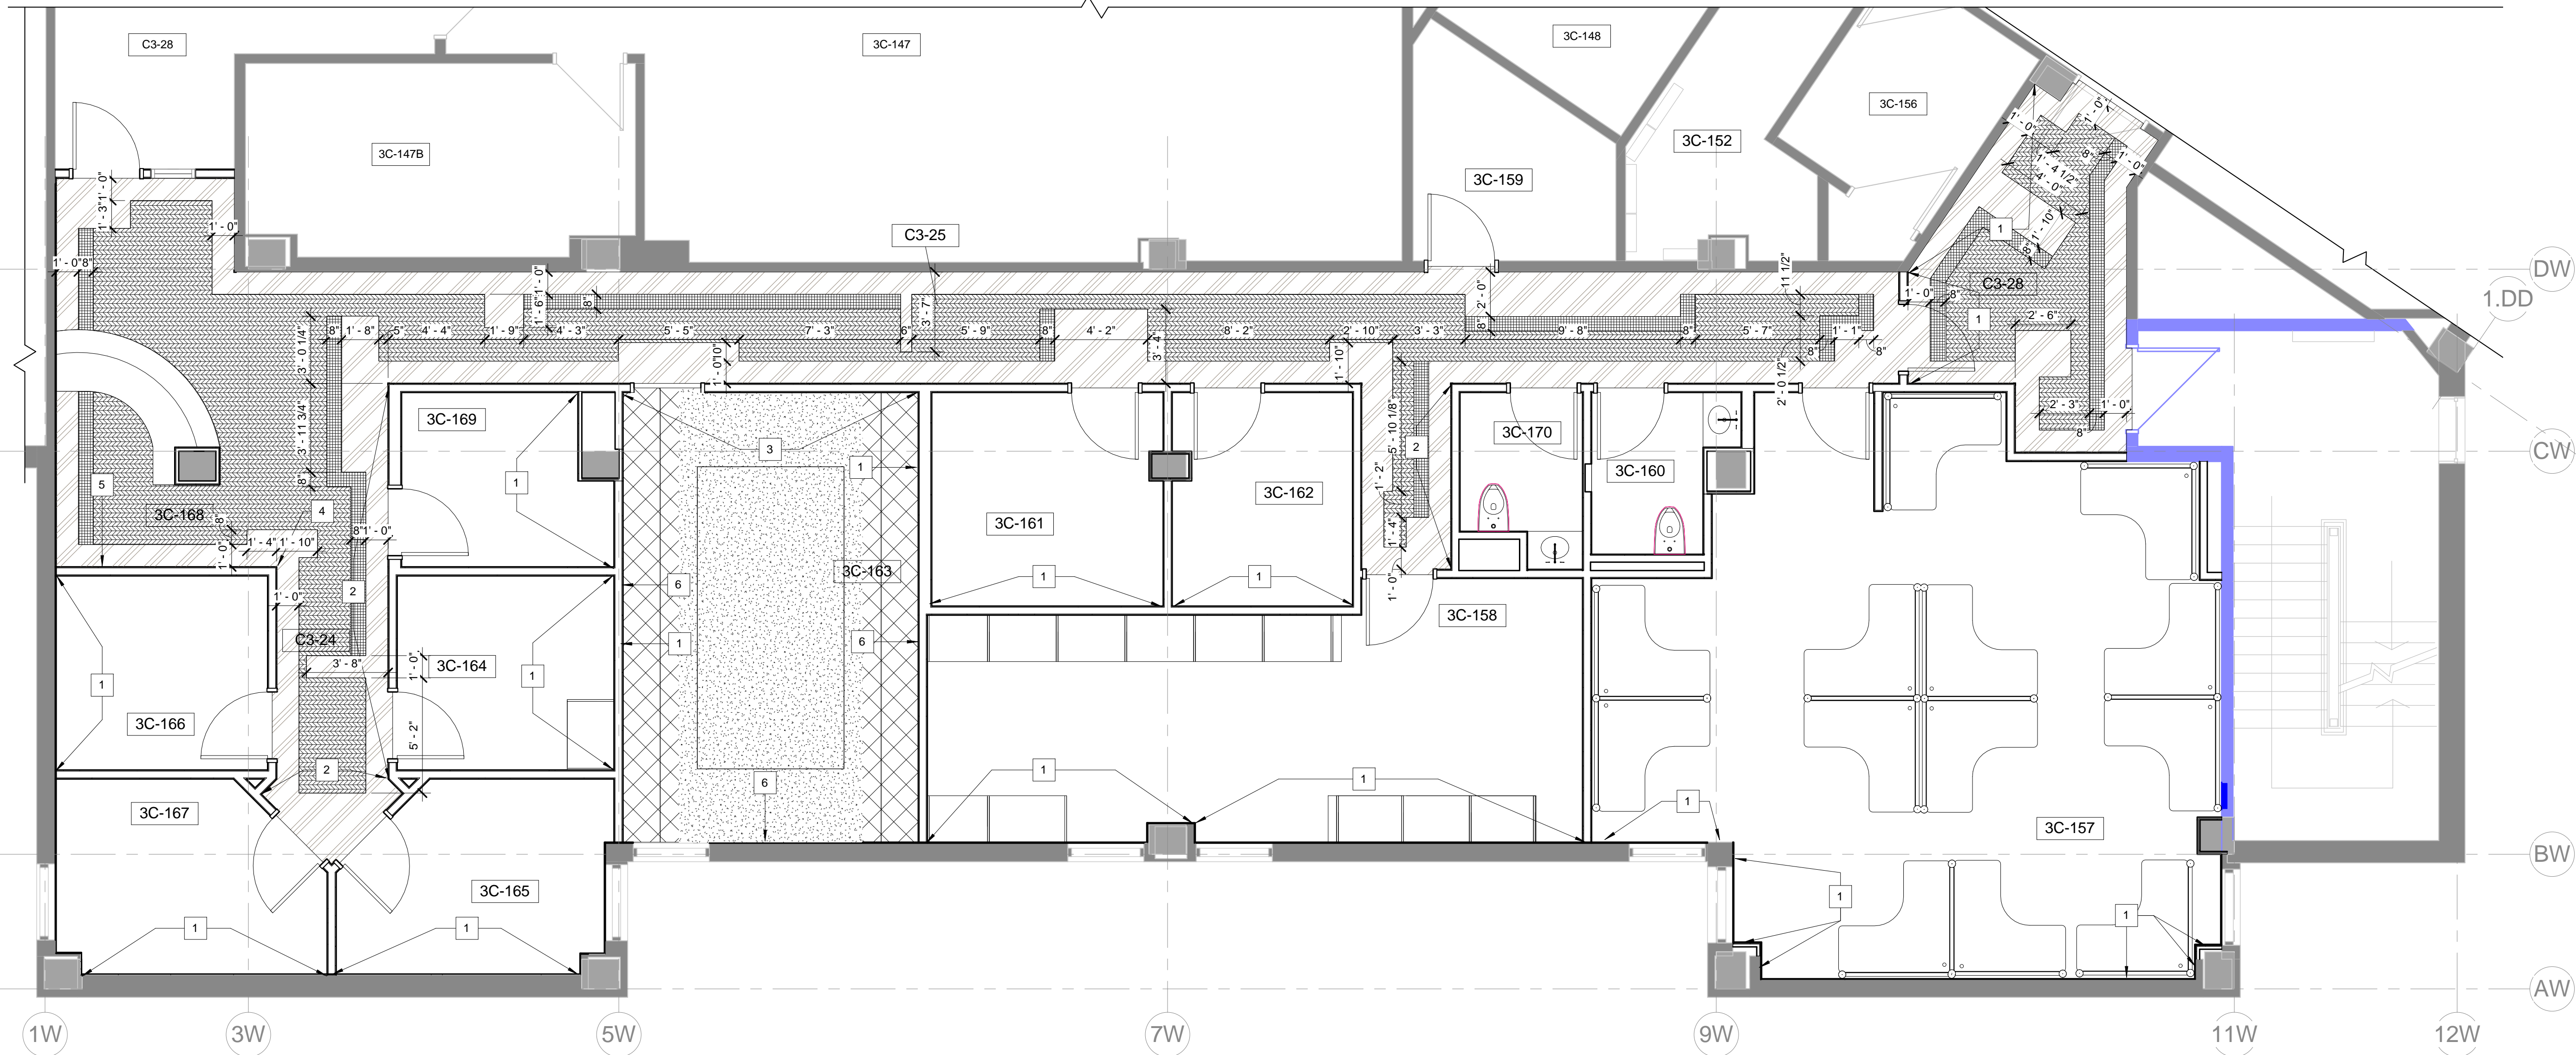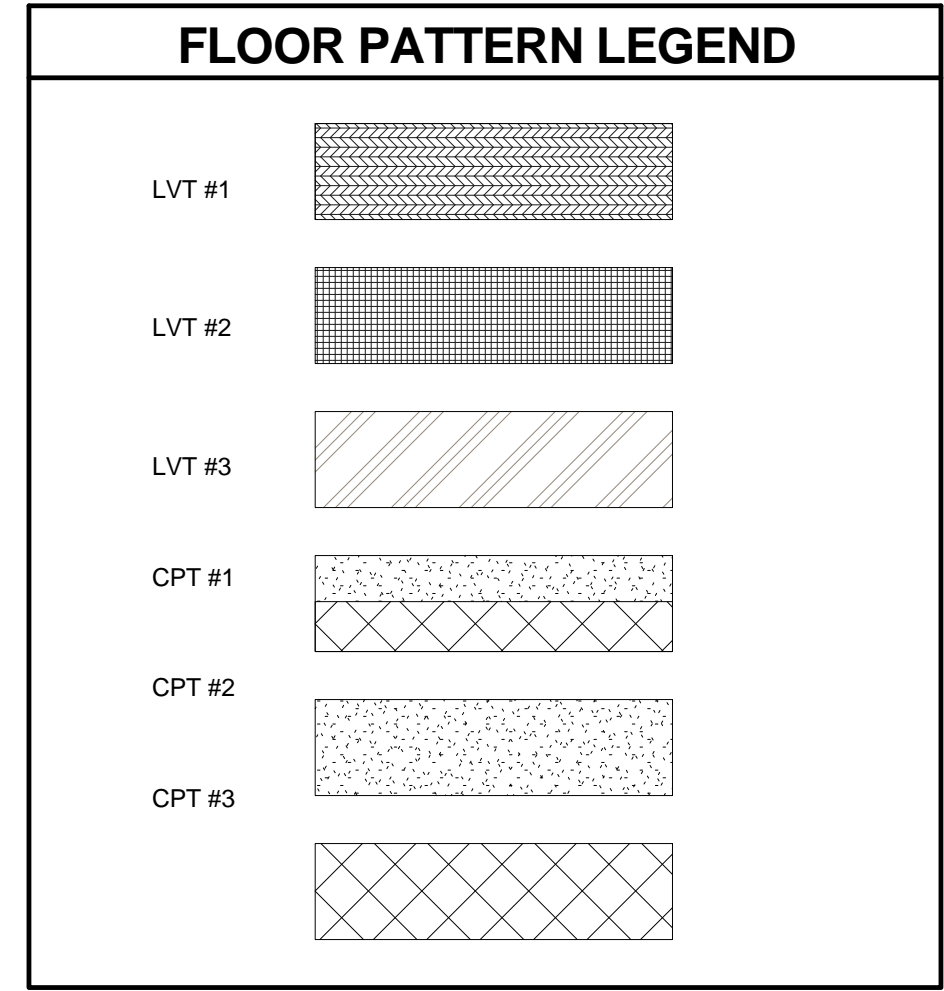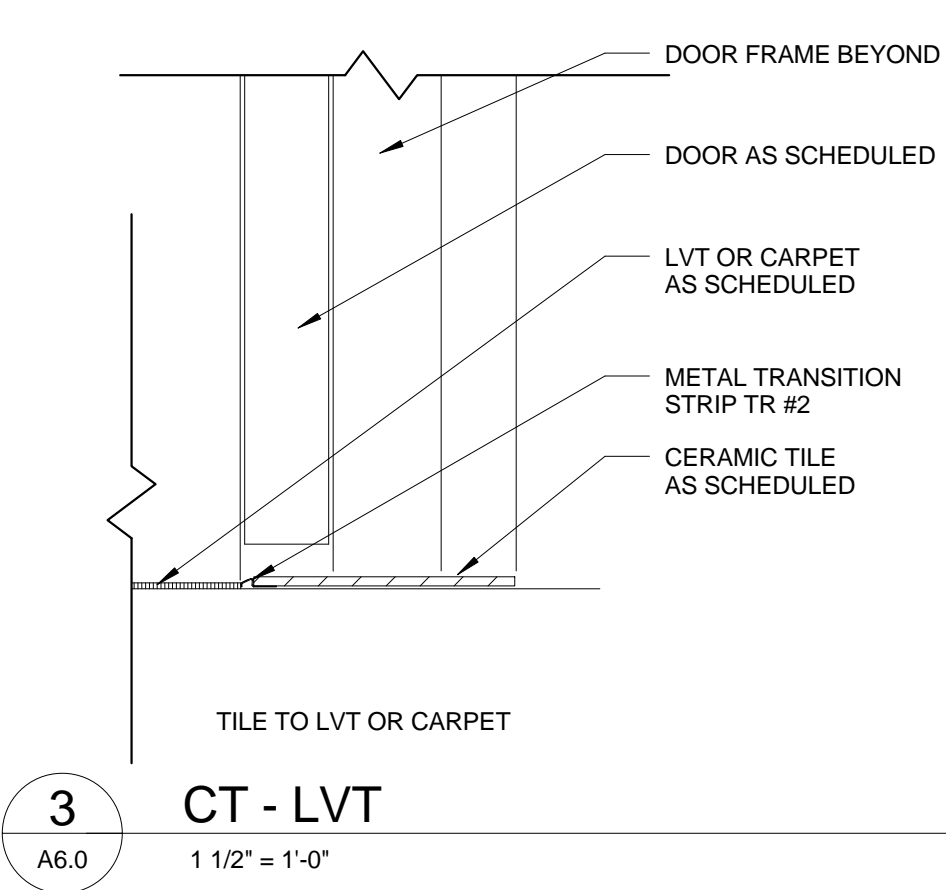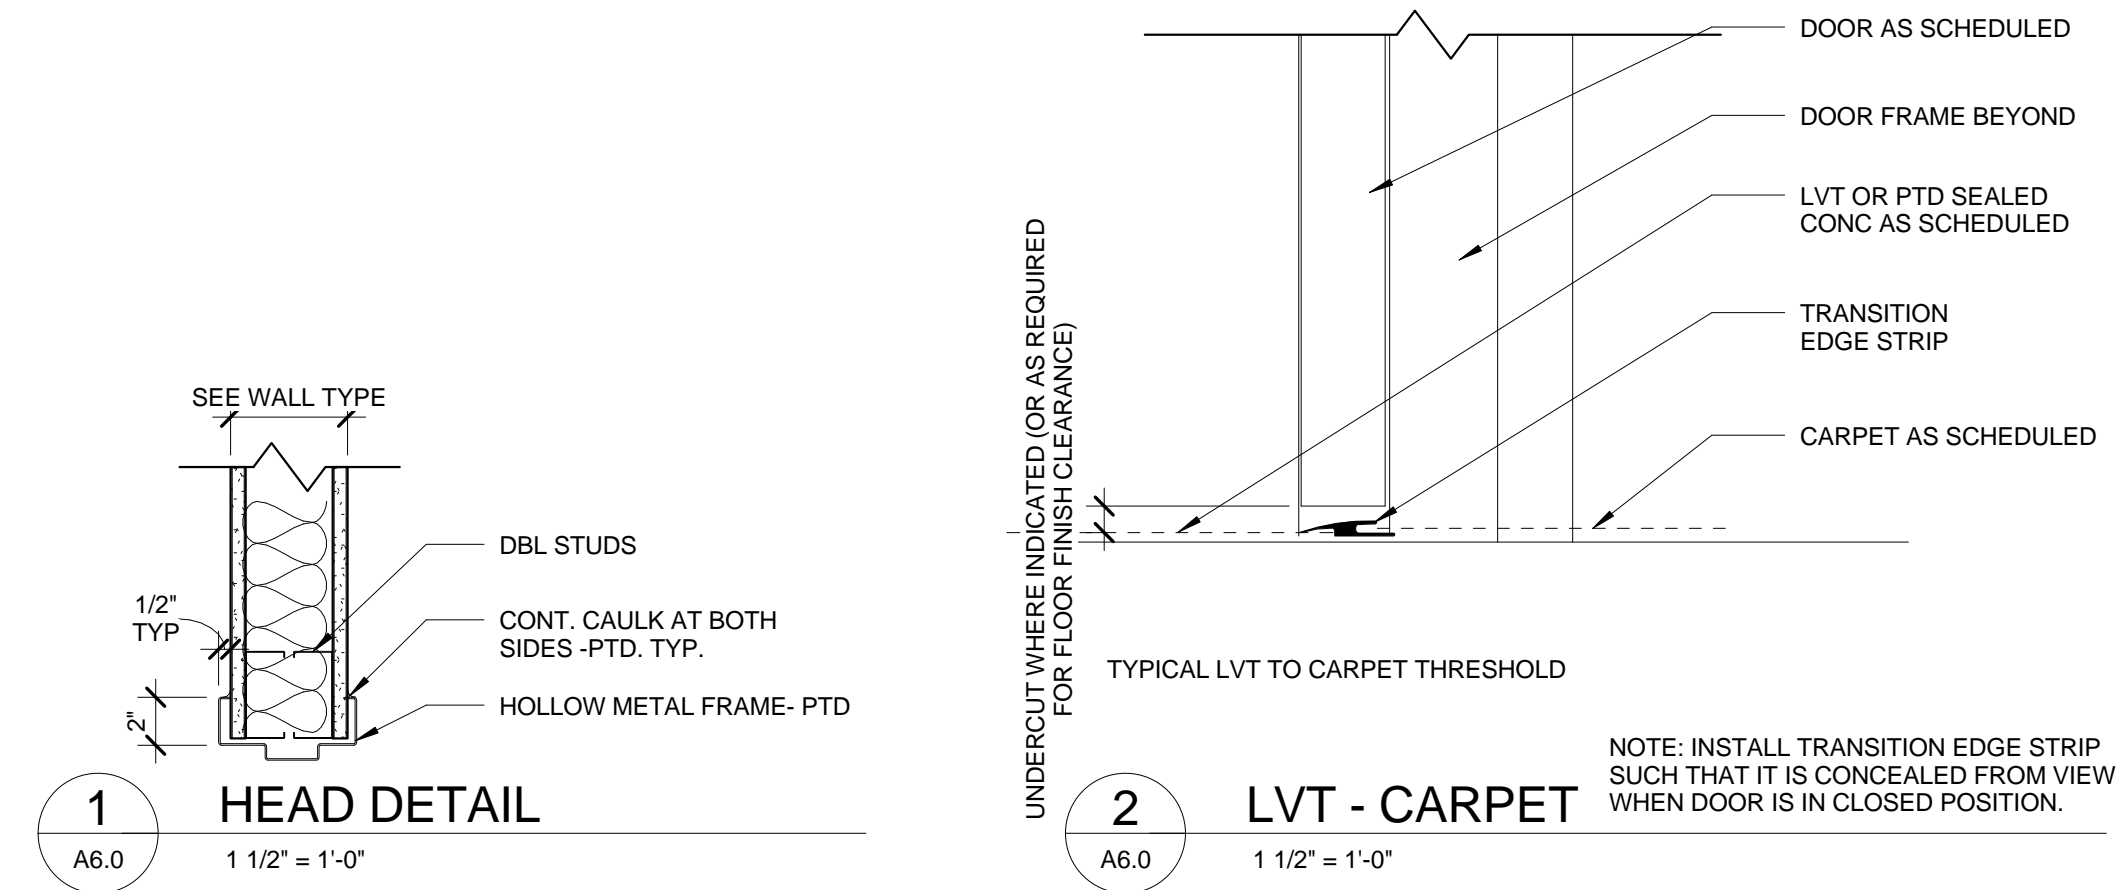




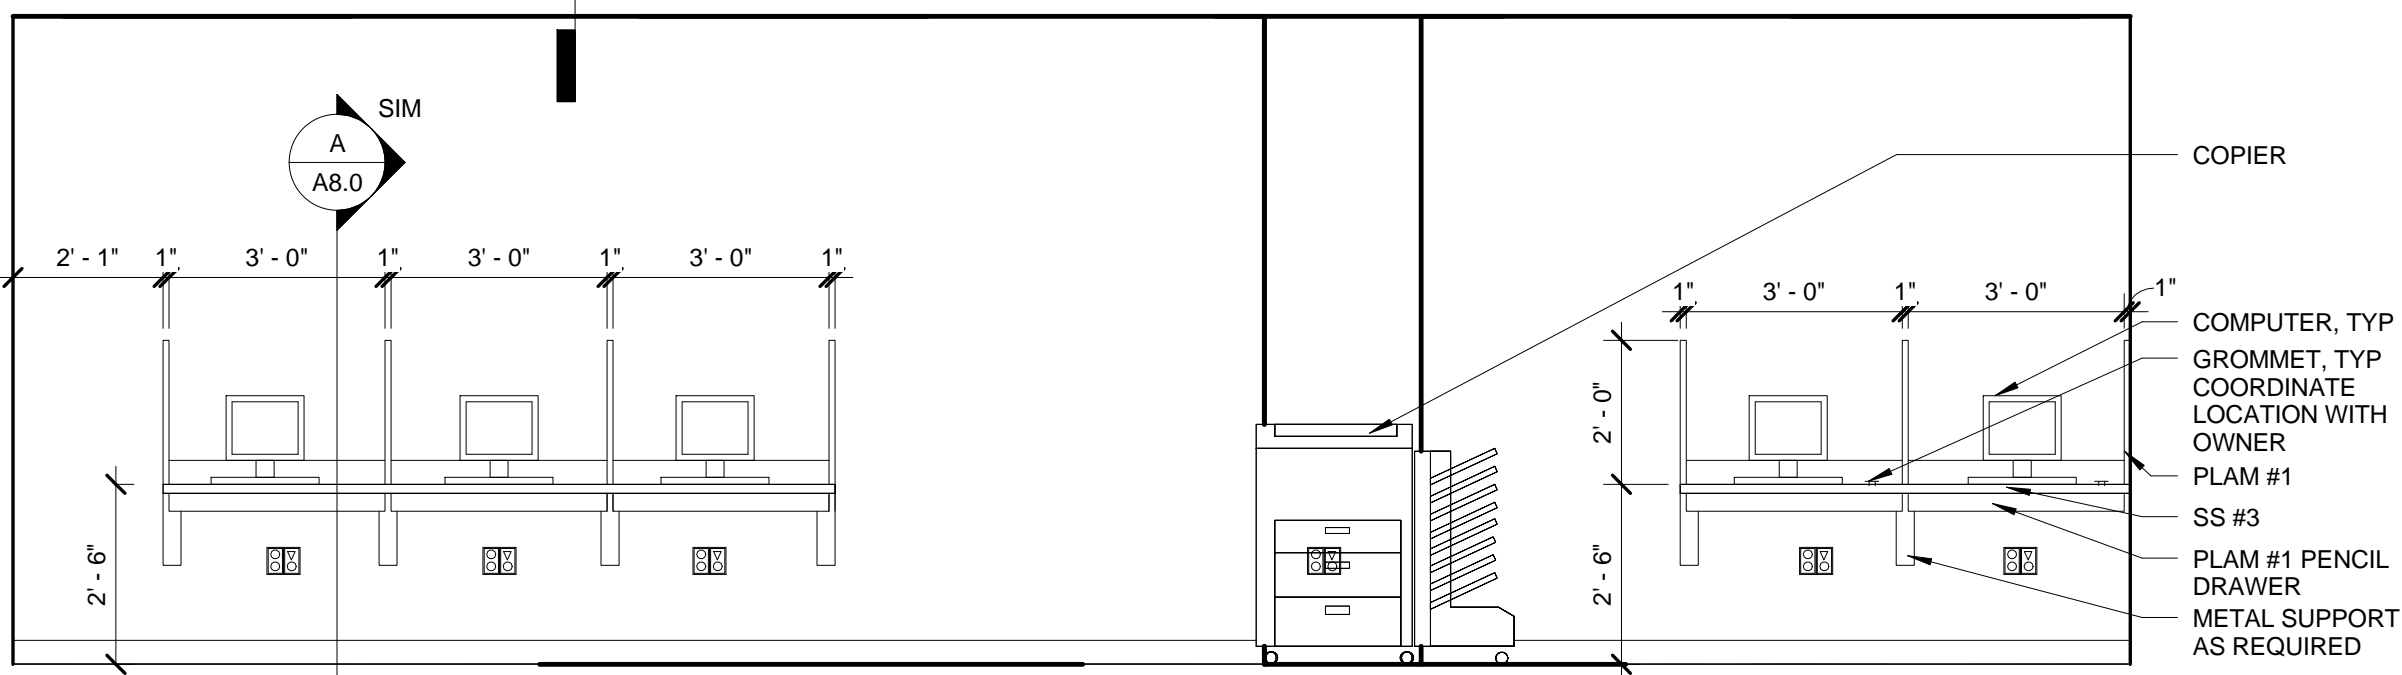


1 RESIDENTS  
3/8" = 1'-0"

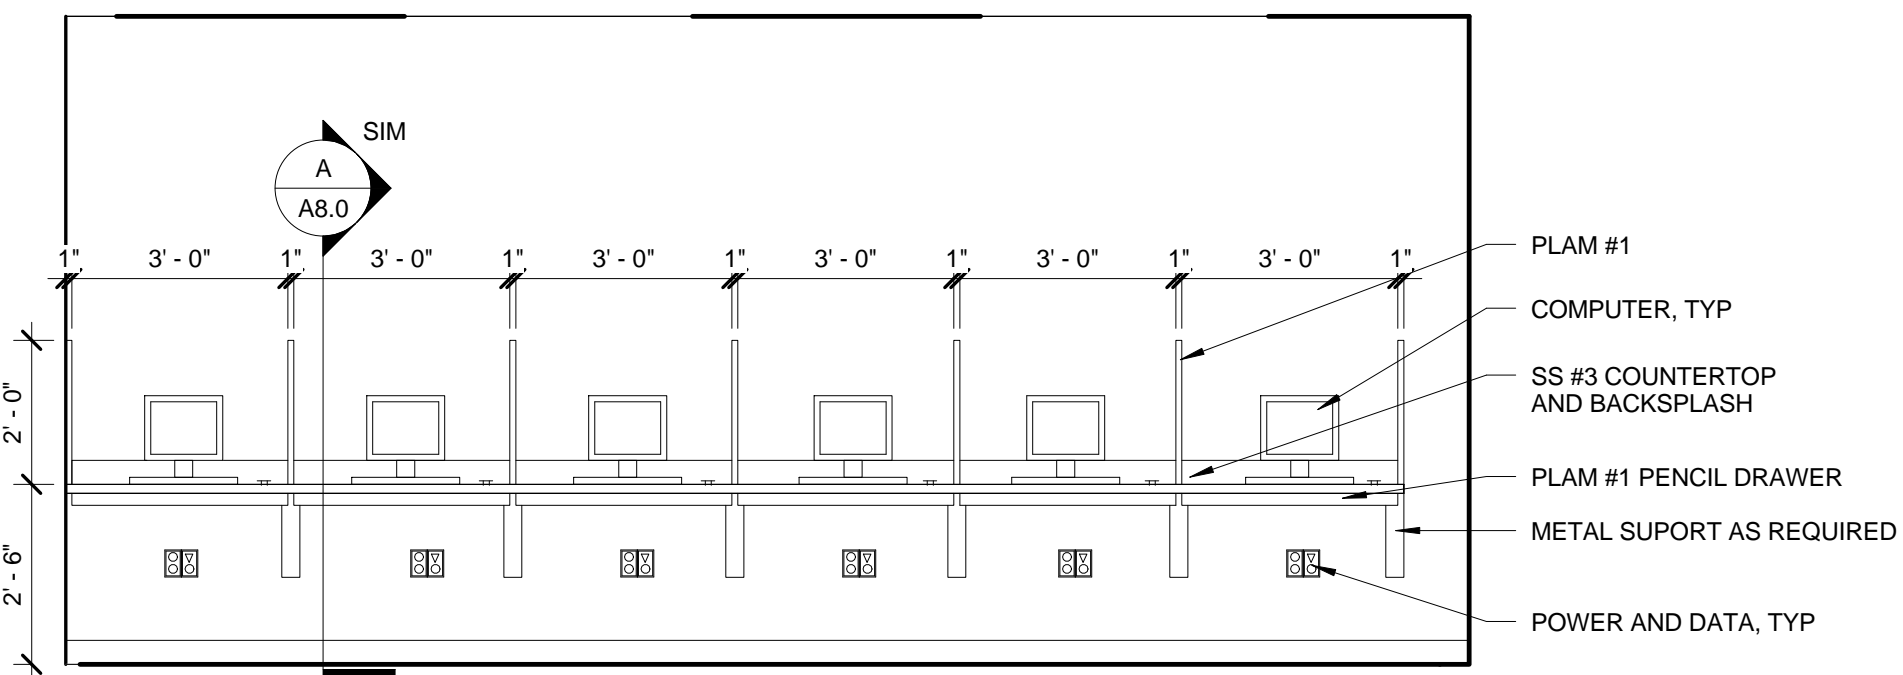


2 RESIDENTS  
3/8" = 1'-0"

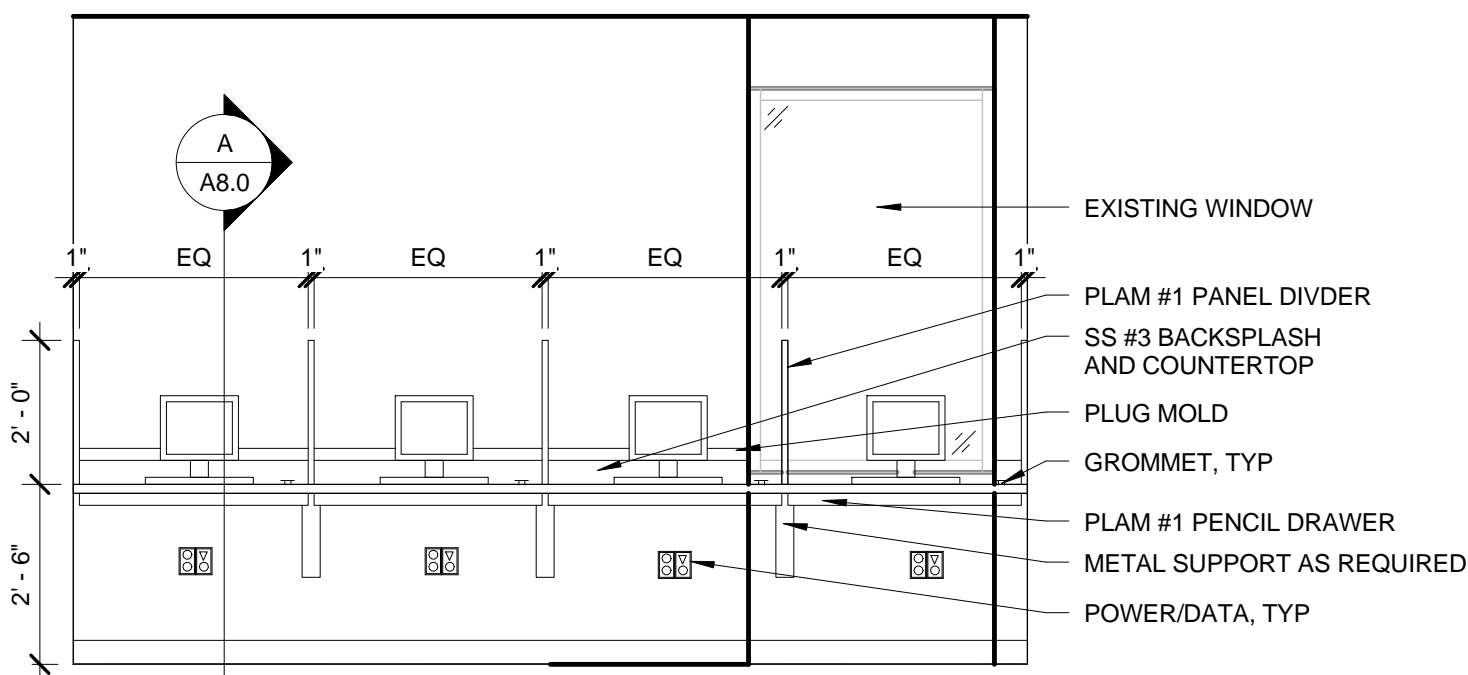


3 CONFERENCE ROOM  
3/8" = 1'-0"

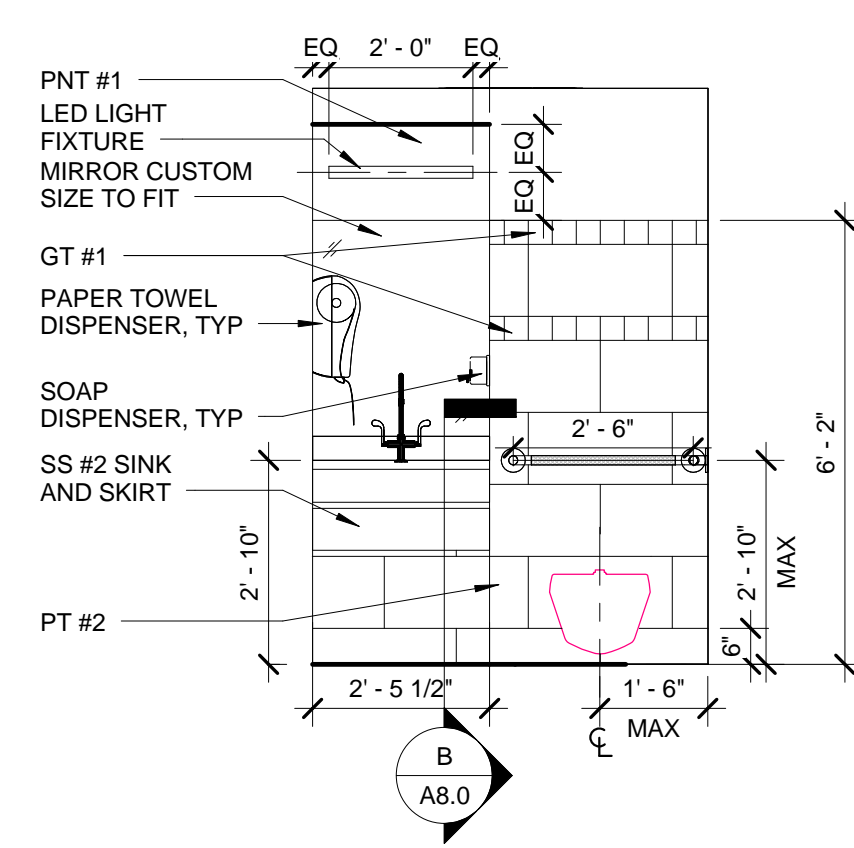


4 TOILET  
3/8" = 1'-0"

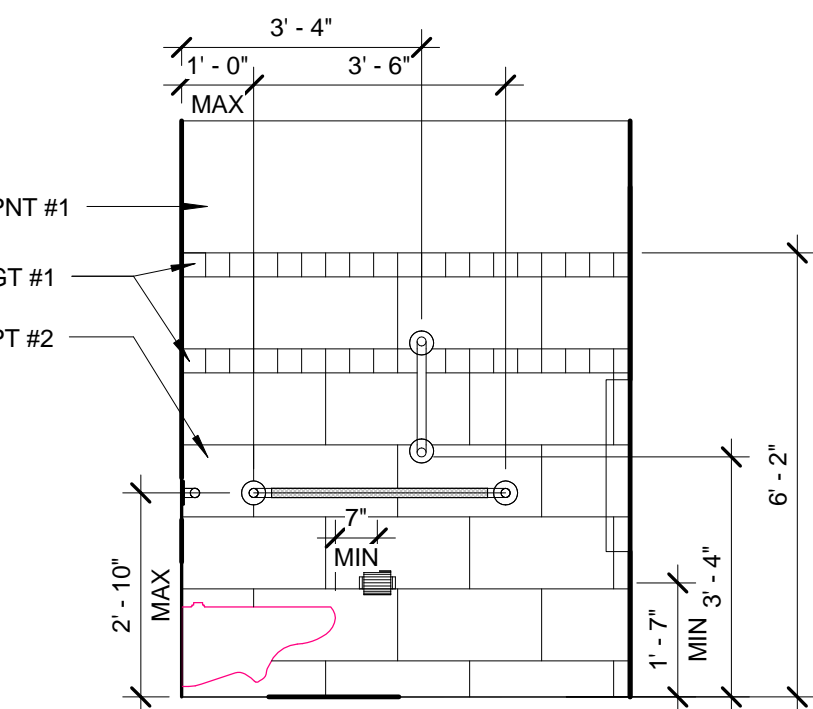


5 TOILET  
3/8" = 1'-0"

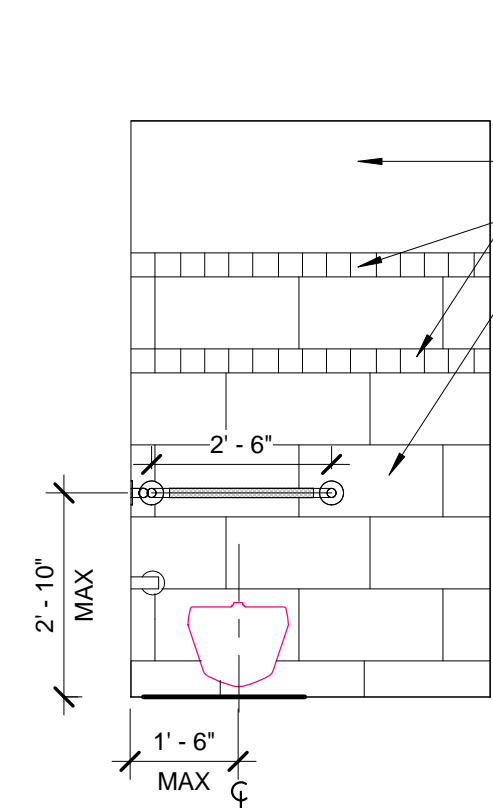


6 TOILET  
3/8" = 1'-0"

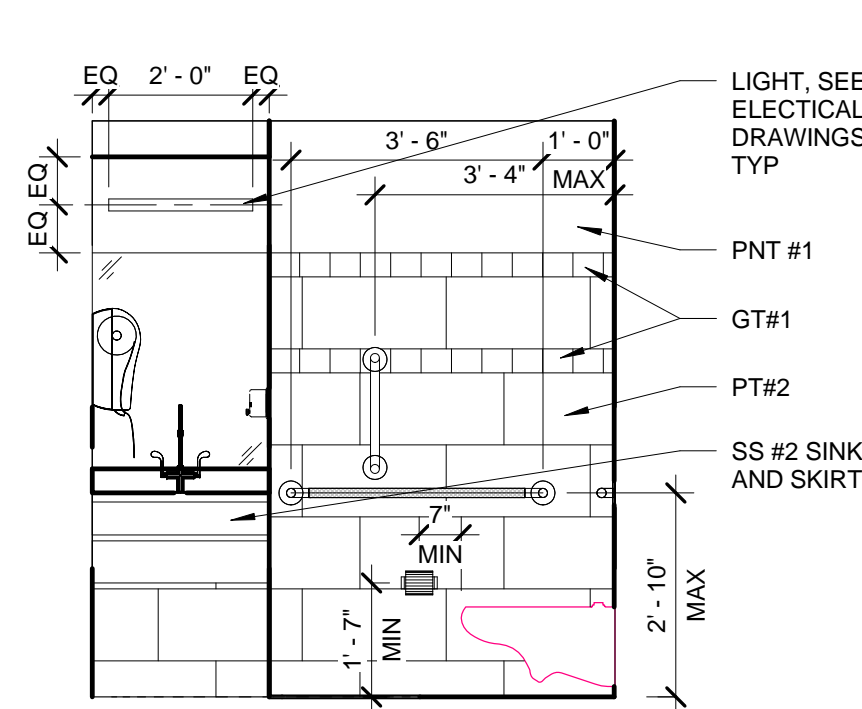


7 TOILET  
3/8" = 1'-0"

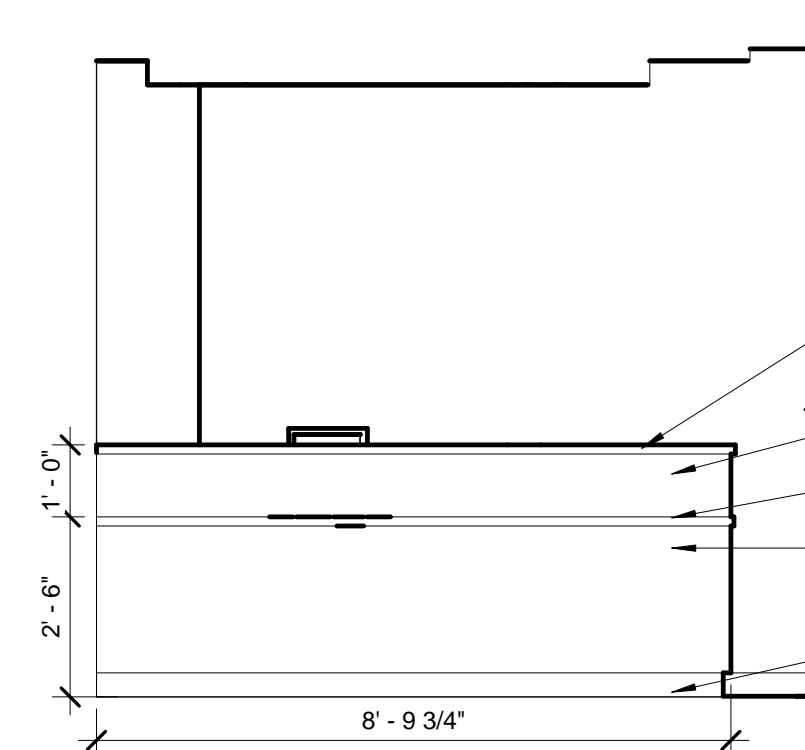


8 PSA  
3/8" = 1'-0"

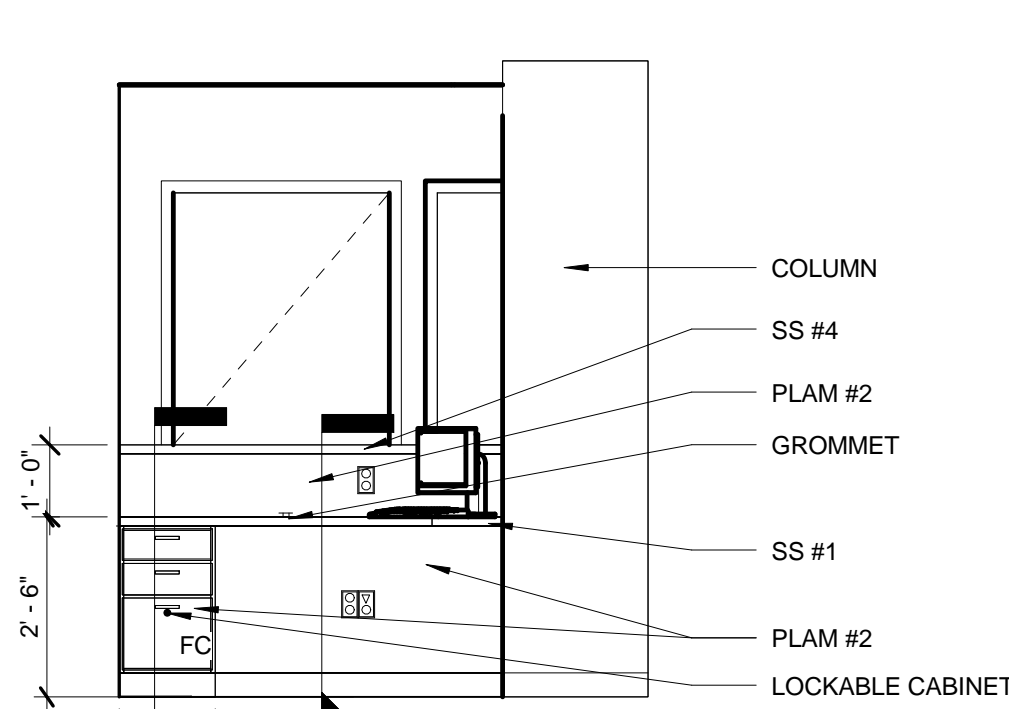


9 PSA BACK  
3/8" = 1'-0"

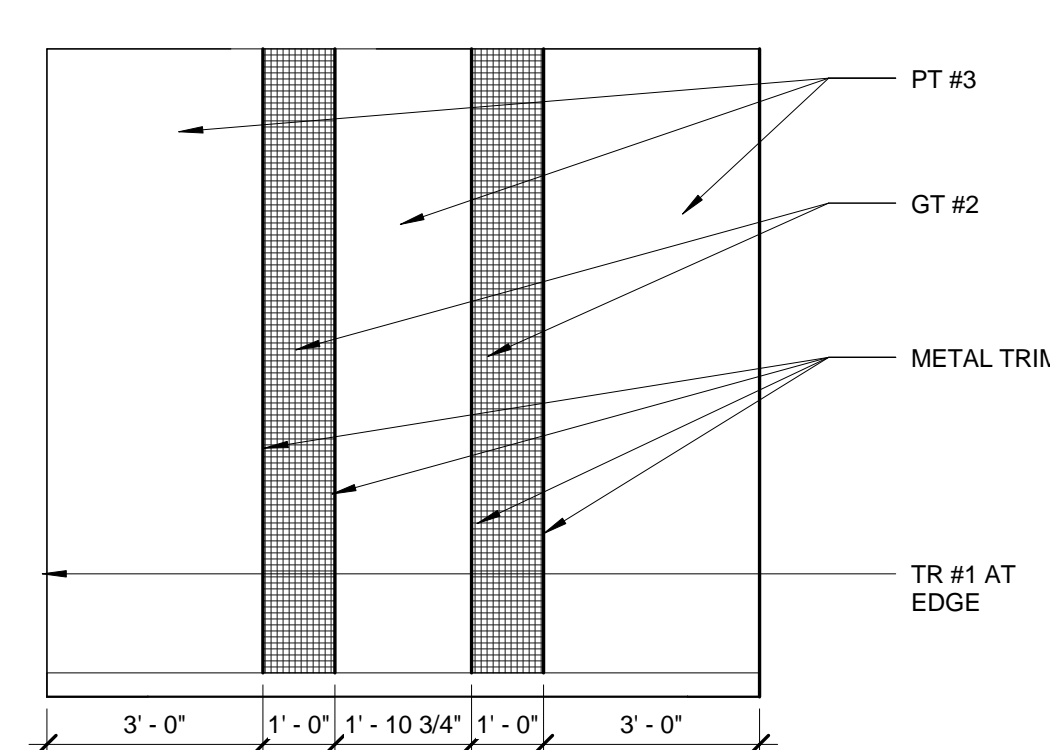


10 PSA WALL  
3/8" = 1'-0"

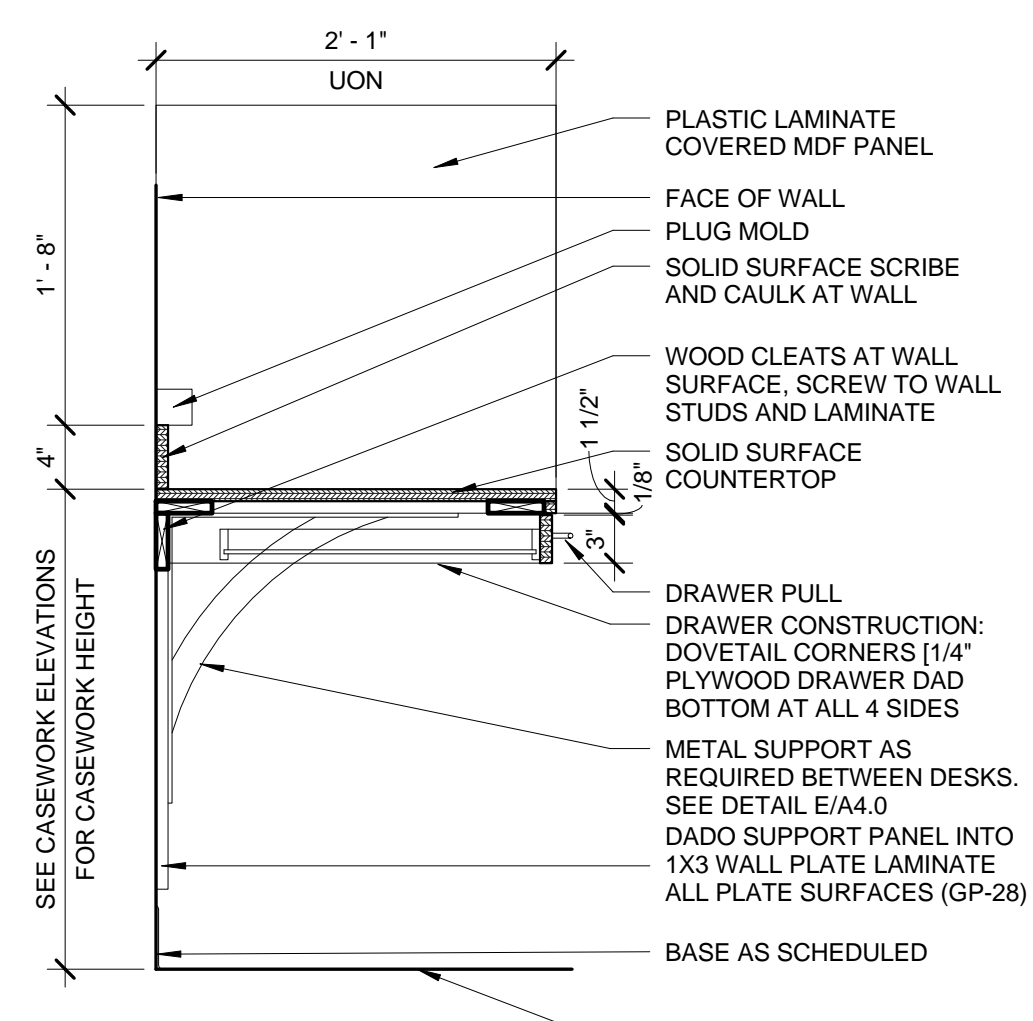


A SECTION  
1" = 1'-0"

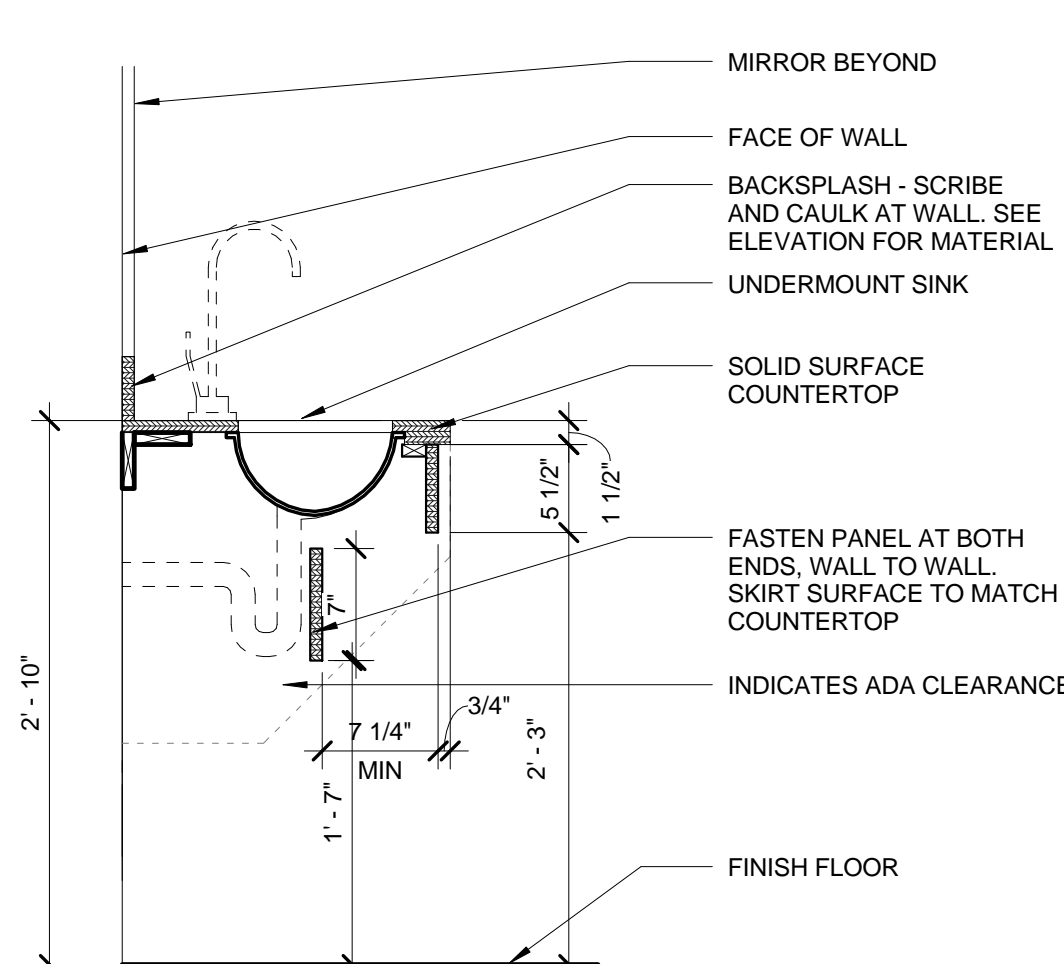

B SECTION  
1" = 1'-0"

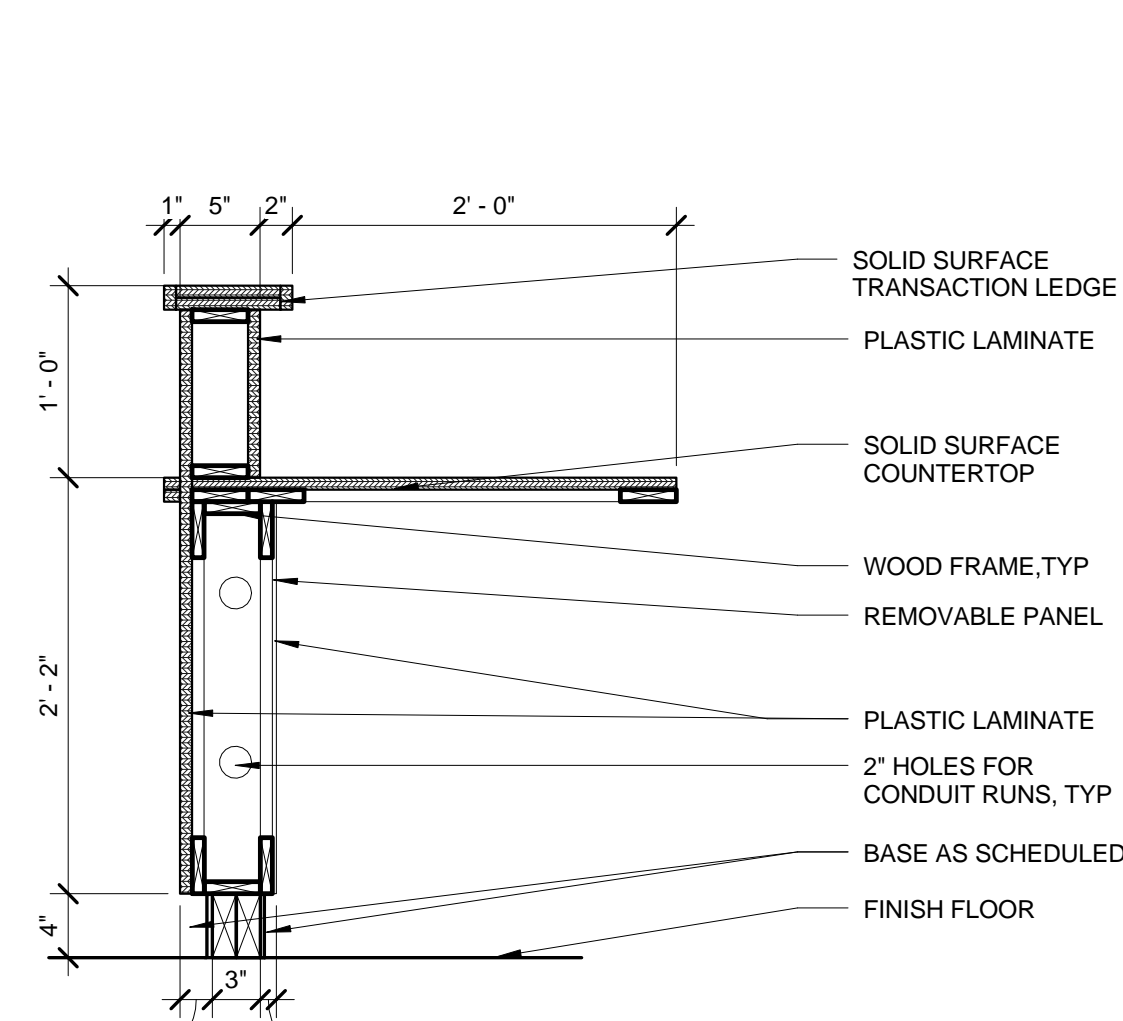

C SECTION  
1" = 1'-0"

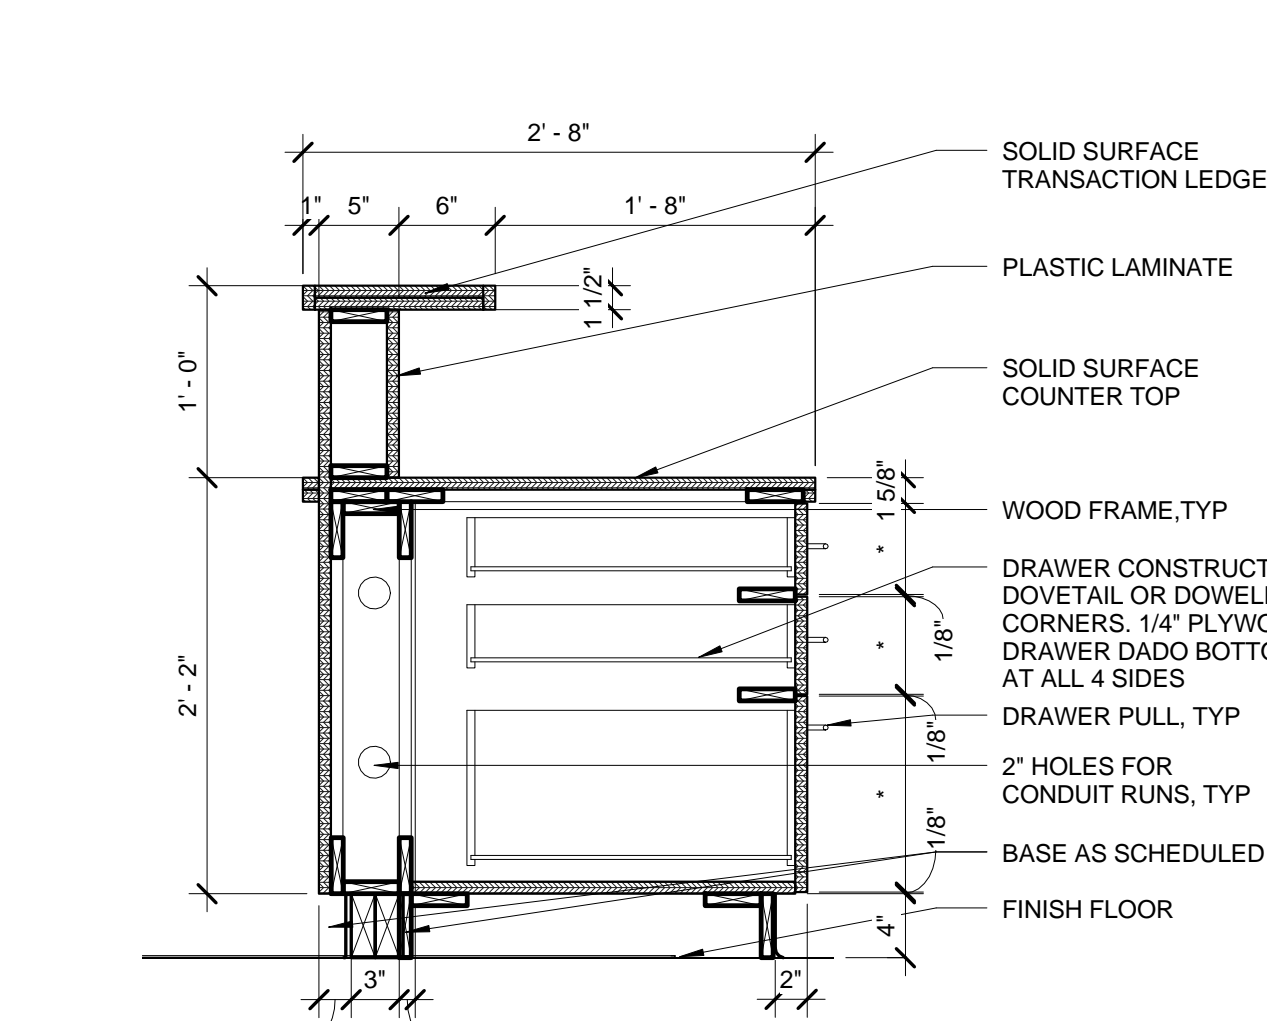

D SECTION  
1" = 1'-0"

**GENERAL CASEWORK NOTES**

ALL CABINETS SHALL BE FLUSH OVERLAY DESIGN, A10 PREMIUM GRADE UNLESS OTHERWISE NOTED OR DETAILED.

PROVIDE 3 MM EDGE BANDING TO MATCH LAMINATE ON EXPOSED EDGES.

DOOR HARDWARE SHALL BE SELF CLOSING SEMI CONCEALED BUTT HINGES.

DRAWER SLIDES SHALL BE FULL EXTENSION TYPE 100 LB CAPACITY PROVIDE 150 LB CAPACITY AT ALL DRAWERS MARKED FC. SIDE MOUNTED WITH INTEGRAL STOP. PROVIDE SELF CLOSING/STAY CLOSED TYPE.

CABINET LOCKS SHALL BE KEYED CYLINDER, TWO KEYS PER LOCK.

DOOR AND DRAWER PULLS SHALL BE 4" STAINLESS STEEL U SHAPED.

ADJUSTABLE SHELF SUPPORTS SHALL BE STANDARD SIDE MOUNTED SYSTEM USING RECESSED METAL SHELF STANDARDS AND COORDINATED SHELF RESTS, POLISHED CHROME FINISHED, FOR NOMINAL 1 INCH SPACING ADJUSTMENTS

DRAWER CONSTRUCTION: DOVETAIL JOINTS.


PROVIDE SOLID SURFACE SS #1 ON ALL TRANSACTION LEDGES

PROVIDE SOLID SURFACE SS#2 AT ALL OTHER LOCATIONS SCHEDULED TO RECEIVE SOLID SURFACE.


PROVIDE PLAM #1 AT ALL BASE AND WALL CABINETS

PROVIDE PLAM #2 AT ACCENT LOCATIONS

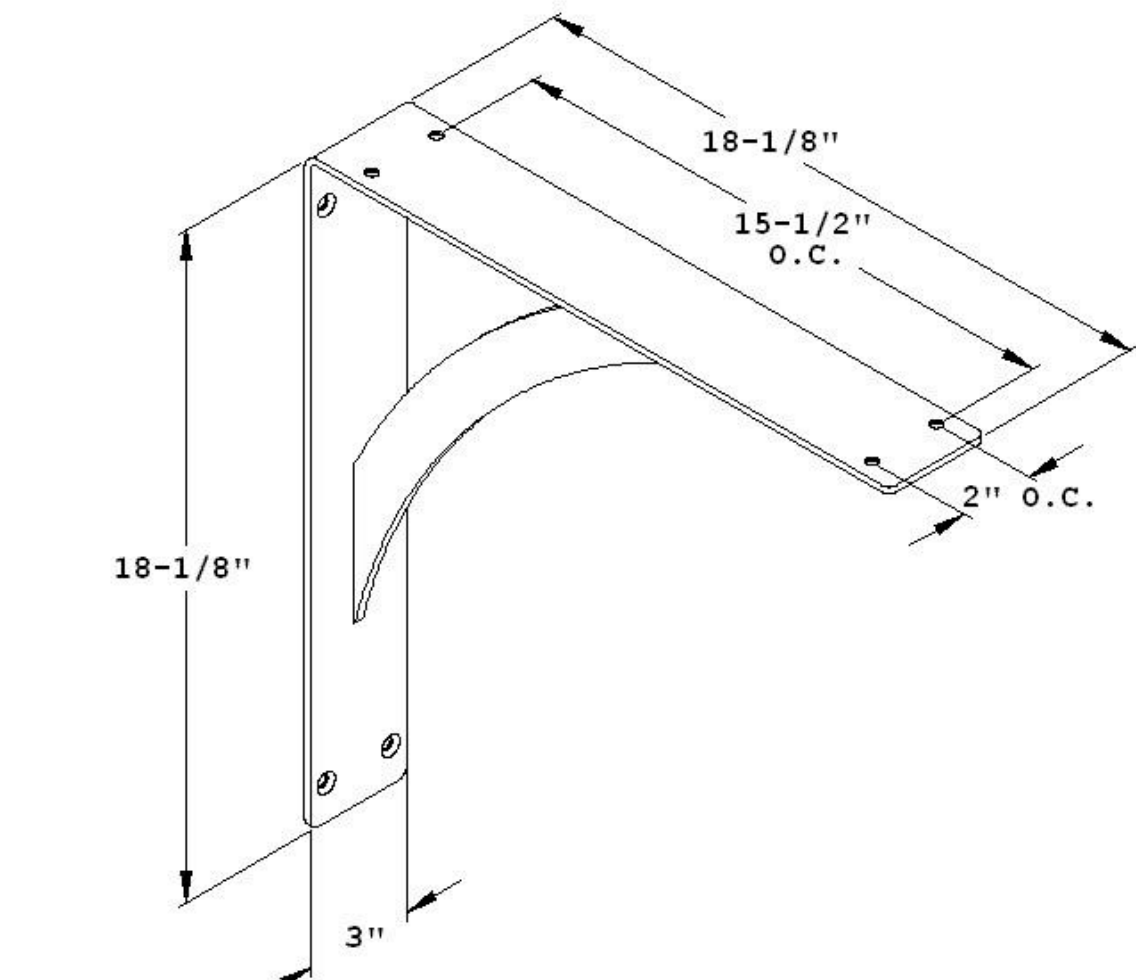



PROVIDE PLAM#3 ON ALL COUNTERTOPS SCHEDULED TO RECEIVE PLAM

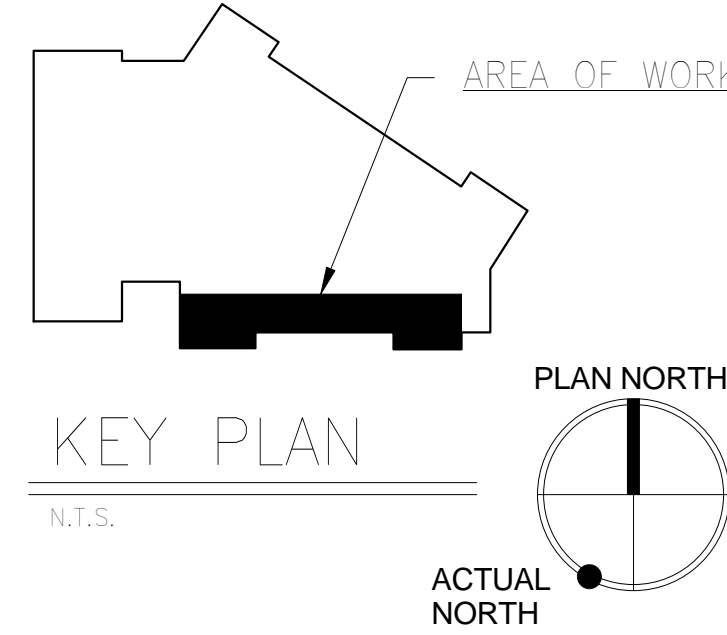


E METAL SUPPORT BRACKET  
NTS



**100% CONSTRUCTION DOCUMENTS  
FULLY SPRINKLERED**

			CONSULTANTS:						ARCHITECT / ENGINEERS:			<div><div>Drawing Title</div><div>Casework Elevations and Sections</div><div>Approved: Medical Center Director</div></div>			<div><div>Project Title</div><div>RENOVATE 3W FOR SURGERY ADMINISTRATION</div><div>Location HUNTINGTON, WV</div><div><div>Date03-28-2014</div><div>Checkedjht</div><div>Drawnjas</div></div></div>			<div><div>Project Number</div><div>581-14-103</div><div>Building Number1W</div><div>Drawing NumberA8.0</div><div>Dwg. 09 of 40</div></div>			<div>Office of Construction and Facilities Management</div> <div> Department of Veterans Affairs</div>					
						 <div><div>Miller-Remick LLC</div><div>M.E.P. &amp; Structural Engineering A Service Disabled Veteran Owned Small Business</div><div>1010 KINGS HIGHWAY SOUTH CHERRY HILL, NEW JERSEY 08034 PHONE: (856)429-4000 FAX: (856)429-5002</div></div>			 <div><div>PF&amp;A</div><div>PF&amp;A DESIGN ARCHITECTURE, PLANNING, INTERIORS World Trade Center 101 West Main Street, Suite 7000 Norfolk, VA 23510 Phone: 757-471-0537 Fax: 757-471-4205 www.pfa-architect.com</div></div>																	
NO. DESCRIPTION DATE																										



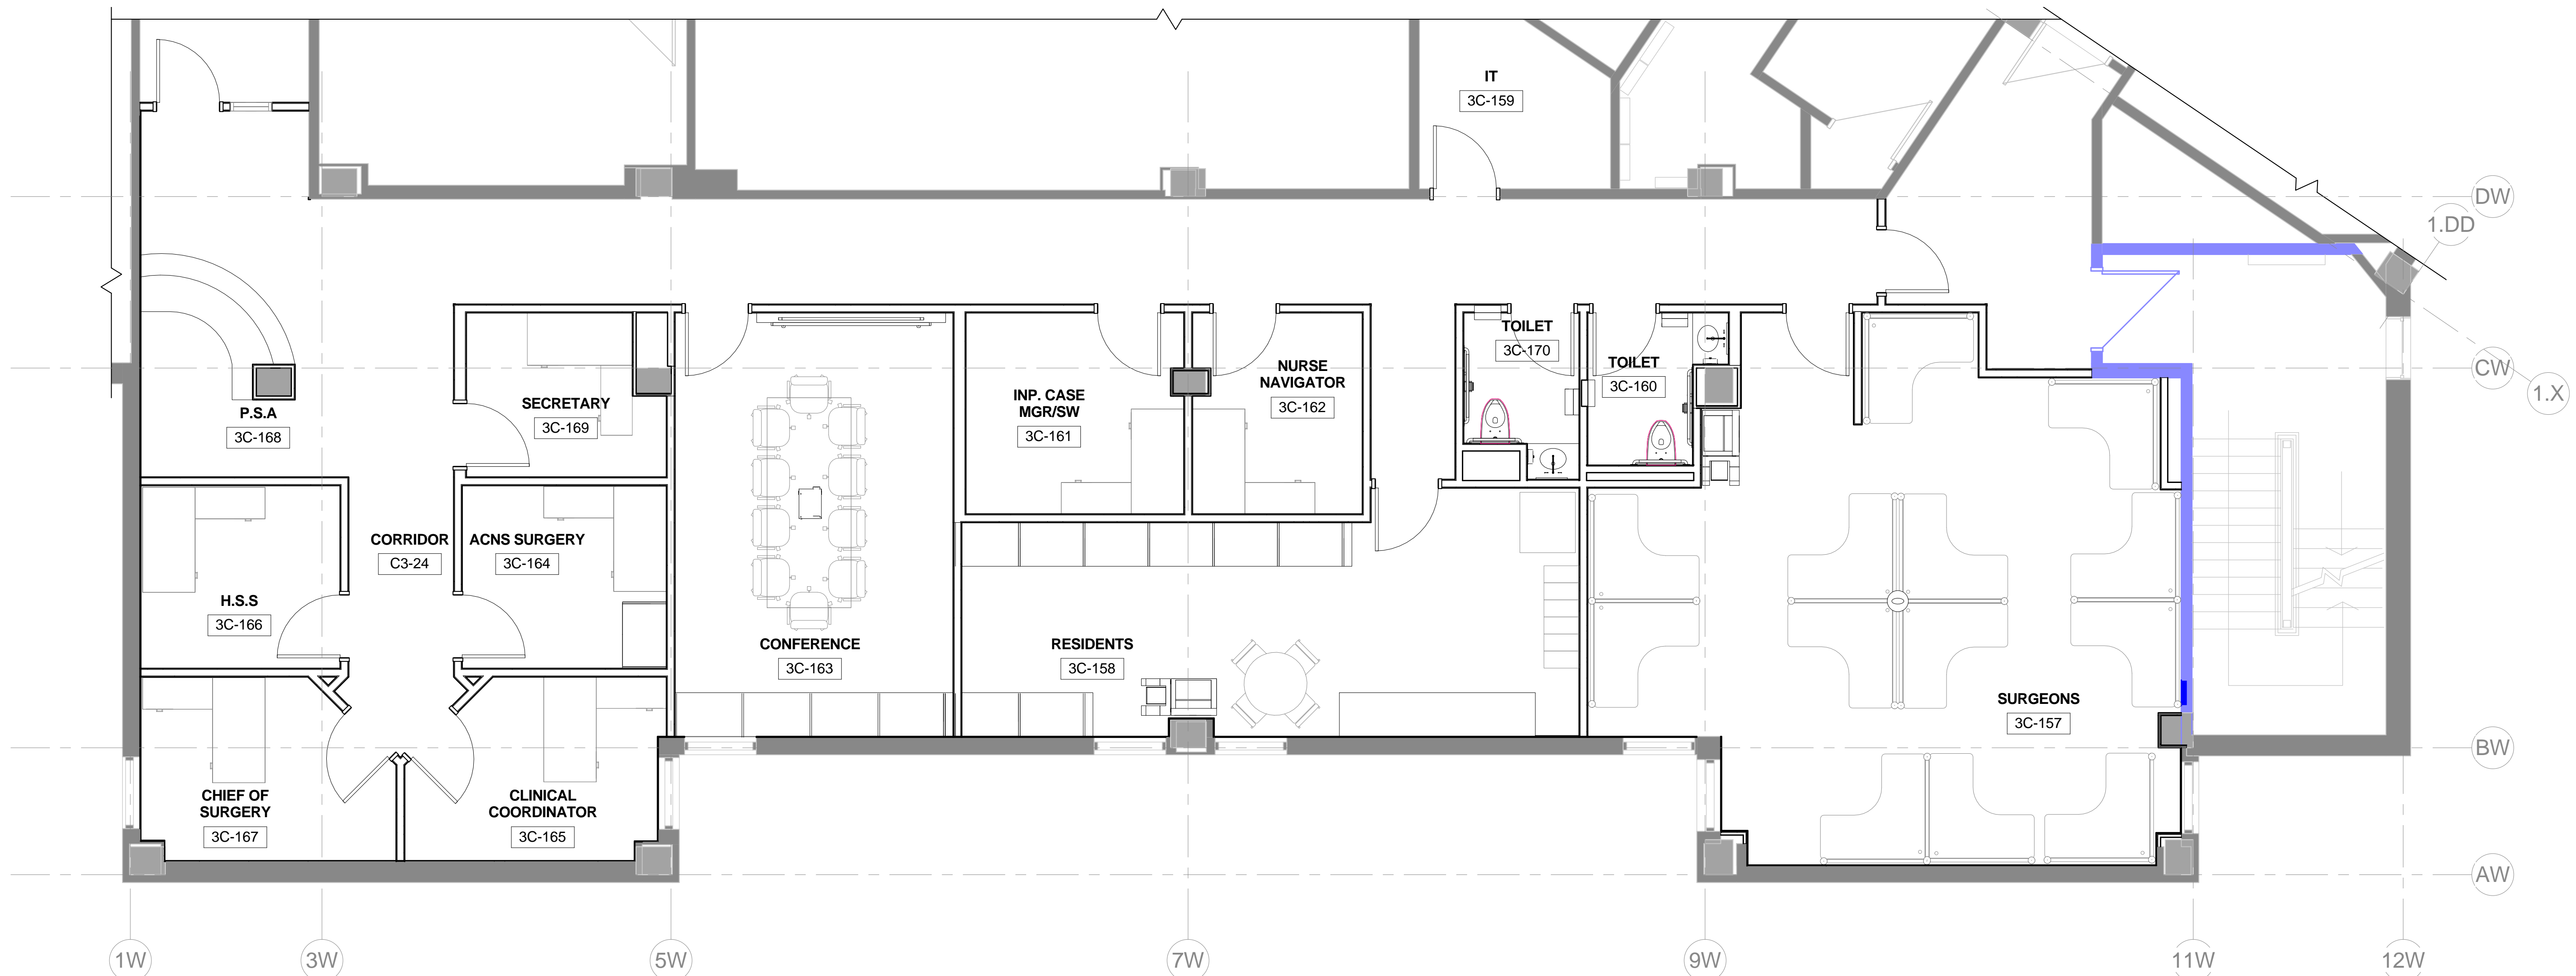

SIGNAGE - NEW WORK PLAN - THIRD FLOOR  
1/4" = 1'-0"

### GENERAL SIGNAGE NOTES

- ALL SIGNS TO BE MOUNTED AT 60" A.F.F. TO THE CENTER OF THE SIGN UNLESS OTHERWISE NOTED. SEE SIGNAGE SCHEDULE FOR SPECIALIZED MOUNTING HEIGHTS.
- ALL SIGNS TO BE MOUNTED 3" FROM THE LATCH SIDE OF THE DOOR WHERE SPACE ALLOWS. WHERE NO SPACE IS PROVIDED ON THE LATCH SIDE OF THE DOOR, SIGN TO BE MOUNTED TO NEAREST ADJACENT WALL.
- A MINIMUM LIGHT REFLECTANCE VALUE (SRV) CONTRAST OF AT LEAST 70% IS REQUIRED BETWEEN SIGN COPY AND BACKGROUND.
- PERMANENT ROOM SIGNS TO HAVE RAISED COPY WITH DUPLICATE COPY IN TYPE II BRAILLE.
- ALL BRAILLE COPY SHALL BE TYPE II WITH DOMED TOP.
- ADA REQUIRED GRAPHICS SHALL HAVE A CLEAR FIELD AREA OF 6" X 6".
- ALL SIGNS SHALL HAVE AN ACRYLIC BACK PLATE TO LEVEL THE MOUNTING SURFACE. SUPPORTING BACK PLATE SHALL NOT BE VISIBLE FROM THE FRONT FACE OF THE SIGN.
- SIGNAGE CONTRACTOR TO FIELD VERIFY ALL SIGN MOUNTING CONDITIONS.
- ALL SIGNS SHALL HAVE 1/16" RADIUS EDGES WHERE SHARP EDGES MAY OCCUR.
- LOGO GRAPHIC USED ON SIGNS SHALL BE PROVIDED BY OWNER.
- COORDINATE WITH COR BEFORE ORDERING AND PURCHASING.

### SIGNAGE NOTES

TYPE: TAKEFORM: FUSION 40

-FACE FINISH: MAPLE

-BACKER FINISH: LT3526 TRAVERTINE

- RAISED COPY: CO101 BLACK FONT: HELVETICA ADA

- RAISED COPY: CO105 DESERT SAND FONT: HELVETICA ADA

- INSERT: MEDIA: IVORY PAPER, BACKGROUND:SHUTTERSTOCK\_21682717\_SEPIA.JPG (35% OPACITY) COPY: HELVETICA ADA, BLACK

- METAL ACCENT: POLISHED

3C-168


TYPE: C3  
9.25" X 8.5"

3C-165

TYPE: C9  
5.5" X 8.5"

SIGNAGE  
3" = 1'-0"

SIGNAGE			
MARK	NUMBER	GRAPHICS	TACTILE BRAILLE
C9	3C-157		3C-157
C9	3C-158		3C-158
C9	3C-159		3C-159
C3	3C-160	ACCESSIBLE	RESTROOM
C9	3C-161		3C-161
C9	3C-162		3C-162
C9	3C-163		3C-163
C9	3C-164		3C-164
C9	3C-165		3C-165
C9	3C-166		3C-166
C9	3C-167		3C-167
C9	3C-169		3C-169
C3	3C-170	ACCESSIBLE	RESTROOM
C9	4C-101		

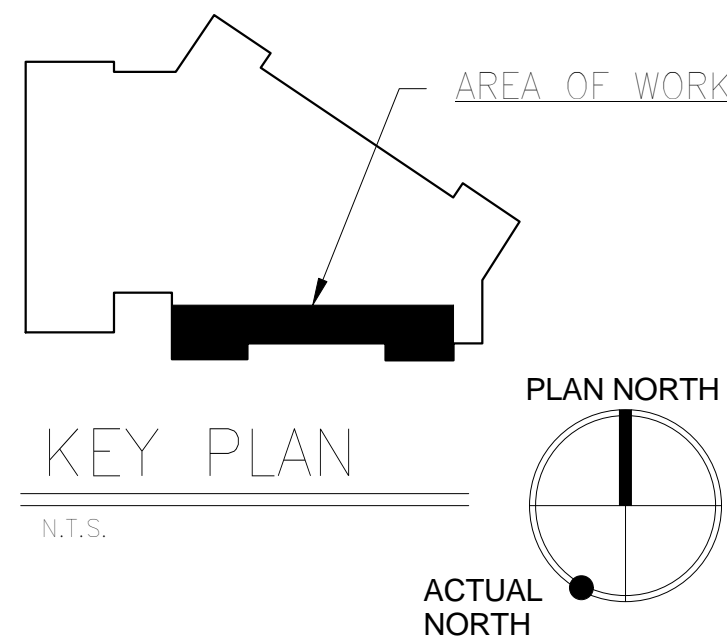

100% CONSTRUCTION DOCUMENTS  
FULLY SPRINKLERED

CONSULTANTS:			ARCHITECT / ENGINEERS:			Drawing Title <b>Architectural Signage</b>		Project Title <b>RENOVATE 3W FOR SURGERY ADMINISTRATION</b>		Project Number <b>581-14-103</b>		Office of Construction and Facilities Management 	
						Approved: Medical Center Director		Location HUNTINGTON, WV		Building Number <b>1W</b>			
								Date 03-28-2014	Checked jht	Drawn Author	Dwg. 10 of 40		

VA FORM 08-6231

1

2

3

4

5

6

7

8

9