


GENERAL CONSTRUCTION NOTES

- ALL NOTES ON OTHER SHEETS APPLY TO THIS SHEET ALSO.
- ALL DIMENSIONS ARE TO BE FIELD VERIFIED PRIOR TO CONSTRUCTION.
- INTENT IS THAT ALL EXISTING AND NEW SURFACES INCLUDING WALLS, SOFFITS, FASCIA, BULK HEADS, AND HARD CEILINGS ARE TO RECEIVE NEW FINISHES. (SEE FINISH SCHEDULE) UNLESS NOTED OTHERWISE. REPAIR, PATCH CLEAN, AND PREPARE SURFACES BEFORE FINISHING. FOLLOW ALL VA SPECIFICATIONS AND MANUFACTURERS REQUIREMENTS AND RECOMMENDATIONS. DISMOUNT ALL WALL MOUNTED SIGNAGE, PLATES, FIXTURES, EQUIPMENT, HANDRAIL, BUMPER GUARDS, MISCELLANEOUS HARDWARE, ETC. AND REINSTALL AFTER PAINTING IS COMPLETE.
- PROVIDE BLOCKING BEHIND ALL WALL MOUNTED ITEMS, FIXTURES, GRAB BARS, ETC.
- CUT AND PATCH EXISTING WALLS TO CONCEAL ROUTING OF UTILITY SERVICES, PIPES, CONDUIT, ETC. UNLESS PROHIBITED BY CODES.
- FURRING OF UTILITIES, PIPES, CONDUIT ETC. IS TO BE DONE BY THE MINIMUM DEPTH NECESSARY TO CONCEAL PIPES.

PLUMBING PLAN KEYNOTES

- THE SELECTIVE DEMOLITION WORK AND NEW CONSTRUCTION INCLUDES THE FOLLOWING:
 - THE NOTED REMOVED ITEMS INCLUDE THE DISPOSAL OF THESE ITEMS, UNLESS OTHERWISE SPECIFIED. THE SITE WORK SELECTIVE DEMOLITION WORK ELEMENTS WILL BE PERFORMED ONLY TO THE EXTENT NECESSARY FOR THE PRODUCTION OF THE WORK. (TYPICAL)
- AT CORE DRILLED LOCATIONS AND AT BARRIER LOCATIONS FILL THE VOIDS FROM REMOVED PIPE WITH MATCHING MATERIALS.
- FURNISH AND INSTALL CAULKING AND, WHERE APPLICABLE, FIRE RATED SEALANT COMPOUNDS AT THE WORK PENETRATIONS. THE FIRE RATED MATERIALS WILL BE CONSISTENT WITH THE FIRE RATINGS OF THE PENETRATED BUILDING COMPONENT. DO NOT USE CLEAR CAULK ABOVE CEILING. (TYPICAL)
- DEMO EXISTING WATER LINES BACK TO SUPPLY / MAIN AND CAP. IF SUPPLY COMES FROM SUB-BASMENT DEMO TO MAIN AND CAP.
- DEMO STEAM LINES TO STEAM SUPPLY LINES AT MAIN.
- DEMO STEAM TRAP AND PRESSURE RELEASE VALVES.
- DEMO TUB STUB OUTS AND CONNECTIONS TO STERILIZERS.
- WORK IN SUB-STERILE AND CLEAN CORRIDOR SHALL BE DONE ON WEEKENDS. CORRIDORS MUST BE CLEAN AND OPERATIONAL BY START OF BUSINESS ON NEXT MORNING. O.R. PERSONNEL MAY REQUIRE ADMITTANCE DURING WEEKEND WORK. THIS WORK MAY BE INCORPORATED INTO OTHER PHASES.
- STEAM RETURN AND CONDENSATE LINES TO REMAIN.
- BID DEDUCT 1: STEAM DEMO WORK
- DEMO EXISTING FLOOR DRAIN BACK TO MAIN. CUT AND CAP.

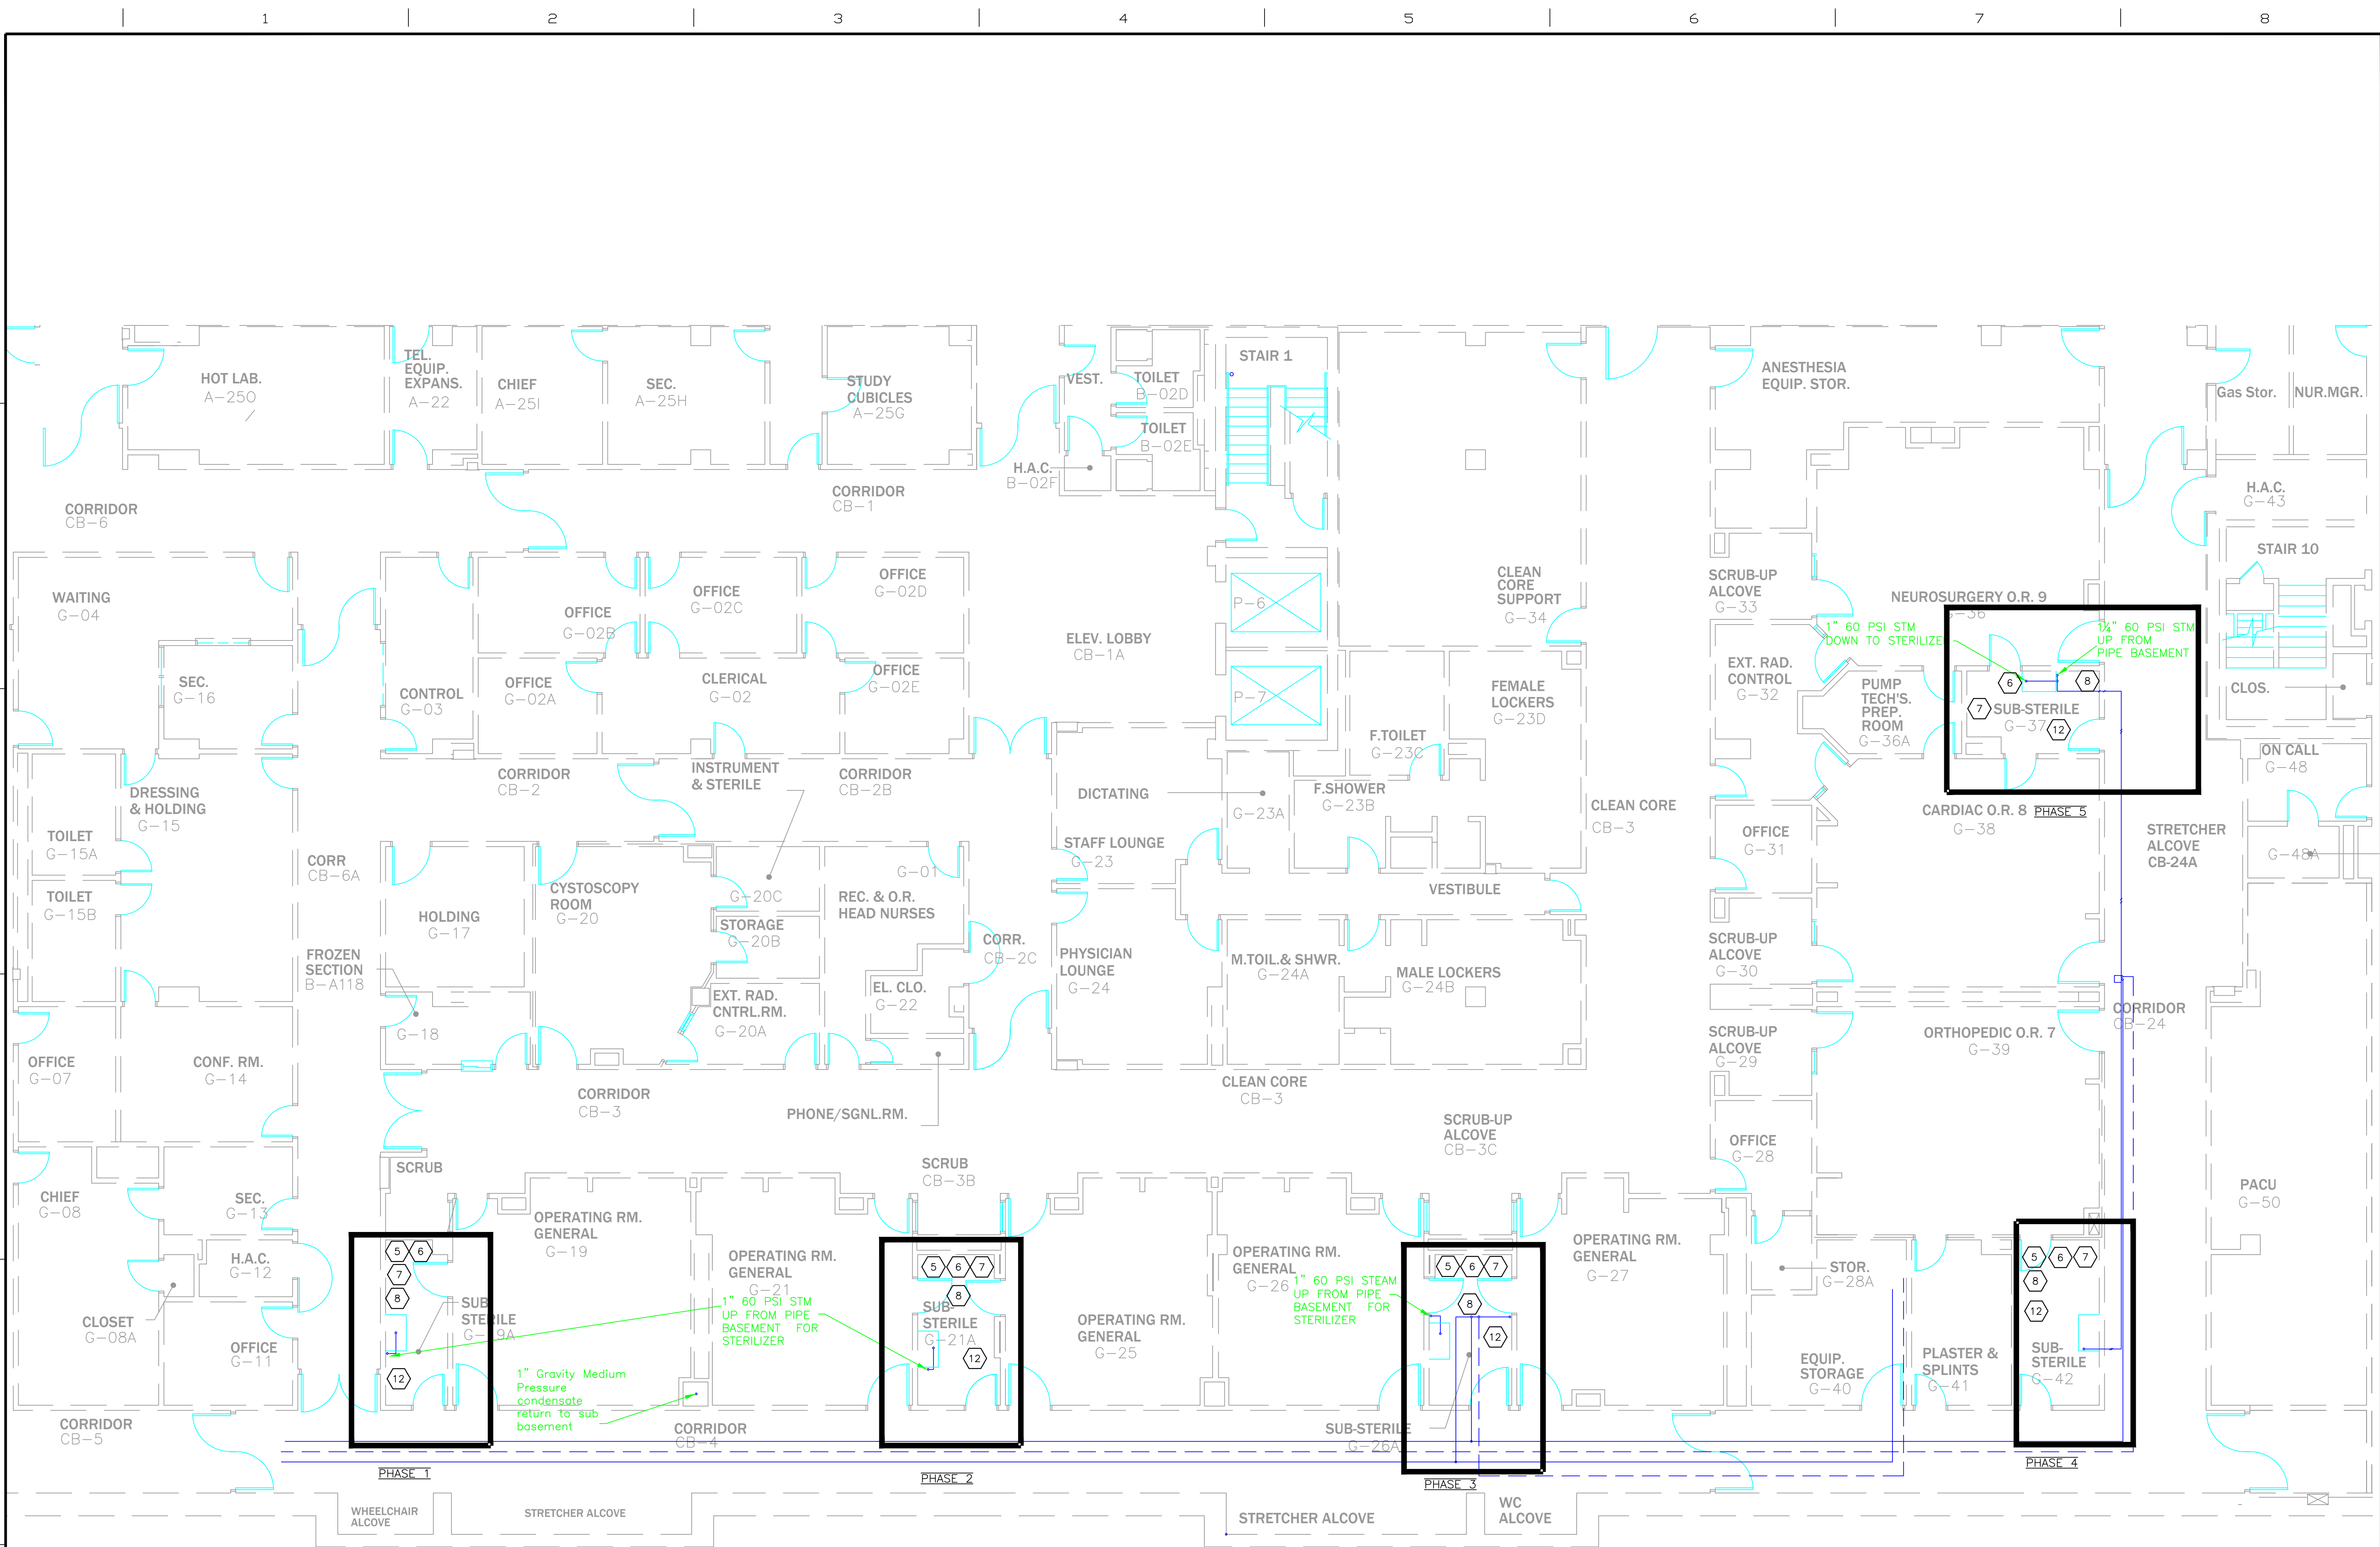

SUB-STERILE- PLUMBING DEMO PLAN

1/8" = 1'-0"

<div>Revisions</div> <div>Date</div>		<div></div> <div>Tennessee Valley Healthcare System</div>	<div></div> <div>MURFREESBORO CAMPUS</div>	<div>AREA OF RENOVATION</div> <div>KEY PLAN</div>	<div>Project Title : O.R. STERILIZER SITE PREPARATION</div> <div>Drawing Title : SITE PREP PLUMBING DEMO</div> <div>Approved By : <div></div></div> <div>Approved By : <div></div></div> <div>Building Number : BLDG I</div> <div>Checked By : X</div> <div>Drawn By : REN</div>	<div>Date : 03-17-2014</div> <div>Project No. : 626-14-510</div> <div>DRAWING NO. : P1-393</div> <div>Drawn By : 4 of 8</div>	<div>Department of Veterans Affairs</div>
--------------------------------------	--	---	--	---	--	---	---