


- NOTES**
- REFER TO SPECIFICATION SECTION 010000 FOR REQUIREMENTS REGARDING PRE-CONSTRUCTION INVESTIGATION PRIOR TO COMMENCEMENT OF WORK. CONTRACTOR TO CONDUCT A COMPLETE SURVEY OF EVERY FIRE PROTECTION SPRINKLER HEAD TO ASSESS EACH HEAD'S CONDITION AND VIABILITY.
 - UPON COMPLETION OF THE ABOVE SURVEY, THE VAMC COR SHALL DESIGNATE UP TO 2,400 HEADS TO BE REPLACED/REWORKED BY THE CONTRACTOR UNDER THIS CONTRACT.
 - THE 2,400 HEADS DESIGNATED BY THE VAMC COR LISTED ABOVE ARE IN ADDITION TO ANY SPECIFIC ITEMS INDICATED ON THIS SHEET.

- KEYED NOTES**
- REWORK/CONFIRM SPRINKLER HEAD LOCATIONS AND SPACING PER CODE NFPA13 IN ROOMS GA01, GB01DA, GB02, GB04, AND GC11.
 - REWORK EXISTING FIRE SPRINKLER HEAD AND PIPING PER CODE NFPA13 IN ROOM GC100. CONFIRM DEFLECTOR POSITIONS.
 - REWORK EXISTING FIRE SPRINKLER HEAD AND PIPING PER CODE NFPA13 IN ROOM GB09A. CONFIRM DEFLECTOR POSITIONS.

LEGEND

AREA APPLIED TO THIS PORTION OF PROJECT

GENERAL NOTE:
 ALL EXISTING PIPING, DUCTWORK, SPRINKLERS, CONDUIT, LIGHTING OR OTHER CONSTRUCTION SHALL BE RELOCATED AS NECESSARY FOR ALL DEMOLITION AND INSTALLATION WORK.

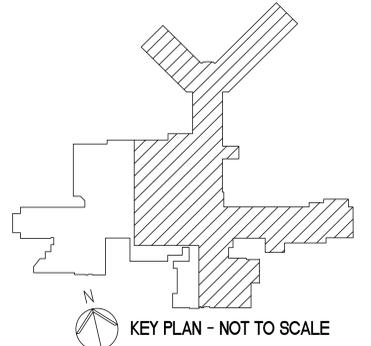

three inches = one foot
 one and one half inches = one foot
 one inch = one foot
 three quarters inch = one foot
 one half inch = one foot
 three eighths inch = one foot
 one quarter inch = one foot
 one eighth inch = one foot

F1 PARTIAL FLOOR PLAN
 1/16" = 1'-0"

FULLY SPRINKLERED
 BID DOCUMENTS
 FOR CONSTRUCTION

AMENDMENT #3 Revisions: _____ Date: 5/20/14		ARCHITECT/ENGINEERS: ENGINEERS AND CONSTRUCTORS 200 Envoy Circle #201, Louisville KY 40299 - PH: 502.339.8511 - www.paradigmusa.com		Drawing Title: FIRE PROTECTION PLAN - GROUND FLOOR BUILDING 1 EAST		Project Title: FIRE SAFETY UPGRADES		Project Number: 660-14-104 Building Number: 1		Office of Construction and Facilities Management 	
				Approved Project Director: _____		Location: GEORGE E WAHLEN VAMC 500 FOOTBALL DR. SALT LAKE CITY, UT		Drawing Number: 1.FX100B		Date: 12-19-2013 Checked: KLP Drawn: JDM	