


inSinkerator®

Evolution Series®

Grind More. Hear Less.®




Dimensions

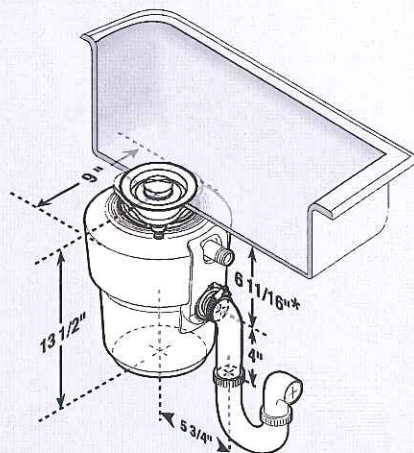

* Add 1/2" when stainless steel sinks are used.

Job Specifications

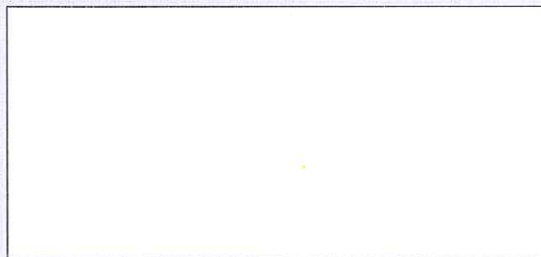

Food Waste Disposers

Evolution Excel®

For those who enjoy the very best kitchen appliances.

△ 02/08/2012

Specifications

Type of Feed	Continuous
On/Off Control	Wall Switch
Motor	Single Phase
HP	1.0
Volts	120
Reversing	Auto-Reverse Grind System™ feature
HZ	60
RPM	1725
Amp. (Avg. Load)	10.2
Time Rating	Intermittent
Lubrication	Permanently Lubricated Upper & Lower Bearings
Shipping Weight (Approx.)	25.5 lbs.
Unit Finish	Stainless Steel Light Gray TEN-1706
Overall Height	13-1/2"
SoundSeal Plus Technology	Anti-Vibration Mount® Anti-Vibration Tailpipe Mount™ Quiet Collar® Sink Baffle Multi-Layer SoundLimiter™ Insulation
MultiGrind Plus Technology	GrindShear Ring® Tri-Action Lug™ System feature Undercutter Disk® Jam-Sensor® Circuit
Grind Chamber Capacity	40 oz.
Motor Protection	Manual Reset Overload
Average Water Usage	Approx. 1 Gallon Per Person Per Day
Average Electrical Usage	3-4 KWh Per Year
Drain Connection	1-1/2" Anti-Vibration (Hose Clamp)
Dishwasher Drain Connection	Yes

Submittal Sheet

The ultimate in disposer performance. Nothing grinds more with less noise.

- SoundSeal Plus™ technology reduces disposer noise by at least 60% vs. standard disposers.
- MultiGrind Plus™ technology delivers 3 stages of grind vs. 1 stage in standard disposer.
- Features exclusive Jam-Sensor® Circuit that increases motor torque 500% to automatically break through the toughest jams.
- Includes Quiet Collar® sound reducing sink baffle.

Sample Specification

Food Waste Disposer(s) shall be InSinkErator Model Evolution Excel® with MultiGrind Plus™ and SoundSeal Plus™ technologies, 1.0 HP motor, Auto-Reverse Grind System®, Stainless Steel Grind Chamber and components.

Warranty:

7-Year parts and in-home service.

* The complete InSinkErator warranty is included in the Care & Use Booklet packed with each unit.



Food waste disposers provide an environmentally responsible alternative to transporting food waste to landfills. And they can help reduce greenhouse gas emissions. At capable wastewater treatment plants, food waste can be converted to biosolids and used as fertilizer. Capable plants can also capture methane gas and recycle it as an energy source. (Check the plant in your area.)



The mark of responsible forestry
BV-COC-080715
© 1996 Forest Stewardship Council A.C.



The Emerson logo is a trademark and service mark of Emerson Electric Co. The mounting collar configuration is a trademark of Emerson Electric Co.

InSinkErator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.



Waste > Indoor Utility

3540 Slim Jim® Waste Container



The industry standard in space-saving waste management.

- Efficient size and shape fits tight spaces.
- Durable, all-plastic construction is easy to clean and provides long life.
- Most specified containers behind bars and desk side.
- Custom imprinting available; contact Rubbermaid Customer Service at (800) 347-9800 for details.

AVAILABLE COLORS

Order #	Color	Product UPC/ UCC Code
FG354000 YEL	YEL	086876180725 / 10086876180722
FG354000 GRAY	GRAY	086876023350 / 10086876023357
FG354000 BRN	BRN	086876023343 / 10086876023340
FG354000 BLUE	BLUE	086876047561 / 10086876047568
FG354000 BLA	BLA	086876164855 / 10086876164852
FG354000 BEIG	BEIG	086876023336 / 10086876023333



Yellow
YEL



Brown
BRN



Black
BLA



Gray
GRAY



Blue
BLUE



Beige
BEIG

SPECIFICATIONS

	U.S.	Metric
Length:	20 in	50.8 cm
Width:	11 in	27.9 cm
Height:	30 in	76.2 cm
Mass Capacity [Nom]:		
Mass Capacity [Max]:		
Volume Capacity [Nom]:	23 gal	87.1 L
Volume Capacity [Max]:		
Volume Capacity [Min]:		
Carton Length:		
Carton Width:		
Carton Height:		
Carton Cube:	6.94 ft ³	0.20 m ³
Ship Weight/Carton:	32.87 lb	14.91 kg

Pack Quantity: 4

Cartons Per Pallet: 8

Material: LLDPE

Process: Injection Molding

ADDITIONAL INFORMATION:

Product Sell Sheets: RCP_FS548_Slim_Jim.pdf

Chemical Resistance Guide: chem.pdf

Products in Slim Jim® Containers

Item #	Description	Length	Width	Height	Mass Capacity	Volume Capacity	Certification
200	Wall Mount Receptacle w/ Concealed Lock & Self Closing Push Doors	19 in	39 in				Americans with Disabilities Act
3542-20	Slim Jim® Combo: 3541 (1) Light Gray; 2688-88 (1) Light Gray						
3540	Slim Jim® Waste Container	20 in	11 in	30 in		23 gal	
3541	Slim Jim® Waste Container with Handles	23 1/8 in	11 in	24 7/8 in		15 7/8 gal	



SELECTO

SCIENTIFIC

SMF CoffeeTea Pro

△ 02/08/2012



System Part #: 80-6200TP
Replacement Cartridge #: 108-067K

Materials of Construction

Filter Media	Ion Exchange Resin
Housing	polypropylene
Head	Proprietary reinforced nylon

Applications:

- Coffee tea and Espresso Machines
- Protection of Hot Beverage Equipment

Benefits:

- No pre filter required
- One Filter can do it all!!!
- Dirt, Chemical and Chloramines reduction
- Low pressure drop

Features:

- High Efficiency Resin & Ultra High Porosity Carbon
- Nylon construction withstands high pressure
- Modular filter design for up to 80% less installation time!
- 40 times more dirt holding capacity than conventional carbon block filters and other polypropylene sediment filters!
- 30 times the chloramine reduction of a conventional carbon block
- 1st Jumbo Sanitary Filter on market
- Blending of treated and incoming water is optional!

Specified to:

- Reduce scale build up
- Reduce Maintenance for coffee, tea & espresso machines
- Reduce tea turbidity to less than 65 NTU
- Reduce pitting and corrosion of equipment
- Reduce sediment, chlorine, chloramine and alkalinity

SMF CoffeeTea Pro hardware has been independently tested against NSF/ANSI Std. 42
 Do not use with water that is microbiologically unsafe or of unknown quality

Cartridge Specifications and Performance Data

Model	Maximum Dimensions	Micron Rating	Initial ΔP (psi) at Flow Rate (gpm)	Scale Control at Flow rate (gpm)	Temperature Rating
SMF CoffeeTea Pro	14" x 9" x 29"	5.0	1-5 psi @ 1 gpm @ 60 psi	1,500 gallons @ 1 gpm 5,700 liters @ 3.79 Lpm	40°F to 100°F

3980 Lakefield Court • Suwanee, GA 30024 USA

P: 678-475-0799 • 800-635-4017

F: 678-475-9126 • 800-811-7682

www.selectoinc.com

Ver. I, Aug 2010 JN



SMF IcePRO

△ 02/08/2012



System Part #: 80-6100IP
Replacement Cartridge #: 108-010IP

Applications:

- ICE MACHINE & FCB APPLICATIONS

Benefits:

- One Filter does it all
- No pre filter required
- Dirt, Chemical and Chloramines reduction
- Low pressure drop
- Improve taste of Ice
- Provide Safe, Clean Ingredient Water
- Reduce Pitting of Stainless Steel Components in Ice Machines
- Inhibits Scale Build-Up

Features:

- Ultra High Porosity Carbon with Siliphos
- Nylon construction withstands high pressure
- Modular filter design for up to 80% less installation time!
- 40 times more dirt holding capacity than conventional carbon block filters and other polypropylene sediment filters!
- 30 times the chloramine reduction of a conventional carbon block

Specified to:

- Reduce Chlorine, Nominal Particulate Class 1, Chloramine, Bad Taste and Odors, Total Organic Compounds, Tannins and Trihalomethanes

Materials of Construction

Filter Media	Hollow Carbon & Scale Inhibitor
Housing	polypropylene
Head	Proprietary reinforced nylon

SMF IcePRO hardware has been independently tested against NSF/ANSI Std. 42
 Do not use with water that is microbiologically unsafe or of unknown quality

Cartridge Specifications and Performance Data

Model	Maximum Dimensions	Micron Rating	Initial ΔP (psi) at Flow Rate (gpm)	Chlorine Reduction & Scale Control Capacity at Flow rate (gpm)	Temperature Rating
SMF IcePRO	14" x 9" x 19"	0.5	1-5 psi @ 5.0 gpm @ 60 psi	50,000 gallons @ 5.0 gpm 189,270 liters @ 18.9 Lpm	40°F to 100°F

Test Parameters

Substance	Influent Challenge Concentration	Reduction Requirement	Maximum Permissible Product Water Concentration mg/L	Actual Reduction Percentage
Chlorine	2.0 mg/L ± 10%	≥ 50%	1.0	99%
Particulate, Class I	>10,000 counts/mL	0.5 to < 1 micron, ≥ 85%	1500 Counts/mL	99%

3980 Lakefield Court • Suwanee, GA 30024 USA

P: 678-475-0799 • 800-635-4017

F: 678-475-9126 • 800-811-7682

www.selectoinc.com

Ver. I, Aug 2010 JN