



85R637-4P Compact Oil Free Compressor

JUN-AIR®



Features

- 100% oil free
- 100% duty cycle
- Super quiet - only 50dBA
- Pressure up to 7 bar
- Long-life, 2-year warranty
- 8000 hours cup life at 7bar
- Easy to use
- Plug & play
- Rubber feet and casters included

Description

- 5µm filter with autodrain
- Pressure regulator
- Automatic drain system with evaporation tray
- Hour run meter
- Receiver with internal coating and 5-year warranty

Certifications




- UL 1450
- cUL (CAN ISCA C22.2, No. 68-09)
- CE (97/23/EC, 2004/108/EC, 2006/95/EC, 2011/65/EU)

Product Specifications

Model	85R637-4P		
Voltage	V	1x230	1x120
Frequency	Hz	50	60
Motor	HP	0.5	0.5
	kW	0.37	0.37
Displacement	l/min	74	78
Air flow @ 7bar / 100 psi	l/min	28	32
	cfm	1.0	1.1
Max. pressure	bar	7	7
	psi	100	100
Max. current	A	2.5	6.4
Receiver volume	litres	4	4
Weight	kg	29.5	29.5
	lbs	65	65
Noise level	dB(A)/1m	50	50
Thermal protection		Yes	Yes
Duty cycle		100%	100%

Air Flow / Pressure Curve

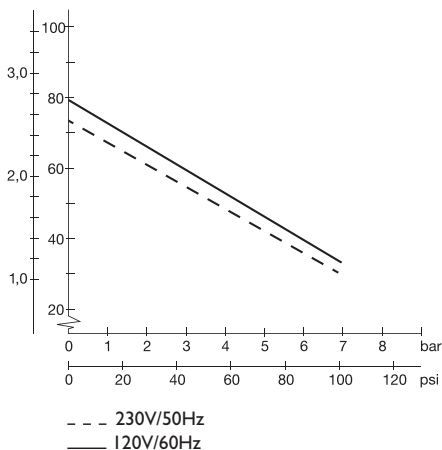

Dimensions*

