TECHNICAL SPECIFICATIONS
Volume 1 of 2

Department of Veterans Affairs
Louis Stokes Cleveland VA Medical Center
WADE PARK

10701 East Boulevard Cleveland, OH 44106

EXPAND AND RENOVATE
NUCLEAR MEDICINE AND RADIOLOGY
Project No. 541-14-101

PREPARED BY:

Perspectus Architecture
13212 Shaker Square, Suite 204
Cleveland, Ohio 44120
P (216) 752-1800 F (216) 752-3833
Project Director: Tim Huffman

Fredrick, Fredrick & Heller Engineers
672 East Royalton Road
Broadview Heights, Ohio 44147
P (440) 546-9696 F (440) 546-9699
Project Director: Mike Long

Barber & Hoffman, Inc.
1100 West 9th Street
Cleveland, Ohio 44113
P (216) 875-0100 F (216) 875-0111
Project Director: Halim Saab

Stephen J. Sebesta & Associates
17830 Englewood Drive, Suite 16
Cleveland, Ohio 44130
P (216) 781-0060 F (216) 781-0024
Project Director: Eileen Oster

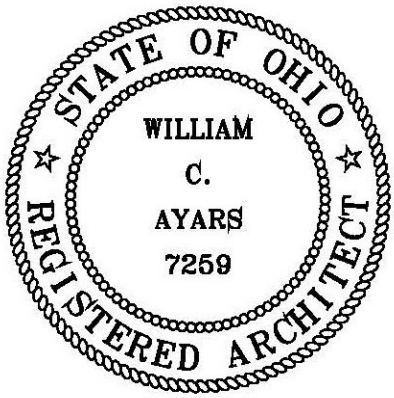

BID ISSUE

ISSUE DATE: January 17, 2014

DEPARTMENT OF VETERANS AFFAIRS
SPECIFICATIONS

TABLE OF CONTENTS
Section 00 01 10

VOLUME 1		**PAGES**
	DIVISION 0 - SPECIAL SECTIONS	
00 01 10	Table of Contents	1-5
00 01 15	Drawing Index	1-5
	DIVISION 1 - GENERAL REQUIREMENTS	
01 00 00	General Requirements (TOC: i)	1-25
	Site Specific Accident Prevention Plan	1-34
	OSHA Requirements and Safety And Health Regulations	1-6
	Sample Infection Control Permit	1
01 01 00	Infection Control Risk Assessment	1-11
01 23 00	Alternates	1
01 32 16.13	Network Analysis Schedules	1-15
01 33 23	Shop Drawings, Product Data, and Samples	1-4
01 42 19	Reference Standards	1-7
01 45 29	Testing Laboratory Services	1-9
01 58 16	Temporary Interior Signage	1
01 74 19	Construction Waste Management	1-7
01 81 11	Sustainable Design Requirements	1-14
01 91 00	General Commissioning Requirements	1-61
	DIVISION 2 – EXISTING CONDITIONS	
02 41 00	Demolition	1-3
02 82 13.13	Glovebag Asbestos Abatement (TOC: i-iv)	1-52
	Certificates and Affidavits	1-4
02 82 13.19	Asbestos Floor Tile and Mastic Abatement (TOC: i-iii)	1-42
	Certificates and Affidavits	1-4
	DIVISION 3 – CONCRETE	
03 30 53	Miscellaneous Cast-In-Place Concrete	1-7
	DIVISION 4 – MASONRY	
	Not used	
	DIVISION 5 – METALS	
05 12 00	Structural Steel Framing	1-4
05 36 00	Composite Metal Decking	1-6

	DIVISION 6 - WOOD, PLASTICS AND COMPOSITES	
06 10 00	Rough Carpentry	1-8
06 20 00	Finish Carpentry and Millwork	1-19
	DIVISION 7 - THERMAL AND MOISTURE PROTECTION	
07 21 13	Thermal and Acoustical Insulation	1-3
07 81 00	Applied Fireproofing	1-6
07 84 00	Firestopping	1-4
07 92 00	Joint Sealants	1-10
	DIVISION 8 - OPENINGS	
08 11 13	Hollow Metal Doors and Frames	1-6
08 14 00	Interior Wood Doors	1-6
08 31 13	Access Doors and Frames	1-3
08 33 13	Overhead Coiling Wood Counter Doors	1-5
08 41 13	Aluminum-Framed Entrances and Storefronts	1-5
08 71 00	Door Hardware	1-29
08 71 13	Automatic Door Operators	1-6
08 80 00	Glazing	1-10
	DIVISION 9 – FINISHES	
09 22 16	Non-Structural Metal Framing	1-8
09 29 00	Gypsum Board	1-8
09 30 13	Ceramic Tiling	1-12
09 51 00	Acoustical Ceilings	1-9
09 54 70	Metal Panel Ceilings	1-9
09 65 13	Resilient Base and Accessories	1-3
09 65 16	Resilient Sheet Flooring	1-10
09 65 19	Resilient Tile Flooring	1-6
09 66 13	Portland Cement Terrazzo Flooring	1-9
09 68 00	Carpeting	1-5
09 72 31	Polypropylene Fabric Wall Covering	1-3
09 75 20	Quartz Surfaces	1-7
09 91 00	Painting	1-17
	DIVISION 10 – SPECIALTIES	
10 26 00	Wall and Door Protection	1-5
10 28 00	Toilet Accessories	1-8
10 44 13	Fire Extinguisher Cabinets	1
	DIVISION 11 – EQUIPMENT	
	Not used	
	DIVISION 12 – FURNISHINGS	
	Not used	

	DIVISION 13 - SPECIAL CONSTRUCTION	
13 49 00	Radiation Protection	1-6
	DIVISION 14– CONVEYING EQUIPEMENT	
	Not used	
VOLUME 2		
	DIVISION 21- FIRE SUPPRESSION	
21 05 11	Common Work Results for Fire Suppression	1-7
21 08 00	Commissioning of Fire Suppression Systems	1-3
21 13 13	Wet-Pipe Sprinkler Systems	1-7
	DIVISION 22 – PLUMBING	
22 05 11	Common Work Results for Plumbing	1-18
22 05 23	General-Duty Valves for Plumbing Piping	1-3
22 07 11	Plumbing Insulation	1-15
22 08 00	Commissioning of Plumbing Systems	1-3
22 11 00	Facility Water Distribution	1-8
22 13 00	Facility Sanitary Sewerage	1-10
22 14 00	Facility Storm Drainage	1-8
22 40 00	Plumbing Fixtures	1-10
22 62 00	Vacuum Systems for Laboratory and Healthcare Facilities	1-11
22 63 00	Gas Systems for Laboratory and Healthcare Facilities	1-14
	DIVISION 23 – HEATING, VENTILATING, AND AIR CONDITIONING	
23 05 11	Common Work Results for HVAC	1-25
23 05 12	General Motor Requirements for HVAC and Steam Generation Equipment	1-4
23 05 41	Noise and Vibration Control for HVAC Piping & Equipment	1-8
23 05 93	Testing, Adjusting, and Balancing for HVAC	1-11
23 07 11	HVAC and Plumbing Insulation	1-19
23 08 00	Commissioning of HVAC Systems	1-4
23 09 23	Controls and Instrumentation (DDC)	1-35
23 21 13	Hydronic Piping	1-19
23 25 00	HVAC Water Treatment	1-3
23 31 00	HVAC Ducts and Casings	1-10
23 34 00	HVAC Fans	1-5
23 36 00	Air Terminal Units	1-5
23 37 00	Air Outlets and Inlets	1-3
23 81 23	Computer Room Air Conditioners	1-5
	DIVISION 26 – ELECTRICAL	
26 05 11	Requirements for Electrical Installations	1-10
26 05 19	Low Voltage Electrical Power Conductors and Cables	1-7
26 05 26	Grounding and Bonding for Electrical Systems	1-9

26 05 33	Raceway and Boxes for Electrical Systems	1-11
26 05 36	Wiring for Radiology Equipment	1-5
26 05 39	Underfloor Raceways for Electrical Systems	1-5
26 05 73	Overcurrent Protective Devices Coordination Study	1-4
26 08 00	Commissioning of Electrical Systems	1-4
26 09 23	Lighting Controls	1-7
26 22 00	Low-Voltage Transformers	1-6
26 24 16	Panelboards	1-6
26 27 26	Wiring Devices	1-7
26 29 11	Low-Voltage Motor Starters	1-11
26 29 21	Disconnect Switches	1-4
26 41 00	Facility Lighting Protection	1-5
26 51 00	Interior Lighting	1-17
	DIVISION 27 – COMMUNICATIONS	
27 05 11	Requirements for Communications Installations	1-6
27 05 26	Grounding and Bonding for Communications Systems	1-10
27 05 33	Raceways and Boxes for Communications Systems	1-11
27 08 00	Commissioning of Communications Systems	1-4
27 10 00	Structured Cabling	1-4
27 11 00	Communications Equipment Room Fittings	1-33
27 15 00	Communications Horizontal Cabling	1-43
27 51 16	Public Address and Mass Notification Systems	1-50
27 52 23	Nurse Call and Code Blue System	1-55
	DIVISION 28 – ELECTRONIC SAFETY AND SECURITY	
28 05 00	Common Work Results for Electronic Safety and Security	1-73
28 05 13	Conductors and Cables for Electronic Safety and Security	1-17
28 05 26	Grounding and Bonding for Electronic Safety and Security	1-8
28 05 28.33	Conduits and Backboxes for Electronic Safety and Security	1-13
28 08 00	Commissioning of Electronic Safety and Security	1-4
28 13 00	Physical Access Control System	1-57
28 26 00	Electronic Personal Protection System	1-15
28 31 00	Fire Detection and Alarm	1-25
	DIVISION 31 – EARTHWORK	
	Not used	
	DIVISION 32 – EXTERIOR IMPROVEMENTS	
	Not used	
	DIVISION 33 – UTILITIES	
	Not used	
	DIVISION 34 – TRANSPORTATION	

	Not used	

- - - E N D - - -

SECTION 00 01 15
DRAWING INDEX

The drawings listed below accompanying this specification form a part of the contract.

DRAWING NO.	**TITLE**
1-X1	Cover Sheet
1-X2	Drawing Index
	ARCHITECTURAL
1-00.1	Symbols, Abbreviations, Schedules, and Misc. Details
1-00.2	Door Schedules and Details
1-01.1	Partial Basement Phasing Plan 1
1-01.2	Partial Basement Phasing Plan 2
1-01.3	Partial Basement Phasing Plan 3
1-01.4	Partial Basement Phasing Plan 4
1-02.1	Partial Basement Life Safety Plan - Final
1-02.2	Partial Basement Life Safety Plan - Phase 1
1-02.3	Partial Basement Life Safety Plan - Phase 2
1-02.4	Partial Basement Life Safety Plan - Phase 3
1-02.5	Partial Basement Life Safety Plan - Phase 4
1-03.1	Partial Basement Demolition Plan - All Phases
1-03.2	Partial Basement Demolition Notes and Details
1-03.3	Partial Basement Demolition Plan - Phase 1
1-03.4	Partial Basement Demolition Plan - Phase 2
1-03.5	Partial Basement Demolition Plan - Phase 3
1-03.6	Partial Basement Demolition Plan - Phase 4
1-04	Partial Basement Floor Plan
1-05.1	Partial Basement Enlarged Equipment Plan
1-05.2	Partial Basement Enlarged Equipment Plan
1-06	Partial Basement Reflected Ceiling Plan
1-06.1	Enlarged Reflected Ceiling Plans and Ceiling Details
1-07.1	Interior Elevations and Millwork Details
1-07.2	Interior Elevations and Millwork Details
1-08.1	Main Street Elevations & Details
1-8.2	Main Street Details

INTERIOR DESIGN

1-IF1	Partial Basement Floor Finish Plan
1-IF2	Partial Basement Wall Finish Plan
1-IF3	Room Finish Schedule
1-IF4	Material Legend and Notes

STRUCTURAL

1-S1	General Notes and Details

FIRE PROTECTION

1-FP-0	Fire Protection Legend, Details, and General Notes
1-FP1.1	Partial Basement Fire Protection Plan - Phase 1
1-FP1.2	Partial Basement Fire Protection Plan - Phase 2
1-FP1.3	Partial Basement Fire Protection Plan - Phase 3
1-FP1.4	Partial Basement Fire Protection Plan - Phase 4

PLUMBING

1-P0	Plumbing Legend, Schedules, Details and Notes
1-P1	Partial Sub-Basement Plumbing Demolition Plan
1-P2.1	Partial Basement Plumbing Demolition Plan - Phase 1
1-P2.2	Partial Basement Plumbing Demolition Plan - Phase 2
1-P2.3	Partial Basement Plumbing Demolition Plan - Phase 3
1-P2.4	Partial Basement Plumbing Demolition Plan - Phase 4
1-P3.1	Partial Basement Medical Gas Demolition Plan - Phase 1
1-P3.2	Partial Basement Medical Gas Demolition Plan - Phase 2
1-P3.3	Partial Basement Medical Gas Demolition Plan - Phase 3
1-P3.4	Partial Basement Medical Gas Demolition Plan - Phase 4
1-P4	Sub-Basement Plumbing Plan
1-P5.1	Partial Basement Plumbing Plan - Phase 1
1-P5.2	Partial Basement Plumbing Plan - Phase 2
1-P5.3	Partial Basement Plumbing Plan - Phase 3
1-P5.4	Partial Basement Plumbing Plan - Phase 4
1-P6.1	Partial Basement Medical Gas Plan - Phase 1
1-P6.2	Partial Basement Medical Gas Plan - Phase 2
1-P6.3	Partial Basement Medical Gas Plan - Phase 3
1-P6.4	Partial Basement Medical Gas Plan - Phase 4
1-P7	Plumbing Isometrics - Nuclear Medicine

1-P8	Plumbing Isometrics - Radiology
	HEATING, VENTILATION, AND AIR CONDITIONING
1-H0	HVAC Symbols and General Notes
1-H1	HVAC Schedules
1-H2	Partial Sub-Basement HVAC Demolition Plan
1-H3.1	Partial Basement HVAC Demolition Plan - Phase 1
1-H3.2	Partial Basement HVAC Demolition Plan - Phase 2
1-H3.3	Partial Basement HVAC Demolition Plan - Phase 3
1-H3.4	Partial Basement HVAC Demolition Plan - Phase 4
1-H4.1	Partial Basement HVAC Ductwork Plan - Phase 1
1-H4.2	Partial Basement HVAC Ductwork Plan - Phase 2
1-H4.3	Partial Basement HVAC Ductwork Plan - Phase 3
1-H4.4	Partial Basement HVAC Ductwork Plan - Phase 4
1-H5.1	Partial Basement HVAC Piping Plan - Phase 1
1-H5.2	Partial Basement HVAC Piping Plan - Phase 2
1-H5.3	Partial Basement HVAC Piping Plan - Phase 3
1-H5.4	Partial Basement HVAC Piping Plan - Phase 4
1-H6	Partial Sub-Basement HVAC Piping Plan
1-H7	East Penthouse HVAC Plan
1-H8	Partial Second Floor Roof HVAC
1-H9	Mechanical Details
1-H10	Temperature Controls
	ELECTRICAL
1-E1.1	Electrical Legend
1-E1.2	Lighting Fixture Schedule
1-E1.3	Lighting Fixture Details
1-E1.4	Partial Basement Electrical Key Plan
1-E2.1	Partial Basement Lighting Demolition Plan - Phase 1
1-E2.2	Partial Basement Lighting Demolition Plan - Phase 2
1-E2.3	Partial Basement Lighting Demolition Plan - Phase 3
1-E2.4	Partial Basement Lighting Demolition Plan - Phase 4
1-E3.1	Partial Basement Power Demolition Plan - Phase 1
1-E3.2	Partial Basement Power Demolition Plan - Phase 2
1-E3.3	Partial Basement Power Demolition Plan - Phase 3
1-E3.4	Partial Basement Power Demolition Plan - Phase 4

1-E3.5	Partial Basement Electrical Rooms H01 & H01A Demolition Plan
1-E4.1	Partial Basement Lighting Plan - Phase 1
1-E4.2	Partial Basement Lighting Plan - Phase 2
1-E4.3	Partial Basement Lighting Plan - Phase 3
1-E4.4	Partial Basement Lighting Plan - Phase 4
1-E5.1	Partial Basement Power Plan - Phase 1
1-E5.2	Partial Basement Power Plan - Phase 2
1-E5.3	Partial Basement Power Plan - Phase 3
1-E5.4	Partial Basement Power Plan - Phase 4
1-E5.5	Nuclear Medicine Room Enlarged Plans
1-E5.6	Nuclear Medicine Room Enlarged Plans
1-E6.1	Partial Basement Mech Connections Plan - Phase 1
1-E6.2	Partial Basement Mech Connections Plan - Phase 2
1-E6.3	Partial Basement Mech Connections Plan - Phase 3
1-E6.4	Partial Basement Mech Connections Plan - Phase 4
1-E6.5	Partial 2nd Floor Roof Mechanical Connections Plan
1-E7.1	Electrical Details
1-E7.2	Electrical Details
1-E7.3	Electrical Details
1-E7.4	Fire Alarm Details
1-E8.1	Power Distribution Legend and Details
1-E8.2	Power Distribution One Line Diagram Demolition
1-E8.3	Power Distribution One Line Diagram Existing
1-E8.4	Power Distribution One Line Diagram New
1-E9.1	Panelboard Schedules
1-E9.2	Panelboard Schedules
1-E9.3	Panelboard Schedules
1-E9.4	Panelboard Schedules

TECHNOLOGY

1-T1.1	Technology Legend
1-T1.2	Partial Basement Technology Key Plan
1-T2.1	Partial Basement Telecom Demolition Plan - Phase 1
1-T2.2	Partial Basement Telecom Demolition Plan - Phase 2
1-T2.3	Partial Basement Telecom Demolition Plan - Phase 3
1-T2.4	Partial Basement Telecom Demolition Plan - Phase 4

1-T3.1	Partial Basement Telecommunications Plan - Phase 1
1-T3.2	Partial Basement Telecommunications Plan - Phase 2
1-T3.3	Partial Basement Telecommunications Plan - Phase 3
1-T3.4	Partial Basement Telecommunications Plan - Phase 4
1-T4.1	Technology Details
1-T4.2	Technology Details
1-T4.3	Security System Riser
1-T4.4	Security Details

ASBESTOS ABATEMENT

1-AA1.1	Partial Basement Asbestos Abatement Plan - Phase 1
1-AA1.2	Partial Basement Asbestos Abatement Plan - Phase 2
1-AA1.3	Partial Basement Asbestos Abatement Plan - Phase 3
1-AA1.4	Partial Basement Asbestos Abatement Plan - Phase 4
1-AA2.1	Standard Asbestos Abatement Details

- - - E N D - - -

SECTION 01 00 00
GENERAL REQUIREMENTS

TABLE OF CONTENTS

1.1 GENERAL INTENTION....2
1.2 STATEMENT OF BID ITEM(S)....3
1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR....3
1.4 CONSTRUCTION SECURITY REQUIREMENETS....3
1.5 FIRE SAFETY....5
1.6 OPERATIONS AND STORAGE AREAS....7
1.7 ALTERATIONS....11
1.8 INFECTION PREVENTION MEASURES....12
1.9 DISPOSAL AND RETENTION....16
1.10 RESTORATION....17
1.11 LAYOUT OF WORK....18
1.12 As-Built Drawings....18
1.13 USE OF ROADWAYS....18
1.14 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT....19
1.15 TEMPORARY USE OF EXISTING ELEVATORS....19
1.16 TEMPORARY TOILETS....20
1.17 AVAILABILITY AND USE OF UTILITY SERVICES....20
1.18 NEW TELEPHONE EQUIPMENT....21
1.19 TESTS....22
1.20 INSTRUCTIONS....22
1.21 GOVERNMENT-FURNISHED PROPERTY....23
1.22 RELOCATED EQUIPMENT and ITEMS....24

SECTION 01 00 00
GENERAL REQUIREMENTS

1.1 GENERAL INTENTION

A. Contractor shall completely prepare site for building operations, including demolition and removal of existing structures, and furnish labor and materials and perform work for the Expand and Renovate Nuclear Medicine and Radiology project as required by drawings and specifications.

B. Visits to the site by Bidders will be in accordance with FAR clause "52.236-27 Site Visits."

C. Offices of Perspectus Architecture and Fredrick, Fredrick and Heller Engineers, as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.

D. Before placement and installation of work subject to tests by testing laboratory retained and paid for by the Contractor, the Contractor shall notify the COR in sufficient time to enable testing laboratory personnel to be present at the site in time for proper taking and testing of specimens and field inspection. Such prior notice shall be not less than three work days unless otherwise designated by the COR.

E. All employees of general contractor and subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.

F. Prior to commencing work, general contractor shall provide proof that a OSHA certified "competent person" (CP) (29 CFR 1926.20(b)(2) will maintain a presence at the work site whenever the general or subcontractors are present.

G. Training:

1. All employees of general contractor or subcontractors shall have the following required hours of OSHA certified Construction Safety course and /or other relevant competency training, as determined by VA CP with input from the ICRA team.
   a. Superintendent: 30 hours
   b. All other Workers: 10 hours
2. Submit training records of all such employees for approval before the start of work.

1.2 STATEMENT OF BID ITEM(S)

A. BID ITEM I (Base Bid) - Expand and Renovate Nuclear Medicine and Radiology: Work includes general construction, alterations, structural, mechanical, plumbing, fire protection, and electrical work, utility systems, asbestos abatement, and necessary removal of existing structures and construction and certain other items. All work to be completed within 1,007 calendar days from date of receipt of Notice to Proceed.

B. BID ITEM II (Alternate Bid Item 1) - Delete lockers. See specification section 01 23 00 for additional requirements.

1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR

A. AFTER AWARD OF CONTRACT, zero (0) sets of specifications and drawings will be furnished.

1.4 CONSTRUCTION SECURITY REQUIREMENETS

A. Security Plan:

1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
2. The General Contractor is responsible for assuring that all sub-contractors working on the project and their employees also comply with these regulations.

B. Security Procedures:

1. General Contractor’s employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
2. For working outside the “regular hours” as defined in the contract, The General Contractor shall give 3 days notice to the Contracting Officer so that security arrangements can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.
3. No photography of VA premises is allowed without written permission of the Contracting Officer.
4. VA reserves the right to close down or shut down the project site and order General Contractor’s employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.

C. Key Control:

1. The General Contractor shall provide duplicate keys and lock combinations to the COR for the purpose of security inspections of every area of project including tool boxes and parked machines and take any emergency action.

2. The General Contractor shall turn over all permanent lock cylinders to the VA locksmith for permanent installation. See Section 08 71 00, DOOR HARDWARE and coordinate.
3. All construction doors/access doors must use VA key system and remain locked at all times from the corridor/exterior side.

D. Document Control:

1. Before starting any work, the General Contractor/Sub Contractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of “sensitive information”.
2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This information shall be shared only with those with a specific need to accomplish the project.
3. Certain documents, sketches, videos or photographs and drawings may be marked “Law Enforcement Sensitive” or “Sensitive Unclassified”. Secure such information in separate containers and limit the access to only those who will need it for the project. Return the information to the Contracting Officer upon request.
4. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
5. All paper waste or electronic media such as CD’s and diskettes shall be shredded and destroyed in a manner acceptable to the VA.
6. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of “sensitive information”.
7. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
8. Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
9. “Sensitive information” including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

E. Motor Vehicle Restrictions

1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping off materials and supplies.
2. No parking is available at Medical Center for contractors and Contractor commuter vehicles shall be parked off-site.

1.5 FIRE SAFETY

A. Applicable Publications: Publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

1. American Society for Testing and Materials (ASTM):
   E84-2009.....Surface Burning Characteristics of Building Materials
2. National Fire Protection Association (NFPA):
   10-2010.....Standard for Portable Fire Extinguishers
   30-2008.....Flammable and Combustible Liquids Code
   51B-2009.....Standard for Fire Prevention During Welding,Cutting and Other Hot Work
   70-2011.....National Electrical Code
   241-2009.....Standard for Safeguarding Construction, Alteration, and Demolition Operations
3..Occupational Safety and Health Administration (OSHA):
   29 CFR 1926.....Safety and Health Regulations for Construction

B. Fire Safety Plan: Establish and maintain a fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to COR and Facility Safety Manager for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the general contractor’s competent person per OSHA requirements. This briefing shall include information on the construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, etc. Documentation shall be provided to the COR that individuals have undergone contractor’s safety briefing.

1. A Hazardous Work Activity Checklist must be completed by the Contractor. Any activity with a YES response is to be detailed in the Site Specific Safety Plan. A sample Hazardous Work Activity Checklist is included at the end of this specification.

C. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.

D. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in

accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).

E. Temporary Construction Partitions:

1. Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas and adjoining areas. Construct partitions of gypsum board on the public side and gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on the construction side of fire retardant treated wood or metal steel studs. Gypsum board joints on the public side of the temporary partition shall be taped and finished. The public side of temporary partitions shall be painted. Extend the partitions through suspended ceilings to floor slab deck or roof. At door openings, install Class C, ¾ hour fire/smoke rated doors with self-closing devices and VA locking system (storeroom type lock always locked from the corridor side). Refer to Drawings for additional requirements.
2. Install temporary construction partitions as shown on drawings to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.
3. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.

F. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.

G. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with COR.

H. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to COR. Any construction materials found in exit stairs or corridors will be disposed of at Contractor’s expense.

I. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.

J. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.

K. Sprinklers: Install, test and activate new automatic sprinklers prior to removing existing sprinklers.

L. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with COR. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the COR.

M. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with COR.

N. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with COR. Obtain permits from COR at least 48 hours in advance.

O. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to COR.

P. Smoking: Smoking is prohibited in and adjacent to construction areas, inside existing buildings and additions under construction.

Q. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily. (Refer to Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT for GEMS Policy Requirements)

R. Perform other construction, alteration and demolition operations in accordance with 29 CFR 1926.

S. If required, submit documentation to the COR that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.

T. See additional OSHA Requirements and Safety and Health Regulations attachment at the end of this specification section.

1.6 OPERATIONS AND STORAGE AREAS

A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.

B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary

buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.

C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.

D. Working space and space available for storing materials shall be as determined by the COR.

E. Workmen are subject to rules of Medical Center applicable to their conduct.

F. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly by patients or medical personnel, and Contractor's personnel, except as permitted by COR where required by limited working space.

1. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient that do not impede with Medical Center activities. Provide unobstructed access to Medical Center areas required to remain in operation.
2. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements and review and approval by COR.
3. All noise generating operations which are disruptive to Hospital operations as determined by the COR, including but not limited to cutting of ceilings, walls and floor coring, drilling etc., shall be scheduled during weekends or between 6:00 PM and 7:00 AM on weekdays, unless otherwise determined by COR. Include all premium time charges in Bid.

G. Phasing: The work for this project is intended to be accomplished in multiple phases as described by the Drawings. If the Contractor elects to create additional phases, Contractor shall furnish the COR with a schedule of approximate phasing dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the COR two weeks in advance for final approval of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such dates to ensure accomplishment of this work in successive phases mutually agreeable to COR and Contractor. Final inspection of each phase before moving to the next phase will be required through the Contracting Officer and COR.

H. When a section of the building is turned over to Contractor, Contractor shall accept entire responsibility therefore.

1. Contractor shall maintain a minimum temperature of 4 degrees C (40 degrees F) at all times, except as otherwise specified.
2. Contractor shall maintain in operating condition existing fire protection and alarm equipment. In connection with fire alarm equipment, Contractor shall make arrangements for pre-inspection of site with Fire Department or Company (Department of Veterans Affairs or municipal) whichever will be required to respond to an alarm from Contractor's employee or watchman.

I. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COR.

1. No utility service such as water, gas, medical gases, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of COR. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without the Medical Center Director’s prior knowledge and written approval. Refer to specification Sections 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS

and 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY for additional requirements.

2. Contractor shall submit a request to interrupt any such services to COR, in writing, three (3) work/business days in advance of a minor shut down and two (2) weeks in advance of a major interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than Contractor's normal working hours.
4. Major interruptions of any system, including crane and dock usage, must be requested, in writing, at least 14 calendar days prior to the desired time and shall be performed as directed by the COR.
5. In case of a contract construction emergency, service will be interrupted on approval of COR. Such approval will be confirmed in writing as soon as practical.
6. All utility service shutdowns such as water, gas, medical gasses, steam, sewers, electricity, or fire protection shall occur during off-hours or weekends at no additional cost to the Government.

J. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, which are to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged at project boundary line. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.

K. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:
1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles.
2. Method and scheduling of required cutting, altering and removal of existing roads, walks and entrances must be approved by the COR.

L. Coordinate the work for this contract with other construction operations as directed by COR. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.

1.7 ALTERATIONS

A. Survey: Before any work is started, the Contractor shall make a thorough survey with the COR of areas of buildings in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by both, to the Contracting Officer. This report shall list by rooms and spaces:
   1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of building.
   2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by drawings to be either reused or relocated, or both.
   3. Shall note any discrepancies between drawings and existing conditions at site.
   4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and COR.

B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of COR, to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this subparagraph B, the contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).

C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and COR together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:
   1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and, will form basis for determining extent of repair work required of Contractor to restore damage caused by Contractor's workmen in executing work of this contract.

D. Protection: Provide the following protective measures:

1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

1.8 INFECTION PREVENTION MEASURES

A. Infection Control permits (see sample at the end of this specification section) will be issued by the COR. Refer also to Specification Section 01 01 00 for the Infection Control Risk Assessment. The Infection Control Permits will be posted outside the appropriate construction area. More than one permit may be issued for a construction project if the work is located in separate areas requiring separate classes. The primary project scope area for this project is: **Class III**, however, work outside the primary project scope area may vary. The required infection control precautions are denoted on the following table:

Description of Required Infection Control Precautions *by Class*

	During Construction Project	Upon Completion of Project
CLASS I	1. Notify and receive permission from the COR to perform requested work. 2. Execute work by methods to minimize raising dust from construction operations. 3. Immediately replace a ceiling tile displaced for visual inspection.	1. Notify COR for inspection once the work is complete.

CLASS II	1. Notify and receive permission from the COR to perform requested work. 2. Provide active means to prevent airborne dust from dispersing into atmosphere. 3. Water mist work surfaces to control dust while cutting. 4. Seal unused doors with duct tape. 5. Block off and seal air vents. 6. Place dust mat at entrance and exit of work area. 7. Remove or isolate HVAC system in areas where work is being performed.	1. Wipe work surfaces with disinfectant. 2. Contain construction waste before transport in tightly covered containers. 3. Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area. 4. Remove isolation of HVAC system in areas where work is being performed.
CLASS III	1. Obtain and post valid Infection Control Construction Permit at each work site. Permit must be signed by COR, I.C. Nurse and General Contractor to be valid. 2. Remove or isolate HVAC system in area where work is being done to prevent contamination of duct system. 3. Complete all critical barriers, i.e., sheetrock, plywood, plastic, to seal area from non-work area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins. Construction of barrier will need to occur outside normal work shifts with approval of COR. 4. Construct anteroom where possible and directed by COR. 5. Maintain negative air pressure within work site utilizing HEPA equipped air filtration units. 6. Contain construction waste before transport in tightly covered containers. 7. Cover transport receptacles or carts. Tape covering unless solid lid. 8. If the spread of dust from construction personnel is not contained workers may be required to where show covers and or be vacuumed prior to leaving worksite at the discretion of the COR or I.C. Nurse. 9. Seal holes, pipes, conduits and punctures appropriately. 10. Include particle count readings on daily logs against baseline points as required by COR or I.C. Nurse.	1. Do not remove barriers from work area until completed project is inspected by the owner's Safety Department. 2. Remove barrier materials carefully to minimize spreading of dirt and debris associated with construction. Barriers are required to be removed after hours with approval of COR. 3. Vacuum work area with HEPA filtered vacuums. 4. Wet mop area with disinfectant. 5. Remove isolation of HVAC system in areas where work is being performed.

CLASS IV	1. Follow all requirements listed in Class III as well as additional requirements listed below. 2. Construct anteroom and require all personnel to pass through this room so they can be vacuumed using a HEPA vacuum cleaner before leaving work site, or they can wear cloth or paper coveralls that are removed each time they leave the work site. 3. All personnel entering work site are required to wear shoe covers. Shoe covers must be changed each time the worker exits the work area.	1. Before work is turned over and accepted by the VA a certified I.H. must be used to certify cleaning as well as swab and air sampling of the area. These tests shall meet or exceed industry standards for the type of area being renovated.

B. An infection control orientation will be provided by the VA Infection Control Personnel to the Contractor prior to construction start.

C. Implement the requirements of VAMC's Infection Control Risk Assessment (ICRA) team. ICRA Group may monitor dust in the vicinity of the construction work and require the Contractor to take corrective action immediately if the safe levels are exceeded.

D. Establish and maintain a dust control program as part of the contractor's infection preventive measures in accordance with the guidelines provided by ICRA Group as specified here. Prior to start of work, prepare a plan detailing project-specific dust protection measures, including periodic status reports, and submit to COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

1. All personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.

E. Medical Center Infection Control personnel shall monitor for airborne disease (e.g. aspergillosis) as appropriate during construction. A baseline of conditions may be established by the medical center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality. In addition:

1. The COR and VAMC Infection Control personnel shall review pressure differential monitoring documentation to verify that pressure differentials in the construction zone and in the patient-care rooms are appropriate for their settings. The requirement for negative air pressure in the construction zone shall be maintained at all times.

Upon notification, the contractor shall implement corrective measures to restore proper pressure differentials as needed.

2. In case of any problem, the medical center, along with assistance from the contractor, shall conduct an environmental assessment to find and eliminate the source.

F. In general, following preventive measures shall be adopted during construction to keep down dust and prevent mold.

1. Dampen debris to keep down dust and provide temporary construction partitions in existing structures where directed by COR. Blank off ducts and diffusers to prevent circulation of dust into occupied areas during construction.
2. Do not perform dust producing tasks within occupied areas without the approval of the COR. For construction in any areas that will remain jointly occupied by the medical Center and Contractor's workers, the Contractor shall:
   a. Provide dust proof temporary drywall construction barriers to completely separate construction from the operational areas of the hospital in order to contain dirt debris and dust. Barriers shall be sealed and painted on hospital occupied side. Install a self-closing rated door in a metal frame, commensurate with the partition, to allow worker access. Maintain negative air at all times. Barrier installation to be done outside normal Medical Center hours.
   b. HEPA filtration is required where the exhaust dust may reenter the breathing zone. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents, or building openings. Install HEPA (High Efficiency Particulate Accumulator) filter vacuum system rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. Insure continuous negative air pressures occurring within the work area. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Exhaust hoses shall be heavy duty, flexible steel reinforced and exhausted so that dust is not reintroduced to the Medical Center.
   c. Adhesive Walk-off/Carpet Walk-off Mats, minimum 600mm x 900mm (24" x 36"), shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.

d. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as they are created. Transport these outside the construction area in containers with tightly fitting lids at the end of each shift.

e. The contractor shall not haul debris through patient-care areas without prior approval of the COR and the Medical Center. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.

f. Using a HEPA vacuum, clean inside the barrier and vacuum ceiling tile prior to replacement. Any ceiling access panels opened for investigation beyond sealed areas shall be sealed immediately when unattended.

g. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.

h. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.

G. Final Cleanup:

1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
3. All new air ducts shall be cleaned prior to final inspection with reports submitted to COR.

1.9 DISPOSAL AND RETENTION

A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:

1. Reserved items which are to remain property of the Government are identified by attached tags or noted on drawings or in specifications as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by COR.
2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.
3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.

1.10 RESTORATION

A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the COR. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the COR before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.

B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.

C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workmen to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are indicated on drawings and which are not scheduled for discontinuance or abandonment.

D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with Bid Solicitation GENERAL CONDITIONS.

1.11 LAYOUT OF WORK

A. The Contractor shall lay out the work indicated on the drawings, and shall be responsible for all measurements in connection with the layout. The Contractor shall furnish, at Contractor's own expense, all templates, platforms, equipment, tools, materials, and labor required to lay out any part of the work. The Contractor shall be responsible for executing the work to the lines and grades that may be established or indicated by the Contracting Officer. The Contractor shall also be responsible for maintaining and preserving all marks established by the Contracting Officer until authorized to remove them. If such marks are destroyed by the Contractor or through Contractor's negligence before their removal is authorized, the Contracting Officer may replace them and deduct the expense of the replacement from any amounts due or to become due to the Contractor.

B. Establish and plainly mark lines for each partition and such other lines that are reasonably necessary to properly assure that location, orientation, and elevations established are in accordance with lines and elevations shown on contract drawings.

1.12 AS-BUILT DRAWINGS

A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.

B. All variations shall be shown in the same general detail as used in the contract drawings. To insure compliance, as-built drawings shall be made available for the COR's review, as often as requested.

C. Contractor shall deliver two approved completed sets of as-built drawings to the COR within 15 calendar days after each completed phase and after the acceptance of the project by the COR.

D. Paragraphs A, B, & C shall also apply to all shop drawings.

1.13 USE OF ROADWAYS

A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the COR, such temporary roads which are necessary in the performance of contract work. Temporary roads shall be constructed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.

1.14 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT

A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to compliance with the following provisions:

1. Permission to use each unit or system must be given by COR. If the equipment is not installed and maintained in accordance with the following provisions, the COR will withdraw permission for use of the equipment.
2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.
3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be eliminated.
4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be replaced at completion of construction and prior to testing and balancing of system.
6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government.

B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.

C. This paragraph shall not reduce the requirements of the mechanical and electrical specifications sections.

1.15 TEMPORARY USE OF EXISTING ELEVATORS

A. Use of existing elevators for handling building materials and Contractor's personnel will be permitted subject to following provisions:

1. Contractor makes all arrangements with the COR for use of elevators. The COR will ascertain that elevators are in proper condition. Contractor may use elevators for daily use for personnel only between the hours of 7:00 am and 6:00 pm and for special nonrecurring time intervals when permission is granted. Personnel for operating elevators will not be provided by the Department of Veterans Affairs.
2. Contractor to develop a proposed elevator usage plan for review and approval by COR.
3. Contractor covers and provides maximum protection of following elevator components:
   a. Entrance jambs, heads soffits and threshold plates.
   b. Entrance columns, canopy, return panels and inside surfaces of car enclosure walls.
   c. Finish flooring.
4. If brake lining of elevators are excessively worn or damaged during temporary use, they shall be removed and replaced by new brake lining.
5. All parts of main controller, starter, relay panel, selector, etc., worn or damaged during temporary use shall be removed and replaced with new parts, if recommended by elevator inspector after elevator is released by Contractor.
6. Place elevator in condition equal, less normal wear, to that existing at time it was placed in service of Contractor as approved by Contracting Officer.

1.16 TEMPORARY TOILETS

A. Provide where directed by COR, ample temporary sanitary toilet accommodations with suitable sewer and water connections; or, when approved by COR, provide suitable dry closets where directed. Keep such places clean and free from flies, and all connections and appliances connected therewith are to be removed prior to completion of contract, and premises left perfectly clean.

1.17 AVAILABILITY AND USE OF UTILITY SERVICES

A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The amount to be paid by the Contractor for chargeable electrical services shall be the prevailing rates charged to the Government. The Contractor shall carefully conserve any utilities furnished without charge.

B. The Contractor, at Contractor's expense and in a workmanlike manner satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines, and all meters

required to measure the amount of electricity used for the purpose of determining charges. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia.

C. Contractor shall install meters at Contractor's expense and furnish the Medical Center a monthly record of the Contractor's usage of electricity as hereinafter specified.

D. Heat: Furnish temporary heat necessary to prevent injury to work and materials through dampness and cold. Use of open salamanders or any temporary heating devices which may be fire hazards or may smoke and damage finished work, will not be permitted. Maintain minimum temperatures as specified for various materials:

E. Electricity (for Construction and Testing): Furnish all temporary electric services.

1. Obtain electricity by connecting to the Medical Center electrical distribution system. The Contractor shall meter and pay for electricity required for electric cranes and hoisting devices, electrical welding devices and any electrical heating devices providing temporary heat. Electricity for all other uses is available at no cost to the Contractor.

F. Water (for Construction and Testing): Furnish temporary water service.

1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection. Water is available at no cost to the Contractor.
2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (at COR's discretion) of use of water from Medical Center's system.

G. Steam: Furnish steam system for testing required in various sections of specifications.

1. Obtain steam for testing by connecting to the Medical Center steam distribution system. Steam is available at no cost to the Contractor.
2. Maintain connections, pipe, fittings and fixtures and conserve steam-use so none is wasted. Failure to stop leakage or other waste will be cause for revocation (at COR's discretion), of use of steam from the Medical Center's system.

1.18 NEW TELEPHONE EQUIPMENT

The contractor shall coordinate with the work of installation of telephone equipment by others if required. This work shall be completed before the building is turned over to VA.

1.19 TESTS

A. Pre-test mechanical and electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.

B. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.

C. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire complex which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a complex which involves several components of different disciplines is a boiler installation. Efficient and acceptable boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feedwater, condensate and other related components.

D. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably short period of time during which operating and environmental conditions remain reasonably constant.

E. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

1.20 INSTRUCTIONS

A. Contractor shall furnish Maintenance and Operating manuals (hard copies and electronic) and verbal instructions when required by the various sections of the specifications and as hereinafter specified.

B. Manuals: Maintenance and operating manuals (four hard copies each and one electronic copy each) for each separate piece of equipment shall be delivered to the COR coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an

index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.

C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed instructions to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the COR and shall be considered concluded only when the COR is satisfied in regard to complete and thorough coverage. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the COR, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

1.21 GOVERNMENT-FURNISHED PROPERTY

A. The Government shall deliver to the Contractor, the Government-furnished property shown on the drawings. (Reference FAR 52.249)

B. Equipment furnished by Government to be installed by Contractor will be furnished to Contractor at the Medical Center.

C. Storage space for equipment will be provided by the Government and the Contractor shall be prepared to unload and store such equipment therein upon its receipt at the Medical Center.

D. Notify Contracting Officer in writing, 60 days in advance, of date on which Contractor will be prepared to receive equipment furnished by

Government. Arrangements will then be made by the Government for delivery of equipment.

1. Immediately upon delivery of equipment, Contractor shall arrange for a joint inspection thereof with a representative of the Government. At such time the Contractor shall acknowledge receipt of equipment described, make notations, and immediately furnish the Government representative with a written statement as to its condition or shortages.
2. Contractor thereafter is responsible for such equipment until such time as acceptance of contract work is made by the Government.

E. Equipment furnished by the Government will be delivered in a partially assembled (knock down) condition in accordance with existing standard commercial practices, complete with all fittings, fastenings, and appliances necessary for connections to respective services installed under contract. All fittings and appliances (i.e., couplings, ells, tees, nipples, piping, conduits, cables, and the like) necessary to make the connection between the Government furnished equipment item and the utility stub-up shall be furnished and installed by the contractor at no additional cost to the Government.

F. Completely assemble and install the Government furnished equipment in place ready for proper operation in accordance with specifications and drawings.

G. Furnish supervision of installation of equipment at construction site by qualified factory trained technicians regularly employed by the equipment manufacturer.

1.22 RELOCATED EQUIPMENT AND ITEMS

A. Contractor shall disconnect, dismantle as necessary, remove and reinstall in new location, all existing items indicated to be relocated by Contractor.

B. Perform relocation of such equipment or items at such times and in such a manner as directed by the COR.

C. Suitably cap existing service lines, such as steam, condensate return, water, drain, gas, air, vacuum and/or electrical, whenever such lines are disconnected from equipment to be relocated. Remove abandoned lines in finished areas and cap as specified herein before under paragraph "Abandoned Lines".

D. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.

E. All service lines such as noted above for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

- - - E N D - - -

(Name) CONSTRUCTION COMPANY

SITE SPECIFIC ACCIDENT PREVENTION PLAN

+

CONSTRUCTION HEALTH AND SAFETY PROGRAM

FOR

Expand and Renovate Nuclear Medicine and Radiology

Veterans Affairs Medical Center – Wade Park
Cleveland, Ohio

Project number given by contracting avoid confusion

PROJECT # 541-14-101
CONTRACT # VA541-<A-XYZ>

RESPONSIBILITIES AND LINES OF AUTHORITY OF <NAME> CONSTRUCTION COMPANY

The following people have responsibilities and authority for corporate safety:

BACKGROUND INFORMATION (Prime)

I. Contractor: **<Name>**
<Address>
<City, State Zip>

II. Project Name: **Wade Park - <Name>**

III. Project Description: **<Brief Description** (541-xx-xxx)>

IV. Contractor Accident Record: **<Contractor provide OSHA Log information>**

A. RESPONSIBILITIES

1. Chief Corporate Safety Officer: **<Contact Name (Contact telephone #)>**
<Name> Construction Company
<Title>

2. Site Safety Responsibilities: **<Contact Name (Contact telephone #)>**
<Name> Construction Company
<Title>

3. Project Safety Consulting: **<Contact Name (Contact telephone #)>**
<Name> Construction Company
<Title>

BACKGROUND INFORMATION (SUBCONTRACTOR)

I. Contractor: **<Name>**
<Address>
<City, State Zip>

II. Project Name: **Wade Park - <Name>**

III. Project Description: **<Brief Description>**

IV. Contractor Accident Record: **<Contractor provide OSHA Log information>**

A. RESPONSIBILITIES

1. Chief Corporate Safety Officer: **<Contact Name (Contact telephone #)>**
<Name> Construction Company
<Title>

2. Site Safety Responsibilities: **<Contact Name (Contact telephone #)>**
<Name> Construction Company
<Title>

3. Project Safety Consulting: **<Contact Name (Contact telephone #)>**

<Name> Construction Company
<Title>

The overall lines of authority concerning safety and health will be as follows:

<Name – Title>
<Name – Title>

A Site Safety and Health Officer will be provided at the work site at all times to perform safety and occupational health management, surveillance, inspections, and safety enforcement for the Contractor and subcontractors. The SSHO will be employed by the prime. SSHO qualifications with education certificates will be listed in Appendix B.

The competent person for Health Hazard Control and Respiratory Protection Program will conduct and document a hazard assessment in accordance with Section 06 to identify and evaluate. (What form of documentation).

Site Safety and Health Officer (SSHO) shall conduct daily safety and health inspections and maintain a written log which includes area/operation inspected, date of inspection, identified hazards, recommended corrective actions, estimated and actual dates of corrections. Safety inspection logs shall be attached to the Contractors daily quality control report. Current "Safety Logs" shall be readily available upon request.

SIGNATURE SHEET

The following persons are responsible for preparing and approving this plan:

Preparer:

<Contact Name (Phone #)>
<Contact Title>
<Name> Construction Company

_____

Date_____

SCOPE OF WORK SUMMARY

Summary

This job consists of **<Basic Description>** **Please include the scope of work submitted for the project**

Pre-demolition:

<Describe the activity in sufficient detail to determine the safety program elements that will be required to be addressed in the body of the procedure – Section 6. Use the PCRA (Pre-Construction Risk Assessment) along with the Scope of Work to determine which elements need to be addressed for the pre-demolition phase.>

Demolition:

<Describe the activity in sufficient detail to determine the safety program elements that will be required to be addressed in the body of the procedure – Section 6. PCRA (Pre-Construction Risk Assessment) along with the Scope of Work to determine which elements need to be addressed for each of the demolition phase.>

Construction:

<Describe the activity in sufficient detail to determine the safety program elements that will be required to be addressed in the body of the procedure Section - 6. PCRA (Pre-Construction Risk Assessment) along with the Scope of Work to determine which elements need to be addressed for the construction phase.>

1. SITE ACCESS:

a) Parking onsite is not provided by the VAMC Cleveland at the Wade Park Facility

b) Access into the facility will be through entrances located close to the work area to avoid patient care areas. The following entrance that will be used by **<Name>** Construction Company employees will be submitted in writing or on the drawings:

<Enter the specific building access to be used>

2. WORK AREA SECURITY:

a) All **<Name>** Construction Company employees will wear company identification badges or those provided by VAMC Cleveland Police Service.
b) Patients, visitors and unauthorized VAMC Cleveland employees will be kept out of work areas using locked doors, barricades and safety postings as appropriate.

3. PLAN FOR PREVENTION OF ALCOHOL AND DRUG ABUSE

<Review – replace with your own company policy if this doesn't work for you>

a) Due to the nature of our work, it is critical that all employees are free from the adverse effects of drugs and/or alcohol. The company is committed to providing a safe workplace for all its employees. The goal of this policy is to maintain a safe and secure work environment that is free from the effects of alcohol and drug abuse.

b) The intent of this policy is to be responsive to the employees health needs by the early recognition and treatment of chemical dependency problems and behavioral/medical disorder, and to support the rights of the company and its employees to work within an alcohol / drug free environment.

c) This policy is not applicable to physician prescribed drugs. Employees on such medication(s), which may adversely affect their job performance, should promptly discuss the matter with their supervisor.

- Failure of the employee to so notify their supervisor can result in disciplinary action including discharge.
- It should be noted that while legal, prescribed drugs could adversely affect the safety of the employee and other employees on the site.
- All **<Name>** Construction employees are drug tested before hiring, periodically, and annually.

4. SITE SAFETY AUDITS (Inspections):

a) INTERNAL INSPECTIONS

The site supervisor, who is the **<Name>** Construction competent person, will conduct the Site Safety and Health inspections. The competent person's certifications are located in Appendix B. **<Put the Certifications in the Appendix B.>** There will two types of safety inspections that will be performed on this job site.

(1) A weekly Safety and Health inspection and report will be conducted by the site supervisor. The inspection forms will document and track the following information:

- Any Violations
- Date of violation
- Nature of violation
- Needed corrective action
- Date of correction
- Name of responsible person(s)

(a) In addition to the above items he will also notify any employee and/or subcontractor in writing of any violations.
(b) This information will be followed up on by the COR or Construction Safety Group, as needed and/or requires immediate attention to the violations. (Should he notify VA of findings?)
(c) All safety inspection forms are reviewed to ensure that all noted corrective actions are within the applicable OSHA and Veterans Affairs Safety and Health Manual guidelines.
(d) This documentation will be kept (readily available?) at the project field office, and will aid in the audits of the Accident Prevention Plan.

(2) The second type of Safety and Health Inspection will be a daily checklist.
(a) This too, will be performed each workday onsite, by the site supervisor.
(b) This documentation will be kept at the project field office, and will aid in the audits of the Accident Prevention Plan. (this too Should be made readily available?)

b) EXTERNAL INSPECTORS/CONSTRUCTION ROUNDS

(1) At various times there may be announced and unannounced visits to the work area of any of the Contracted Construction Projects. They may be visited by
some or all of the members of the Construction Safety Inspection Group.

(2) Prior to the activity of cutting and/or welding, the COR for the Veterans Affairs will be contacted to assist in scheduling a site inspection and submission for a burn permit.

(3) Prior to any activity including digging and/or excavating, the COR for the Veterans Affairs will be contacted to assist in scheduling a site inspection and submission for a permit.

(4) Prior to any activity including the renovation and/or penetration of rated walls, the COR for the Veterans Affairs will be contacted to assist in scheduling a site inspection and submission for a permit.

(5) Prior to any activity including the removal or repair of Asbestos

Containing Building Material, the COR for the Veterans Affairs will be contacted to assist in scheduling a site inspection and submission for a permit.

c) INSPECTIONS BY OUTSIDE PARTIES i.e., OSHA, EPA, etc.

(1) Presentation of Credentials - Upon arrival at the work site or facility, the Compliance Officer must display his or her credentials and will ask to meet with the appropriate employer representative.

(2) The contractor must notify the projects COR immediately upon the initial contact of the Compliance Officer's contact.

(3) Opening Conference – During an opening conference, the compliance officer will explain the purpose of the inspection. The contractor's management representative must be prepared to discuss actions that have been taken to demonstrate their company's commitment to the health and safety of employees (e.g. work practices, safety and industrial hygiene standards, safety manuals, training conducted, internal inspections, etc).

(4) An authorized employee representative will be given the opportunity to attend the opening conference and to accompany the compliance officer during the inspection. Employees may also be consulted during the conduct of the inspection. Employees who participate in the inspection, or are consulted by the compliance officer, are protected from discrimination for exercising their safety and health rights under the "Whistle Blowers Act".

(5) A contractor management representative and a VAMC Cleveland Safety representative must accompany the compliance officer during the inspection and keep accurate notes of any actual or possible violations found by the compliance officer. Obvious violations detected by the compliance officer should be corrected on the spot where possible.

(6) It is imperative that existing operations, reports, logs, etc. not be misrepresented to the compliance officer. The penalty for making false statements or representation to OSHA or its compliance officers is a maximum of $10,000 and 6 months imprisonment. In addition, the offending party can be subject to discipline by the company up to and including discharge.

(7) Closing Conference - After the inspection has been conducted, a closing conference will be held between the compliance officer, the employer and employee representatives and VAMC Cleveland. This is the best time, before possible issuance of a citation, to explain the company's position. It is imperative that we question any proposed findings or abatement periods that are unreasonable. Request that any citations be sent to the company with a copy to the VAMC Cleveland safety office.

5. SAFETY TRAINING /EDUCATION:

a) Site orientation training:

All employees on site will be required to attend a Safety Training Orientation at the start of the project, or before they begin work at the job site. The site supervisor, competent person, will conduct the training. Training on the applicable requirements of this Site Specific Training Plan is plan is mandatory and must be documented.

b) Supervisor and employee safety meetings:

The primary site supervisor, who is the competent person (certifications located in Appendix B), will conduct the initial employee site safety orientation. Mandatory safety meetings will be held on a weekly basis. Safety and health topics will vary from week to week on subject matter, utilizing the 29 CFR 1910 and 29 CFR 1926 standards, along with the Veterans Affairs Safety and Health Program and issues raised during construction.

<Place documentation of training sign-in sheets and agenda in Appendix B>

c) Employee training:

<Name> Construction Company employees will be trained, at the site safety orientation on the following topics:

- When PPE is necessary.
- What PPE is necessary and which PPE has been selected for each process the employee operates.
- How to properly put on, take off, adjust, and wear PPE.

6. ACCIDENT REPORTING:

All **<Name>** Construction employees on site will be required to attend an "Accident and Event Reporting" Orientation class at the start of the project, or before they begin work at the job site. The site supervisor, competent person, will conduct the above mentioned training.

a) Accident investigations, reports, and logs:

The project manager and site supervisor will conduct all accident and near miss investigations. The site supervisor will maintain the OSHA 300 log. All documentation will be kept on the job site. Certifications for competent person(s) are located in Appendix B.

b) Immediate notification of major accidents:

Should a major accident occur, the following notifications will take place as soon as any injured person(s) are cared for:

<Contact Name, Title>
<Contact Name, Title>
<Contact Name, Title>
VA Safety Representative: Frank Wunderle

Local Emergency Services:

For Wade Park

Hospital	VA Wade Park Medical Facility 10701 East Blvd. Cleveland, Ohio 44106 Dial 2222 from any VA Phone
Hospital	University Hospitals 11100 Euclid Avenue Cleveland, Ohio 44106 911 / (216) 844-1000
Fire Department	911 / 216-664-6813
Security	Dial 4207 from any VA Phone

For Brecksville

Hospital	VA Brecksville Medical Facility 10000 Brecksville Rd.. Brecksville, Ohio 44141 Dial 2222 from any VA Phone
Hospital	Marymount medical Center 2001 East Royalton Rd. Broadview Hts., Ohio 44147 440.717.5800
Fire Department	911 / 440-526-2640
Security	Dial 4207 from any VA Phone

This listing will be posted in the field office.

c) Accident response plan:

<Name> Construction Company intends to make certain all emergency incidents are handled in a proper and safe manner giving priority to the following:

- Life Safety
- Property Conservation
- Emergency Situation Investigation
- Return to Normal Operations

d) Exposure data / man hours worked:

(1) This section covers the following operations **<Fill in operation/s requiring additional training>** unless the employer can demonstrate that the operation does not involve employee exposure or the reasonable possibility for employee

exposure to safety or health hazards. Example; (a negative impact statement or asbestos abatement)

(2) This information will be maintained by the site supervisor and verified by <**Contact Name**>. A daily log will be maintained of all man hours worked. This information will also be used to determine the final TIR for the project. Any data collected will be submitted to the COR for their report.

7. EMERGENCY RESPONSE PLAN:

This plan covers the actions of all <**Name**> Construction employees. All subcontractors on site will be required to submit for approval, to <**Name**> Construction Company, their own site specific Emergency Response Plan. If not adequate, the subcontractor and their employees must be orientated to the <**Name**> Construction Company's "SITE SPECIFIC EMERGENCY RESPONSE PLAN", before they can begin work at this site.

a) Chemical Safety:

As part of this program, <**Name**> Construction Company will inform subcontractors, or their representatives of the site emergency response procedures and any potential fire, explosion, health, safety, or other hazards.

The following procedures address emergency response as follows:

- Pre-emergency planning and coordination with outside parties:
  VAMC (COR) will receive notification of date to start work, along with MSDS's of all substances brought onto the facility.

- Personal roles, lines of authority, training, and communication:

The personnel utilizing chemicals will contain the substances brought onto the facility. Plumbers will contain and handle all compressed gas cylinders, providing they have been trained and documented.
In the case where a situation occurs that they cannot handle, all employees will be trained on evacuating the area, notifying the on-site supervisor, and workers in the immediate worksite.

- Emergency recognition and prevention:

All workers will, at the safety orientation, be informed of this site-specific emergency response plan and procedures.
All workers will be responsible to recognize hazards and their prevention, practice this at all times on the worksite.
All workers will be responsible to answer question from surveyors about general safety, health, and emergency procedures wherever they are on site.

b) Emergency plan for severe weather:

For the site-specific severe weather conditions that employees may encounter during the project, <**Name**> Construction Company has developed the following procedures. First,

<**Name**> Construction Company employees will adhere to all NWS warnings and advisories. For snowfall, the policy for workers is that a Level Three emergency, which is predicted heavy snow fall, or other dangerous weather conditions.

- Safe distances and places of refuge:

All workers at this site will be informed of the designated location of the safe zone. This will also be posted in the field office for all to be reminded of. In the event of an emergency occurrence, and the Local Fire Department, or any other entity is summoned, all workers will report to this zone to be accounted for.

- Site security and control:

In the event of an emergency, workers will notify the site supervisor or project manager of the situation, at that time, workers will report to the safe zone. The site supervisor and/or project manager will notify security and any other applicable authorities. Staying away from the immediate situation and not allowing any unauthorized personnel to enter until proper authorities arrive.

- Evacuation routes and procedures:

Any work will be performed on the interior of the building. Evacuation plans are posted in various locations throughout work area by the VA.

- Decontamination:

This would be required if there is a possibility of a large spill of hazardous material with the potential of contaminating contractor employees. Small spills and personnel contaminations are expected to be cleaned up using the contractors Hazard Communication program and associated MSDS requirements.

c) Medical support:

It will be the duty of all workers onsite, including subcontractors, to immediately report to the site supervisor and/or project manager, COR's any and all emergencies.

The following are items of concern regarding the handling of all medical support requirements:

(1) On site:

- For incidents occurring on site at Wade Park Veterans Affairs Medical Center or Brecksville Veterans Affairs Medical Center; the victim(s) will be stabilized prior to be relocated to another institution.

- For non-emergency support first aid supplies will be kept at the <**Name**> Construction Company field office. All subcontractors will be required to supply properly trained personnel as well as their own first aid supplies.

- All supplies will be subject to our safety inspections. No one will perform first aid or CPR unless properly trained, and verification of certification is on file at the jobsite.

-

(2) Off site:

- For the Wade Park location, University Hospital Medical Center is located at 11100 Euclid Avenue (216) 844-1000. For the Brecksville location, Marymount medical Center is located on 2001 East Royalton Rd., Broadview Hts., OH 44147.

- Maps are posted and available for all contractors on site (See Appendix A).

- Emergency medical treatment and first aid:

- Emergency alerting and response procedures:

- It will be the duty of all workers onsite, including subcontractors, to immediately respond to the COR's, Construction Safety Team or Outside Inspectors from governmental agencies or agencies approving accreditation regarding their function during an emergency.

(3) Posting of emergency telephone numbers:

The posting of these Emergency Telephone Numbers will be in the job field office, where all workers will have access to them. All employees and subcontractors will be made aware of these and the location at the safety orientation. The numbers are as follows:

Hospital	Wade Park Veterans Affairs Medical Center Dial 2222 from any VA Phone University Hospital 911 / (216) 844-1000
Fire Department	911 / (216) 664-6813
Security	Dial 4207 from any VA Phone

d) Hazard communication program:

This site specific Hazard Communication Plan has been implemented in accordance with 29 CFR 1910.1200.

All areas in which hazardous chemicals will be stored shall have the proper label and/or signs. The MSDS for all chemicals on site will be located in a book labeled MSDS, in the project field office.

The training of employees and subcontractors will be as follows:

- Where to find this program
- What is in this program
- All chemicals on this jobsite
- What is an MSDS
- How to find specific information on an MSDS
- Labeling system
- What area these chemicals are stored in, map indicating
- The proper handling procedures for these chemicals
- Spill/release clean up protocol

Should there be an immediate threat to life or property, the emergency response plan for the installation, which is to be on file at the field office.

It is mandatory that all subcontractors submit, before a new chemical is introduced to the worksite, that the proper MSDS is submitted to the site supervisor/project manager. It will be the responsibility of the site supervisor to inform all employees and subcontractors of the new chemical(s), introduce the MSDS, and the potential hazards of that chemical. The site supervisor and/or project manager will have the responsibility to notify the Contracting Officer / COR of any and all new chemicals brought onto the facility.

Chemical storage areas, if needed, to be located per VA designated location.

e) CORRECTIVE ACTIONS INVOLVING CLEAN-UP OPERATIONS AT SITES COVERED BY THE RESOURCE CONSERVATION AND RECOVERY ACT OF 1976 (RCRA) AS AMENDED (42 W.S.C. 6901 ET SEQ).

Clean-up operations required by a governmental body, whether Federal, state, local or other involving hazardous substance that are conducted at uncontrolled hazardous waste sites (including, but not limited to, the EPA's National Priority Site List (NPL), state priority site lists, sites recommended for the EPA, NPL, and initial investigations of government identified sites which area conducted before the presence or absence of hazardous substances has been ascertained;

Voluntary clean-up operations at sites recognized by Federal, state, local or other governmental bodies as uncontrolled hazardous waste sites;

Operations involving hazardous waste that area conducted at treatment, storage, disposal (TSD) facilities regulated by 40 CFR Parts 264 and 265 pursuant to RCRA; or by agencies under agreement with U.S.E.P.A. to implement RCRA regulations; and Emergency response operations for releases of, or substantial threats of releases of, hazardous substances with regard to the location of the hazard.

8. FIRE PREVENTION PLAN:

We at **<Name>** Construction Company limit our employees participation to the use of portable fire extinguishers. The site supervisor at safety orientation will cover this Plan. The following topics will include:

a) All areas controlled by the primary contractor are required to maintain fire protection during their occupancy. As a minimum smoke detectors and heat sensors shall be in place whenever the areas original fire protection has been compromised.

b) All fire extinguishers must be checked and tagged every thirty day

c) The general principles of fire extinguisher use and the hazards involved with incipient stage firefighting.

d) Actions to be taken by authorized person(s)
(1) Evacuate area.
(2) Notify site supervisor and/or project manager.
(3) Determine if fire is incipient
(4) Utilize fire extinguisher.
(5) If fire or smoke is too great, report to safe zone.
(6) Make call to Fire Department if instructed by supervisor and/or project manager.

e) Actions to be taken by unauthorized person(s)
(1) Evacuate area
(2) Notify supervisor and/or project manager.
(3) Report to safe zone.
(4) Make call to Fire Department if instructed by site supervisor and/or project manager.

f) Only approved fire extinguishers will be onsite and checked on a daily basis by the site supervisor. These will be located in the following areas, but not limited to:
(1) Portable Fire Extinguishers
(2) Individual Roles and Responsibilities
(3) Fire Watch
(4) Response Plans
(5) Safe Zone
(6) Notification
(7) Site Mapping
(8) Inside field office.
(9) In any area where cutting or welding is taking place

g) The following sections listed below are all part of this Accident Prevention Plan. The information below contains additional requirements that are part of this Fire Prevention Plan:

- Safety and Health Inspections
- Firefighting Plan
- Posting of Emergency Numbers
- Hazard Communication Program
- Site Sanitation Plan

(1) The risk of a job site fire can be avoided through; safety and health inspections, housekeeping, proper maintenance, proper storage and handling, ensuring all employees and subcontractors are performing their designated work duties properly, the handling of supplies and equipment as directed, following all guidelines set forth through operating manuals, instructions, and training,

(2) All employees and subcontractors require the proper storage of combustibles. Combustible liquids must be stored and covered in approved containers.

(3) All chemical spills including, of course, combustible liquids, must be cleaned up immediately.

(4) All chemical and chemical products will be handled and stored in accordance with the procedures noted on their individual MSDS

Note: Care must be taken when cleaning up chemical spills. Information on appropriate personal protective equipment, proper disposal, proper cleanup procedures, required ventilation, etc is found on the products MSDS.

(5) Cleanup materials and damaged containers must be properly disposed.

(6) Combustible liquids and trash must be segregated and stored away from ignition sources.

(7) Approved portable fire extinguishers will be checked on daily basis, ensuring they are charged and ready for use.

(8) Smoking is not permitted inside the facility. Only designated areas by the VA will be permitted (outside), with smoking debris discarded in designated areas..

(9) Debris will not be allowed to accumulate on the job site and will be maintained daily.

h) Submission of a Burn Permit. <**Name**> Construction will submit a Burn Permit to the COR to perform acetylene oxygen welding, brazing and cutting, the following precautionary measures will be required as part of this permit along with any additional requirements by the VA Medical Center Policy 138-012 (Hot Work):

(1) Inspect all surroundings and equipment to insure that combustible substances are not present in any area where contact of metal at a temperature above the flashpoint of any compound is possible.

(2) Ensure that no open containers or spills of combustible substances are present.

(3) Ensure that ignition is not possible by conduction, convection, radiation, or dispersion of molten metal.

(4) Proper protection equipment and practices will be used, i.e., fireproof

blankets, removal of combustible materials where practicable, and portable fire extinguishers of proper type on hand.

(5) When the above operations are in use a continuous Fire Watch will be performed while equipment is being used.

(6) Training in fire protection will occur at the site safety orientation. This training shall include the following topics, but not limited to:

a. **<List of Topics>**

9. SITE SAFETY RULES:

<Name> Construction Company has developed a comprehensive safety and health program that addresses our specific safety and health concerns and provides guidance for the performance of our individual job tasks within the framework of appropriate Occupational Safety and Health Administration (OSHA) standards.

Safety requires not only that each person understand and perform individual tasks in a safe manner, but also that each individual is aware of his/her surroundings and is actively involved in the safety and health of others.

a) No Smoking: Smoking is not permitted inside the facility. Only designated areas by the VA will be permitted (outside), with smoking debris discarded in designated areas.

b) Accidents: In the event of an emergency, workers will notify the site supervisor or project manager of the situation, at that time, workers will report to the safe zone. The site supervisor and/or project manager will notify security and any other applicable authorities.

The goals for all projects are as follows:

(1) Zero accident rate
(2) Zero injury/illness rate
(3) Compliance with all applicable Local, State, OSHA standards and Veterans Affairs Safety Directives

c) Hard Hats: Head Protection will be as follows:

- All workers on this site will be required to wear approved hart hats when working in the close proximity of heavy equipment and where structural steel is being hoisted

- In the area where another workers activities may exposing them to injury.

d) Hazard Reporting: Each employee is encouraged to contact their Supervisor immediately should a safety or health risk exist so that corrective action may be taken immediately.

e) Controlled Substances: Therefore, the following actions are strictly prohibited and will prompt disciplinary action up to and including consideration for immediate discharge:

(1) The illegal use, sale, arranging for sale, possession or manufacturing of narcotics, drugs or controlled substances while on the job or on VA property.
(2) The use of alcohol or illegal drugs while on the job or VA property.

f) Safety Devices: **<Name>** Construction Company has fulfilled all required Safety and Health Plans and Programs according to regulation, and has installed all required safety device for the equipment being used for the tasks. Failure to use or to disable the mentioned safety device relating to CFR 1910 and 1926 standards to ensure 100% safety will be grounds for review .

The goal is to provide the company and its workers protection against those individuals who refuse to act in a consistently safe manner.

Without proper enforcement, the policy will not be able to deliver the intended results. Therefore, it is essential that all employees be held accountable to these guidelines for disciplinary actions up to and including discharge.

g) Personnel Protective Equipment: Procedures for implementing an effective PPE policy in accordance with 29 CFR 1910.132, will be as follows:

(1) During a pre-construction walk through, **<Contact Name>**, the Project Manager, will perform a job site hazard assessment.

(b) HAZARD ASSESSMENT: The purpose of the survey is to identify sources of hazards to workers and co-workers. The documentation of this hazard assessment is located in PCRA (Pre-Construction Risk Assessment)

(c) POTENTIAL HAZARD SOURCES **<Adjust based on scope of work>**

- **<Surfaces that could become slick, uneven walking and working surfaces>**
- **<Welding / Brazing Hazards>**
- **<Quality Air Control>**
- **<Electrical Hazards>**
- **<Potential Overhead Obstructions (above ceiling)>**
- **<Fall Protection>**
- **<Rolling or pinching objects>**
- **<Sharp objects that might pierce feet or cut hands>**
- **<Motion that includes tool movement, moving machinery, or machine parts, or movement of personnel that could result in collision with stationary objects.>**

(d) EMPLOYEE TRAINING: **<Name>** Construction Company employees will be trained, at the site safety orientation on the following topics:

- When PPE is necessary.
- What PPE is necessary and which PPE has been selected for each process the employee operates.
- How to properly put on, take off, adjust and wear PPE.

(2) Each of the basic hazards has been reviewed and a determination made as to the type, level of risk, and seriousness of potential injury.

- When exposure to hazards cannot be engineered completely out of normal operations or maintenance work.
- When safe work practices cannot provide sufficient additional protection.
- A Final method of control is through the use of protective clothing or equipment. These include eye protection, steel-toed shoes, hard hats, hearing protection, gloves, and fall protection

(3) Consideration has been given to the possibility of exposure to several hazards at once. The general procedure for determining appropriate protective equipment is to:

- Identify the potential hazards and the type of protective equipment that is available, and what protection it provides.
- Compare the capabilities of various types of PPE with the hazards associated with the environment.
- Select the PPE, which provides a level of protection greater than the minimum required to protect employees from the hazards.
- Select PPE that will fit each employee properly and provides protection from the hazard.
- The Hazard Assessment Worksheet is located in Appendix D.

h) Horseplay: Safety training needs will be identified by continual reassessment of our work methods, equipment and job sites as well as employee and management input. Observation of unsafe acts will be addressed immediately.

i) Reporting Under the Influence:

(1) Arriving at work or working under the influence of alcohol or illegal drugs, narcotics or controlled substances.

(2) Any illegal substance confiscated pursuant to this policy will be turned over to the proper authorities.

j) Flammable Liquid Storage: It is mandatory that all subcontractors submit, before a new chemical is introduced to the worksite, that the proper MSDS is submitted to the site supervisor/project manager. It will be the responsibility of the site supervisor to inform all employees and subcontractors of the new chemical(s), introduce the MSDS, and the potential hazards of that chemical. The site supervisor and/or project manager will have the responsibility to notify the Contracting Officer / COR of any and all new chemicals brought onto the facility.

k) Heavy Equipment Operation

10. WEEKLY CONTRACTOR REVIEWS:

a) The primary site supervisor, who is the competent person (certifications in Appendix will conduct the initial employee site safety orientation.

b) Mandatory safety meetings will be held on a weekly basis. Safety and health topics will vary from week to week on subject matter, utilizing the 29 CFR 1910 and 29 CFR 1926 standards, along with the Veterans Affairs Safety and Health Program and issues raised during construction.(Place documentation of training sign-in sheets and agenda in Appendix B)

c) Safety takes a commitment from all personnel within our organization. Weekly Training will be interactive with an opportunity for all to actively participate, ask questions, make suggestions, and refer to our written policies and procedures.

11. COMPETENT PERSON:

a) A Site Safety and Health Officer (SSHO) will be provided at the work site at all times to perform safety and occupational health management, surveillance, inspections, and safety enforcement for the Contractor and subcontractors.

b) The SSHO will be employed by the prime. SSHO qualifications with education certificates will be listed in Appendix B.

d) There will be a competent person for maintaining a Health Hazard Control and Respiratory Protection Program. They will conduct and document a hazard assessment in accordance with Section 06 to identify and evaluate the need and level of protection required for the activities being scheduled. (What form of documentation).

d) Conduct daily safety and health inspections and maintain a written log which includes area/operation inspected, date of inspection, identified hazards, recommended corrective actions, estimated and actual dates of corrections. Safety inspection logs shall be attached to the Contractors daily quality control report. Current “Safety Logs” shall be readily available upon request.

12. WRITTEN PROTOCOLS FOR OUTSIDE INSPECTIONS:

.

a) Presentation of Credentials - Upon arrival at the work site or facility, the OSHA compliance officer must display his or her credentials and will ask to meet with the appropriate employer representative.

b) The contractor must notify the COR immediately upon the initial OSHA Contact.

(1) Opening Conference – During an opening conference, the compliance officer will explain the purpose of the inspection. Contractor Management representatives must be prepared to discuss actions that have been taken to demonstrate their company’s commitment to the health

and safety of employees (e.g. work practices, safety and industrial hygiene standards, safety manuals, training conducted, internal inspections, etc).

(2) An authorized employee representative will be given the opportunity to attend the opening conference and to accompany the compliance officer during the inspection. Employees may also be consulted during the conduct of the inspection. Employees who participate in the inspection, or are consulted by the compliance officer, are protected under the OSHA act from discrimination for exercising their safety and health rights.

(3) A contractor management representative and a VAMC Cleveland Safety representative must accompany the compliance officer during the inspection and keep accurate notes of any actual or possible violations found by the compliance officer. Obvious violations detected by the compliance officer should be corrected on the spot where possible.

(4) It is imperative that existing operations, reports, logs, etc. not be misrepresented to the compliance officer. The penalty for making false statements or representation to OSHA or its compliance officers is a maximum of $10,000 and 6 months imprisonment. In addition, the offending party can be subject to discipline by the company up to and including discharge

(5) Closing Conference - After the inspection has been conducted, a closing conference will be held between the compliance officer, the employer and employee representatives and VAMC Cleveland. This is the best time, before possible issuance of a citation, to explain the company's position. It is imperative that we question any proposed findings or abatement periods that are unreasonable. Request that any citations be sent to the company with a copy to the VAMC Cleveland safety office.

13. SUBCONTRACTOR SITE SPECIFIC SAFETY PLAN:

As part of employment with **<Name>** Construction Company, **employees** are required to comply with all aspects **of their** corporate level "Safety and Health Plan".

- Supervisors are expected and required to comply with all aspects of the corporate level "Safety and Health Plan" as well as to enforce all applicable requirements at the jobsite.

- Supervisors are expected and required to complete all necessary site safety documentation in a complete and timely manner.

- Supervisors are required to report all safety incidents to the main office as soon as possible. The projects COR is to be notified ASAP. The above items represent the method used to ensure our goals are met.

14. REQUIRED POSTERS:

This Policy Statement will be conspicuously posted in the job site office along with all other required postings including the OSHA Form 300, Log and Summary of Occupational Injuries and Illnesses.

15. SUBCONTRACTOR/SUPPLIERS ORIENTATION PROGRAM:

a) Identification of subcontractors:
<Name of Subcontractor> (List all subcontractors expected to be on site)

b) Controlling and coordination of subcontractors and suppliers:

Suppliers will be under close supervision during material delivery and pick-up. Communication with suppliers will be important to ensure loads are put in designated areas, and supplier is made aware of any immediate hazards in the area he/she will be in. A project schedule has been coordinated and submitted for approval for the coordination of the scope of work being performed.

c) SAFETY RESPONSIBILITIES OF SUBCONTRACTORS AND SUPPLIERS:

All subcontractors will be responsible to Submit and implement their corporate level Safety and Health Plan as appropriate for the project. Subcontractor shall submit these documents to **<Name>** Construction Company for approval prior to the start of their activities on the work site. In addition, they will be responsible for adhering to all applicable OSHA and the Veterans Affairs Safety and Health Program requirements. These documents will be verified through our own site safety inspections and meetings.

In the event that a subcontractor does not have the required safety and health programs, their employees will receive training utilizing **<Name>** Construction Company's safety and health programs prior to accessing the work site. This training will be documented and compliance with the provisions of **<Name>** Construction Company's Safety and Health programs will be mandatory as well as being readily accessible.

16. REPORTING OF CATASTROPHIC EVENTS:

It is the policy of **<Name>** Construction Company to provide a work environment that is inherently safe. The safety and health of our employees is of primary importance as they are our most important resource

- Pre-emergency planning and coordination with outside parties:

  VAMC (COR) will receive notification of date to start work, along with MSDS's of all substances brought onto the facility.

- Personal roles, lines of authority, training, and communication:

  The personnel utilizing chemicals will contain the substances brought onto the facility. Plumbers will contain and handle all compressed gas cylinders, providing they have been trained and documented.

In the case where a situation occurs that they cannot handle, all employees will be trained on evacuating the area, notifying the on-site supervisor, and workers in the immediate worksite.

- Emergency recognition and prevention:

  All workers will, at the safety orientation, be informed of this site-specific emergency response plan and procedures.
  All workers will be responsible to recognize hazards and their prevention, practice this at all times on the worksite.

  All workers will be responsible to answer question from surveyors about general safety, health, and emergency procedures wherever they are on site.

- Safe distances and places of refuge:

  All workers at this site will be informed of the designated location of the safe zone. This will also be posted in the field office for all to be reminded of. In the event of an emergency occurrence, and the Local Fire Department, or any other entity is summoned, all workers will report to this zone to be accounted for.

- Site security and control:

  In the event of an emergency, workers will notify the site supervisor or project manager of the situation, at that time, workers will report to the safe zone. The site supervisor and/or project manager will notify security and any other applicable authorities. Staying away from the immediate situation and not allowing any unauthorized personnel to enter until proper authorities arrive.

- Evacuation routes and procedures:

  Any work will be performed on the interior of the building. Evacuation plans are posted in various locations throughout work area by the VA.

- Decontamination:

  This would be required if there is a possibility of a large spill of hazardous material with the potential of contaminating contractor employees. Small spills and personnel contaminations are expected to be cleaned up using the contractors Hazard Communication program and associated MSDS requirements.

- Emergency medical treatment and first aid:

- Emergency alerting and response procedures:

  It will be the duty of all workers onsite, including subcontractors, to immediately report to the site supervisor and/or project manager, COR's any and all emergencies

17. Site specific plans to address PCRA:

a. Only those hazards identified as “yes” on the PCRA need to be addressed.
b. Modify the description of the safety precautions as needed to address the specific concern. You may refer to a company policy or company rule book to describe the safety precautions or safety plan; however, we will need to have a copy of your plan or policy on file.
c. To place a check in the box
- right click on the box
- Click “Properties”
- Click “Checked”
- Click “OK”

Pre Construction Risk Assessment (PCRA)

	Description of safety precautions or reference to contractor Safety Procedures
☐	(1) Respiratory Protection Plan ○ **Describe of ACTIVITY requiring respiratory protection if applicable** ○ **NEED documentation of training.** ○ **Need documentation of fit test.**
☐	(2) Hearing: Protection Plan Any area with noise levels at or above 85dba will be required to wear hearing protection. When workers are utilizing loud equipment, or being exposed to such levels, hearing protection shall be provided.
☐	(3) PPE other: Personal protective equipment (PPE) includes hard hats, gloves, safety glasses, steel-toed shoes/boots, hearing protection, and personal fall protection. Eye protection will be as follows: ○ Safety glasses used for any worker performing, observing tasks that may result in flying objects, dust, or in the area where another workers activities may exposing them to eye injury. ○ During welding/cutting operations, the required filter lenses will be utilized according to the operation, electrode size and arc current. Foot Protection: ○ All workers will be required to wear the appropriate foot protection. ○ Steel-toed shoes/boots are mandatory. Hand Protection: ○ Workers may be exposed to hand injuries from; ▪ sharp objects, ▪ abrasive materials ▪ and weather. ○ Gloves designed to protect against the specific hazard encountered are an effective means of reducing such risks and will be used on this project.
☐	(4) Overhead hazards: **<(Example)There will be X critical lifts required on this project. A crane will be utilized to load new materials onto Xth floor roof and remove demolished material from the roof. A plan will be submitted** and approved **prior to this work being performed.>**
☐	(5) Confined space: Procedures for entering a confined space depend on the type of confined space and the scope of work associated with the entry. a) The VAMC Cleveland Confined Space Entry Program provides the detailed information necessary for regulatory compliance. The contractor may use the VAMC Program or their own providing that it meets regulatory compliance and is reviewed and approved before entry is made.

	b) Under no circumstances should a person enter into a posted confined space without notifying the COR. A "Shutdown Request" reviewd by Occupational Health and Safety and approved by the COR will be used for this notification. c) Sub-basements are considered non-permit required confined spaces unless welding is performed or other hazards introduced that may create a hazardous atmosphere. When atmospheric hazards are identified then the sub-basements will be worked under the alternate procedure provisions provided that continuous ventilation is used to control the atmospheric hazard. d) Areas posted as "Permit Required" confined spaces will not be entered unless the hazards are eliminated and the space is reclassified. All tanks, voids, ventilation ducts and sewers are considered "Permit Required" confined spaces unless a hazard assessment is conducted and the space is reclassified. e) Employees entering confined spaces will be trained. Training will be based on the Confined Space Entry Program, ANSI National Standard "Safety Requirements for working in Tanks and other Confined Spaces" (ANSI Z117.1), or equivalent training
☐	(6) Ladders: Workers that may be performing work on ladders are instructed to adhere to the following: ▪ Inspect before using ▪ Place ladder using 4 to 1 rule ▪ Never place base of ladder on objects ▪ Never place ladder in front of door unless ▪ Door is blocked in open position ▪ Door is demarcated off ▪ Door is locked
☐	(7) Scaffolding: For work that requires scaffolding use for employees and subcontractors, personal fall protection shall be mandatory, unless working less than 6 ft. The following topics listed will be conveyed to workers prior to scaffolding use ▪ Review scaffolding supplier pamphlet for proper construction ▪ Inspect scaffolding structure before initial use/and daily ▪ Report any defects immediately / do not use / tag out of service ▪ Placement of structure ▪ When fall protection is required ▪ What you can tie off to
☐	(8) Work platforms: Describe type of platform required and specific requirements for its use.
☐	(9) Fall protection**:** Personal Fall Protection **<Name>** Construction Company requires all employees working at or above 6' to wear personal fall protection, unless the personal fall protection creates a safety hazard by utilizing it. In that case, other means of fall protection shall be provided.
☐	(10) Asbestos: As part of the Asbestos program, **<Name>** Construction Company will inform subcontractors, or their representatives of the site emergency response procedures and any potential fire, explosion, health, safety, or other hazards. The

		substances listed in Section 13, paragraph c, under MSDS, have the potential to be released or spilled. Section 13.c, Hazard Communication, lists some potential hazards that contractors and/or subcontractors my encounter. Also listed are the response actions to be taken and the proper notification.
☐	(11)	Hazardous materials: The substances listed in Section 13 paragraph c, under MSDS, have the potential to be released or spilled. Section 13 c, Hazard Communication, lists some potential hazards that contractors and/or subcontractors my encounter. Also listed are the response actions to be taken and the proper notification. MSDS sheets must be made available for review by the VAMC and contracted employees.
☐	(12)	Hot work: The <**Name**> Construction Company will follow VAMC Cleveland's Hot work Policy (MCP 138-012), <**Name**> Construction will submit a Hot Work Permit to the COR to perform acetylene oxygen welding, brazing and cutting, the following precautionary measures will be required. ▪ Inspect all surroundings and equipment to insure that combustible substances are not present in any area where contact of metal at a temperature above the flashpoint of any compound is possible. ▪ Ensure that no open containers or spills of combustible substances are present. ▪ Ensure that ignition is not possible by conduction, convection, radiation, or dispersion of molten metal. ▪ Proper protection equipment and practices will be used, i.e., fireproof blankets, removal of combustible materials where practicable, and portable fire extinguishers of proper type on hand. ▪ When the above operations are in use a continuous Fire Watch will be performed while equipment is being used. ▪ Training in fire protection will occur at the site safety orientation.
☐	(13)	Ventilation: <**Describe the type of forced ventilation that will be used and the reason it is required. Example: A 500 CFM Red Devil blower will be set up for welding operations in the sub-basement. The exhaust of this blower will be directed to the outside.**>
☐	(14)	Power distribution: Describe the circumstances that would make it necessary for disruption of power from the main power lines or associated transformers entering the facility.
☐	(15)	Work being done on energized equipment: Any work to be done on Energized Equipment must be done in accordance with Medical Center Policy (MCP) 138 – 03 (Working on Energized Equipment). The Medical Centers Directors permission is required to work any circuit energized. A Energized Circuit Work permit must be approved before starting work.
☐	(16)	Other electric: List Specifics
☐	(17)	Loto: ▪ Only VA Employees will manipulate breakers or valves to perform a Lock Out

		Tag unless specific permission (in writing) is obtained by the Assistant Chief Engineering, M&O. ▪ The VA will hang Locks or tags on valves or breakers as requested by the project manager. ▪ After the VA places their lock on the device, then **<Name>** Construction Company will be allowed to place their lock on the device. ▪ When clearing the Lock Out Tag Out, **<Name>** Construction. ▪ Company will remove **<Name>** Construction's locks and notify the COR. ▪ The VA will then remove the VA locks and reposition the valve or breaker at the request of **<Name>** Construction Company.
☐	(18)	Crane operation: **<(Example) There will be X critical lifts required on this project. A crane will be utilized to load new materials onto Xth floor roof and remove demolished material from the roof. A plan will be submitted and approved prior to this work being performed.>**
☐	(19)	Excavating; Trenches, ditches – Describe the type, name of competent person, trench boxes required and if necessary air sampling requirements.
☐	(20)	Earthmoving: **(Example)** The use of this equipment will be required on this project for moving of earth. Safety will be the responsibility of the company performing the work.
☐	(21)	Industrial trucks: **(Example)** The use of this equipment will be required on this project for loading materials onto the Xth floor roof. Industrial truck safety will be the responsibility of the company performing the work.
☐	(22)	Other motorized equipment: List type and specific use. Only qualified operators will be allowed to operate motorized equipment. Diesel powered equipment will not be used near medical Center Ventilation Intakes.
☐	(23)	Concrete, Masonry operations: Describe the work to be performed and what fall protection will be provided for workers on forms that are higher than six feet.
☐	(24)	Steel Erection: Describe the type of steel erection, fire protection coatings used and fall protection requirements if not already addressed in (10) Fall Protection.
☐	(25)	Alteration or Improvement of existing Electrical transmission and distribution lines and equipment. – Describe the scope of work and provisions made to ensure that the facility does not lose power during the work.
☐	(26)	Hand & portable tools a) Hand Tools .1 For your own protection, do not misuse your tools. Use tools only for the purpose for which they were designed. .2 Your job will be easier and much safer if tools are in good condition. Take care in handling and storing tools.

.3 You and the person in charge must be satisfied that all the tools you use on the job, whether they are Company- or personally-owned, are in safe condition.
.4 Tools with mushroomed heads, loose, split or broken handles, broken screw drivers, defective pliers, wrenches with spread jaws, defective cords, ground wires and plugs, etc., must not be used.
.5 Never use a defective tool. Defective tools are to be removed from service and marked defective.
.6 For your own protection, do not misuse your tools.
.7 Cover sharp-edged and pointed tools with scabbards and guards. Always use the guards when the tools are not in use.
.8 Never strike the hardened part of one tool against the hardened part of another tool or against any hardened surface.
.9 Never use a file with a tang unless it is equipped with a handle.
.10 Never throw tools from one person to another or from one level to another.
.11 Hot tools, equipment or materials on tables or benches, even if they are metal covered, shall be properly identified.
.12 Never use improper handles when you work with jacks. Always remove handles when they are not being used.
.13 Never use metal-shielded spotlights or flashlights around exposed electrical equipment.

b) Extension Cords

.1 Use only approved extension cords and lamp guards. Extension cord lamps used in explosion-hazard atmospheres, such as oil vapor or flammable gases, must be equipped with guards and vapor-proof globes. Do not use a lamp with a switch.
.2 When you use an extension cord around switchboards, switch structures or electrical equipment, it must have a non-metallic socket and guard.
.3 Use only specially approved low voltage (6 or 12 Volt) extension cords or ground fault circuit interrupter (GFCI) when you need portable lighting in wet locations. This type of cord should be used when you work outdoors, in tanks or in other areas where moisture or condensation may be a hazard.
.4 Use GFCI protected circuits where required by the electric code. If there is a question about the requirements, contact Engineering Service for resolution.

c) Tool Containers

.1 Cover any grating to prevent your tools or material from falling. When you are working on scaffolds or platforms, use a suitable container for any of your tools that are not actually being used.

d) Power Tools

.1 Always wear the proper personal protective equipment including but not limited to eye protection.

	.2 Before you use any power tool, check to make sure: • .it is properly tested; • all guards are in place; • all material is properly secured; • you disconnect the tool electrically before inserting or removing any attachments; and • you use GFCI protected circuits when required. .3 While a machine is in operation: • never remove chips with your hand; always use a suitable brush, hook or stick; • do not let the machine run unattended; • do not place tools or materials on machines where they can be jarred or pushed off; • never try to stop a machine using your hands or any other part of your body as a brake; and • both hands shall be used when working with portable tools. .4 You must unplug power tools when they are left unattended. You must shut off and de-pressurize (bleed down) pneumatic- or hydraulic-operated tools when they are left unattended. .5 Keep the floor around machines clean and free from oil. If you spill any oil, wipe it up immediately or use an oil absorbent. Slipping is one of the most common causes of accidents. .6 Carefully inspect grinding machines before you use them. Be sure that: • you perform a ring test prior to installing a new wheel; • the wheel is secure on the driving shaft; • the wheel is in good condition; dress or replace the wheel as necessary; • the work rest is adjusted properly; and • the safety guard is in place and allows proper visibility to do the work. • Do not use the side of the wheel for grinding, unless it is specifically designed for side grinding. • Many wheels cannot stand up under side grinding. • Never drive a grinding wheel at speeds above that specified by the manufacturer. • When you grind small objects, hold them firmly in place with a suitable tool, not with your fingers. • Do not grind soft metals such as aluminum
☐	(27) Compressed Gasses: Compressed gas cylinders may be used at this worksite. These cylinders and gases present an injury hazard in the event that a regulator or cylinder is damaged and/or broken. The particular gases used will be **<Name Gas>.** These hazards will be reduced by routine inspections and maintenance of compressed gas cylinders and by assuring all the units are secured from tipping. Safety caps will be installed on all cylinders that are not in use. Compressed gas cylinder will be kept away from excessive heat, will not be stored where they might be damaged or knocked over by passing or falling objects. The storage of oxygen and fuel gas compressed cylinders will be separated by at least

		20 ft.
☐	(28)	Other hazardous activities <**(Name and describe safety precautions)**>
☐	(29)	Infection Control : Infection Control (216-791-3800 Ext 4791) has been contacted for work in patient care or high risk areas to conduct an Infection Control Risk Assessment (ICRA). Provisions of the ICRA will be followed unless changed by Infection Control.
☐	(30)	Life Safety: Occupational Health and Safety 216-791-3800 Ext 4172 has been contacted to conduct a Life Safety Risk Assessment. Interim Life Safety measures have been determined and will be posted outside of the construction area. Fire extinguishers will be provided inside the construction area and they will be inspected at a minimum of 30 day intervals. Provisions of the Interim Life Safety measures will be followed unless modified by Occupational Health and Safety. If penetrations are made in smoke/fire barriers the COR will verify that they have been appropriately sealed before project completion.
☐	(31)	Emergency Procedures: Standard Emergency Response Plan is described in section 7. Additional provisions required for rescuing employees working at heights or working in Permit Required Confined Spaces will be as follows: <**Describe Specifics**>
☐	(32)	Demolition: Demolition is described in the Scope of Work Summary. Collection of demolition debris for recycling will minimize dust generation. All containers will be covered and employees will use appropriate methods for controlling the spread of dust outside the construction zone.
☐	(33)	New Construction Recycling: A minimum of <X%> of total project waste will be diverted to a landfill. a) Concrete b) Steel
☐	(34)	Interior Remodeling Recycling: A minimum of <X%> of total project waste will be diverted to a landfill. a) Ceiling Tile b) Steel c) Carpet
☐	(35)	General Recycling: The following categories of waste shall be diverted from a landfill (Check all that apply):
	☐	Green Waste (Biodegradable landscaping material)
	☐	Soil
	☐	Inserts (concrete, asphalt, masonry)
	☐	Clean dimensional wood, palette wood
	☐	Engineered wood products, plywood, particle board, I joints, etc.
	☐	Cardboard Paper packaging
	☐	Asphalt Roofing materials
	☐	Insulation
	☐	Gypsum board
	☐	Carpet and pad

	☐	Paint
	☐	Plastics: ABX, PVC
	☐	Beverage containers

APPENDIX A

Evacuation Routes Work Zone Layouts and Maps to Emergency Services

Contractor and subcontractors working in the Medical Center will follow the posted exit signs and maps to evacuate the medical Center. To ensure all employees have been evacuated, they will meet at **<Location>.**

Map from VAMC Cleveland (Wade Park Division) to University Hospital

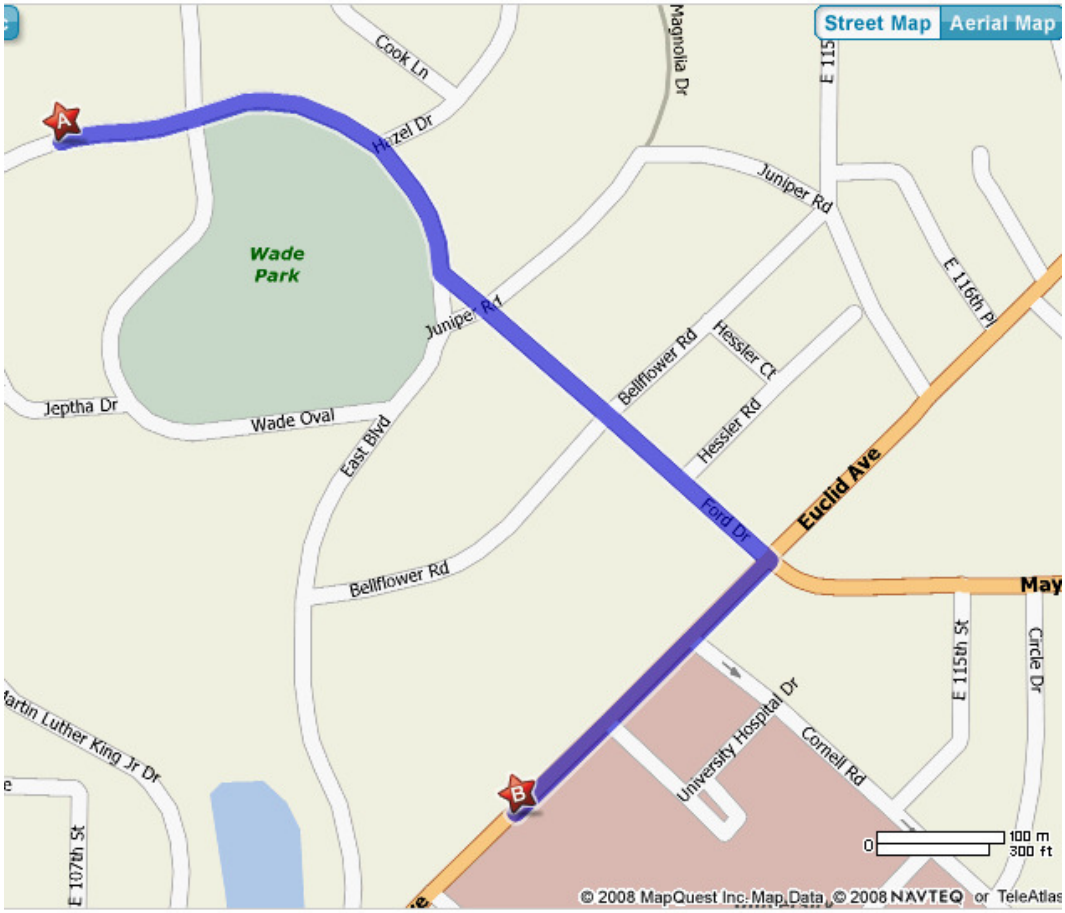

APPENDIX B

CERTIFICATIONS
&
JOBSITE DOCUMENTATION PROGRAM

<List all individuals including their titles, who have completed

1. **OSHA 30 Hour Construction Safety Course**
2. **OSHA 10 Hour construction Safety Course**
3. **Competent Person Certifications for Respiratory Protection, Fall Protection, Trenching and Shoring, etc. as required by the Scope of Work and applicable regulations.>**

APPENDIX C

CONTRACTOR ACCIDENT RECORD

OSHA 300 FORM

<To be updated and maintained in the on site construction office or the service company if an office is not located on station.>

OSHA Requirements and Safety and Health Regulations

PART 1 - OSHA Requirements

1.1 General

A. Contractors are required to comply with the Occupational Safety and Health Act of 1970. This will include the safety and health standard found in Code of Federal Regulations (CFR) 1910 and 1926. Copies of those standards can be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20420.

B. In addition, Contractor will be required to comply with other applicable Medical Center policies and safety regulations. These policies and regulations will be presented to the Contractor at the pre-construction meeting. Each of the Contractor's employees will be required to read the statement of policies and regulations, and sign an acknowledgment that such policies and regulations are understood. Signed acknowledgment will be returned to the Contract Officer Technical Representative (COR).

C. Contractors involved with the removal, alteration or disturbance of asbestos-type insulation or materials or lead paint will be required to comply strictly with the regulations found in CFR 1910.1001 and the appropriate Environmental Protection Agency (EPA) lead regulations regarding disposal of asbestos or lead paint. Assistance in identifying asbestos or lead can be requested from the Medical Center's Industrial Hygienist and the COR.

D. Contractors entering locations of asbestos contamination or lead paint residue (i.e., pipe, basements, walls, windows) shall be responsible for providing respiratory protection to their employees and ensuring respirators are worn in accordance with the Occupational Safety and Health Administration (OSHA) [CFR 1910.1001(g)]. Asbestos-or lead paint-contaminated areas shall be defined on project drawings. The minimum equipment requirements will be a half-mask air-purifying respirator equipped with high efficiency filters and disposable coveralls, or as determined by air monitoring results.

E. Contractor, along with other submittals and at least two weeks prior to bringing any materials on-site, must submit a complete list of chemicals the Contractor will use and Material Safety Data Sheets (MSDS) for all hazardous materials as defined in OSHA 1910.1200(d), Hazard Determination. Contracting Officer shall have final approval of all materials brought on site.

F. The Contractor will be held solely responsible for the safety and health of their employees. The contractor will also be held responsible for protecting the health and safety of the VA Community (patients, staff, and visitors) from the unwanted effects of construction. VA staff will monitor the Contractor's performance in complying with all safety and health aspects of the project. Severe or constant violations may result in an immediate work stoppage or request for a Compliance Officer from the Occupational Safety and Health Administration.

G. During all phases of demolition, construction and alterations, Contractors are required to understand and strictly follow National Fire Protection Association (NFPA) 241, Standard for Safeguarding Construction, Alteration and Demolition Operations. The Medical Center's Safety and Occupational Health Specialist or Industrial Hygienist will closely monitor the work area for compliance. Appropriate action will be taken for non-compliance.

PART 2 - Specific VA Medical Center Fire and Safety Policies, Procedures and Regulations

2.1 Introduction.

A. The safety and fire protection of patients, employees, members of the public and government is one of continuous concern to this Medical Center.

B. Contractors, their supervisors and employees are required to comply with Medical Center policies to ensure the occupational safety and health of all. Failure to comply may result in work stoppage.

C. While working at this Medical Center, contractors are responsible for the occupational safety and health of their employees. Contractors are required to comply with the applicable OSHA standards found in 29 CFR 1910 for general industry and 29 CFR 1926 for construction. Failure to comply with these standards may result in work stoppage and a request to the Area Director of OSHA for a Compliance Officer to inspect your work site.

D. Contractors are to comply with the requirements found in the National Fire Protection Association (NFPA) 241, Building Construction and Demolition Operation, and NFPA 51B, Fire Prevention in Use of Cutting and Welding Processes.

E. Questions regarding occupational safety and health issues can be addressed to the Medical Center Safety and Occupational Health Specialist (ext. 4172) or Industrial Hygienist (ext. 4628).

F. Smoking is not permitted in any interior areas of the Medical Center, including all interior stairwells, tunnels, construction and/or service/maintenance sites. Compliance with this policy by your direct and subcontracted labor force is required.

2.2 Hazard Communication

A. Contractors shall comply with OSHA Standard 29 CFR 1926.59, Hazard Communication.

B. Contractors shall submit to the COR, copies of MSDS covering all hazardous materials to which the Contractor and VA employees are exposed.

C. Contractors shall inform the Safety Officer of the hazards to which VA personnel and patients may be exposed.

D. Contractors shall have a written Hazard Communication Program available at the construction site, which details how the Contractor will comply with 29 CFR 1926.59.

2.3 Fires

A. All fires must be reported. In the event of a fire in your work area, use the nearest pull box station, and also notify Medical Center staff in the immediate area. Emergency notification can also be accomplished by dialing ext. 2222.

B. Be sure to give the exact location from where you are calling and the nature of the emergency. If a Contractor experiences a fire that was rapidly extinguished by your staff, you still must notify the COR within an hour of the event so that an investigation of the fire can be accomplished.

2.4 Fire Alarms, Smoke Detection and Sprinkler System

If the nature of your work requires the deactivation of the fire alarm, smoke detection or sprinkler system, you must notify the COR. Notification must be made in accordance with the major and minor shutdown requirements of the specification so time can be allowed to deactivate the system and provide alternative measures for fire protection. Under no circumstance is a Contractor allowed to deactivate any of the fire protection systems in this Medical Center.

2.5 Smoke Detectors

False alarms will not be tolerated. You are required to be familiar with the location of the smoke detectors in your work area. When performing cutting, burning or welding or any other operations that may cause smoke or dust, you must take steps to temporarily cover smoke detectors in order to prevent false alarms. Failure to take the appropriate action will result in the Contracting Officer assessing actual costs for government response for each false alarm that is preventable. Prior to covering the smoke detectors, the Contractor will notify the COR, who will also be notified when the covers are removed.

2.6 Hot Work Permit

A. Hot work is defined as operations including, but not limited to, cutting, welding, thermal welding, brazing, soldering, grinding, thermal spraying, thawing pipes or any similar situation. If such work is required, whenever possible the Contractor must notify the COR no less than three (3) days in advance of such work. The Competent Hot Work Supervisor (CHWS) will inspect the work area and issue a Hot Work Permit, authorizing the performance of such work.

B. All hot work will be performed in compliance with the Medical Center's policy 138-012 regarding Hot Work Permits and NFPA 241, Safeguarding Construction, Alternation and Demolition Operations; and NFPA 51B, Fire Prevention in Use of Cutting and Welding Processes; and applicable OSHA standard. A hot work permit will only be issued to individuals familiar with these regulations.

C. A Hot Work Permit will be issued only for the period necessary to perform such work. In the event the time necessary will exceed one day, a Hot Work Permit may be issued for the period needed; however, the CHWS will inspect the area daily. Hot Work Permit will apply only to the location identified on the permit. If additional areas involve hot work, then additional permits must be requested.

D. Contractors will not be allowed to perform hot work processes without the appropriate permit.

E. Any work involving the Medical Center's fire protection system will require advance notification. Under no circumstance will the Contractor or employee attempt to alter or tamper with the existing fire protection system.

F. Thirty minutes following completion of the hot work, the Fire Watch will perform an inspection of the area to confirm that sparks or drops of hot metal are not present.

2.7 Temporary Enclosures

Only non-combustible materials will be used to construct temporary enclosures or barriers at this Medical Center. Materials used to construct dust barriers must conform to NFPA 701, Standard Methods of Fire Tests for Flame-Resistant Textiles and Films.

2.8 Flammable Liquids

All flammable liquids will be kept in approved safety containers. Only the amount necessary for your immediate work will be allowed in the building. Flammable liquids must be removed from the building at the end of each day.

2.9 Compressed Gas Cylinders

Compressed gas shall be secured in an upright position at all times. A suitable cylinder cart will be used to transport compressed gas cylinders. Only those compressed gas cylinders necessary for immediate work will be allowed in occupied buildings. All other compressed gas cylinders will be stored outside of buildings in a designated area. Contractors will comply with applicable standards compressed gas cylinders found in 29 CFR 1910 and 1926 (OSHA).

2.10 Internal Combustion Engine-Powered Equipment

Equipment powered by an internal combustion engine (such as saws, compressors, generators, etc.) will not be used in an occupied building. Special consideration may be given for unoccupied buildings only if the OSHA and NFPA requirements have been met.

2.11 Powder-Activated Tools

The operator of powder-activated tools must be trained and certified to use them. Powder-activated tools will be kept secured at all times. When not in use, the tools will be locked up. When in use, the operator will have the tool under his immediate control.

2.12 Tools

A. Under no circumstances will equipment, tools and other items of work to be left unattended for any reason. All tools, equipment and items of work must be under the immediate control of your employee.

B. If for some reason a work area must be left unattended, then tools and other equipment must be placed in an appropriate box or container and locked. All tool boxes, containers or any other device used for the storage of tools and equipment will be provided with a latch and padlock, and will be kept locked at all times, except for putting in and removing tools.

C. All doors to work areas will be closed and locked when rooms are left unattended. Failure to comply with this policy will be considered a violation of VA Regulations 1.218(b), Failure to comply with signs of a directive and restrictive nature posted for safety purposes, and subject to a $50.00 fine. Subsequent similar violations may result in both imposition of such a fine as well as the Contracting Officer taking action under the contract's Accident Prevention Clause [Federal Acquisition Regulation (FAR) 52.236-13] to suspend all contract work until violations may be satisfactorily resolved, or under FAR 52.236-5, Material and Workmanship Clause, to remove from the worksite any personnel deemed by the Contracting Officer to be careless to the point of jeopardizing the welfare of facility patients or staff.

D. You must report any tools or equipment that are missing to the VA Police Department.

E. Tools and equipment found unattended will be confiscated and removed from the work area.

2.13 Ladders

Ladders must not be left unattended in an upright position. Ladders must be attended at all times or taken down, and chained securely to a stationary object.

2.14 Scaffolds

All scaffolds will be attended at all times. When not in use, an effective barricade (fence) will be erected around the scaffold to prevent use by unauthorized personnel (Reference OSHA 1926, Subpart L).

2.15 Excavations

The contractor shall comply with OSHA 1926, Subpart P. An OSHA Competent Person must be on site during the excavation. The contractor shall coordinate with COR and utility companies prior to the excavation to identify underground utilities tanks, etc. All excavations left unattended will be provided with a barricade suitable to prevent entry by unauthorized persons.

2.16 Storage

You must make prior arrangements with the COR for the storage of building materials. Storage will not be allowed to accumulate in the Medical Center buildings.

2.17 Trash and Debris

You must remove all trash and debris from the work area on a daily basis. Trash and debris will not be allowed to accumulate inside or outside of the buildings. You are responsible for making arrangements for removal of trash from the Medical Center facility.

2.18 Protection of Floors

It may be necessary at times to take steps to protect floors from dirt, debris, paint, etc. A tarp or other protective covering may be used in accordance with specifications outlined in the general requirements section. However, you must maintain the proper amount of floor space for the safe passage of pedestrian traffic.

2.19 Signs

Signs must be placed at the entrance to work areas warning people of your work. Signs must be suitable for the condition of the work. Small pieces of paper with printing or writing are not acceptable. The VA Medical Center (VAMC) Safety Officer or COR can be consulted in this matter.

2.20 Accidents and Injuries

Contractors must report all accidents and injuries involving their employees.

2.21 Infection Control

Contractors must control the generation of dust and the contamination of patient care surfaces, supplies and equipment. During demolition phases of the construction:

A. The construction area shall be under negative pressure, ensuring there is an appreciable flow of clean air from the VA-occupied portion of the facility into the construction area. The airflow shall be sufficiently strong enough to draw in the plastic door flaps commonly located at the construction entrance or at the specific site within the construction area.

B. Construction debris being transported through the VA-occupied portion of the facility shall be covered and/or whetted.

C. Construction employees shall remove dust-laden clothing before entering the VA-occupied portion of the facility.

D. Carpet/sticky mats shall be placed at all construction entrances, and be satisfactorily maintained so as to minimize the tracking of dust into the VA-occupied portion of the facility.

E. Dry sweeping of dust and debris is not to be performed.

F. Contractor must obtain an Infection Control Construction permit from the COR before work can begin. A separate permit is required for each area work is being done. Permit must be signed by the I.C. Nurse, COR, and Contractor. Permit is required to be posted outside work site at all times.

(Control measures B - E above must be practiced during the construction phase.)

2.22 Confined Space Entry

A. Contractor will be notified if a project work area contains spaces requiring a confined space work permit. Entry to these confined space areas will only be permitted through compliance with a permit space program meeting the requirements of 29 CFR 1910.146 and 1926.21(b)(6).

B. Contractor will be apprised of the elements including the hazards identified and the Medical Center's (last employer) experience with the space that makes the space in question a permit space.

C. Contractor will be apprised of any precautions or procedures that the Medical Center has implemented for the protection of employees in or near permit space where Contractor personnel will be working.

D. Medical Center and Contractor will coordinate entry operations when both Medical Center personnel and Contractor personnel will be working in or near permit spaces as required by 29 CFR 1910.146(d)(ii) and 1926.21(b)(6).

E. Contractor will obtain any available information regarding permit space hazards and entry operation from the Medical Center.

F. At the conclusion of the entry operations, the Medical Center and Contractor will discuss any hazards confronted or created in permit spaces.

G. The Contractor is responsible for complying with 29 CFR 1910.246(d) through (g) and 1926.21(b)(6). The Medical Center, does not provide rescue and emergency services required by 29 CFR 1910.246(k) and 1926.21(b)(6).

2.23 Contractor Parking and Material Delivery

Contractor's parking is not available at the medical center and the delivery of building materials tools, etc., must be pre-arranged with the COR.

SAMPLE INFECTION CONTROL PERMIT
Infection Control Construction Permit

Construction Class:

Project Name and Number: **Permit #:**

Location of Construction:

COR: **Telephone:**

Contractor Performing Work:

Supervisor: **Telephone:**

CLASS I	1. Obtain approval from COR before activities begin 2. Work performed is limited to inspections and minor installations 3. Execute work by methods to minimize raising dust from inspection operations 4. Permit does not need to be posted for this classification.
CLASS II	1. Obtain and post infection control permit at work location before work begins 2. Provide active means to prevent air borne dust from dispersing into atmosphere 3. Place dust mat at entrances and exits of work sites 4. Tools and equipment must be cleaned prior to entrance to the medical center 5. Isolate HVAC and seal unused doors with duct tape 6. Contain construction waste before transport in tightly covered containers
CLASS III	1. Obtain and post infection control permit at work location before work begins 2. Follow all requirements listed for Class II in addition to requirements listed below 3. Isolate supply and return ductwork to prevent contamination of system. 4. Complete all critical dust barriers as well as the creation of an anti-room where required for inspection by COR before work begins. 5. Maintain negative air pressure within work site utilizing HEPA equipped air filtration units. 6. Construct antiroom where required by COR and I.C. Nurse 7. Obtain COR approval before contruction and removal of any dust partitions 8. Include paticle count readings on daily logs against baseline points as required by COR or I.C. Nurse.
CLASS IV	1. Obtain and post infection control permit at work location before work begins 2. Follow all requirements listed for Class III in addition to requirements listed below 3. Workers are required to wear clean suites on site 4. All personel entering and leving work site must be vacuumed using a HEPA filted vacuum cleaner. 5. This class of permit will require additional specilized precautions unique to each activity which will be listed below

Additional Requirements:

Infection Control Nurse: **Date:**

COR: **Date:**

Contractor:	**Date:**

Infection Control Risk Assessment
Matrix of Precautions for Construction & Renovation

Step One:
Using the following table, identify the Type of Construction Project Activity (Type A-D)

TYPE A	**Inspection and Non-Invasive Activities** Includes, but is not limited to: • Removal of ceiling tiles for visual inspection limited to 1 tile per 50 square feet • Painting (but sanding) • Wall covering, electrical work, minor plumbing, and activities, which do not generate dust or require cutting of walls or access to ceiling other than for visual inspection.
TYPE B	**Small scale, short duration activities create minimal dust** Includes, but is not limited to: • Installation of telephone and computer cabling • Access to chase spaces • Cutting of walls or ceiling where dust migration can be controlled
TYPE C	**Work that generates a moderate to high level of dust or requires demolition or Removal of any fixed building components or assemblies** • Sanding of walls for painting or wall covering • Removal of floor coverings, ceiling tiles and casework • New wall construction • Minor dust work or electrical work above ceilings • Major cabling activities • Any activity that cannot be completed within single work shift
TYPE D	**Major demolition and construction projects** Includes, but is not limited to: • Activities which require consecutive work shifts • Requires heavy demolition • New Construction

Step Two:
Using the following table, identify the **Patient Risk Groups** that will be affected.
If more than one risk group will be affected, select the higher risk group.

Low Risk	Medium Risk	High Risk	Highest Risk
• Office areas	• Echocardiography • Endoscopy • Nuclear Medicine • Physical Therapy • Radiology • Respiratory Therapy • Mental Health Unit • Domicilary • Primary Care Clinics	• Emergency Room • Laboratories (specimen) • OutPatient Surgery • Pharmacy • Nursing Home Care Unit • Intermediate Care Unit	• Any area caring for immunocomprised Patients • SPD • Intensive Care Unit • Medical Unit • Negative pressure isolation rooms • Oncology

Step Three: Match the

Patient Risk Group (Low, Medium, High Highest) with the planned **Construction Project Type (A, B, C, D)** on the following matrix, to find the **Class of Precautions (I, II, III or IV)** on level of infection control activities required.

Class I-IV Precautions are delineated on the following page.

IC Matrix-Class of Precautions: Construction Project by Patient Risk

Construction Project Type

Patient Risk Group	TYPE A	TYPE B	TYPE C	TYPE D
LOW Risk	**I**	**II**	**II**	**III**
MEDIUM Risk	**I**	**II**	**III**	**IV**
HIGH Risk	**I**	**II**	**III**	**IV**
HIGHEST Risk	**I**	**III**	**III**	**IV**

Note: Infection Control approval will be required when the Construction Activity and Risk Level indicate that **Class III** or **Class IV** control procedures are necessary.

Description of Required Infection Control Precaution by Class

	During Construction Project	**Upon Construction of Project**
CLASS I	1.Execute work by methods to minimize raising dust from construction operations. 2. Immediately replace a ceiling tile displaced for visual inspection.	
CLASS II	1.Provide active means to prevent airborne dust from dispersing into atmosphere. 2.Water mist work surfaces to control dust while cutting. 3.Seal unused doors with duct tapes. 4.Block off and seal air vents. 5.Place dust mat at entrance and exit of work area. 6.Remove or isolate HVAC systems in areas where work is being performed.	1.Wet wipe work surfaces 2.Contain construction waste before transport in tightly covered containers. 3.Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area. 4.Remove isolation of HVAC system in areas where work is being performed.
CLASS III	1.Remove or isolate HVAC system in area where work is being done to prevent contamination of duct system. 2.Complete all critical barriers i.e. sheetrock, plywood, plastic, to seal area from non-work site before construction begins. 3.Maintain negative air pressure within work site utilizing HEPA equipped air filtration units. 4.Place dust mat at entrance and exit of work area. 5.Contain construction waste before transport in tightly covered containers. 6.Cover transport receptacles or carts. Tape covering unless solid lid.	1.Do not remove barriers from work area until completed project by the infection Control Nurse and thoroughly cleaned by the Environmental Management Service. 2.Remove barrier materials carefully to minimize spreading of dirt and debris associated with construction. 3.Vacuum work area t with HEPA filtered vacuums. 4.Wet mop area with disinfectant. 5.Remove isolation of HVAC system in areas where work is being performed.

C L A S S IV	1.Isolate HVAC system in area where work is being done to prevent contamination of duct system. 2.Complete all critical barrier i.e. sheetrock, plywood, plastic, to seal area from non-work area before construction begins. 3.Maintain negative air pressure within work site utilizing HEPA equipped air filtration units. 4.Seal holes, pipes, conduits, and punctures appropriately. 5.Contain construction waste before transport in tightly covered containers. 6 .Cover transport receptacles or carts. Tape covering unless solid lid.	1.Do not remove barriers from work area until completed project is inspected by the Infection Control Nurse and thoroughly cleaned by the Environmental Management Service. 2.Vacuum work area with HEPA filtered vacuums. 3.Wet mop area with disinfectant. 4.Remove isolation of HVAC system in areas where work is being performed. 5.Remove barrier material carefully to minimize spreading of dirt and debris associated with construction.

Step 4. Identify the area surroundings the project area, assessing potential impact.

Unit Below	Unit Above	Lateral	Lateral	Behind	Front
Risk Group	Risk Group	Risk Group	Risk Group	Risk Group	Risk Group

Step 5. Identify specific site of activity eg, patient rooms, medication room, etc.

_____

Step 6. Identify issues related to: ventilation, plumbing, electrical in terms of the occurrence of probable outages.

_____

Step 7. Identify containment measures, using prior assessment. What types of barriers? (Eg, solids wall barriers); Will HEPA filtration be required?

_____

(Note: Renovation/construction area shall be isolated from the occupied areas during construction and shall be negative with respect to surrounding areas)

Step 8 **Consider potential risk of water damage. Is there a risk due to compromising structural integrity? (e.g.; wall, ceiling, roof)**

Step 9. **Work hours: Can or will the work be done during non-patient care hours?**

Step 10: **Do plans allow for adequate number of isolation/negative airflow rooms?**

Step 11. **Do the plans allow for the required number & type of handwashing sinks?**

Step 12 **Does the infection control staff agree with the minimum number of sinks for this project?** (Verify against AIA Guidelines for types and area)

Step 13 **Does the infection control staff agree with the plans relative to clean and soiled utility rooms?**

Step 14 **Plan to discuss the following containment issues with the project team. Eg, traffic flow, housekeeping, debris removal (how and when)**

_____

_____

Appendix: Identify and communicate the responsibility for project monitoring that includes infection control concerns and risk. The ICRA may be modified throughout the project. Revisions must be communicated to the Project Management

Infection Control Construction Permit

	Permit No.
Location of Construction:	Project Start Date:
Project Coordinator:	Estimated Duration:
Contractor Performing Work:	Permit Expiration Date:
Supervisor:	Telephone:

YES	NO	Construction Activity	YES	NO	INFECTION CONTROL RISK GROUP
		TYPE A: Inspection, non-invasive activity			GROUP 1: Low Risk
		TYPE D: Small scale, short duration Moderate to high level			GROUP 2: Medium Risk
		TYPE C: Activity generates moderate to high Levels of dust, requires greater work shift for completion			GROUP 3: Medium/High Risk
		TYPE D: Major duration and construction activities requiring consecutive work shift			GROUP 4: Highest Risk

CLASS I	1. Execute work by methods to minimize raising dust from Construction operations. 2. Immediately replace any ceiling tile displaced for visual Inspection.	3. Minor Demolition for Remodeling.
CLASS II	1. Provide active means to prevent air-borne dust from dispensing into atmosphere. 2. Water mist work surfaces to control dust while cutting. 3. Seal unused doors with duct tape. 4. Block off and seal air vents. 5. Wipe surfaces with disinfectant.	6. Vacuum work with HEPA filtered vacuum. 7. Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area. 8. Place dust mat at entrance and exit of work area. 9. Remove or isolate HVAC system in area where work is being performed.
CLASS III Date Initial	1. Obtain infection control permit before construction begins. 2. Isolate HVAC system in area where work is being done to prevent contamination of the duct system. 3. Complete all critical barriers or implement control cube method before construction begins. 4. Maintain negative air pressure within work site utilizing HEPA equipped air filtration units. 5. Do not remove barriers from work area until complete project is thoroughly cleaned by Env. Services Dept.	6. Vacuum work with HEPA filtered vacuums. 7. Wet mop with disinfectant. 8. Remove barrier materials carefully to minimize spreading of dirt and debris associated with construction. 9. Contain construction waste before transport in tightly covered containers. 10.Cover transport receptacles or carts. Tape covering. 11.Remove or isolate HVAC system in areas where work is being performed.
CLASS IV Date Initial	1. Obtain infection control permit before construction begins. 2. Isolate HVAC system in area where work is being done to prevent contamination of duct system. 3. Complete all critical barriers or implement control cube method before construction begins. 4. Maintain negative air pressure within work site utilizing HEPA equipped air filtration unit. 5. Seal holes, pipes, conduits, and punctures appropriately. 6. Construct anteroom and require all personnel to pass through this room so they can be vacuumed using a HEPA vacuum cleaner before leaving work site or they can be wear cloth or paper overalls that are removed each time they leave the work site.	7. All personnel entering work site are required to wear shoe covers. 8. Do not remove barriers from work area until completed project is thoroughly cleaned by the Environmental Service Dept. 9. Vacuum work area with HEPA filtered vacuums. 10 Wet mop with disinfectant. 11.Remove barrier materials carefully to minimize spreading of dirt and debris associated with construction. 12.Contain construction waste before transport in tightly covered containers. 13.Cover transport receptacles or carts. Tape covering. 14.Remove or isolate HVAC system in areas where wrok is being done.

Additional Requirements:

Date Initials:	_____Exceptions/Additions to this permit Date Initials are noted by attached memoranda
Permit Request By:	Permit Authorized By:
Date:	Date:

Possible threats to your organization

Security

- Bomb threat
- Civil disturbance
- Gang-related activity
- Hostage situation
- Infant abduction
- Location in a high-crime area
- Terrorist attack, including biological, chemical, radiation and explosive-internal or external
- Visiting or injured VIP
- Workplace violence

Utility Failures

- Central medical vacuum
- Central oxygen
- Electrical
- Emergency generator
- Fire suppression/alarm system
- Heating, ventilating, and air-conditioning (HVAC)
- Information system/computers
- Natural gas
- Overhead paging
- Sewage
- Telephone/telecommunications
- Water main break

Weather

- Blizzard or snowstorm
- Earthquake
- Hail
- High winds
- Hurricane
- Ice storm
- Severe cold
- Severe heat/humidity
- Severe rainfall/flood
- Sinkholes
- Tornado

Structural Implications

- Chemical or hazmat spill or release-internal
- Explosion-internal
- Fire, smoke-internal
- Flooding-internal
- Gas leak-internal
- Structural damage to building

Other

- Aviation, bus, or train crash
- Chemical or hazmat spill or release-external

- Explosion-external
- Fire, smoke-external
- Flooding-external
- Gas leak-external
- Other mass casualty incident

Additional Inspection Recommendations to review with the General Contractor on site:

Temporary construction barriers

From VACO:
SECTION 01 00 00
GENERAL REQUIREMENTS
Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas and adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab or roof. Seal joints and penetrations. At door openings, install tight-fitting solid-core wood doors with self-closing devices. [From JCAHO:
Temporary construction partitions must be smoke tight and build of noncombustible or limited combustible materials that will not contribute to the development or spread of fire. Plastic sheets may only be used for short-term periods of 30 days or less (when approved by the contracting officer). If the project involves torch cutting, welding, brazing or open flame, then barriers of noncombustible or limited combustible material must be constructed. (Material in parenthesis added.)]

I have read and understand this requirement: _____
Install locks to prevent unauthorized entry into the construction area.

Smoke Barriers
Where construction work penetrates smoke barriers or fire rated partitions, close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials.

I have read and understand this requirement: _____

Egress Routes for Construction Workers:
Maintain free and unobstructed egress in the construction area. Inspect daily.

I have read and understand this requirement: _____

Fire Extinguishers:
Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.

I have read and understand this requirement: _____

Existing Fire Protection:
Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request and coordinate with the COR in advance. Where operations create dusty conditions or when spray painting operations are conducted, cover smoke detectors in the construction area with thin paper bags.

I have read and understand this requirement: _____

Hot Work:
Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Obtain hot work permit from COR.

I have read and understand this requirement: _____

Smoking:
Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction.

I have read and understand this requirement: _____

Waste:
The Contractor shall at all times keep the work area, including storage areas, free from accumulation of waste materials. Remove debris and trash from buildings daily.

I have read and understand this requirement: _____

Effects to other parts of the building:
Execute work so as to interfere as little as possible with normal functioning of the Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied by patients or medical personnel except as permitted by COR.

Infection Control:
a. In addition, to the temporary construction barriers of noncombustible or limited combustible material, provide plastic barriers to completely separate construction from the operational areas of he hospital in order to contain dirt, debris, dust, odors and vapors. Create a barrier reaching from floor to ceiling before any ceiling is entered. Surround the affected area entirely and seal with duct tape at the ceiling, floor and sides. Provide walk-off tack mats to reduce spread of dust.

I have read and understand this requirement: _____

b. Install HEPA (High Efficiency Particulate Accumulator) filter vacuum system rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. Insure continuous negative air pressures occurring within the work area.

I have read and understand this requirement: _____

c. Broom clean and wet mop at the end of each workday. Remove debris as they are created. Trash chutes shall be used except when exception is made by the CO. When trash chutes are not required, transport trash and debris outside the construction area in containers with tightly fitting lids. Use freight elevators and routes approved by the COR for waste removal.

I have read and understand this requirement: _____

Other Safety Measures:
a. Provide appropriate safety barricades, signs, and signal lights;
b. Wear appropriate personal protective equipment;
c. Comply with the standards issued by the Secretary of Labor at 29 CFR part 1926 and 29 CFR part 1910;
d. Provide evidence of training when doing any excavations exceeding 5 ft., entering any confined spaces on site, performing asbestos removal; and

e. Ensure that any additional measures the Contracting Officer determines to be reasonably necessary for the purposes are taken.

I have read and understand this requirement: _____

Unexpected Discovery of Asbestos:
If material that is suspected to be asbestos containing material is found during demolition operations, the contractor will cease work, take action to safeguard the material from becoming further disturbed, and notify the CO as soon as possible. OHSU will take prompt appropriate action to alleviate identified asbestos exposure hazards where ACM is discovered during construction work.

I have read and understand this requirement: _____

SECTION 01 23 00
ALTERNATES

PART 1 GENERAL

1.1 DESCRIPTION

This section administrative and procedural requirements for alternates.

1.2 DEFINITIONS

A. Alternate: An amount proposed by bidders and stated on the Bid Form for certain work defined in the bidding requirements that may be added to or deducted from the base bid amount if Owner decides to accept a corresponding change either in the amount of construction to be completed or in the products, materials, equipment, systems, or installation methods described in the Contract Documents.

1. Alternates described in this Section are part of the Work only if enumerated in the Agreement.
2. The cost or credit for each alternate is the net addition to or deduction from the Contract Sum to incorporate alternate into the Work. No other adjustments are made to the Contract Sum.

1.3 PROCEDURES

A. Coordination: Revise or adjust affected adjacent work as necessary to completely integrate work of the alternate into Project.

1. Include as part of each alternate, miscellaneous devices, accessory objects, and similar items incidental to or required for a complete installation whether or not indicated as part of alternate.

B. Notification: Immediately following award of the Contract, notify each party involved, in writing, of the status of each alternate. Indicate if alternates have been accepted, rejected, or deferred for later consideration. Include a complete description of negotiated revisions to alternates.

C. Execute accepted alternates under the same conditions as other work of the Contract.

D. Schedule: A schedule of alternates is included at the end of this Section.

PART 2 PRODUCTS (NOT USED)

PART 3 EXECUTION

3.1 SCHEDULE OF ALTERNATES

A. **Alternate Bid Item 1** - Delete the lockers in Lockers BB-437 and Cardiology Tech BC-442.

- - - E N D - - -

SECTION 01 32 16.13
NETWORK ANALYSIS SCHEDULES

PART 1- GENERAL

1.1 DESCRIPTION:

A. The Contractor shall develop a Network Analysis System (NAS) plan and schedule demonstrating fulfillment of the contract requirements, shall keep the network up-to-date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating and monitoring work under this contract (including all activities of subcontractors, equipment vendors and suppliers). Conventional Critical Path Method (CPM) Precedence Diagramming Method (PDM) technique will be utilized to satisfy both time and cost applications. All schedule data and reports required under this specification section shall be based upon regular total float, not relative total float schedules.

B. Contractor shall not perform any work onsite until the NAS associated with that work is first approved by the VA.

1.2 CONTRACTOR'S REPRESENTATIVE:

A. The Contractor shall designate an authorized representative in the firm who will be responsible for the preparation of the network diagram, review and report progress of the project with and to the Contracting Officer's representative.

B. The Contractor's representative shall have direct project control and complete authority to act on behalf of the Contractor in fulfilling the requirements of this specification section and such authority shall not be interrupted throughout the duration of the project.

1.3 CONTRACTOR'S CONSULTANT:

A. To prepare the network diagram, and compact disk(s), which reflects the Contractor's project plan, the Contractor shall engage an independent CPM consultant who is skilled in the time and cost application of scheduling using (PDM) network techniques for construction projects, the cost of which is included in the Contractor's bid. This consultant shall not have any financial or business ties to the Contractor, and shall not be an affiliate or subsidiary company of the Contractor, and shall not be employed by an affiliate or subsidiary company of the Contractor.

B. Prior to engaging a consultant, and within 10 calendar days after award of the contract, the Contractor shall submit to the Contracting Officer:

1. The name and address of the proposed consultant.

2. Sufficient information to show that the proposed consultant has the qualifications to meet the requirements specified in the preceding paragraph.
3. A list of prior construction projects, along with selected PDM network diagram samples on current projects which the proposed consultant has performed complete project scheduling services. These network diagram samples must show complete project planning for a project of similar size and scope as covered under this contract.

C. The Contracting Officer has the right to approve or disapprove employment of the proposed consultant, and will notify the Contractor of the VA decision within seven calendar days from receipt of information. In case of disapproval, the Contractor shall resubmit another consultant within 10 calendar days for renewed consideration. The Contractor must have their CPM Consultant approved prior to submitting any diagram.

1.4 COMPUTER PRODUCED SCHEDULES

A. The contractor shall provide to the COR, monthly computer processing of all computer-produced time/cost schedules and reports generated from monthly project updates. This monthly computer service will include: three copies of up to five different reports (inclusive of all pages) available within the user defined reports of Primavera (P3 or P6) to the COR; a hard copy listing of all project schedule changes, and associated data, made at the update and an electronic file of this data in Primavera (P3 or P6) batch format; and the resulting monthly updated schedule in a compressed electronic file in Primavera (P3 or P6), (PDM) format. These must be submitted with and substantively support the contractor’s monthly payment request and the signed lookahead report. The COR shall identify the five different report formats that the contractor shall provide based upon the monthly schedule updates.

B. The contractor is responsible for the correctness and timeliness of the computer-produced reports. The Contractor is also responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.

C. The VA shall report errors in computer-produced reports to the Contractor’s representative within ten calendar days from receipt of reports. The Contractor will reprocess the computer-produced reports and associated compact disk(s), when requested by the COR, to correct errors which affect the payment and schedule for the project.

1.5 THE COMPLETE PROJECT NETWORK DIAGRAM SUBMITTAL

A. Within 45 calendar days after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; three blue line copies of the complete network diagram on sheets of paper 765 x 1070 mm (30 x 42 inches) and an electronic file in a compressed Primavera (P3 or P6), (PDM) format. The submittal shall also include three copies of a computer-produced activity/event ID schedule showing project duration; phase completion dates; and other data, including event cost. Each activity/event on the computer-produced schedule shall contain as a minimum, but not limited to, activity/event ID, duration, predecessor and successor relationships, trade code, area code, description, budget amount, early start date, early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start and start-to-start without lead or lag constraints. The lead or lag for the SS relationships may only be allowed in limited basis if justified in writing and must be approved by the Contracting Officer. Activity/event date constraints, not required by the contract, will not be accepted unless submitted to and approved by the Contracting Officer. The contractor shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer’s written approval before incorporating them into the network diagram. The Contracting Officer’s separate approval of the network diagram shall not excuse the contractor of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events, but must have a zero duration. The complete working network diagram shall reflect the Contractor's approach to scheduling the complete project. **The final network diagram in its original form shall contain no contract changes or delays which may have been incurred during the final network diagram development period and shall reflect the entire contract duration as defined in the bid documents.** These changes/delays shall be entered at the first update after the final network diagram has been approved. The Contractor should provide their requests for time and supporting time extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

B. Within 30 calendar days after receipt of the complete project network diagram, the Contracting Officer or his representative, will do one or both of the following:
   1. Notify the Contractor concerning his actions, opinions, and objections.
   2. A meeting with the Contractor at or near the job site for joint review, correction or adjustment of the proposed plan will be scheduled if required. Within 14 calendar days after the joint review, the Contractor shall revise and shall submit three blue line copies of the revised network diagram, three copies of the revised computer-produced activity/event ID schedule and a revised electronic file as specified by the Contracting Officer. The revised submission will be reviewed by the Contracting Officer and, if found to be as previously agreed upon, will be approved.

C. The approved baseline network diagram schedule and the corresponding computer-produced schedule(s) shall constitute the approved baseline schedule until subsequently revised in accordance with the requirements of this section.

D. The Complete Project Network Diagram will contain all pertinent work activities/events.

1.6 WORK ACTIVITY/EVENT COST DATA

A. The Contractor shall cost load all work activities/events except procurement activities. The cost loading shall reflect the appropriate level of effort of the work activities/events. The cumulative amount of all cost loaded work activities/events (including alternates) shall equal the total contract price. Prorate overhead, profit and general conditions on all work activities/events for the entire project length. The contractor shall generate from this information cash flow curves indicating graphically the total percentage of work activity/event dollar value scheduled to be in place on early finish, late finish. These cash flow curves will be used by the Contracting Officer to assist him in determining approval or disapproval of the cost loading. In the event of disapproval, the Contractor shall revise and resubmit in accordance with Article, THE COMPLETE PROJECT NETWORK DIAGRAM SUBMITTAL. Negative work activity/event cost data will not be acceptable, except on VA issued contract changes.

B. The Contractor shall cost load work activities/events, test, balance and adjust various systems in accordance with the provisions in the FAR 52.232 - 5 (PAYMENTS UNDER FIXED-PRICE CONSTRUCTION), Article, and VAAR 852.236 - 83(PAYMENTS UNDER FIXED-PRICE CONSTRUCTION).

C. The Contractor shall submit, simultaneously with the cost per work activity/event of the construction schedule required by this Section, a responsibility code for all activities/events of the project for which the Contractor's forces will perform the work.

D. The Contractor shall cost load work activities/events for ASBESTOS ABATEMENT. The sum of asbestos abatement work activity/event costs shall equal the value of the asbestos abatement in the Contractors' bid.

E. The Contractor shall cost load work activities/events for all BID ITEMS. The sum of the cost loading for each bid item work activities/events shall equal the value of the item in the Contractors' bid.

F. Work activities/events for Contractor bond shall have a trade code and area code of BOND.

1.7 NETWORK DIAGRAM REQUIREMENTS

A. Show on the network diagram the sequence and interdependence of work activities/events required for complete performance of all items of work. In preparing the network diagram, the Contractor shall:

1. Exercise sufficient care to produce a clear, legible and accurate network diagram, refer to the drawing, CPM-1 (Sample CPM Network). Computer plotted network diagrams shall legibly display and plot all information required by the VA CPM activity/event legend or the computer plotted network diagram will not be acceptable. If the computer plotted network diagram is not found acceptable by the contracting officer’s representative, then the network diagram will need to be hand drafted and meet legibility requirements. Group activities related to specific physical areas of the project, on the network diagram for ease of understanding and simplification. Provide a key plan on each network diagram sheet showing the project area associated with the work activities/events shown on that sheet.
2. Show the following on each work activity/event:
   a. Activity/Event ID number.
   b. Concise description of the work represented by the activity/event. (35 characters or less including spaces preferred).
   c. Performance responsibility or trade code (five alpha characters or less): GEN, MECH, ELEC, CARP, PLAST, or other acceptable abbreviations.
   d. Duration (in work days.)
   e. Cost (in accordance with Article, ACTIVITY/EVENT COST DATA of this section and less than $9,999,999 per activity).
   f. Work location or area code (five characters or less), descriptive of the area involved.

g. Manpower required (average number of men per day).

h. The SYMBOL LEGEND format shown below and on the drawing, CPM-1 (Sample CPM Network) is mandatory and shall be followed in preparing final network diagrams.

SYMBOL LEGEND

Show Network Diagram page number location(s) for all incoming/outgoing node connector(s).

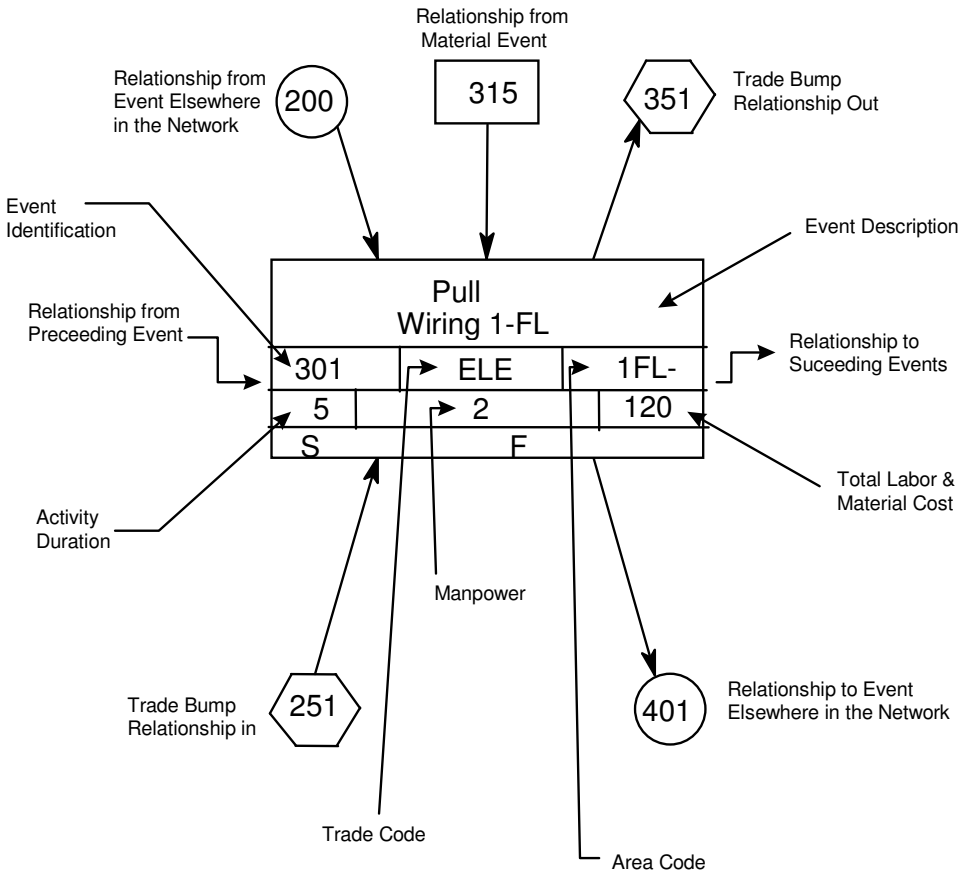

3. Show activities/events as:

a. Contractor's time required for submittal of shop drawings, templates, fabrication, delivery and similar pre-construction work.

b. Contracting Officer's and Architect-Engineer's review and approval of shop drawings, equipment schedules, samples, template, or similar items.

c. Interruption of VA Medical Center utilities, delivery of Government furnished equipment, and rough-in drawings, project phasing and any other specification requirements.

d. Test, balance and adjust various systems and pieces of equipment, maintenance and operation manuals, instructions and preventive maintenance tasks.

e. **Commissioning Activities** – Based upon the project specific Commissioning plan and the specification section 01 91 00, the contractor shall include in the **Day 1 CPM Diagram all the systems commissioning activities (see systems covered in Division 7, 8, 21, 22, 23, 26, 28, 31 and others as specified)** such as start up, Pre-functional check list, Pre -test, individual component and system level Functional test, Operator's training, O.& M. Manuals etc.(including any deficiency correction and re-testing). **The majority of commissioning activities should be completed as part of the normal construction schedule and finalized prior to the construction contract completion date.** To this end, it is imperative that the Commissioning Agent and the Contractor collaborate to integrate commissioning activities into the Contractor's overall construction schedule. All commissioning activities shall be cost loaded as required in the earlier paragraphs.

f. The Commissioning Plan will identify critical commissioning activities and associated construction/start up tasks that must precede these activities to allow for successful execution of the commissioning activities. In order to coordinate these activities with the construction schedule, a **Commissioning Duration Schedule s**hould be provided by the Commissioning Agent to the VA RE and the Contractor to provide a rational basis for integration of commissioning into the Day 1 diagram and the construction schedule. The Commissioning Duration Schedule should include the following information:

   1) Description of Commissioning Activity
   2) Prerequisite Construction Tasks Required to Execute the Cx Activity
   3) Elapsed Time Duration of Each Activity
   4) Documentation Associated with Each Task/Document Responsibility

g. Once the duration schedule is delivered to the Contractor, the Commissioning Agent will collaborate with the Contractor to integrate all commissioning activities into the fixed duration construction schedule in accordance with VA NAS requirements for scheduling the project.

h. VA inspection and acceptance activity/event with a minimum duration of five work days at the end of each phase and immediately preceding any VA move activity/event required by the contract phasing for that phase. Schedule these activities/events so that only one phase is scheduled for completion within the same 30 consecutive calendar day period (except for those phases immediately preceding the final acceptance). Maintain this scheduling condition throughout the length of the contract unless waived by the Contracting Officer's representative in writing.

i. Bid items other than the Base Bid (ITEM 1) shall have trade codes corresponding to the appropriate bid item number (e.g., ITM 3, ITM 4 and other items).

4. Show not only the activities/events for actual construction work for each trade category of the project, but also trade relationships to indicate the movement of trades from one area, floor, or building, to another area, floor, or building, for at least five trades who are performing major work under this contract.
5. Break up the work into activities/events of a duration no longer than 20 work days each, except as to non-construction activities/events (i.e., procurement of materials, delivery of equipment, concrete and asphalt curing) and any other activities/events for which the Contracting Officer may approve the showing of a longer duration. The duration for VA approval of any required submittal, shop drawing, or other submittals shall not be less than 20 work days. Refer to drawing CPM-1 for VA approval activities/events which will require minimum duration longer than 20 workdays. The construction time as determined by the CPM schedule from early start to late finish for any sub-phase, phase or the entire project shall not exceed the contract time(s) specified or shown.
6. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.
7. Uniquely number each activity/event with numbers ranging from 1 to 99998 only. The network diagram should be generally numbered in such a way to reflect either discipline, phase or location of the work.

B. Submit the following supporting data in addition to the network diagram, activity/event ID schedule and electronic file (s). Failure of the Contractor to include this data will delay the review of the submittal until the Contracting Officer is in receipt of the missing data:

1. The proposed number of working days per week.
2. The holidays to be observed during the life of the contract (by day, month, and year).
3. The planned number of shifts per day.
4. The number of hours per shift.
5. List the major construction equipment to be used on the site, describing how each piece relates to and will be used in support of the submitted network diagram work activities/events.
6. Provide a typed, doubled spaced, description, at least one page in length, of the plan and your approach to constructing the project.

C. To the extent that the network diagram or any revised network diagram shows anything not jointly agreed upon, it shall not be deemed to have been approved by the Contracting Officer. Failure to include any element of work required for the performance of this contract shall not excuse the Contractor from completing all work required within any applicable completion date of each phase regardless of the Contracting Officer's approval of the network diagram.

D. Compact Disk Requirements and CPM Activity/Event Record Specifications: Submit to the VA (COR) an electronic file(s) containing one file of the data required to produce a Primavera (P3 or P6), (PDM) produced schedule, reflecting all the activities/events of the complete project network diagram being submitted.

1.8 PAYMENT TO THE CONTRACTOR:

A. Monthly, the contractor shall submit the AIA application and certificate for payment documents G702 & G703 reflecting updated schedule activities and cost data in accordance with the provisions of the following Article, PAYMENT AND PROGRESS REPORTING, as the basis upon which progress payments will be made pursuant to Article FAR 52.232 - 5 (PAYMENTS UNDER FIXED-PRICE CONSTRUCTION), and VAAR 852.236 - 83(PAYMENTS UNDER FIXED-PRICE CONSTRUCTION). The Contractor is entitled to a monthly progress payment upon approval of estimates as determined from the currently approved updated computer-produced calendar-dated schedule unless, in special situations, the Contracting Officer permits an exception to this requirement. Monthly payment requests shall include: three copies of up to five different reports (inclusive of all pages) available within the user defined reports of Primavera (P3 or P6), (PDM) to the COR; a listing of all project schedule changes, and associated data, made at the update; and an electronic file (s) of the resulting monthly updated schedule in a compressed Primavera (P3 or P6), (PDM) format. These must be submitted with and substantively support

the contractor's monthly application and certificate for payment request documents.

B. When the Contractor fails or refuses to furnish to the Contracting Officer the information and the associated updated Primavera (P3 or P6), (PDM) schedule in electronic format, which, in the sole judgment of the Contracting Officer, is necessary for processing the monthly progress payment, the Contractor shall not be deemed to have provided an estimate and supporting schedule data upon which progress payment may be made.

1.9 PAYMENT AND PROGRESS REPORTING

A. Bi-monthly job site progress meetings shall be held on dates mutually agreed to by the COR and the Contractor. Contractor and the CPM consultant will be required to attend all bi-monthly progress meetings. Presence of Subcontractors during progress meeting is optional unless required by the COR. The Contractor shall update the project schedule and all other data required by this section shall be accurately filled in and completed prior to the monthly progress meeting. The Contractor shall provide this information to the COR in completed form three work days in advance of the progress meeting. Job progress will be reviewed to verify:

1. Actual start and/or finish dates for updated/completed activities/events.
2. Remaining duration, required to complete each activity/event started, or scheduled to start, but not completed.
3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the network diagram and computer-produced schedules. Changes in activity/event sequence and duration which have been made pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
4. Percentage for completed and partially completed activities/events.
5. Logic and duration revisions required by this section of the specifications.
6. Activity/event duration and percent complete shall be updated independently.

B. The Contractor shall submit a narrative report as a part of his bi-monthly review and update, in a form agreed upon by the Contractor and the COR. The narrative report shall include a description of problem areas; current and anticipated delaying factors and their estimated impact on performance of other activities/events and completion dates; and an explanation of corrective action taken or proposed. This report is in addition to the daily reports pursuant to the provisions of

Article, DAILY REPORT OF WORKERS AND MATERIALS in the GENERAL CONDITIONS.

C. After completion of the joint review and the Contracting Officer's approval of all entries, the contractor will generate an updated computer-produced calendar-dated schedule and supply the Contracting Officer’s representative with reports in accordance with the Article, COMPUTER PRODUCED SCHEDULES, specified.

D. After completing the monthly schedule update, the contractor’s scheduling consultant shall rerun all current period contract change(s) against the prior approved monthly project schedule. The analysis shall only include original workday durations and schedule logic agreed upon by the contractor and COR for the contract change(s). When there is a disagreement on logic and/or durations, the consultant shall use the schedule logic and/or durations provided and approved by the COR. After each rerun update, the resulting electronic project schedule data file shall be appropriately identified and submitted to the VA in accordance to the requirements listed in articles 1.4 and 1.7. This electronic submission is separate from the regular monthly project schedule update requirements and shall be submitted to the COR within fourteen (14) calendar days of completing the regular schedule update. **Before inserting the contract changes durations, care must be taken to ensure that only the original durations will be used for the analysis, not the reported durations after progress. In addition, once the final network diagram is approved, the contractor must recreate all manual progress payment updates on this approved network diagram and associated reruns for contract changes in each of these update periods as outlined above for regular update periods. This will require detailed record keeping for each of the manual progress payment updates.**

E. After VA acceptance and approval of the final network diagram, and after each monthly update, the contractor shall submit to the Contracting Officer three blue line copies of a revised complete network diagram showing all completed and partially completed activities/events, contract changes and logic changes made on the intervening updates or at the first update on the final diagram. The Contracting Officer may elect to have the contractor do this on a less frequent basis, but it shall be done on a quarterly basis as a minimum.

F. Following approval of the CPM schedule, the VA, the General Contractor, its approved CPM Consultant, RE office representatives, and all subcontractors needed, as determined by the SRE, shall meet to discuss

the monthly updated schedule. The main emphasis shall be to address work activities to avoid slippage of project schedule and to identify any necessary actions required to maintain project schedule during the reporting period. The Government representatives and the Contractor should conclude the meeting with a clear understanding of those work and administrative actions necessary to maintain project schedule status during the reporting period. This schedule coordination meeting will occur after each monthly project schedule update meeting utilizing the resulting schedule reports from that schedule update. If the project is behind schedule, discussions should include ways to prevent further slippage as well as ways to improve the project schedule status, when appropriate.

1.10 RESPONSIBILITY FOR COMPLETION

A. Whenever it becomes apparent from the current monthly progress review meeting or the monthly computer-produced calendar-dated schedule that phasing or contract completion dates will not be met, the Contractor shall execute some or all of the following remedial actions:
   1. Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.
   2. Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.
   3. Reschedule the work in conformance with the specification requirements.

B. Prior to proceeding with any of the above actions, the Contractor shall notify and obtain approval from the Contracting Officer for the proposed schedule changes. If such actions are approved, the CPM revisions shall be incorporated by the Contractor into the network diagram before the next update, at no additional cost to the Government.

1.11 CHANGES TO NETWORK DIAGRAM AND SCHEDULE

A. Within 30 calendar days after VA acceptance and approval of any updated computer-produced schedule, the Contractor will submit a revised network diagram, the associated compact disk(s), and a list of any activity/event changes including predecessors and successors for any of the following reasons:
   1. Delay in completion of any activity/event or group of activities/events, indicate an extension of the project completion by 20 working days or 10 percent of the remaining project duration, whichever is less. Such delays which may be involved with contract changes, strikes, unusual weather, and other delays will not relieve

the Contractor from the requirements specified unless the conditions are shown on the CPM as the direct cause for delaying the project beyond the acceptable limits.

2. Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.
3. The schedule does not represent the actual prosecution and progress of the project.
4. When there is, or has been, a substantial revision to the activity/event costs of the network diagram regardless of the cause for these revisions.

B. CPM revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, vacating of areas by the VA Medical Center, contract phase(s) and sub phase(s), utilities furnished by the Government to the Contractor, or any other previously contracted item, must be furnished in writing to the Contracting Officer for approval.

C. Contracting Officer's approval for the revised network diagram and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or the VA representative.

D. The cost of revisions to the network diagram resulting from contract changes will be included in the proposal for changes in work as specified in Article, FAR 52.243 -4 (CHANGES), VAAR 852.236 - 88 (CHANGES - SUPPLEMENTS), and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.

E. The cost of revisions to the network diagram not resulting from contract changes is the responsibility of the Contractor.

1.12 ADJUSTMENT OF CONTRACT COMPLETION

A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the Contractor shall be supported with a justification, CPM data and supporting evidence as the Contracting Officer may deem necessary for determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in work days) and costs is obligatory to any approvals. The schedule must clearly display that the Contractor has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract

extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.

B. Actual delays in activities/events which, according to the computer-produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the facts and advise the Contractor in writing of the Contracting Officer's decision.

C. The Contractor shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under Article, FAR 52.243 -4 (CHANGES), VAAR 852.236 - 88 (CHANGES - SUPPLEMENTS). The Contractor shall include, as a part of each change order proposal, a sketch showing all CPM logic revisions, duration (in work days) changes, and cost changes, for work in question and its relationship to other activities on the approved network diagram.

D. All delays due to non-work activities/events such as RFI's, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month by month basis.

1.13 CONSTRUCTION SCHEDULE RISK ANALYSIS / MITIGATION PLAN

A. Schedule Risk Analysis - The contractor shall conduct the statistical schedule risk analysis based on the above detailed construction activities in the Day 1 approved diagram, identifying major schedule risk areas and recommended risk mitigation plans as outlined below.

B. The risk analysis shall be conducted by a person or firm skilled in the statistical method of schedule risk analysis based on the (PDM) network techniques for major construction projects, preferably in the major health care related projects. The cost of this service shall be included in the Contractor's proposal.

C. The Contracting Officer has the right to approve or disapprove the Person or firm designated to perform the risk analysis.

1.14 RISK ANALYSIS FORMAT / REQUIREMENTS / SUBMITTALS

A. Risk Analysis Software / Format - Within 45 calendar days (60 calendar days on projects over $50,000,000) after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; a Risk Analysis software to be utilized, the method of performing the analysis, the format of presenting the data and the reports for VA approval.

B. Conduct Risk Analysis **/ Submittals - Based on the approved software / format, the consultant shall** perform statistical risk analysis on the detailed approved Day 1 diagram. The contractor shall review and utilize any previous Risk analysis performed by the A/E of record based on the "semi-detailed" (yet at an overall level) construction logic and schedule to ensure the continuity of previous schedule risk analysis. The contractor's project manager and Superintendent shall identify the major schedule risk areas and possible risk mitigation strategy/plan and record it in a narrative format, with **electronic file submission** to the VA. **The risk analysis exercise shall be performed or updated at least on a quarterly basis or as directed by the VA Contracting officer.**

C. The submittal shall include three copies of a computer-produced risk analysis results, predicting the various meaningful probability curves of achieving the contract schedules. It shall also include a detailed narrative list of all major and minor potential and specific schedule and cost risk areas, and a contractor's recommendations of mitigating the identified risks which must be addressed by the VA Project and COR teams to maintain the contract schedule.

- - - E N D - - -

SECTION 01 33 23
SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

1-1. Refer to Articles titled SPECIFICATIONS AND DRAWINGS FOR CONSTRUCTION (FAR 52.236-21) and, SPECIAL NOTES (VAAR 852.236-91), in GENERAL CONDITIONS.

1-2. For the purposes of this contract, samples, test reports, certificates, and manufacturers' literature and data shall also be subject to the previously referenced requirements. The following text refers to all items collectively as SUBMITTALS.

1-3. Submit for approval, all of the items specifically mentioned under the separate sections of the specification, with information sufficient to evidence full compliance with contract requirements. Materials, fabricated articles and the like to be installed in permanent work shall equal those of approved submittals. After an item has been approved, no change in brand or make will be permitted unless:

A. Satisfactory written evidence is presented to, and approved by Contracting Officer, that manufacturer cannot make scheduled delivery of approved item or;
B. Item delivered has been rejected and substitution of a suitable item is an urgent necessity or;
C. Other conditions become apparent which indicates approval of such substitute item to be in best interest of the Government.

1-4. Forward submittals in sufficient time to permit proper consideration and approval action by Government. Time submission to assure adequate lead time for procurement of contract - required items. Delays attributable to untimely and rejected submittals will not serve as a basis for extending contract time for completion.

1-5. Submittals will be reviewed for compliance with contract requirements by Architect-Engineer, and action thereon will be taken by COR on behalf of the Contracting Officer.

1-6. Upon receipt of submittals, Architect-Engineer will assign a file number thereto. Contractor, in any subsequent correspondence, shall refer to this file and identification number to expedite replies relative to previously approved or disapproved submittals.

1-7. The Government reserves the right to require additional submittals, whether or not particularly mentioned in this contract. If additional submittals beyond those required by the contract are furnished pursuant

to request therefor by Contracting Officer, adjustment in contract price and time will be made in accordance with Articles titled CHANGES (FAR 52.243-4) and CHANGES - SUPPLEMENT (VAAR 852.236-88) of the GENERAL CONDITIONS.

1-8. Schedules called for in specifications and shown on shop drawings shall be submitted for use and information of Department of Veterans Affairs and Architect-Engineer. However, the Contractor shall assume responsibility for coordinating and verifying schedules. The Contracting Officer and Architect- Engineer assumes no responsibility for checking schedules or layout drawings for exact sizes, exact numbers and detailed positioning of items.

1-9. Submittals must be submitted by Contractor only and shipped prepaid. Contracting Officer assumes no responsibility for checking quantities or exact numbers included in such submittals.

A. Submit samples required by inidividual specification sections, in quadruplicate, except where a greater number is required. Submit shop drawings, schedules, manufacturers' literature and data, and certificates in quadruplicate, except where a greater number is specified. Electronic submittal of samples is not permitted.

B. Submittals will receive consideration only when covered by a transmittal letter signed by Contractor. Letter shall be sent via first class mail or electronically and shall contain the list of items, name of Medical Center, name of Contractor, contract number, applicable specification paragraph numbers, applicable drawing numbers (and other information required for exact identification of location for each item), manufacturer and brand, ASTM or Federal Specification Number (if any) and such additional information as may be required by specifications for particular item being furnished. In addition, catalogs shall be marked to indicate specific items submitted for approval.

1. A copy of letter must be enclosed with items, and any items received without identification letter will be considered "unclaimed goods" and held for a limited time only.
2. Each sample, certificate, manufacturers' literature and data shall be labeled to indicate the name and location of the Medical Center, name of Contractor, manufacturer, brand, contract number and ASTM or Federal Specification Number as applicable and location(s) on project.
3. Required certificates shall be signed by an authorized representative of manufacturer or supplier of material, and by Contractor.

C. If submittal samples have been disapproved, resubmit new samples as soon as possible after notification of disapproval. Such new samples shall be marked "Resubmitted Sample" in addition to containing other previously specified information required on label and in transmittal letter.

D. Approved samples will be kept on file by the COR at the site until completion of contract, at which time such samples will be delivered to Contractor as Contractor's property. Where noted in technical sections of specifications, approved samples in good condition may be used in their proper locations in contract work. At completion of contract, samples that are not approved will be returned to Contractor only upon request and at Contractor's expense. Such request should be made prior to completion of the contract. Disapproved samples that are not requested for return by Contractor will be discarded after completion of contract.

E. Submittal drawings (shop, erection or setting drawings) and schedules, required for work of various trades, shall be checked before submission by technically qualified employees of Contractor for accuracy, completeness and compliance with contract requirements. These drawings and schedules shall be stamped and signed by Contractor certifying to such check. If submittal drawings are not submitted electronically, comply with the following requirements.

1. For each drawing required, submit one legible photographic paper or vellum reproducible.
2. Reproducible shall be full size.
3. Each drawing shall have marked thereon, proper descriptive title, including Medical Center location, project number, manufacturer's number, reference to contract drawing number, detail Section Number, and Specification Section Number.
4. A space 120 mm by 125 mm (4-3/4 by 5 inches) shall be reserved on each drawing to accommodate approval or disapproval stamp.
5. Submit drawings, ROLLED WITHIN A MAILING TUBE, fully protected for shipment.
6. One reproducible print of approved or disapproved shop drawings will be forwarded to Contractor.
7. When work is directly related and involves more than one trade, shop drawings shall be submitted to Architect-Engineer under one cover.

1-10. Samples, shop drawings, test reports, certificates and manufacturers' literature and data, shall be submitted for approval to:

René Niemoller
Perspectus Architecture
13212 Shaker Square, Suite 204
Cleveland, Ohio 44120
rniemoller@perspectusarch.com

1-11. At the time of transmittal to the Architect-Engineer, the Contractor shall also send a copy of the complete submittal directly to the COR.

- - - E N D - - -

SECTION 01 42 19
REFERENCE STANDARDS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)

A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to - GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.

B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)

The specifications and standards cited in this solicitation can be examined at the following location:

DEPARMENT OF VETERANS AFFAIRS
Office of Construction & Facilities Management
Facilities Quality Service (00CFM1A)
425 Eye Street N.W, (sixth floor)
Washington, DC 20001
Telephone Numbers: (202) 632-5249 or (202) 632-5178
Between 9:00 AM - 3:00 PM

1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

AA	Aluminum Association Inc. http://www.aluminum.org
AABC	Associated Air Balance Council http://www.aabchq.com
AAMA	American Architectural Manufacturer's Association http://www.aamanet.org
AAN	American Nursery and Landscape Association http://www.anla.org
AASHTO	American Association of State Highway and Transportation Officials http://www.aashto.org
AATCC	American Association of Textile Chemists and Colorists http://www.aatcc.org
ACGIH	American Conference of Governmental Industrial Hygienists http://www.acgih.org
ACI	American Concrete Institute http://www.aci-int.net
ACPA	American Concrete Pipe Association http://www.concrete-pipe.org
ACPPA	American Concrete Pressure Pipe Association http://www.acppa.org
ADC	Air Diffusion Council http://flexibleduct.org
AGA	American Gas Association http://www.aga.org
AGC	Associated General Contractors of America http://www.agc.org
AGMA	American Gear Manufacturers Association, Inc. http://www.agma.org
AHAM	Association of Home Appliance Manufacturers http://www.aham.org
AISC	American Institute of Steel Construction http://www.aisc.org
AISI	American Iron and Steel Institute http://www.steel.org
AITC	American Institute of Timber Construction http://www.aitc-glulam.org
AMCA	Air Movement and Control Association, Inc. http://www.amca.org

ANLA	American Nursery & Landscape Association http://www.anla.org
ANSI	American National Standards Institute, Inc. http://www.ansi.org
APA	The Engineered Wood Association http://www.apawood.org
ARI	Air-Conditioning and Refrigeration Institute http://www.ari.org
ASAE	American Society of Agricultural Engineers http://www.asae.org
ASCE	American Society of Civil Engineers http://www.asce.org
ASHRAE	American Society of Heating, Refrigerating, and Air-Conditioning Engineers http://www.ashrae.org
ASME	American Society of Mechanical Engineers http://www.asme.org
ASSE	American Society of Sanitary Engineering http://www.asse-plumbing.org
ASTM	American Society for Testing and Materials http://www.astm.org
AWI	Architectural Woodwork Institute http://www.awinet.org
AWS	American Welding Society http://www.aws.org
AWWA	American Water Works Association http://www.awwa.org
BHMA	Builders Hardware Manufacturers Association http://www.buildershardware.com
BIA	Brick Institute of America http://www.bia.org
CAGI	Compressed Air and Gas Institute http://www.cagi.org
CGA	Compressed Gas Association, Inc. http://www.cganet.com
CI	The Chlorine Institute, Inc. http://www.chlorineinstitute.org
CISCA	Ceilings and Interior Systems Construction Association http://www.cisca.org

CISPI	Cast Iron Soil Pipe Institute http://www.cispi.org
CLFMI	Chain Link Fence Manufacturers Institute http://www.chainlinkinfo.org
CPMB	Concrete Plant Manufacturers Bureau http://www.cpmb.org
CRA	California Redwood Association http://www.calredwood.org
CRSI	Concrete Reinforcing Steel Institute http://www.crsi.org
CTI	Cooling Technology Institute http://www.cti.org
DHI	Door and Hardware Institute http://www.dhi.org
EGSA	Electrical Generating Systems Association http://www.egsa.org
EEI	Edison Electric Institute http://www.eei.org
EPA	Environmental Protection Agency http://www.epa.gov
ETL	ETL Testing Laboratories, Inc. http://www.et1.com
FAA	Federal Aviation Administration http://www.faa.gov
FCC	Federal Communications Commission http://www.fcc.gov
FPS	The Forest Products Society http://www.forestprod.org
GANA	Glass Association of North America http://www.cssinfo.com/info/gana.html/
FM	Factory Mutual Insurance http://www.fmglobal.com
GA	Gypsum Association http://www.gypsum.org
GSA	General Services Administration http://www.gsa.gov
HI	Hydraulic Institute http://www.pumps.org

HPVA	Hardwood Plywood & Veneer Association http://www.hpva.org
ICBO	International Conference of Building Officials http://www.icbo.org
ICEA	Insulated Cable Engineers Association Inc. http://www.icea.net
\ICAC	Institute of Clean Air Companies http://www.icac.com
IEEE	Institute of Electrical and Electronics Engineers http://www.ieee.org\
IMSA	International Municipal Signal Association http://www.imsasafety.org
IPCEA	Insulated Power Cable Engineers Association
NBMA	Metal Buildings Manufacturers Association http://www.mbma.com
MSS	Manufacturers Standardization Society of the Valve and Fittings Industry Inc. http://www.mss-hq.com
NAAMM	National Association of Architectural Metal Manufacturers http://www.naamm.org
NAPHCC	Plumbing-Heating-Cooling Contractors Association http://www.phccweb.org.org
NBS	National Bureau of Standards See - NIST
NBBPVI	National Board of Boiler and Pressure Vessel Inspectors http://www.nationboard.org
NEC	National Electric Code See - NFPA National Fire Protection Association
NEMA	National Electrical Manufacturers Association http://www.nema.org
NFPA	National Fire Protection Association http://www.nfpa.org
NHLA	National Hardwood Lumber Association http://www.natlhardwood.org
NIH	National Institute of Health http://www.nih.gov
NIST	National Institute of Standards and Technology http://www.nist.gov

NLMA	Northeastern Lumber Manufacturers Association, Inc. http://www.nelma.org
NPA	National Particleboard Association 18928 Premiere Court Gaithersburg, MD 20879 (301) 670-0604
NSF	National Sanitation Foundation http://www.nsf.org
NWWDA	Window and Door Manufacturers Association http://www.nwwda.org
OSHA	Occupational Safety and Health Administration Department of Labor http://www.osha.gov
PCA	Portland Cement Association http://www.portcement.org
PCI	Precast Prestressed Concrete Institute http://www.pci.org
PPI	The Plastic Pipe Institute http://www.plasticpipe.org
PEI	Porcelain Enamel Institute, Inc. http://www.porcelainenamel.com
PTI	Post-Tensioning Institute http://www.post-tensioning.org
RFCI	The Resilient Floor Covering Institute http://www.rfci.com
RIS	Redwood Inspection Service See - CRA
RMA	Rubber Manufacturers Association, Inc. http://www.rma.org
SCMA	Southern Cypress Manufacturers Association http://www.cypressinfo.org
SDI	Steel Door Institute http://www.steeldoor.org
IGMA	Insulating Glass Manufacturers Alliance http://www.igmaonline.org
SJI	Steel Joist Institute http://www.steeljoist.org

SMACNA	Sheet Metal and Air-Conditioning Contractors National Association, Inc. http://www.smacna.org
SSPC	The Society for Protective Coatings http://www.sspc.org
STI	Steel Tank Institute http://www.steeltank.com
SWI	Steel Window Institute http://www.steelwindows.com
TCA	Tile Council of America, Inc. http://www.tileusa.com
TEMA	Tubular Exchange Manufacturers Association http://www.tema.org
TPI	Truss Plate Institute, Inc. 583 D'Onofrio Drive; Suite 200 Madison, WI 53719 (608) 833-5900
UBC	The Uniform Building Code See ICBO
UL	Underwriters' Laboratories Incorporated http://www.ul.com
ULC	Underwriters' Laboratories of Canada http://www.ulc.ca
WCLIB	West Coast Lumber Inspection Bureau 6980 SW Varns Road, P.O. Box 23145 Portland, OR 97223 (503) 639-0651
WRCLA	Western Red Cedar Lumber Association P.O. Box 120786 New Brighton, MN 55112 (612) 633-4334
WWPA	Western Wood Products Association http://www.wwpa.org

- - - E N D - - -

SECTION 01 45 29
TESTING LABORATORY SERVICES

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained by the Contractor.

1.2 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

B. American Association of State Highway and Transportation Officials (AASHTO):

T27-11.....Standard Method of Test for Sieve Analysis of Fine and Coarse Aggregates

T96-02 (R2006).....Standard Method of Test for Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine

T99-10.....Standard Method of Test for Moisture-Density Relations of Soils Using a 2.5 Kg (5.5 lb.) Rammer and a 305 mm (12 in.) Drop

T104-99 (R2007).....Standard Method of Test for Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate

T180-10.....Standard Method of Test for Moisture-Density Relations of Soils using a 4.54 kg (10 lb.) Rammer and a 457 mm (18 in.) Drop

T191-02(R2006).....Standard Method of Test for Density of Soil In-Place by the Sand-Cone Method

C. American Concrete Institute (ACI):

506.4R-94 (R2004).....Guide for the Evaluation of Shotcrete

D. American Society for Testing and Materials (ASTM):

A325-10.....Standard Specification for Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength

A370-12.....Standard Test Methods and Definitions for Mechanical Testing of Steel Products

A416/A416M-10.....Standard Specification for Steel Strand, Uncoated Seven-Wire for Prestressed Concrete

A490-12.....Standard Specification for Heat Treated Steel Structural Bolts, 150 ksi Minimum Tensile Strength

C31/C31M-10.....Standard Practice for Making and Curing Concrete Test Specimens in the Field

C33/C33M-11a.....Standard Specification for Concrete Aggregates

C39/C39M-12.....Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens

C109/C109M-11b.....Standard Test Method for Compressive Strength of Hydraulic Cement Mortars

C136-06.....Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates

C138/C138M-10b.....Standard Test Method for Density (Unit Weight), Yield, and Air Content (Gravimetric) of Concrete

C140-12.....Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units

C143/C143M-10a.....Standard Test Method for Slump of Hydraulic Cement Concrete

C172/C172M-10.....Standard Practice for Sampling Freshly Mixed Concrete

C173/C173M-10b.....Standard Test Method for Air Content of freshly Mixed Concrete by the Volumetric Method

C330/C330M-09.....Standard Specification for Lightweight Aggregates for Structural Concrete

C567/C567M-11.....Standard Test Method for Density Structural Lightweight Concrete

C780-11.....Standard Test Method for Pre-construction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry

C1019-11.....Standard Test Method for Sampling and Testing Grout

C1064/C1064M-11.....Standard Test Method for Temperature of Freshly Mixed Portland Cement Concrete

C1077-11c.....Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation

C1314-11a.....Standard Test Method for Compressive Strength of Masonry Prisms

D422-63(2007).....Standard Test Method for Particle-Size Analysis of Soils

D698-07e1.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort

D1140-00(2006).....Standard Test Methods for Amount of Material in Soils Finer than No. 200 Sieve

D1143/D1143M-07e1.....Standard Test Methods for Deep Foundations Under Static Axial Compressive Load

D1188-07e1.....Standard Test Method for Bulk Specific Gravity and Density of Compacted Bituminous Mixtures Using Coated Samples

D1556-07.....Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method

D1557-09.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000ft lbf/ft3 (2,700 KNm/m3))

D2166-06.....Standard Test Method for Unconfined Compressive Strength of Cohesive Soil

D2167-08).....Standard Test Method for Density and Unit Weight of Soil in Place by the Rubber Balloon Method

D2216-10.....Standard Test Methods for Laboratory Determination of Water (Moisture) Content of Soil and Rock by Mass

D2974-07a.....Standard Test Methods for Moisture, Ash, and Organic Matter of Peat and Other Organic Soils

D3666-11.....Standard Specification for Minimum Requirements for Agencies Testing and Inspecting Road and Paving Materials

D3740-11.....Standard Practice for Minimum Requirements for Agencies Engaged in Testing and/or Inspection of Soil and Rock as used in Engineering Design and Construction

D6938-10.....Standard Test Method for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth)

E94-04(2010).....Standard Guide for Radiographic Examination

E164-08.....Standard Practice for Contact Ultrasonic Testing of Weldments

E329-11c.....Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection

E543-09.....Standard Specification for Agencies Performing Non-Destructive Testing

E605-93(R2011).....Standard Test Methods for Thickness and Density of Sprayed Fire Resistive Material (SFRM) Applied to Structural Members

E709-08.....Standard Guide for Magnetic Particle Examination

E1155-96(R2008).....Determining FF Floor Flatness and FL Floor Levelness Numbers

E. American Welding Society (AWS):

D1.D1.1M-10.....Structural Welding Code-Steel

1.3 REQUIREMENTS:

A. Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority and will be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory's scope of accreditation must include the appropriate ASTM standards (i.e.; E329, C1077, D3666, D3740, A880, E543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the "Corporate Office."

B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by COR. When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of COR to such failure.

C. Written Reports: Testing laboratory shall submit test reports to COR, Architect, and Contractor, unless other arrangements are agreed to in writing by the COR. Submit reports of tests that fail to meet construction contract requirements on colored paper.

D. Verbal Reports: Give verbal notification to COR immediately of any irregularity.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 CONCRETE:

A. Batch Plant Inspection and Materials Testing:

1. Perform continuous batch plant inspection until concrete quality is established to satisfaction of COR with concurrence of Contracting

Officer and perform periodic inspections thereafter as determined by COR.

2. Periodically inspect and test batch proportioning equipment for accuracy and report deficiencies to COR.
3. Sample and test mix ingredients as necessary to insure compliance with specifications.
4. Sample and test aggregates daily and as necessary for moisture content. Test the dry rodded weight of the coarse aggregate whenever a sieve analysis is made, and when it appears there has been a change in the aggregate.
5. Certify, in duplicate, ingredients and proportions and amounts of ingredients in concrete conform to approved trial mixes. When concrete is batched or mixed off immediate building site, certify (by signing, initialing or stamping thereon) on delivery slips (duplicate) that ingredients in truck-load mixes conform to proportions of aggregate weight, cement factor, and water-cement ratio of approved trial mixes.

B. Field Inspection and Materials Testing:

1. Provide a technician at site of placement at all times to perform concrete sampling and testing.
2. Review the delivery tickets of the ready-mix concrete trucks arriving on-site. Notify the Contractor if the concrete cannot be placed within the specified time limits or if the type of concrete delivered is incorrect. Reject any loads that do not comply with the Specification requirements. Rejected loads are to be removed from the site at the Contractor’s expense. Any rejected concrete that is placed will be subject to removal.
3. Take concrete samples at point of placement in accordance with ASTM C172. Mold and cure compression test cylinders in accordance with ASTM C31. Make at least three cylinders for each 40 m^3 (50 cubic yards) or less of each concrete type, and at least three cylinders for any one day's pour for each concrete type. After good concrete quality control has been established and maintained as determined by COR make three cylinders for each 80 m^3 (100 cubic yards) or less of each concrete type, and at least three cylinders from any one day's pour for each concrete type. Label each cylinder with an identification number. COR may require additional cylinders to be molded and cured under job conditions.
4. Perform slump tests in accordance with ASTM C143. Test the first truck each day, and every time test cylinders are made. Test pumped

concrete at the hopper and at the discharge end of the hose at the beginning of each day's pumping operations to determine change in slump.

5. Determine the air content of concrete per ASTM C173. For concrete required to be air-entrained, test the first truck and every 20 m^3 (25 cubic yards) thereafter each day. For concrete not required to be air-entrained, test every 80 m^3 (100 cubic yards) at random. For pumped concrete, initially test concrete at both the hopper and the discharge end of the hose to determine change in air content.
6. If slump or air content fall outside specified limits, make another test immediately from another portion of same batch.
7. Perform unit weight tests in compliance with ASTM C138 for normal weight concrete and ASTM C567 for lightweight concrete. Test the first truck and each time cylinders are made.
8. Notify laboratory technician at batch plant of mix irregularities and request materials and proportioning check.
9. Verify that specified mixing has been accomplished.
10. Environmental Conditions: Determine the temperature per ASTM C1064 for each truckload of concrete during hot weather and cold weather concreting operations:
    a. When ambient air temperature falls below 4.4 degrees C (40 degrees F), record maximum and minimum air temperatures in each 24 hour period; record air temperature inside protective enclosure; record minimum temperature of surface of hardened concrete.
    b. When ambient air temperature rises above 29.4 degrees C (85 degrees F), record maximum and minimum air temperature in each 24 hour period; record minimum relative humidity; record maximum wind velocity; record maximum temperature of surface of hardened concrete.
11. Inspect the reinforcing steel placement, including bar size, bar spacing, top and bottom concrete cover, proper tie into the chairs, and grade of steel prior to concrete placement. Submit detailed report of observations.
12. Observe conveying, placement, and consolidation of concrete for conformance to specifications.
13. Observe condition of formed surfaces upon removal of formwork prior to repair of surface defects and observe repair of surface defects.
14. Observe curing procedures for conformance with specifications, record dates of concrete placement, start of preliminary curing, start of final curing, end of curing period.

15. Observe preparations for placement of concrete:
    a. Inspect handling, conveying, and placing equipment, inspect vibrating and compaction equipment.
    b. Inspect preparation of construction, expansion, and isolation joints.
16. Observe preparations for protection from hot weather, cold weather, sun, and rain, and preparations for curing.
17. Observe concrete mixing:
    a. Monitor and record amount of water added at project site.
    b. Observe minimum and maximum mixing times.
18. Measure concrete flatwork for levelness and flatness as follows:
    a. Perform Floor Tolerance Measurements F_F and F_L in accordance with ASTM E1155. Calculate the actual overall F- numbers using the inferior/superior area method.
    b. Perform all floor tolerance measurements within 48 hours after slab installation and prior to removal of shoring and formwork.
    c. Provide the Contractor and the COR with the results of all profile tests, including a running tabulation of the overall F_F and F_L values for all slabs installed to date, within 72 hours after each slab installation.
19. Other inspections:
    a. Grouting under base plates.
    b. Grouting anchor bolts and reinforcing steel in hardened concrete.

C. Laboratory Tests of Field Samples:
1. Test compression test cylinders for strength in accordance with ASTM C39. For each test series, test one cylinder at 7 days and one cylinder at 28 days. Use remaining cylinder as a spare tested as directed by COR. Compile laboratory test reports as follows: Compressive strength test shall be result of one cylinder, except when one cylinder shows evidence of improper sampling, molding or testing, in which case it shall be discarded and strength of spare cylinder shall be used.
2. Make weight tests of hardened lightweight structural concrete in accordance with ASTM C567.
3. Furnish certified compression test reports (duplicate) to COR. In test report, indicate the following information:
    a. Cylinder identification number and date cast.
    b. Specific location at which test samples were taken.
    c. Type of concrete, slump, and percent air.
    d. Compressive strength of concrete in MPa (psi).

e. Weight of lightweight structural concrete in kg/m^3 (pounds per cubic feet).
f. Weather conditions during placing.
g. Temperature of concrete in each test cylinder when test cylinder was molded.
h. Maximum and minimum ambient temperature during placing.
i. Ambient temperature when concrete sample in test cylinder was taken.
j. Date delivered to laboratory and date tested.

3.2 REINFORCEMENT:

A. Review mill test reports furnished by Contractor.
B. Make one tensile and one bend test in accordance with ASTM A370 from each pair of samples obtained.
C. Written report shall include, in addition to test results, heat number, manufacturer, type and grade of steel, and bar size.
D. Perform tension tests of mechanical and welded splices in accordance with ASTM A370.

3.3 SPRAYED-ON FIREPROOFING:

A. Provide field inspection and testing services to certify sprayed-on fireproofing has been applied in accordance with contract documents.
B. Obtain a copy of approved submittals from COR.
C. Use approved installation in test areas as criteria for inspection of work.
D. Test sprayed-on fireproofing for thickness and density in accordance with ASTM E605.
   1. Thickness gauge specified in ASTM E605 may be modified for pole extension so that overhead sprayed material can be reached from floor.
E. Location of test areas for field tests as follows:
   1. Thickness: Select one bay per floor, or one bay for each 930 m^2 (10,000 square feet) of floor area, whichever provides for greater number of tests. Take thickness determinations from each of following locations: Metal deck, beam, and column.
   2. Density: Take density determinations from each floor, or one test from each 930 m^2 (10,000 square feet) of floor area, whichever provides for greater number of tests, from each of the following areas: Underside of metal deck, beam flanges, and beam web.

F. Submit inspection reports, certification, and instances of noncompliance to COR.

- - - E N D - - -

SECTION 01 58 16
TEMPORARY INTERIOR SIGNAGE

PART 1 GENERAL

DESCRIPTION

This section specifies temporary interior signs.

PART 2 PRODUCTS

2.1 TEMPORARY SIGNS

A. Fabricate from 50 Kg (110 pound) mat finish white paper.

B. Cut to 100 mm (4-inch) wide by 300 mm (12 inch) long size tag.

C. Punch 3 mm (1/8-inch) diameter hole centered on 100 mm (4-inch) dimension of tag. Edge of Hole spaced approximately 13 mm (1/2-inch) from one end on tag.

D. Reinforce hole on both sides with gummed cloth washer or other suitable material capable of preventing tie pulling through paper edge.

E. Ties: Steel wire 0.3 mm (0.0120-inch) thick, attach to tag with twist tie, leaving 150 mm (6-inch) long free ends.

PART 3 EXECUTION

3.1 INSTALLATION

A. Install temporary signs attached to room door frame or room door knob, lever, or pull for doors on corridor openings.

B. Mark on signs with felt tip marker having approximately 3 mm (1/8-inch) wide stroke for clearly legible numbers or letters.

C. Identify room with numbers as designated on floor plans.

3.2 LOCATION

A. Install on doors that have room, corridor, and space numbers shown.

B. Doors that do not require signs are as follows:

1. Corridor barrier doors (cross-corridor) in corridor with same number.
2. Folding doors or partitions.
3. Toilet or bathroom doors within and between rooms.
4. Communicating doors in partitions between rooms with corridor entrance doors.
5. Closet doors within rooms.

C. Replace missing, damaged, or illegible signs.

- - - E N D - - -

SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.

B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.

C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:

1. Waste Management Plan development and implementation.
2. Techniques to minimize waste generation.
3. Sorting and separating of waste materials.
4. Salvage of existing materials and items for reuse or resale.
5. Recycling of materials that cannot be reused or sold.

D. At a minimum the following waste categories shall be diverted from landfills:

1. Soil.
2. Inerts (eg, concrete, masonry and asphalt).
3. Clean dimensional wood and palette wood.
4. Green waste (biodegradable landscaping materials).
5. Engineered wood products (plywood, particle board and I-joists, etc).
6. Metal products (eg, steel, wire, beverage containers, copper, etc).
7. Cardboard, paper and packaging.
8. Bitumen roofing materials.
9. Plastics (eg, ABS, PVC).
10. Carpet and/or pad.
11. Gypsum board.
12. Insulation.
13. Paint.
14. Fluorescent lamps.

1.2 RELATED WORK

A. Section 02 41 00, DEMOLITION.

B. Section 01 00 00, GENERAL REQUIREMENTS.

C. Asbestos Removal: Section 02 82 13.13, GLOVEBAG ASBESTOS ABATEMENT and Section 02 82 13.19, ASBESTOS FLOOR TILE AND MASTIC ABATEMENT.

1.3 QUALITY ASSURANCE

A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction /Demolition waste includes products of the following:

1. Excess or unusable construction materials.
2. Packaging used for construction products.
3. Poor planning and/or layout.
4. Construction error.
5. Over ordering.
6. Weather damage.
7. Contamination.
8. Mishandling.
9. Breakage.

B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.

C. Contractor shall develop and implement procedures to recycle construction and demolition waste to a minimum of 50 percent.

D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.

E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations. The Whole Building Design Guide website http://www.wbdg.org/tools/cwm.php provides a Construction Waste Management Database that contains information on companies that haul, collect, and process recyclable debris from construction projects.

F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to

be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.

G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.

H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

1.4 TERMINOLOGY

A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.

B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.

C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.

D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.

E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).

F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.

G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.

H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.

I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.

J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.

K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.

L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.

1. On-site Recycling - Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
2. Off-site Recycling - Materials hauled to a location and used in an altered form in the manufacture of new products.

M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.

N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.

O. Return: To give back reusable items or unused products to vendors for credit.

P. Salvage: To remove waste materials from the site for resale or re-use by a third party.

Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.

R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.

S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:

B. Prepare and submit to the COR a written demolition debris management plan. The plan shall include, but not be limited to, the following information:
   1. Procedures to be used for debris management.
   2. Techniques to be used to minimize waste generation.
   3. Analysis of the estimated job site waste to be generated:
      a. List of each material and quantity to be salvaged, reused, recycled.
      b. List of each material and quantity proposed to be taken to a landfill.
   4. Detailed description of the Means/Methods to be used for material handling.
      a. On site: Material separation, storage, protection where applicable.
      b. Off site: Transportation means and destination. Include list of materials.
         1) Description of materials to be site-separated and self-hauled to designated facilities.
         2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
      c. The names and locations of mixed debris reuse and recycling facilities or sites.
      d. The names and locations of trash disposal landfill facilities or sites.
      e. Documentation that the facilities or sites are approved to receive the materials.
C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.
D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.
E. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.6 APPLICABLE PUBLICATIONS

A Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation

only. In the event that criteria requirements conflict, the most stringent requirements shall be met.

B. U.S. Green Building Council (USGBC):
LEED Green Building Rating System for New Construction

1.7 RECORDS

Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the LEED Reference Guide and LEED Template.

PART 2 - PRODUCTS

2.1 MATERIALS

A. List of each material and quantity to be salvaged, recycled, reused.
B. List of each material and quantity proposed to be taken to a landfill.
C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

PART 3 - EXECUTION

3.1 COLLECTION

A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.
B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.
C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

3.2 DISPOSAL

A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.
B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

3.3 REPORT

A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.

B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.

C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

SECTION 01 81 11
SUSTAINABLE DESIGN REQUIREMENTS

PART 1 - GENERAL

1.1 SUMMARY

This Section describes general requirements and procedures to comply with the Guiding Principles for Leadership in High Performance and Sustainable Buildings Memorandum of Understanding incorporated in the Executive Orders 13423 and 13514; Energy Policy Act of 2005 (EPA 2005) and the Energy Independence and Security Act of 2007 (EISA 2007).

1.2 OBJECTIVES

A. To maximize resource efficiency and reduce the environmental impacts of construction and operation, the Contractor during the construction phase of this project shall implement the following procedures:

1. Select products that minimize consumption of energy, water and non-renewable resources, while minimizing the amounts of pollution resulting from the production and employment of building technologies. It is the intent of this project to conform with EPA's Five Guiding Principles on environmentally preferable purchasing. The five principles are:
   a. Include environmental considerations as part of the normal purchasing process.
   b. Emphasize pollution prevention early in the purchasing process.
   c. Examine multiple environmental attributes throughout a product's or service's life cycle.
   d. Compare relevant environmental impacts when selecting products and services.
   e. Collect and base purchasing decisions on accurate and meaningful information about environmental performance.
2. Control sources for potential Indoor Air Quality (IAQ) pollutants by controlled selection of materials and processes used in project construction in order to attain superior IAQ.
3. Products and processes that achieve the above objectives to the extent currently possible and practical have been selected and included in these Construction Documents. The Contractor is responsible to maintain and support these objectives in developing means and methods for performing the work of this Contract and in

proposing product substitutions and/or changes to specified processes.

4. Use building practices that ensure construction debris and particulates do not contaminate or enter duct work prior to system startup and turn over.

1.3 RELATED DOCUMENTS

A. Section 01 01 00, INFECTION CONTROL RISK ASSESSMENT
B. Section 01 74 19, CONSTRUCTION WASTE MANANGEMENT
C. Section 01 91 00, GENERAL COMMISSIONG REQUIREMENTS

1.4 DEFINITIONS

A. Agrifiber Products: Composite panel products derived from agricultural fiber.
B. Biobased Product: As defined in the 2002 Farm Bill, a product determined by the Secretary to be a commercial or industrial product (other than food or feed) that is composed, in whole or in significant part, of biological products or renewable domestic agricultural materials (including plant, animal, and marine materials) or forestry materials.
C. Biobased Content: The weight of the biobased material divided by the total weight of the product and expressed as a percentage by weight.
D. Certificates of Chain-of-Custody: Certificates signed by manufacturers certifying that wood used to make products has been tracked through its extraction and fabrication to ensure that is was obtained from forests certified by a specified certification program.
E. Composite Wood: A product consisting of wood fiber or other plant particles bonded together by a resin or binder.
F. Construction and Demolition Waste: Includes solid wastes, such as building materials, packaging, rubbish, debris, and rubble resulting from construction, remodeling, repair and demolition operations. A construction waste management plan is to be provided by the Contractor as defined in Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.
G. Third Party Certification: Certification of levels of environmental achievement by nationally recognized sustainability rating system.
H. Light Pollution: Light that extends beyond its source such that the additional light is wasted in an unwanted area or in an area where it inhibits view of the night sky.

I. Recycled Content Materials: Products that contain pre-consumer or post-consumer materials as all or part of their feedstock.

J. Post-Consumer Recycled Content: The percentage by weight of constituent materials that have been recovered or otherwise diverted from the solid-waste stream after consumer use.

K. Pre-Consumer Recycled Content: Materials that have been recovered or otherwise diverted from the solid-waste stream during the manufacturing process. Pre-consumer content must be material that would not have otherwise entered the waste stream as per Section 5 of the FTC Act, Part 260 “Guidelines for the Use of Environmental Marketing Claims”: www.ftc.gov/bcp/grnrule/guides980427.

L. Regional Materials: Materials that are extracted, harvested, recovered, and manufactured within a radius of 250 miles (400 km) from the Project site.

M. Salvaged or Reused Materials: Materials extracted from existing buildings in order to be reused in other buildings without being manufactured.

N. Sealant: Any material that fills and seals gaps between other materials.

O. Type 1 Finishes: Materials and finishes which have a potential for short-term levels of off gassing from chemicals inherent in their manufacturing process, or which are applied in a form requiring vehicles or carriers for spreading which release a high level of particulate matter in the process of installation and/or curing.

P. Type 2 Finishes: “Fuzzy" materials and finishes which are woven, fibrous, or porous in nature and tend to adsorb chemicals offgas.

Q. Volatile Organic Compounds (VOCs): Any compound of carbon, excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate, which participates in atmospheric photochemical reactions. Compounds that have negligible photochemical reactivity, listed in EPA 40 CFR 51.100(s), are also excluded from this regulatory definition.

1.5 SUBMITTALS

A. Sustainable Design Submittals:

1. Water Conserving Fixtures: Submittals must include manufacturer’s cut sheets for all water-consuming plumbing fixtures and fittings (toilets, urinals, faucets, showerheads, etc.) highlighting maximum

flow rates and/or flush rates. Include cut sheets for any automatic faucet-control devices.

2. Process Water Use: Provide manufacturer's cut sheets for all water-consuming commercial equipment, highlighting water consumption performance. Include manufacturer's cut sheets or product data for any cooling towers, highlighting water consumption estimates, water use reduction measures, and corrosion inhibitors.
3. Elimination of CFCs AND HCFCs: Provide manufacturer's cut sheets for all cooling equipment with manufacturer's product data, highlighting refrigerants; provide manufacturer's cut sheets for all fire-suppression equipment, highlighting fire-suppression agents; provide manufacturer's cut-sheets for all polystyrene insulation (XPS) and closed-cell spray foam polyurethane insulation, highlighting the blowing agent(s).
4. On-Site Renewable Energy Systems: Provide cut sheets and manufacturer's product data for all on-site renewable energy generating components and equipment, including documentation of output capacity.
5. Measurement and Verification Systems: Provide cut sheets and manufacturer's product data for all controls systems, highlighting electrical metering and trending capability components.
6. Salvaged or Reused Materials: Provide documentation that lists each salvaged or reused material, the source or vendor of the material, the purchase price, and the replacement cost if greater than the purchase price.
7. Recycled Content: Submittals for all materials with recycled content (excluding MEP systems equipment and components) must include the following documentation: Manufacturer's product data, product literature, or a letter from the manufacturer verifying the percentage of post-consumer and pre-consumer recycled content (by weight) of each material or product.
   a. An electronic spreadsheet that tabulates the Project's total materials cost and combined recycled content value (defined as the sum of the post-consumer recycled content value plus one-half of the pre-consumer recycled content value) expressed as a percentage of total materials cost. This spreadsheet shall be submitted with the Contractor's Certificate and Application for

Payment, in the frequency determined by the construction contract. It should indicate, on an ongoing basis, line items for each material, including cost, pre-consumer recycled content, post-consumer recycled content, and combined recycled content value.

8. Regional Materials: Submittals for all products or materials expected to contribute to the regional calculation (excluding MEP systems equipment and components) must include the following documentation:
   a. Cost of each material or product, excluding cost of labor and equipment for installation.
   b. Location of product manufacture and distance from point of manufacture to the Project Site.
   c. Location of point of extraction, harvest, or recovery for each raw material in each product and distance from the point of extraction, harvest, or recovery to the Project Site.
   d. Manufacturer’s product data, product literature, or a letter from the manufacturer verifying the location and distance from the Project Site to the point of manufacture for each regional material.
   e. Manufacturer’s product data, product literature, or a letter from the manufacturer verifying the location and distance from the Project Site to the point of extraction, harvest, or recovery for each regional material or product, including, at a minimum, gravel and fill, planting materials, concrete, masonry, and GWB
   f. An electronic spreadsheet that tabulates the Project’s total materials cost and regional materials value, expressed as a percentage of total materials cost. This spreadsheet shall be submitted with the Contractor’s Certificate and Application for Payment, in the frequency determined by the construction contract. It should indicate on an ongoing basis, line items for each material, including cost, location of manufacture, distance from manufacturing plant to the Project Site, location of raw material extraction, and distance from extraction point to the Project Site.
9. Outdoor Air Delivery Monitoring: Provide manufacturer’s cut sheets highlighting the installed carbon dioxide monitoring system

components and sequence of controls shop drawing documentation, including CO2 differential set-points and alarm capabilities.

10. Interior Adhesives and Sealants: Submittals for all field-applied adhesives and sealants, which have a potential impact on indoor air, must include manufacturer's MSDSs or other Product Data highlighting VOC content.
    a. Provide manufacturers' documentation verifying all adhesives used to apply laminates, whether shop-applied or field-applied, contain no urea-formaldehyde.
11. Interior Paints and Coatings: Submittals for all field-applied paints and coatings, which have a potential impact on indoor air, must include manufacturer's MSDSs or other Product Data highlighting VOC content.
12. Exterior Paints and Coatings: Submittals for all field-applied paints and coatings, which have a potential impact on ambient air quality, must include manufacturer's MSDSs or other manufacturer's Product Data highlighting VOC content.
13. Floorcoverings:
    a. Carpet Systems: Submittals for all carpet must include the following:
        1) A copy of an assessment from the Building for Environmental and Economic Sustainability (BEES) software model, either Version 3.0 or 4.0, with parameters of the model set as described by this specification section.
        2) Manufacturer's product data verifying that all carpet systems meet or exceed the testing and product requirements of the Carpet and Rug Institute Green Label Plus program.
    b. Engineered Wood Flooring: Submittals for all engineered wood flooring must include manufacturer's product data verifying certification under either the Greenguard or FloorScore indoor emissions testing program.
14. Composite Wood and Agrifiber Binders: Submittals for all composite wood and agrifiber products (including but not limited to particleboard, wheatboard, strawboard, agriboard products, engineered wood components, solid-core wood doors, OSB, MDF, and plywood products) must include manufacturer's product data verifying that these products contain no urea-formaldehyde resins.

15. Air Filtration: Provide manufacturer's cut sheets and product data highlighting the following:
    a. Minimum Efficiency Reporting Value (MERV) for filtration media in all air handling units (AHUs) per ASHRAE HVAC Design Manual for Hospitals and Clinics.
    b. Minimum Efficiency Reporting Value (MERV) for filtration media installed at return air grilles during construction if permanently installed AHUs are used during construction. See above for requirements.
16. Mercury in Lighting: Provide manufacturer's cut sheets or product data for all fluorescent or HID lamps highlighting mercury content.
17. Lighting Controls: Provide manufacturer's cut sheets and shop drawing documentation highlighting all lighting controls systems components.
18. Thermal Comfort Controls: Provide manufacturer's cut sheets and shop drawing documentation highlighting all thermal comfort-control systems components.
19. Blended Cement: It is the intent of this specification to reduce CO_2 emissions and other environmentally detrimental effects resulting from the production of portland cement by requiring that all concrete mixes, in aggregate, utilize blended cement mixes to displace portland cement as specified in Section 03 30 53, MISCELLANEOUS CAST-IN-PLACE CONCRETE typically included in conventional construction. Provide the following submittals:
    a. Copies of concrete design mixes for all installed concrete.
    b. Copies of typical regional baseline concrete design mixes for all compressive strengths used on the Project.
    c. Quantities in cubic yards of each installed concrete mix.
20. Gypsum Wall Board: Provide manufacturer's cut sheets or product data verifying that, where specified to be installed, gypsum wallboard products are moisture and mold-resistant.
21. Fiberglass Insulation: Provide manufacturer's cut sheets or product data verifying that fiberglass batt insulation contains no urea-formaldehyde.
22. Duct Acoustical Insulation: Provide manufacturer's cut sheets or product data verifying that mechanical sound insulation materials in air distribution ducts consists of an impervious, non-porous

coatings that prevent dust from accumulating in the insulating materials.

B. Project Materials Cost Data: Provide a spreadsheet in an electronic file indicating the total cost for the Project and the total cost of building materials used for the Project, as follows:

1. Not more than 60 days after the Preconstruction Meeting, the General Contractor shall provide to the COR a preliminary schedule of materials costs for all materials used for the Project organized by specification section. Exclude labor costs and all mechanical, electrical, and plumbing (MEP) systems materials and labor costs. Include the following:
   a. Identify each reused or salvaged material, its cost, and its replacement value.
   b. Identify each recycled-content material, its post-consumer and pre-consumer recycled content as a percentage the product's weight, its cost, its combined recycled content value (defined as the sum of the post-consumer recycled content value plus one-half of the pre-consumer recycled content value), and the total combined recycled content value for all materials as a percentage of total materials costs.
   c. Identify each regional material, its cost, its manufacturing location, the distance of this location from the Project site, the source location for each raw material component of the material, the distance of these extraction locations from the Project site, and the total value of regional materials as a percentage of total materials costs.
   d. Identify each biobased material, its source, its cost, and the total value of biobased materials as a percentage of total materials costs. Also provide the total value of rapidly renewable materials (materials made from plants that are harvested in less than a 10-year cycle) as a percentage of total materials costs.
   e. Identify each wood-based material, its cost, the total wood-based materials cost, each FSC Certified wood material, its cost, and the total value of Certified wood as a percentage of total wood-based materials costs.

2. Provide final versions of the above spreadsheets to the COR not more than 14 days after Substantial Completion.

C. Construction Waste Management: See Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT for submittal requirements.

D. Construction Indoor Air Quality (IAQ) Management: Submittals must include the following:

1. Not more than 30 days after the Preconstruction Meeting, prepare and submit for the COR's approval, an electronic copy of the draft Construction IAQ Management Plan in an electronic file including, but not limited to, descriptions of the following:
   a. Instruction procedures for meeting or exceeding the minimum requirements of the Sheet Metal and Air Conditioning National Contractors Association (SMACNA) IAQ Guidelines for Occupied Buildings Under Construction, 1995, Chapter 3, including procedures for HVAC Protection, Source Control, Pathway Interruption, Housekeeping, and Scheduling
   b. Instruction procedures for protecting absorptive materials stored on-site or installed from moisture damage
   c. Schedule of submission to COR of photographs of on-site construction IAQ management measures such as protection of ducts and on-site stored oil installed absorptive materials
   d. Instruction procedures if air handlers must be used during construction, including a description of filtration media to be used at each return air grille
   e. Instruction procedure for replacing all air-filtration media immediately prior to occupancy after completion of construction, including a description of filtration media to be used at each air handling or air supply unit

3. Not more than 30 days following receipt of the approved draft CIAQMP, submit an electronic copy of the approved CIAQMP in an electronic file, along with the following:
   a. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for all filtration media to be installed at return air grilles during construction if permanently installed AHUs are used during construction.

b. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for filtration media in all air handling units (AHUs).

4. Not more than 14 days after Substantial Completion provide the following:

a. Documentation verifying required replacement of air filtration media in all air handling units (AHUs) after the completion of construction and prior to occupancy and, if applicable, required installation of filtration during construction.

b. Minimum of 18 Construction photographs: Six photographs taken on three different occasions during construction of the SMACNA approaches employed, along with a brief description of each approach, documenting implementation of the IAQ management measures, such as protection of ducts and on-site stored or installed absorptive materials.

E. Commissioning: See Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS for submittal requirements.

F. Sustainable Design Progress Reports: Concurrent with each Application for Payment, submit reports for the following:

1. Construction Waste Management: Waste reduction progress reports and logs complying with the requirements of Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.

2. Construction IAQ Management: See details below under Section 3.2 Construction Indoor Air Quality Management for Construction IAQ management progress report requirements.

1.6 QUALITY ASSURANCE

A. Preconstruction Meeting: After award of Contract and prior to the commencement of the Work, schedule and conduct meeting with the COR and all Subcontractors to discuss the Construction Waste Management Plan, the required Construction Indoor Air Quality (IAQ) Management Plan, and all other Sustainable Design Requirements. The purpose of this meeting is to develop a mutual understanding of the Project's Sustainable Design Requirements and coordination of the Contractor's management of these requirements with the Contracting Officer and the Construction Quality Manager.

B. Construction Job Conferences: The status of compliance with the Sustainable Design Requirements of these specifications will be an

agenda item at all regular job meetings conducted during the course of work at the site.

PART 2 - PRODUCTS

2.1 PRODUCT ENVIRONMENTAL REQUIREMENTS

A. Do not burn rubbish, organic matter, etc. or any material on the site. Dispose of legally in accordance with Specifications Sections 01 74 19.

B. Herbicides and Pest Control: Herbicides shall not be permitted, and pest control measures shall utilize EPA-registered biopesticides only.

C. Water-Conserving Fixtures: Plumbing fixtures and fittings shall use in aggregate at least 20% less water than the water use baseline calculated for the building after meeting the Energy Policy Act of 1992 fixture performance requirements. Flow and flush rates shall not exceed the following:

1. Toilets: no more than 1.3 gallons per flush, otherwise be dual flush 1.6/0.8 gallons per flush, and have documented bowl evacuation capability per MaP testing of at least 400 grams
2. Urinals: Waterless or Water sense rated with no more than 0.5 gallons per flush.
3. Lavatory Faucets: 0.5 gpm with automatic faucet controls
4. Kitchen Sink Lavatories: 2.2 gpm
5. Showerheads: no more than 1.5gpm

D. Process Water Use: Employ strategies that in aggregate result in 20% less water use than the process water use baseline for the building after meeting the commercial equipment and HVAC performance requirements as listed in the Table below. For equipment not addressed by EPACT 2005 or the list below, additional equipment performance requirements may be proposed provided documentation supporting the proposed benchmark or industry standard is submitted.

1. Ice Machine: 20 gallons/100 pounds ice for machines making over 175 pounds of ice per day; 30 gallons/100 pounds ice for machines making less than 175 ice per day. Avoid water-cooled machines.
2. Cooling Towers: 2.3 gallons/ton-hr. water loss

E. Elimination of CFCs AND HCFCs:

1. Ozone Protection and Greenhouse Gas Reduction: Base building cooling equipment shall contain no refrigerants other than the following: HCFC-123, HFC-134a, HFC-245fa, HFC-407c, or HFC 410a.

2. Fire suppression systems may not contain ozone-depleting substances such as halon 1301 and 1211.
3. Extruded polystyrene insulation (XPS) and closed-cell spray foam polyurethane insulation shall not be manufactured with hydrochlorofluorocarbon (HCFC) blowing agents.

F. Appliances and Equipment: All materials and equipment being installed that falls under the Energy Star or FEMP programs must be Energy Star or FEMP-rated. Eligible equipment includes refrigerators, motors, laundry equipment, office equipment and more. Refer to each program's website for a complete list.

G. HVAC Distribution Efficiency:
1. All duct systems shall be constructed of aluminum, stainless steel or galvanized sheet metal, as deemed appropriate based on the application requirements. No fiberglass duct board shall be permitted.
2. All medium- and high-pressure ductwork systems shall be pressure-tested in accordance with the current SMACNA standards.
3. All ductwork shall be externally insulated. No interior duct liner shall be permitted.
4. Where possible, all air terminal connections shall be hard-connected with sheet metal ductwork. If flexible ductwork is used, no flexible duct extension shall be more than six feet in length.
5. All HVAC equipment shall be isolated from the ductwork system with flexible duct connectors to minimize the transmittance of vibration.
6. All supply and return air branch ducts shall include the appropriate style of volume damper. Air terminal devices such as grilles, registers, and diffusers shall be balanced at duct branch dampers, not at terminal face.

H. Measurement and Verification: Install controls and monitoring devices as required by MEP divisions order to comply with International Performance Measurement & Verification Protocol (IPMVP), Volume III: Concepts and Options for Determining Energy Savings in New Construction, April 2003, Option D.
1. The IPMVP provides guidance on situation-appropriate application of measurement and verification strategies.

I. Salvaged or Reused materials: There shall be no substitutions for specified salvaged and reused materials and products.

1. Salvaged materials: Use of salvaged materials reduces impacts of disposal and manufacturing of replacements.

J. Recycled Content of Materials:

1. Provide building materials with recycled content such that post-consumer recycled content value plus half the pre-consumer recycled content value constitutes a minimum of 30% of the cost of materials used for the Project, exclusive of all MEP equipment, labor, and delivery costs. The Contractor shall make all attempts to maximize the procurement of materials with recycled content.
   a. The post-consumer recycled content value of a material shall be determined by dividing the weight of post-consumer recycled content by the total weight of the material and multiplying by the cost of the material.
   b. Do not include mechanical and electrical components in the calculations.
   c. Do not include labor and delivery costs in the calculations.
   d. Recycled content of materials shall be defined according to the Federal Trade Commission's "Guide for the Use of Environmental Marketing Claims," 16 CFR 260.7 (e).
   e. Utilize all on-site existing paving materials that are scheduled for demolition as granulated fill, and include the cost of this material had it been purchased in the calculations for recycled content value.
   f. The materials in the following list must contain the minimum recycled content indicated:

Category	**Minimum Recycled Content**
Compost/mulch	100% post-consumer
Asphaltic Concrete Paving	25% post-consumer
Cast-in-Place Concrete	6% pre-consumer
CMU: Gray Block	20% pre-consumer
Steel Reinforcing Bars	90% combined
Structural Steel Shapes	90% combined
Steel Joists	75% combined

Steel Deck	75% combined
Steel Fabrications	60% combined
Steel Studs	30% combined
Steel Roofing	30% post-consumer
Aluminum Fabrications	35% combined
Rigid Insulation	20% pre-consumer
Batt insulation	30% combined

K. Biobased Content:

1. For products designated by the USDA’s BioPreferred program, provide products that meet or exceed USDA recommendations for biobased content, so long as products meet all other performance requirements in VA master specifications. For more information regarding the product categories covered by the BioPreferred program, visit the government's BioPreferred website.

- - - E N D - - -

SECTION 01 91 00

GENERAL COMMISSIONING REQUIREMENTS

PART 1 - GENERAL

1.1 COMMISSIONING DESCRIPTION

A. This Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS shall form the basis of the construction phase commissioning process and procedures. The Commissioning Agent shall add, modify, and refine the commissioning procedures, as approved by the Department of Veterans Affairs (VA), to suit field conditions and actual manufacturer's equipment, incorporate test data and procedure results, and provide detailed scheduling for all commissioning tasks.

B. Various sections of the project specifications require equipment startup, testing, and adjusting services. Requirements for startup, testing, and adjusting services specified in the Division 21, Division 22, Division 23, Division 26, Division 27, and Division 28 series sections of these specifications are intended to be provided in coordination with the commissioning services and are not intended to duplicate services. The Contractor shall coordinate the work required by individual specification sections with the commissioning services requirements specified herein.

C. Where individual testing, adjusting, or related services are required in the project specifications and not specifically required by this commissioning requirements specification, the specified services shall be provided and copies of documentation, as required by those specifications shall be submitted to the VA and the Commissioning Agent to be indexed for future reference.

D. Where training or educational services for VA are required and specified in other sections of the specifications, including but not limited to Division 8, Division 21, Division 22, Division 23, Division 26, Division 27, and Division 28 series sections of the specification, these services are intended to be provided in addition to the training and educational services specified herein.

E. Commissioning is a systematic process of verifying that the building systems perform interactively according to the construction documents and the VA’s operational needs. The commissioning process shall encompass and coordinate the system documentation, equipment startup,

control system calibration, testing and balancing, performance testing and training. Commissioning during the construction and post-occupancy phases is intended to achieve the following specific objectives according to the contract documents:

1. Verify that the applicable equipment and systems are installed in accordance with the contact documents and according to the manufacturer's recommendations.
2. Verify and document proper integrated performance of equipment and systems.
3. Verify that Operations & Maintenance documentation is complete.
4. Verify that all components requiring servicing can be accessed, serviced and removed without disturbing nearby components including ducts, piping, cabling or wiring.
5. Verify that the VA’s operating personnel are adequately trained to enable them to operate, monitor, adjust, maintain, and repair building systems in an effective and energy-efficient manner.
6. Document the successful achievement of the commissioning objectives listed above.

F. The commissioning process does not take away from or reduce the responsibility of the Contractor to provide a finished and fully functioning product.

1.2 CONTRACTUAL RELATIONSHIPS

A. For this construction project, the Department of Veterans Affairs contracts with a Contractor to provide construction services. The contracts are administered by the VA Contracting Officer and the COR as the designated representative of the Contracting Officer. On this project, the authority to modify the contract in any way is strictly limited to the authority of the Contracting Officer.

B. In this project, only two contract parties are recognized and communications on contractual issues are strictly limited to VA COR and the Contractor. It is the practice of the VA to require that communications between other parties to the contracts (Subcontractors and Vendors) be conducted through the COR and Contractor. It is also the practice of the VA that communications between other parties of the project (Commissioning Agent and Architect/Engineer) be conducted through the COR.

C. Whole Building Commissioning is a process that relies upon frequent and direct communications, as well as collaboration between all parties to the construction process. By its nature, a high level of communication and cooperation between the Commissioning Agent and all other parties (Architects, Engineers, Subcontractors, Vendors, third party testing agencies, etc.) is essential to the success of the Commissioning effort.

D. With these fundamental practices in mind, the commissioning process described herein has been developed to recognize that, in the execution of the Commissioning Process, the Commissioning Agent must develop effective methods to communicate with every member of the construction team involved in delivering commissioned systems while simultaneously respecting the exclusive contract authority of the Contracting Officer and COR. Thus, the procedures outlined in this specification must be executed within the following limitations:

1. No communications (verbal or written) from the Commissioning Agent shall be deemed to constitute direction that modifies the terms of any contract between the Department of Veterans Affairs and the Contractor.
2. Commissioning Issues identified by the Commissioning Agent will be delivered to the COR and copied to the designated Commissioning Representatives for the Contractor and subcontractors on the Commissioning Team for information only in order to expedite the communication process. These issues must be understood as the professional opinion of the Commissioning Agent and as suggestions for resolution.
3. In the event that any Commissioning Issues and suggested resolutions are deemed by the COR to require either an official interpretation of the construction documents or require a modification of the contract documents, the Contracting Officer or COR will issue an official directive to this effect.
4. All parties to the Commissioning Process shall be individually responsible for alerting the COR of any issues that they deem to constitute a potential contract change prior to acting on these issues.
5. Authority for resolution or modification of design and construction issues rests solely with the Contracting Officer or COR, with

appropriate technical guidance from the Architect/Engineer and/or Commissioning Agent.

1.3 RELATED WORK

A. Section 01 00 00 GENERAL REQUIREMENTS.
B. Section 01 32.13 NETWORK ANALYSIS SCHEDULES
C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES
D. Section 01 81 11 SUSTAINABNLE DESIGN REQUIREMENTS
E. Section 21 08 00 COMMISSIONING OF FIRE PROTECTION SYSTEMS.
F. Section 22 08 00 COMMISSIONING OF PLUMBING SYSTEMS.
G. Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.
H. Section 26 08 00 COMMISSIONING OF ELECTRICAL SYSTEMS.
I. Section 27 08 00 COMMISSIONING OF COMMUNICATIONS SYSTEMS.
J. Section 28 08 00 COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

1.4 SUMMARY

A. This Section includes general requirements that apply to implementation of commissioning without regard to systems, subsystems, and equipment being commissioned.
B. The commissioning activities have been developed to support the VA requirements to meet guidelines for Federal Leadership in Environmental, Energy, and Economic Performance.

1.5 ACRONYMS

List of Acronyms	
Acronym	Meaning
A/E	Architect / Engineer Design Team
AHJ	Authority Having Jurisdiction
ASHRAE	Association Society for Heating Air Condition and Refrigeration Engineers
BOD	Basis of Design
BSC	Building Systems Commissioning
CCTV	Closed Circuit Television
CD	Construction Documents
CMMS	Computerized Maintenance Management System
CO	Contracting Officer (VA)
COR	Contracting Officer’s Representative (see also VA-RE)

List of Acronyms	
Acronym	Meaning
COBie	Construction Operations Building Information Exchange
CPC	Construction Phase Commissioning
Cx	Commissioning
CxA	Commissioning Agent
CxM	Commissioning Manager
CxR	Commissioning Representative
DPC	Design Phase Commissioning
FPT	Functional Performance Test
GBI-GG	Green Building Initiative - Green Globes
HVAC	Heating, Ventilation, and Air Conditioning
LEED	Leadership in Energy and Environmental Design
NC	Department of Veterans Affairs National Cemetery
NCA	Department of Veterans Affairs National Cemetery Administration
NEBB	National Environmental Balancing Bureau
O&M	Operations & Maintenance
OPR	Owner’s Project Requirements
PFC	Pre-Functional Checklist
PFT	Pre-Functional Test
SD	Schematic Design
SO	Site Observation
TAB	Test Adjust and Balance
VA	Department of Veterans Affairs
VAMC	VA Medical Center
VA CFM	VA Office of Construction and Facilities Management
VACO	VA Central Office
VA PM	VA Project Manager
VA-COR	VA Contracting Officer Representative
USGBC	United States Green Building Council

1.6 DEFINITIONS

Acceptance Phase Commissioning: Commissioning tasks executed after most construction has been completed, most Site Observations and Static Tests have been completed and Pre-Functional Testing has been completed

and accepted. The main commissioning activities performed during this phase are verification that the installed systems are functional by conducting Systems Functional Performance tests and Owner Training.

Accuracy: The capability of an instrument to indicate the true value of a measured quantity.

Back Check: A back check is a verification that an agreed upon solution to a design comment has been adequately addressed in a subsequent design review

Basis of Design (BOD): The Engineer's Basis of Design is comprised of two components: the Design Criteria and the Design Narrative, these documents record the concepts, calculations, decisions, and product selections used to meet the Owner's Project Requirements (OPR) and to satisfy applicable regulatory requirements, standards, and guidelines.

Benchmarks: Benchmarks are the comparison of a building's energy usage to other similar buildings and to the building itself.. For example, ENERGY STAR Portfolio Manager is a frequently used and nationally recognized building energy benchmarking tool.

Building Information Modeling (BIM): Building Information Modeling is a parametric database which allows a building to be designed and constructed virtually in 3D, and provides reports both in 2D views and as schedules. This electronic information can be extracted and reused for pre-populating facility management CMMS systems. Building Systems Commissioning (BSC): NEBB acronym used to designate its commissioning program.

Calibrate: The act of comparing an instrument of unknown accuracy with a standard of known accuracy to detect, correlate, report, or eliminate by adjustment any variation in the accuracy of the tested instrument.

CCTV: Closed circuit Television. Normally used for security surveillance and alarm detections as part of a special electrical security system.

COBie: Construction Operations Building Information Exchange (COBie) is an electronic industry data format used to transfer information developed during design, construction, and commissioning into the Computer Maintenance Management Systems (CMMS) used to operate facilities. See the Whole Building Design Guide website for further information (http://www.wbdg.org/resources/cobie.php)

Commissionability: Defines a design component or construction process that has the necessary elements that will allow a system or component to be effectively measured, tested, operated and commissioned

Commissioning Agent (CxA): The qualified Commissioning Professional who administers the Cx process by managing the Cx team and overseeing the Commissioning Process. Where CxA is used in this specification it means the Commissioning Agent, members of his staff or appointed members of the commissioning team. Note that LEED uses the term Commissioning Authority in lieu of Commissioning Agent.

Commissioning Checklists: Lists of data or inspections to be verified to ensure proper system or component installation, operation, and function. Verification checklists are developed and used during all phases of the commissioning process to verify that the Owner's Project Requirements (OPR) is being achieved.

Commissioning Design Review: The commissioning design review is a collaborative review of the design professionals design documents for items pertaining to the following: owner's project requirements; basis of design; operability and maintainability (O&M) including documentation; functionality; training; energy efficiency, control systems' sequence of operations including building automation system features; commissioning specifications and the ability to functionally test the systems.

Commissioning Issue: A condition identified by the Commissioning Agent or other member of the Commissioning Team that adversely affects the commissionability, operability, maintainability, or functionality of a system, equipment, or component. A condition that is in conflict with the Contract Documents and/or performance requirements of the installed systems and components. (See also – Commissioning Observation).

Commissioning Manager (CxM): A qualified individual appointed by the Contractor to manage the commissioning process on behalf of the Contractor.

Commissioning Observation: An issue identified by the Commissioning Agent or other member of the Commissioning Team that does not conform to the project OPR, contract documents or standard industry best practices. (See also Commissioning Issue)

Commissioning Plan: A document that outlines the commissioning process, commissioning scope and defines responsibilities, processes, schedules, and the documentation requirements of the Commissioning Process.

Commissioning Process: A quality focused process for enhancing the delivery of a project. The process focuses upon verifying and documenting that the facility and all of its systems, components, and assemblies are planned, designed, installed, tested, can be operated, and maintained to meet the Owner's Project Requirements.

Commissioning Report: The final commissioning document which presents the commissioning process results for the project. Cx reports include an executive summary, the commissioning plan, issue log, correspondence, and all appropriate check sheets and test forms.

Commissioning Representative (CxR): An individual appointed by a sub-contractor to manage the commissioning process on behalf of the sub-contractor.

Commissioning Specifications: The contract documents that detail the objective, scope and implementation of the commissioning process as developed in the Commissioning Plan.

Commissioning Team: Individual team members whose coordinated actions are responsible for implementing the Commissioning Process.

Construction Phase Commissioning: All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

Contract Documents (CD): Contract documents include design and construction contracts, price agreements and procedure agreements. Contract Documents also include all final and complete drawings, specifications and all applicable contract modifications or supplements.

Construction Phase Commissioning (CPC): All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

Coordination Drawings: Drawings showing the work of all trades that are used to illustrate that equipment can be installed in the space allocated without compromising equipment function or access for maintenance and replacement. These drawings graphically illustrate and dimension manufacturers’ recommended maintenance clearances. On mechanical projects, coordination drawings include structural steel,

ductwork, major piping and electrical conduit and show the elevations and locations of the above components.

Data Logging: The monitoring and recording of temperature, flow, current, status, pressure, etc. of equipment using stand-alone data recorders.

Deferred System Test: Tests that cannot be completed at the end of the acceptance phase due to ambient conditions, schedule issues or other conditions preventing testing during the normal acceptance testing period.

Deficiency: See “Commissioning Issue”.

Design Criteria: A listing of the VA Design Criteria outlining the project design requirements, including its source. These are used during the design process to show the design elements meet the OPR.

Design Intent: The overall term that includes the OPR and the BOD. It is a detailed explanation of the ideas, concepts, and criteria that are defined by the owner to be important. The design intent documents are utilized to provide a written record of these ideas, concepts and criteria.

Design Narrative: A written description of the proposed design solutions that satisfy the requirements of the OPR.

Design Phase Commissioning (DPC): All commissioning tasks executed during the design phase of the project.

Environmental Systems: Systems that use a combination of mechanical equipment, airflow, water flow and electrical energy to provide heating, ventilating, air conditioning, humidification, and dehumidification for the purpose of human comfort or process control of temperature and humidity.

Executive Summary: A section of the Commissioning report that reviews the general outcome of the project. It also includes any unresolved issues, recommendations for the resolution of unresolved issues and all deferred testing requirements.

Functionality: This defines a design component or construction process which will allow a system or component to operate or be constructed in a manner that will produce the required outcome of the OPR.

Functional Test Procedure (FTP): A written protocol that defines methods, steps, personnel, and acceptance criteria for tests conducted

on components, equipment, assemblies, systems, and interfaces among systems.

Industry Accepted Best Practice: A design component or construction process that has achieved industry consensus for quality performance and functionality. Refer to the current edition of the NEBB Design Phase Commissioning Handbook for examples.

Installation Verification: Observations or inspections that confirm the system or component has been installed in accordance with the contract documents and to industry accepted best practices.

Integrated System Testing: Integrated Systems Testing procedures entail testing of multiple integrated systems performance to verify proper functional interface between systems. Typical Integrated Systems Testing includes verifying that building systems respond properly to loss of utility, transfer to emergency power sources, re-transfer from emergency power source to normal utility source; interface between HVAC controls and Fire Alarm systems for equipment shutdown, interface between Fire Alarm system and elevator control systems for elevator recall and shutdown; interface between Fire Alarm System and Security Access Control Systems to control access to spaces during fire alarm conditions; and other similar tests as determined for each specific project.

Issues Log: A formal and ongoing record of problems or concerns – and their resolution – that have been raised by members of the Commissioning Team during the course of the Commissioning Process.

Lessons Learned Workshop: A workshop conducted to discuss and document project successes and identify opportunities for improvements for future projects.

Maintainability: A design component or construction process that will allow a system or component to be effectively maintained. This includes adequate room for access to adjust and repair the equipment. Maintainability also includes components that have readily obtainable repair parts or service.

Manual Test: Testing using hand-held instruments, immediate control system readouts or direct observation to verify performance (contrasted to analyzing monitored data taken over time to make the ‘observation’).

Owner’s Project Requirements (OPR): A written document that details the project requirements and the expectations of how the building and its

systems will be used and operated. These include project goals, measurable performance criteria, cost considerations, benchmarks, success criteria, and supporting information.

Peer Review: A formal in-depth review separate from the commissioning review processes. The level of effort and intensity is much greater than a typical commissioning facilitation or extended commissioning review. The VA usually hires an independent third-party (called the IDIQ A/E) to conduct peer reviews.

Precision: The ability of an instrument to produce repeatable readings of the same quantity under the same conditions. The precision of an instrument refers to its ability to produce a tightly grouped set of values around the mean value of the measured quantity.

Pre-Design Phase Commissioning: Commissioning tasks performed prior to the commencement of design activities that includes project programming and the development of the commissioning process for the project

Pre-Functional Checklist (PFC): A form used by the contractor to verify that appropriate components are onsite, correctly installed, set up, calibrated, functional and ready for functional testing.

Pre-Functional Test (PFT): An inspection or test that is done before functional testing. PFT’s include installation verification and system and component start up tests.

Procedure or Protocol: A defined approach that outlines the execution of a sequence of work or operations. Procedures are used to produce repeatable and defined results.

Range: The upper and lower limits of an instrument’s ability to measure the value of a quantity for which the instrument is calibrated.

Resolution: This word has two meanings in the Cx Process. The first refers to the smallest change in a measured variable that an instrument can detect. The second refers to the implementation of actions that correct a tested or observed deficiency.

Site Observation Visit: On-site inspections and observations made by the Commissioning Agent for the purpose of verifying component, equipment, and system installation, to observe contractor testing, equipment start-up procedures, or other purposes.

Site Observation Reports (SO): Reports of site inspections and observations made by the Commissioning Agent. Observation reports are

intended to provide early indication of an installation issue which will need correction or analysis.

Special System Inspections: Inspections required by a local code authority prior to occupancy and are not normally a part of the commissioning process.

Static Tests: Tests or inspections that validate a specified static condition such as pressure testing. Static tests may be specification or code initiated.

Start Up Tests: Tests that validate the component or system is ready for automatic operation in accordance with the manufactures requirements.

Systems Manual: A system-focused composite document that includes all information required for the owners operators to operate the systems.

Test Procedure: A written protocol that defines methods, personnel, and expectations for tests conducted on components, equipment, assemblies, systems, and interfaces among systems.

Testing: The use of specialized and calibrated instruments to measure parameters such as: temperature, pressure, vapor flow, air flow, fluid flow, rotational speed, electrical characteristics, velocity, and other data in order to determine performance, operation, or function.

Testing, Adjusting, and Balancing (TAB): A systematic process or service applied to heating, ventilating and air-conditioning (HVAC) systems and other environmental systems to achieve and document air and hydronic flow rates. The standards and procedures for providing these services are referred to as “Testing, Adjusting, and Balancing” and are described in the Procedural Standards for the Testing, Adjusting and Balancing of Environmental Systems, published by NEBB or AABC.

Thermal Scans: Thermographic pictures taken with an Infrared Thermographic Camera. Thermographic pictures show the relative temperatures of objects and surfaces and are used to identify leaks, thermal bridging, thermal intrusion, electrical overload conditions, moisture containment, and insulation failure.

Training Plan: A written document that details, in outline form the expectations of the operator training. Training agendas should include instruction on how to obtain service, operate, startup, shutdown and maintain all systems and components of the project.

Trending: Monitoring over a period of time with the building automation system.

Unresolved Commissioning Issue: Any Commissioning Issue that, at the time that the Final Report or the Amended Final Report is issued that has not been either resolved by the construction team or accepted by the VA. Validation: The process by which work is verified as complete and operating correctly:

1. First party validation occurs when a firm or individual verifying the task is the same firm or individual performing the task.
2. Second party validation occurs when the firm or individual verifying the task is under the control of the firm performing the task or has other possibilities of financial conflicts of interest in the resolution (Architects, Designers, General Contractors and Third Tier Subcontractors or Vendors).
3. Third party validation occurs when the firm verifying the task is not associated with or under control of the firm performing or designing the task.

Verification: The process by which specific documents, components, equipment, assemblies, systems, and interfaces among systems are confirmed to comply with the criteria described in the Owner’s Project Requirements.

Warranty Phase Commissioning: Commissioning efforts executed after a project has been completed and accepted by the Owner. Warranty Phase Commissioning includes follow-up on verification of system performance, measurement and verification tasks and assistance in identifying warranty issues and enforcing warranty provisions of the construction contract.

Warranty Visit: A commissioning meeting and site review where all outstanding warranty issues and deferred testing is reviewed and discussed.

Whole Building Commissioning: Commissioning of building systems such as Building Envelope, HVAC, Electrical, Special Electrical (Fire Alarm, Security & Communications), Plumbing and Fire Protection as described in this specification.

1.7 SYSTEMS TO BE COMMISSIONED

A. Commissioning of a system or systems specified for this project is part of the construction process. Documentation and testing of these

systems, as well as training of the VA's Operation and Maintenance personnel, is required in cooperation with the VA and the Commissioning Agent.

B. The following systems will be commissioned as part of this project:

Systems To Be Commissioned	
System	**Description**
Building Exterior Closure *(Not in project scope)*	
Specialties *(Not in project scope)*	
Equipment *(Not in project scope)*	
Conveying Equipment *(Not in project scope)*	
Fire Suppression	
Fire Sprinkler Systems	Wet pipe system, dry pipe system, pre-action system, special agent systems
Plumbing	
Plumbing fixtures	Stainless steel, stops, escutcheons, laminar flow control devices, carriers, water closets, lavatories, sinks, drinking water dispensers, emergency fixtures.
HVAC	
Direct Digital Control System**	Operator Interface Computer, Operator Work Station (including graphics, point mapping, trends, alarms), Network Communications Modules and Wiring, Integration Panels. [DDC Control panels will be commissioned with the systems controlled by the panel]
HVAC Air Handling Systems**	Air handling Units, packaged rooftop AHU, Outdoor Air conditioning units, humidifiers, DDC control panels

Systems To Be Commissioned	
System	**Description**
HVAC Ventilation/Exhaust Systems	General exhaust, toilet exhaust, laboratory exhaust, isolation exhaust, room pressurization control systems
HVAC Terminal Unit Systems**/***	VAV Terminal Units, CAV terminal units, fan coil units, fin-tube radiation, unit heaters
Decentralized Unitary HVAC Systems*	Split-system HVAC systems, controls, interface with facility DDC
Electrical	
Low-Voltage Distribution System	Normal power distribution system, Life-safety power distribution system, critical power distribution system, equipment power distribution system, switchboards, distribution panels, panelboards, verify breaker testing results (injection current, etc)
Lighting & Lighting Control** Systems	Emergency lighting, occupancy sensors, lighting control systems, architectural dimming systems, theatrical dimming systems, exterior lighting and controls
Communications	
Grounding & Bonding System	Witness 3rd party testing, review reports
Public Address & Mass Notification Systems	Witness 3rd party testing, review reports
Intercom & Program Systems	Witness 3rd party testing, review reports
Nurse Call & Code Blue Systems	Witness 3rd party testing, review reports
Electronic Safety and Security	
Fire Detection and Alarm System	100% device acceptance testing, battery draw-down test, verify system monitoring, verify interface with other systems.
Renewable Energy Sources *(Not in project scope)*	

Systems To Be Commissioned	
System	**Description**
Site Utilities *(Not in project scope)*	
Transportation *(Not in project scope)*	
Integrated Systems Tests *(Not in project scope)*	
Table Notes	
** Denotes systems that LEED requires to be commissioned to comply with the LEED Fundamental Commissioning pre-requisite. *** Full functional testing (including sensor calibration and air/water balancing) shall be performed on **all** VAV boxes. Cx agent, TAB contractor and Controls contractor will work together during functional testing of VAV boxes.	

1.8 COMMISSIONING TEAM

A. The commissioning team shall consist of, but not be limited to, representatives of Contractor, including Project Superintendent and subcontractors, installers, schedulers, suppliers, and specialists deemed appropriate by the Department of Veterans Affairs (VA) and Commissioning Agent.

B. Members Appointed by Contractor:

1. Contractor' Commissioning Manager: The designated person, company, or entity that plans, schedules and coordinates the commissioning activities for the construction team.
2. Contractor's Commissioning Representative(s): Individual(s), each having authority to act on behalf of the entity he or she represents, explicitly organized to implement the commissioning process through coordinated actions.

C. Members Appointed by VA:

1. Commissioning Agent: The designated person, company, or entity that plans, schedules, and coordinates the commissioning team to implement the commissioning process. The VA will engage the CxA under a separate contract.

2. User: Representatives of the facility user and operation and maintenance personnel.
3. A/E: Representative of the Architect and engineering design professionals.

1.9 VA'S COMMISSIONING RESPONSIBILITIES

A. Appoint an individual, company or firm to act as the Commissioning Agent.
B. Assign operation and maintenance personnel and schedule them to participate in commissioning team activities including, but not limited to, the following:
   1. Coordination meetings.
   2. Training in operation and maintenance of systems, subsystems, and equipment.
   3. Testing meetings.
   4. Witness and assist in Systems Functional Performance Testing.
   5. Demonstration of operation of systems, subsystems, and equipment.
C. Provide the Construction Documents, prepared by Architect and approved by VA, to the Commissioning Agent and for use in managing the commissioning process, developing the commissioning plan, systems manuals, and reviewing the operation and maintenance training plan.

1.10 CONTRACTOR'S COMMISSIONING RESPONSIBILITIES

A. The Contractor shall assign a Commissioning Manager to manage commissioning activities of the Contractor, and subcontractors.
B. The Contractor shall ensure that the commissioning responsibilities outlined in these specifications are included in all subcontracts and that subcontractors comply with the requirements of these specifications.
C. The Contractor shall ensure that each installing subcontractor shall assign representatives with expertise and authority to act on behalf of the subcontractor and schedule them to participate in and perform commissioning team activities including, but not limited to, the following:
   1. Participate in commissioning coordination meetings.
   2. Conduct operation and maintenance training sessions in accordance with approved training plans.

3. Verify that Work is complete and systems are operational according to the Contract Documents, including calibration of instrumentation and controls.
4. Evaluate commissioning issues and commissioning observations identified in the Commissioning Issues Log, field reports, test reports or other commissioning documents. In collaboration with entity responsible for system and equipment installation, recommend corrective action.
5. Review and comment on commissioning documentation on a weekly basis.
6. Participate in meetings to coordinate Systems Functional Performance Testing.
7. Provide schedule for operation and maintenance data submittals, equipment startup, and testing to Commissioning Agent for incorporation into the commissioning plan.
8. Provide information to the Commissioning Agent for developing commissioning plan.
9. Participate in training sessions for VA's operation and maintenance personnel.
10. Provide technicians who are familiar with the construction and operation of installed systems and who shall develop specific test procedures to conduct Systems Functional Performance Testing of installed systems.
11. TAB contractor required to provide pencil copies of balancing documentation to Commissioning agent for review prior to completion of functional testing for each phase of construction. In addition, final TAB reports are to be completed and submitted to the VA within 2 weeks following phase construction completion.

1.11 COMMISSIONING AGENT’S RESPONSIBILITIES

A. Organize and lead the commissioning team.
B. Prepare the commissioning plan. See Paragraph 1.11-A of this specification Section for further information.
C. Review and comment on selected submittals from the Contractor for general conformance with the Construction Documents. Review and comment on the ability to test and operate the system and/or equipment, including providing gages, controls and other components required to operate, maintain, and test the system. Review and comment on

performance expectations of systems and equipment and interfaces between systems relating to the Construction Documents.

D. At the beginning of the construction phase, conduct an initial construction phase coordination meeting for the purpose of reviewing the commissioning activities and establishing tentative schedules for operation and maintenance submittals; operation and maintenance training sessions; TAB Work; Pre-Functional Checklists, Systems Functional Performance Testing; and project completion.

E. Convene commissioning team meetings for the purpose of coordination, communication, and conflict resolution; discuss status of the commissioning processes. Responsibilities include arranging for facilities, preparing agenda and attendance lists, and notifying participants. The Commissioning Agent shall prepare and distribute minutes to commissioning team members and attendees within five workdays of the commissioning meeting.

F. Observe construction and report progress, observations and issues. Observe systems and equipment installation for adequate accessibility for maintenance and component replacement or repair, and for general conformance with the Construction Documents.

G. Prepare Project specific Pre-Functional Checklists and Systems Functional Performance Test procedures.

H. Coordinate Systems Functional Performance Testing schedule with the Contractor.

I. Witness selected systems startups.

J. Verify selected Pre-Functional Checklists completed and submitted by the Contractor.

K. Witness and document Systems Functional Performance Testing.

L. Compile test data, inspection reports, and certificates and include them in the systems manual and commissioning report.

M. Review and comment on operation and maintenance (O&M) documentation and systems manual outline for compliance with the Contract Documents. Operation and maintenance documentation requirements are specified in Paragraph 1.25, Section 01 00 00 GENERAL REQUIREMENTS.

N. Review operation and maintenance training program developed by the Contractor. Verify training plans provide qualified instructors to conduct operation and maintenance training.

O. Prepare commissioning Field Observation Reports.

P. Prepare the Final Commissioning Report.

Q. Return to the site at 10 months into the 12 month warranty period and review with facility staff the current building operation and the condition of outstanding issues related to the original and seasonal Systems Functional Performance Testing. Also interview facility staff and identify problems or concerns they have operating the building as originally intended. Make suggestions for improvements and for recording these changes in the O&M manuals. Identify areas that may come under warranty or under the original construction contract. Assist facility staff in developing reports, documents and requests for services to remedy outstanding problems.

R. Assemble the final commissioning documentation, including the Final Commissioning Report and Addendum to the Final Commissioning Report.

1.12 COMMISSIONING DOCUMENTATION

A. Commissioning Plan: A document, prepared by Commissioning Agent that outlines the schedule, allocation of resources, and documentation requirements of the commissioning process, and shall include, but is not limited, to the following:

1. Plan for delivery and review of submittals, systems manuals, and other documents and reports. Identification of the relationship of these documents to other functions and a detailed description of submittals that are required to support the commissioning processes. Submittal dates shall include the latest date approved submittals must be received without adversely affecting commissioning plan.
2. Description of the organization, layout, and content of commissioning documentation (including systems manual) and a detailed description of documents to be provided along with identification of responsible parties.
3. Identification of systems and equipment to be commissioned.
4. Schedule of Commissioning Coordination meetings.
5. Identification of items that must be completed before the next operation can proceed.
6. Description of responsibilities of commissioning team members.
7. Description of observations to be made.
8. Description of requirements for operation and maintenance training.
9. Schedule for commissioning activities with dates coordinated with overall construction schedule.

10. Process and schedule for documenting changes on a continuous basis to appear in Project Record Documents.
11. Process and schedule for completing prestart and startup checklists for systems, subsystems, and equipment to be verified and tested.
12. Preliminary Systems Functional Performance Test procedures.

B. Systems Functional Performance Test Procedures: The Commissioning Agent will develop Systems Functional Performance Test Procedures for each system to be commissioned, including subsystems, or equipment and interfaces or interlocks with other systems. Systems Functional Performance Test Procedures will include a separate entry, with space for comments, for each item to be tested. Preliminary Systems Functional Performance Test Procedures will be provided to the VA, Architect/Engineer, and Contractor for review and comment. The Systems Performance Test Procedure will include test procedures for each mode of operation and provide space to indicate whether the mode under test responded as required. Each System Functional Performance Test procedure, regardless of system, subsystem, or equipment being tested, shall include, but not be limited to, the following:

1. Name and identification code of tested system.
2. Test number.
3. Time and date of test.
4. Indication of whether the record is for a first test or retest following correction of a problem or issue.
5. Dated signatures of the person performing test and of the witness, if applicable.
6. Individuals present for test.
7. Observations and Issues.
8. Issue number, if any, generated as the result of test.

C. Pre-Functional Checklists: The Commissioning Agent will prepare Pre-Functional Checklists. Pre-Functional Checklists shall be completed and signed by the Contractor, verifying that systems, subsystems, equipment, and associated controls are ready for testing. The Commissioning Agent will spot check Pre-Functional Checklists to verify accuracy and readiness for testing. Inaccurate or incomplete Pre-Functional Checklists shall be returned to the Contractor for correction and resubmission.

D. Test and Inspection Reports: The Commissioning Agent will record test data, observations, and measurements on Systems Functional Performance Test Procedure. The report will also include recommendation for system acceptance or non-acceptance. Photographs, forms, and other means appropriate for the application shall be included with data. Commissioning Agent Will compile test and inspection reports and test and inspection certificates and include them in systems manual and commissioning report.

E. Corrective Action Documents: The Commissioning Agent will document corrective action taken for systems and equipment that fail tests. The documentation will include any required modifications to systems and equipment and/or revisions to test procedures, if any. The Commissioning Agent will witness and document any retesting of systems and/or equipment requiring corrective action and document retest results.

F. Commissioning Issues Log: The Commissioning Agent will prepare and maintain Commissioning Issues Log that describes Commissioning Issues and Commissioning Observations that are identified during the Commissioning process. These observations and issues include, but are not limited to, those that are at variance with the Contract Documents. The Commissioning Issues Log will identify and track issues as they are encountered, the party responsible for resolution, progress toward resolution, and document how the issue was resolved. The Master Commissioning Issues Log will also track the status of unresolved issues.

1. Creating a Commissioning Issues Log Entry:
   a. Identify the issue with unique numeric or alphanumeric identifier by which the issue may be tracked.
   b. Assign a descriptive title for the issue.
   c. Identify date and time of the issue.
   d. Identify test number of test being performed at the time of the observation, if applicable, for cross reference.
   e. Identify system, subsystem, and equipment to which the issue applies.
   f. Identify location of system, subsystem, and equipment.
   g. Include information that may be helpful in diagnosing or evaluating the issue.

h. Note recommended corrective action.
i. Identify commissioning team member responsible for corrective action.
j. Identify expected date of correction.
k. Identify person that identified the issue.

2. Documenting Issue Resolution:
a. Log date correction is completed or the issue is resolved.
b. Describe corrective action or resolution taken. Include description of diagnostic steps taken to determine root cause of the issue, if any.
c. Identify changes to the Contract Documents that may require action.
d. State that correction was completed and system, subsystem, and equipment are ready for retest, if applicable.
e. Identify person(s) who corrected or resolved the issue.
f. Identify person(s) verifying the issue resolution.

G. Final Commissioning Report: The Commissioning Agent will document results of the commissioning process, including unresolved issues, and performance of systems, subsystems, and equipment. The Commissioning Report will indicate whether systems, subsystems, and equipment have been properly installed and are performing according to the Contract Documents. This report will be used by the Department of Veterans Affairs when determining that systems will be accepted. This report will be used to evaluate systems, subsystems, and equipment and will serve as a future reference document during VA occupancy and operation. It shall describe components and performance that exceed requirements of the Contract Documents and those that do not meet requirements of the Contract Documents. The commissioning report will include, but is not limited to, the following:

1. Lists and explanations of substitutions; compromises; variances with the Contract Documents; record of conditions; and, if appropriate, recommendations for resolution. Design Narrative documentation maintained by the Commissioning Agent.
2. Commissioning plan.
3. Pre-Functional Checklists completed by the Contractor, with annotation of the Commissioning Agent review and spot check.

4. Systems Functional Performance Test Procedures, with annotation of test results and test completion.
5, Commissioning Issues Log.
6. Listing of deferred and off season test(s) not performed, including the schedule for their completion.

H. Addendum to Final Commissioning Report: The Commissioning Agent will prepare an Addendum to the Final Commissioning Report near the end of the Warranty Period. The Addendum will indicate whether systems, subsystems, and equipment are complete and continue to perform according to the Contract Documents. The Addendum to the Final Commissioning Report shall include, but is not limited to, the following:

1. Documentation of deferred and off season test(s) results.
2. Completed Systems Functional Performance Test Procedures for off season test(s).
3. Documentation that unresolved system performance issues have been resolved.
4. Updated Commissioning Issues Log, including status of unresolved issues.
5. Identification of potential Warranty Claims to be corrected by the Contractor.

I. Systems Manual: The Commissioning Agent will gather required information and compile the Systems Manual. The Systems Manual will include, but is not limited to, the following:

1. Design Narrative, including system narratives, schematics, single-line diagrams, flow diagrams, equipment schedules, and changes made throughout the Project.
2. Reference to Final Commissioning Plan.
3. Reference to Final Commissioning Report.
4. Approved Operation and Maintenance Data as submitted by the Contractor.

1.13 SUBMITTALS

A. Preliminary Commissioning Plan Submittal: The Commissioning Agent has prepared a Preliminary Commissioning Plan based on the final Construction Documents. The Preliminary Commissioning Plan is included as an Appendix to this specification section. The Preliminary

Commissioning Plan is provided for information only. It contains preliminary information about the following commissioning activities:

1. The Commissioning Team: A list of commissioning team members by organization.
2. Systems to be commissioned. A detailed list of systems to be commissioned for the project. This list also provides preliminary information on systems/equipment submittals to be reviewed by the Commissioning Agent; preliminary information on Pre-Functional Checklists that are to be completed; preliminary information on Systems Performance Testing, including information on testing sample size (where authorized by the VA).
3. Commissioning Team Roles and Responsibilities: Preliminary roles and responsibilities for each Commissioning Team member.
4. Commissioning Documents: A preliminary list of commissioning-related documents, include identification of the parties responsible for preparation, review, approval, and action on each document.
5. Commissioning Activities Schedule: Identification of Commissioning Activities, including Systems Functional Testing, the expected duration and predecessors for the activity.
6. Pre-Functional Checklists: Preliminary Pre-Functional Checklists for equipment, components, subsystems, and systems to be commissioned. These Preliminary Pre-Functional Checklists provide guidance on the level of detailed information the Contractor shall include on the final submission.
7. Systems Functional Performance Test Procedures: Preliminary step-by-step System Functional Performance Test Procedures to be used during Systems Functional Performance Testing. These Preliminary Systems Functional Performance procedures provide information on the level of testing rigor, and the level of Contractor support required during performance of system’s testing.

B. Final Commissioning Plan Submittal: Based on the Final Construction Documents and the Contractor’s project team, the Commissioning Agent will prepare the Final Commissioning Plan as described in this section. The Commissioning Agent will submit three hard copies and three sets of electronic files of Final Commissioning Plan. The Contractor shall review the Commissioning Plan and provide any comments to the VA. The

Commissioning Agent will incorporate review comments into the Final Commissioning Plan as directed by the VA.

C. Systems Functional Performance Test Procedure: The Commissioning Agent will submit preliminary Systems Functional Performance Test Procedures to the Contractor, and the VA for review and comment. The Contractor shall return review comments to the VA and the Commissioning Agent. The VA will also return review comments to the Commissioning Agent. The Commissioning Agent will incorporate review comments into the Final Systems Functional Test Procedures to be used in Systems Functional Performance Testing.

D. Pre-Functional Checklists: The Commissioning Agent will submit Pre-Functional Checklists to be completed by the Contractor.

E. Test and Inspection Reports: The Commissioning Agent will submit test and inspection reports to the VA with copies to the Contractor and the Architect/Engineer.

F. Corrective Action Documents: The Commissioning Agent will submit corrective action documents to the VA COR with copies to the Contractor and Architect.

G. Preliminary Commissioning Report Submittal: The Commissioning Agent will submit three electronic copies of the preliminary commissioning report. One electronic copy, with review comments, will be returned to the Commissioning Agent for preparation of the final submittal.

H. Final Commissioning Report Submittal: The Commissioning Agent will submit four sets of electronically formatted information of the final commissioning report to the VA. The final submittal will incorporate comments as directed by the VA.

I. Data for Commissioning:

1. The Commissioning Agent will request in writing from the Contractor specific information needed about each piece of commissioned equipment or system to fulfill requirements of the Commissioning Plan.
2. The Commissioning Agent may request further documentation as is necessary for the commissioning process or to support other VA data collection requirements, including Construction Operations Building Information Exchange (COBIE), Building Information Modeling (BIM), etc.

1.14 COMMISSIONING PROCESS

A. The Commissioning Agent will be responsible for the overall management of the commissioning process as well as coordinating scheduling of commissioning tasks with the VA and the Contractor. As directed by the VA, the Contractor shall incorporate Commissioning tasks, including, but not limited to, Systems Functional Performance Testing (including predecessors) with the Master Construction Schedule.

B. Within 30 days of contract award, the Contractor shall designate a specific individual as the Commissioning Manager (CxM) to manage and lead the commissioning effort on behalf of the Contractor. The Commissioning Manager shall be the single point of contact and communications for all commissioning related services by the Contractor.

C. Within 45 days of contract award, the Contractor shall ensure that each subcontractor designates specific individuals as Commissioning Representatives (CXR) to be responsible for commissioning related tasks. The Contractor shall ensure the designated Commissioning Representatives participate in the commissioning process as team members providing commissioning testing services, equipment operation, adjustments, and corrections if necessary. The Contractor shall ensure that all Commissioning Representatives shall have sufficient authority to direct their respective staff to provide the services required, and to speak on behalf of their organizations in all commissioning related contractual matters.

1.15 QUALITY ASSURANCE

A. Instructor Qualifications: Factory authorized service representatives shall be experienced in training, operation, and maintenance procedures for installed systems, subsystems, and equipment.

B. Test Equipment Calibration: The Contractor shall comply with test equipment manufacturer's calibration procedures and intervals. Recalibrate test instruments immediately whenever instruments have been repaired following damage or dropping. Affix calibration tags to test instruments. Instruments shall have been calibrated within six months prior to use.

1.16 COORDINATION

A. Management: The Commissioning Agent will coordinate the commissioning activities with the VA and Contractor. The Commissioning Agent will submit commissioning documents and information to the VA. All commissioning team members shall work together to fulfill their contracted responsibilities and meet the objectives of the contract documents.

B. Scheduling: The Contractor shall work with the Commissioning Agent and the VA to incorporate the commissioning activities into the construction schedule. The Commissioning Agent will provide sufficient information (including, but not limited to, tasks, durations and predecessors) on commissioning activities to allow the Contractor and the VA to schedule commissioning activities. All parties shall address scheduling issues and make necessary notifications in a timely manner in order to expedite the project and the commissioning process. The Contractor shall update the Master Construction as directed by the VA.

C. Initial Schedule of Commissioning Events: The Commissioning Agent will provide the initial schedule of primary commissioning events in the Commissioning Plan and at the commissioning coordination meetings. The Commissioning Plan will provide a format for this schedule. As construction progresses, more detailed schedules will be developed by the Contractor with information from the Commissioning Agent.

D. Commissioning Coordinating Meetings: The Commissioning Agent will conduct periodic Commissioning Coordination Meetings of the commissioning team to review status of commissioning activities, to discuss scheduling conflicts, and to discuss upcoming commissioning process activities.

E. Pretesting Meetings: The Commissioning Agent will conduct pretest meetings of the commissioning team to review startup reports, Pre-Functional Checklist results, Systems Functional Performance Testing procedures, testing personnel and instrumentation requirements.

F. Systems Functional Performance Testing Coordination: The Contractor shall coordinate testing activities to accommodate required quality assurance and control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting. The Contractor shall coordinate the schedule times for tests, inspections, obtaining samples, and similar activities.

PART 2 - PRODUCTS

2.1 TEST EQUIPMENT

A. The Contractor shall provide all standard and specialized testing equipment required to perform Systems Functional Performance Testing. Test equipment required for Systems Functional Performance Testing will be identified in the detailed System Functional Performance Test Procedure prepared by the Commissioning Agent.

B. Data logging equipment and software required to test equipment shall be provided by the Contractor.

C. All testing equipment shall be of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified in the Specifications. If not otherwise noted, the following minimum requirements apply: Temperature sensors and digital thermometers shall have a certified calibration within the past year to an accuracy of 0.5 ^{o}C (1.0 ^{o}F) and a resolution of + or - 0.1 ^{o}C (0.2 ^{o}F). Pressure sensors shall have an accuracy of + or - 2.0% of the value range being measured (not full range of meter) and have been calibrated within the last year. All equipment shall be calibrated according to the manufacturer's recommended intervals and following any repairs to the equipment. Calibration tags shall be affixed or certificates readily available.

PART 3 - EXECUTION

3.1 COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES

A. The following table outlines the roles and responsibilities for the Commissioning Team members during the Construction Phase:

Construction Phase		CxA = Commissioning Agent COR = Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes
Meetings	Construction Commissioning Kick Off meeting	L	A	P	P	O	
	Commissioning Meetings	L	A	P	P	O	
	Project Progress Meetings	P	A	P	L	O	
	Controls Meeting	L	A	P	P	O	
Coordination	Coordinate with [OGC's, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support the OPR and BOD.	L	A	P	P	N/A	
Cx Plan & Spec	Final Commissioning Plan	L	A	R	R	O	
Schedules	Duration Schedule for Commissioning Activities	L	A	R	R	N/A	

Construction Phase		CxA = Commissioning Agent					L = Lead
Commissioning Roles & Responsibilities		COR = Contracting Officer Representative					P = Participate
		A/E = Design Arch/Engineer					A = Approve
		PC = Prime Contractor					R = Review
		O&M = Gov't Facility O&M					O = Optional
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	O	
	Maintain BOD/DID on behalf of Owner	L	A	R	R	O	
Document Reviews	TAB Plan Review	L	A	R	R	O	
	Submittal and Shop Drawing Review	R	A	R	L	O	
	Review Contractor Equipment Startup Checklists	L	A	R	R	N/A	
	Review Change Orders, ASI, and RFI	L	A	R	R	N/A	
Site Observations	Witness Factory Testing	P	A	P	L	O	
	Construction Observation Site Visits	L	A	R	R	O	
Functional Test Protocols	Final Pre-Functional Checklists	L	A	R	R	O	
	Final Functional Performance Test Protocols	L	A	R	R	O	

Construction Phase		CxA = Commissioning Agent COR = Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes
Technical Activities	Issues Resolution Meetings	P	A	P	L	O	
Reports and Logs	Status Reports	L	A	R	R	O	
	Maintain Commissioning Issues Log	L	A	R	R	O	

B. The following table outlines the roles and responsibilities for the Commissioning Team members during the Acceptance Phase:

Acceptance Phase		CxA = Commissioning Agent COR = Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes
Meetings	Commissioning Meetings	L	A	P	P	O	
	Project Progress Meetings	P	A	P	L	O	
	Pre-Test Coordination Meeting	L	A	P	P	O	

Acceptance Phase		CxA = Commissioning Agent COR = Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes
	Lessons Learned and Commissioning Report Review Meeting	L	A	P	P	O	
Coordination	Coordinate with [OGC's, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support OPR and BOD	L	P	P	P	O	
Cx Plan & Spec	Maintain/Update Commissioning Plan	L	A	R	R	O	
Schedules	Prepare Functional Test Schedule	L	A	R	R	O	
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	O	
	Maintain BOD/DID on behalf of Owner	L	A	R	R	O	
Document Reviews	Review Completed Pre-Functional Checklists	L	A	R	R	O	
	Pre-Functional Checklist Verification	L	A	R	R	O	
	Review Operations & Maintenance Manuals	L	A	R	R	R	
	Training Plan Review	L	A	R	R	R	
	Warranty Review	L	A	R	R	O	
	Review TAB Report	L	A	R	R	O	

Acceptance Phase		CxA = Commissioning Agent COR = Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes
Site Observations	Construction Observation Site Visits	L	A	R	R	O	
	Witness Selected Equipment Startup	L	A	R	R	O	
Functional Test Protocols	TAB Verification	L	A	R	R	O	
	Systems Functional Performance Testing	L	A	P	P	P	
	Retesting	L	A	P	P	P	
Technical Activities	Issues Resolution Meetings	P	A	P	L	O	
	Systems Training	L	S	R	P	P	
Reports and Logs	Status Reports	L	A	R	R	O	
	Maintain Commissioning Issues Log	L	A	R	R	O	
	Final Commissioning Report	L	A	R	R	R	
	Prepare Systems Manuals	L	A	R	R	R	

C. The following table outlines the roles and responsibilities for the Commissioning Team members during the Warranty Phase:

Warranty Phase		CxA = Commissioning Agent COR = Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Meetings	Post-Occupancy User Review Meeting	L	A	O	P	P	
Site Observations	Periodic Site Visits	L	A	O	O	P	
Functional Test Protocols	Deferred and/or seasonal Testing	L	A	O	P	P	
Technical Activities	Issues Resolution Meetings	L	S	O	O	P	
	Post-Occupancy Warranty Checkup and review of Significant Outstanding Issues	L	A		R	P	
Reports and Logs	Final Commissioning Report Amendment	L	A		R	R	
	Status Reports	L	A		R	R	

3.2 STARTUP, INITIAL CHECKOUT, AND PRE-FUNCTIONAL CHECKLISTS

A. The following procedures shall apply to all equipment and systems to be commissioned, according to Part 1, Systems to Be Commissioned.

1. Pre-Functional Checklists are important to ensure that the equipment and systems are hooked up and operational. These ensure that Systems Functional Performance Testing may proceed without unnecessary delays. Each system to be commissioned shall have a full Pre-Functional Checklist completed by the Contractor prior to Systems Functional Performance Testing. No sampling strategies are used.
   a. The Pre-Functional Checklist will identify the trades responsible for completing the checklist. The Contractor shall ensure the appropriate trades complete the checklists.
   b. The Commissioning Agent will review completed Pre-Functional Checklists and field-verify the accuracy of the completed checklist using sampling techniques.
2. Startup and Initial Checkout Plan: The Contractor shall develop detailed startup plans for all equipment. The primary role of the Contractor in this process is to ensure that there is written documentation that each of the manufacturer recommended procedures have been completed. Parties responsible for startup shall be identified in the Startup Plan and in the checklist forms.
   a. The Contractor shall develop the full startup plan by combining (or adding to) the checklists with the manufacturer's detailed startup and checkout procedures from the O&M manual data and the field checkout sheets normally used by the Contractor. The plan shall include checklists and procedures with specific boxes or lines for recording and documenting the checking and inspections of each procedure and a summary statement with a signature block at the end of the plan.
   b. The full startup plan shall at a minimum consist of the following items:
      1) The Pre-Functional Checklists.
      2) The manufacturer's standard written startup procedures copied from the installation manuals with check boxes by each procedure and a signature block added by hand at the end.
      3) The manufacturer's normally used field checkout sheets.

c. The Commissioning Agent will submit the full startup plan to the VA and Contractor for review. Final approval will be by the VA.
d. The Contractor shall review and evaluate the procedures and the format for documenting them, noting any procedures that need to be revised or added.

3. Sensor and Actuator Calibration
   a. All field installed temperature, relative humidity, CO2 and pressure sensors and gages, and all actuators (dampers and valves) on all equipment shall be calibrated using the methods described in Division 21, Division 22, Division 23, Division 26, Division 27, and Division 28 specifications.
   b. All procedures used shall be fully documented on the Pre-Functional Checklists or other suitable forms, clearly referencing the procedures followed and written documentation of initial, intermediate and final results.
4. Execution of Equipment Startup
   a. 4 weeks prior to equipment startup, the Contractor shall schedule startup and checkout with the VA and Commissioning Agent. The performance of the startup and checkout shall be directed and executed by the Contractor.
   b. The Commissioning Agent will observe the startup procedures for selected pieces of primary equipment.
   c. The Contractor shall execute startup and provide the VA and Commissioning Agent with a signed and dated copy of the completed startup checklists, and contractor tests.
   d. Only individuals that have direct knowledge and witnessed that a line item task on the Startup Checklist was actually performed shall initial or check that item off. It is not acceptable for witnessing supervisors to fill out these forms.

3.3 DEFICIENCIES, NONCONFORMANCE, AND APPROVAL IN CHECKLISTS AND STARTUP

A. The Contractor shall clearly list any outstanding items of the initial startup and Pre-Functional Checklist procedures that were not completed successfully, at the bottom of the procedures form or on an attached sheet. The procedures form and any outstanding deficiencies shall be provided to the VA and the Commissioning Agent within two days of completion.

B. The Commissioning Agent will review the report and submit comments to the VA. The Commissioning Agent will work with the Contractor to correct and verify deficiencies or uncompleted items. The Commissioning Agent will involve the VA and others as necessary. The Contractor shall correct all areas that are noncompliant or incomplete in the checklists in a timely manner, and shall notify the VA and Commissioning Agent as soon as outstanding items have been corrected. The Contractor shall submit an updated startup report and a Statement of Correction on the original noncompliance report. When satisfactorily completed, the Commissioning Agent will recommend approval of the checklists and startup of each system to the VA.

C. The Contractor shall be responsible for resolution of deficiencies as directed the VA.

3.4 PHASED COMMISSIONING

A. The project may require startup and initial checkout to be executed in phases. This phasing shall be planned and scheduled in a coordination meeting of the VA, Commissioning Agent, and the Contractor. Results will be added to the master construction schedule and the commissioning schedule.

3.5 DDC SYSTEM TRENDING FOR COMMISSIONING

A. Trending is a method of testing as a standalone method or to augment manual testing. The Contractor shall trend any and all points of the system or systems at intervals specified below.

B. Alarms are a means to notify the system operator that abnormal conditions are present in the system. Alarms shall be structured into three tiers – Critical, Priority, and Maintenance.

1. Critical alarms are intended to be alarms that require the immediate attention of and action by the Operator. These alarms shall be displayed on the Operator Workstation in a popup style window that is graphically linked to the associated unit's graphical display. The popup style window shall be displayed on top of any active window within the screen, including non DDC system software.
2. Priority level alarms are to be printed to a printer which is connected to the Operator’s Work Station located within the engineer’s office. Additionally Priority level alarms shall be able to be monitored and viewed through an active alarm application. Priority level alarms are alarms which shall require reaction from

the operator or maintenance personnel within a normal work shift, and not immediate action.

3. Maintenance alarms are intended to be minor issues which would require examination by maintenance personnel within the following shift. These alarms shall be generated in a scheduled report automatically by the DDC system at the start of each shift. The generated maintenance report will be printed to a printer located within the engineer's office.

C. The Contractor shall provide a wireless internet network in the building for use during controls programming, checkout, and commissioning. This network will allow project team members to more effectively program, view, manipulate and test control devices while being in the same room as the controlled device.

D. The Contractor shall provide graphical trending through the DDC control system of systems being commissioned. Trending requirements are indicated below and included with the Systems Functional Performance Test Procedures. Trending shall occur before, during and after Systems Functional Performance Testing. The Contractor shall be responsible for producing graphical representations of the trended DDC points that show each system operating properly during steady state conditions as well as during the System Functional Testing. These graphical reports shall be submitted to the COR and Commissioning Agent for review and analysis before, during dynamic operation, and after Systems Functional Performance Testing. The Contractor shall provide, but not limited to, the following trend requirements and trend submissions:

1. Pre-testing, Testing, and Post-testing – Trend reports of trend logs and graphical trend plots are required as defined by the Commissioning Agent and COR. At a minimum, one trend report per mechanical system, as well as, each mechanical subsystem shall be provided. Trend reports can include up to a maximum of 50 points. The trend log points, sampling rate, graphical plot configuration, and duration will be dictated by the Commissioning Agent. At any time during the Commissioning Process the Commissioning Agent may recommend changes to aspects of trending as deemed necessary for proper system analysis. The Contractor shall implement any changes as directed by the COR. Any pre-test trend analysis comments generated by the Commissioning Team should be addressed and resolved

by the Contractor, as directed by the COR, prior to the execution of Systems Functional Performance Testing.

2. Dynamic plotting – The Contractor shall also provide dynamic plotting during Systems Functional Performance testing at frequent intervals for points determined by the Systems Functional Performance Test Procedure. The graphical plots will be formatted and plotted at durations listed in the Systems Functional Performance Test Procedure.
3. Graphical plotting - The graphical plots shall be provided with a dual y-axis allowing 15 or more trend points (series) plotted simultaneously on the graph with each series in distinct color. The plots will further require title, axis naming, legend etc. all described by the Systems Functional Performance Test Procedure. If this cannot be sufficiently accomplished directly in the Direct Digital Control System then it is the responsibility of the Contractor to plot these trend logs in Microsoft Excel.
   a. Graphical plotting shall be capable of displaying historical (up to 12 months) and dynamic trend data simultaneously.
4. The following tables indicate the points to be trended and alarmed by system. The Operational Trend Duration column indicates the trend duration for normal operations. The Testing Trend Duration column indicates the trend duration prior to Systems Functional Performance Testing and again after Systems Functional Performance Testing. The Type column indicates point type: AI = Analog Input, AO = Analog Output, DI = Digital Input, DO = Digital Output, Calc = Calculated Point. In the Trend Interval Column, COV = Change of Value. The Alarm Type indicates the alarm priority; C = Critical, P = Priority, and M = Maintenance. The Alarm Range column indicates when the point is considered in the alarm state. The Alarm Delay column indicates the length of time the point must remain in an alarm state before the alarm is recorded in the DDC. The intent is to allow minor, short-duration events to be corrected by the DDC system prior to recording an alarm.

Air Handling Unit Trending and Alarms

Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
OA Temp	AI	15 Min	24 hours	3 days	N/A		
RA Temp	AI	15 Min	24 hours	3 days	N/A		
RA Humidity	AI	15 Min	24 hours	3 days	P	>60% RH	10 min
SA Humidity	AI	15 Min	24 hours	3 days	P	>90% RH	10 min
MA Temp	AI	None	None	None	N/A		
SA Temp	AI	15 Min	24 hours	3 days	C	±5°F from SP	10 min
Heating Coil Temp	AI	15 Min	24 hours	3 days	N/A		
Return Fan Speed	AI	15 Min	24 hours	3 days	N/A		
Supply Fan Speed	AI	15 Min	24 hours	3 days	N/A		
Return Fan Speed	AI	15 Min	24 hours	3 days	N/A		
Filter #1 Status	DI	COV	None	None	M		
Filter #2 Status	DI	COV	None	None	M		
Filter #3 Status	DI	COV	None	None	M		
Filter #1 Status	AI	15 Min	None	None	M		
Filter #2 Status	AI	15 Min	None	None	M		
Filter #3 Status	AI	15 Min	None	None	M		
OA Flow	AI	15 Min	24 hours	3 days	P	±10% from SP	5 min
RA Flow	AI	15 Min	24 hours	3 days	P	±10% from SP	5 min
SA Flow	AI	15 Min	24 hours	3 days	C	±10% from SP	10 min
Duct Pressure	AI	15 Min	24 hours	3 days	C	±25% from SP	5 min
CO2 Level	AI	15 Min	24 hours	3 days	P	±10% from SP	10 min
Supply Fan Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Return Fan Status	DI	COV	24 hours	3 days	C	Status <> Command	10 Min
High Static Status	DI	COV	24 hours	3 days	P	True	1 min

Air Handling Unit Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Fire Alarm Status	DI	COV	24 hours	3 days	C	True	5 min
Freeze Stat Level 3	DI	COV	24 hours	3 days	P	True	1 min
Fire/Smoke Damper Status	DI	COV	24 hours	3 days	P	Closed	1 min
Emergency AHU Shutdown	DI	COV	24 hours	3 days	P	True	1 min
Exhaust Fan #1 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
High Static Alarm	DI	COV	24 hours	3 days	C	True	10 min
Power Failure	DI	COV	24 hours	3 days	P	True	1 min
CHW Valve Position	AO	15 Min	24 hours	3 days	N/A		
HW Valve Position	AO	15 Min	24 hours	3 days	N/A		
HUM Valve Position	AO	15 Min	24 hours	3 days	N/A		
Supply Fan S/S	DO	COV	24 hours	3 days	N/A		
Return Fan S/S	DO	COV	24 hours	3 days	N/A		
Fire/Smoke Dampers	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
AHU Energy	Calc	1 Hour	30 day	N/A	N/A		

Terminal Unit (VAV, CAV, etc.) Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Temp	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Air Flow	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
SA Temp	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Local Setpoint	AI	15 Min	12 hours	3 days	M	±10°F from SP	60 min

Terminal Unit (VAV, CAV, etc.) Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Humidity	AI	15 Min	12 hours	3 days	P	> 60% RH	5 min
Unoccupied Override	DI	COV	12 hours	3 days	M	N/A	12 Hours
Damper Position	AO	15 Minutes	12 hours	3 days	N/A		
Heating coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		

4-Pipe Fan Coil Trending and Alarms *(Not in project scope)*							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**

2-Pipe Fan Coil Unit Trending and Alarms *(Not in project scope)*							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**

Unit Heater Trending and Alarms *(Not in project scope)*							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**

Steam and Condensate Pumps Trending and Alarms *(Not in project scope)*

Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay

Domestic Hot Water Trending and Alarms *(Not in project scope)*							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**

Hydronic Hot Water Trending and Alarms *(Not in project scope)*							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**

Chilled Water System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**

Condenser Water System Trending and Alarms *(Not in project scope)*							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**

Steam Boiler System Trending and Alarms *(Not in project scope)*							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**

Hot Water Boiler System Trending and Alarms *(Not in project scope)*							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**

E. The Contractor shall provide the following information prior to Systems Functional Performance Testing. Any documentation that is modified after submission shall be recorded and resubmitted to the COR and Commissioning Agent.

1. Point-to-Point checkout documentation;
2. Sensor field calibration documentation including system name, sensor/point name, measured value, DDC value, and Correction Factor.
3. A sensor calibration table listing the referencing the location of procedures to following in the O&M manuals, and the frequency at which calibration should be performed for all sensors, separated by system, subsystem, and type. The calibration requirements shall be submitted both in the O&M manuals and separately in a standalone document containing all sensors for inclusion in the commissioning documentation. The following table is a sample that can be used as a template for submission.

SYSTEM		
Sensor	**Calibration Frequency**	**O&M Calibration Procedure Reference**
Discharge air temperature	Once a year	Volume I Section D.3.aa
Discharge static pressure	Every 6 months	Volume II Section A.1.c

4. Loop tuning documentation and constants for each loop of the building systems. The documentation shall be submitted in outline or table separated by system, control type (e.g. heating valve temperature control); proportional, integral and derivative

constants, interval (and bias if used) for each loop. The following table is a sample that can be used as a template for submission.

AIR HANDLING UNIT AHU-1				
Control Reference	Proportional Constant	Integral Constant	Derivative Constant	Interval
Heating Valve Output	1000	20	10	2 sec.

3.6 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

A. This paragraph applies to Systems Functional Performance Testing of systems for all referenced specification Divisions.

B. Objectives and Scope: The objective of Systems Functional Performance Testing is to demonstrate that each system is operating according to the Contract Documents. Systems Functional Performance Testing facilitates bringing the systems from a state of substantial completion to full dynamic operation. Additionally, during the testing process, areas of noncompliant performance are identified and corrected, thereby improving the operation and functioning of the systems. In general, each system shall be operated through all modes of operation (seasonal, occupied, unoccupied, warm-up, cool-down, part- and full-load, fire alarm and emergency power) where there is a specified system response. The Contractor shall verify each sequence in the sequences of operation. Proper responses to such modes and conditions as power failure, freeze condition, low oil pressure, no flow, equipment failure, etc. shall also be tested.

C. Development of Systems Functional Performance Test Procedures: Before Systems Functional Performance Test procedures are written, the Contractor shall submit all requested documentation and a current list of change orders affecting equipment or systems, including an updated points list, program code, control sequences and parameters. Using the testing parameters and requirements found in the Contract Documents and approved submittals and shop drawings, the Commissioning Agent will develop specific Systems Functional Test Procedures to verify and document proper operation of each piece of equipment and system to be commissioned. The Contractor shall assist the Commissioning Agent in developing the Systems Functional Performance Test procedures as

requested by the Commissioning Agent i.e. by answering questions about equipment, operation, sequences, etc. Prior to execution, the Commissioning Agent will provide a copy of the Systems Functional Performance Test procedures to the VA, the Architect/Engineer, and the Contractor, who shall review the tests for feasibility, safety, equipment and warranty protection.

D. Purpose of Test Procedures: The purpose of each specific Systems Functional Performance Test is to verify and document compliance with the stated criteria of acceptance given on the test form. Representative test formats and examples are found in the Commissioning Plan for this project. (The Commissioning Plan is issued as a separate document and is available for review.) The test procedure forms developed by the Commissioning Agent will include, but not be limited to, the following information:

1. System and equipment or component name(s)
2. Equipment location and ID number
3. Unique test ID number, and reference to unique Pre-Functional Checklists and startup documentation, and ID numbers for the piece of equipment
4. Date
5. Project name
6. Participating parties
7. A copy of the specification section describing the test requirements
8. A copy of the specific sequence of operations or other specified parameters being verified
9. Formulas used in any calculations
10. Required pretest field measurements
11. Instructions for setting up the test.
12. Special cautions, alarm limits, etc.
13. Specific step-by-step procedures to execute the test, in a clear, sequential and repeatable format
14. Acceptance criteria of proper performance with a Yes / No check box to allow for clearly marking whether or not proper performance of each part of the test was achieved.
15. A section for comments.
16. Signatures and date block for the Commissioning Agent. A place for the Contractor to initial to signify attendance at the test.

E. Test Methods: Systems Functional Performance Testing shall be achieved by manual testing (i.e. persons manipulate the equipment and observe performance) and/or by monitoring the performance and analyzing the results using the control system's trend log capabilities or by standalone data loggers. The Contractor and Commissioning Agent shall determine which method is most appropriate for tests that do not have a method specified.

1. Simulated Conditions: Simulating conditions (not by an overwritten value) shall be allowed, although timing the testing to experience actual conditions is encouraged wherever practical.
2. Overwritten Values: Overwriting sensor values to simulate a condition, such as overwriting the outside air temperature reading in a control system to be something other than it really is, shall be allowed, but shall be used with caution and avoided when possible. Such testing methods often can only test a part of a system, as the interactions and responses of other systems will be erroneous or not applicable. Simulating a condition is preferable. e.g., for the above case, by heating the outside air sensor with a hair blower rather than overwriting the value or by altering the appropriate setpoint to see the desired response. Before simulating conditions or overwriting values, sensors, transducers and devices shall have been calibrated.
3. Simulated Signals: Using a signal generator which creates a simulated signal to test and calibrate transducers and DDC constants is generally recommended over using the sensor to act as the signal generator via simulated conditions or overwritten values.
4. Altering Setpoints: Rather than overwriting sensor values, and when simulating conditions is difficult, altering setpoints to test a sequence is acceptable. For example, to see the Air Conditioning compressor lockout initiate at an outside air temperature below 12 C (54 F), when the outside air temperature is above 12 C (54 F), temporarily change the lockout setpoint to be 2 C (4 F) above the current outside air temperature.
5. Indirect Indicators: Relying on indirect indicators for responses or performance shall be allowed only after visually and directly verifying and documenting, over the range of the tested parameters, that the indirect readings through the control system represent

actual conditions and responses. Much of this verification shall be completed during systems startup and initial checkout.

F. Setup: Each function and test shall be performed under conditions that simulate actual conditions as closely as is practically possible. The Contractor shall provide all necessary materials, system modifications, etc. to produce the necessary flows, pressures, temperatures, etc. necessary to execute the test according to the specified conditions. At completion of the test, the Contractor shall return all affected building equipment and systems, due to these temporary modifications, to their pretest condition.

G. Sampling: No sampling is allowed in completing Pre-Functional Checklists. Sampling is allowed for Systems Functional Performance Test Procedures execution. The Commissioning Agent will determine the sampling rate. If at any point, frequent failures are occurring and testing is becoming more troubleshooting than verification, the Commissioning Agent may stop the testing and require the Contractor to perform and document a checkout of the remaining units, prior to continuing with Systems Functional Performance Testing of the remaining units.

H. Cost of Retesting: The cost associated with expanded sample System Functional Performance Tests shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.

I. Coordination and Scheduling: The Contractor shall provide a minimum of 7 days’ notice to the Commissioning Agent and the VA regarding the completion schedule for the Pre-Functional Checklists and startup of all equipment and systems. The Commissioning Agent will schedule Systems Functional Performance Tests with the Contractor and VA. The Commissioning Agent will witness and document the Systems Functional Performance Testing of systems. The Contractor shall execute the tests in accordance with the Systems Functional Performance Test Procedure.

J. Testing Prerequisites: In general, Systems Functional Performance Testing will be conducted only after Pre-Functional Checklists have been satisfactorily completed. The control system shall be sufficiently tested and approved by the Commissioning Agent and the VA before it is used to verify performance of other components or systems. The air

balancing and water balancing shall be completed before Systems Functional Performance Testing of air-related or water-related equipment or systems are scheduled. Systems Functional Performance Testing will proceed from components to subsystems to systems. When the proper performance of all interacting individual systems has been achieved, the interface or coordinated responses between systems will be checked.

K. Problem Solving: The Commissioning Agent will recommend solutions to problems found, however the burden of responsibility to solve, correct and retest problems is with the Contractor.

3.7 DOCUMENTATION, NONCONFORMANCE AND APPROVAL OF TESTS

A. Documentation: The Commissioning Agent will witness, and document the results of all Systems Functional Performance Tests using the specific procedural forms developed by the Commissioning Agent for that purpose. Prior to testing, the Commissioning Agent will provide these forms to the VA and the Contractor for review and approval. The Contractor shall include the filled out forms with the O&M manual data.

B. Nonconformance: The Commissioning Agent will record the results of the Systems Functional Performance Tests on the procedure or test form. All items of nonconformance issues will be noted and reported to the VA on Commissioning Field Reports and/or the Commissioning Master Issues Log.

1. Corrections of minor items of noncompliance identified may be made during the tests. In such cases, the item of noncompliance and resolution shall be documented on the Systems Functional Test Procedure.
2. Every effort shall be made to expedite the systems functional Performance Testing process and minimize unnecessary delays, while not compromising the integrity of the procedures. However, the Commissioning Agent shall not be pressured into overlooking noncompliant work or loosening acceptance criteria to satisfy scheduling or cost issues, unless there is an overriding reason to do so by direction from the VA.
3. As the Systems Functional Performance Tests progresses and an item of noncompliance is identified, the Commissioning Agent shall discuss the issue with the Contractor and the VA.
4. When there is no dispute on an item of noncompliance, and the Contractor accepts responsibility to correct it:

a. The Commissioning Agent will document the item of noncompliance and the Contractor's response and/or intentions. The Systems Functional Performance Test then continues or proceeds to another test or sequence. After the day's work is complete, the Commissioning Agent will submit a Commissioning Field Report to the VA. The Commissioning Agent will also note items of noncompliance and the Contractor’s response in the Master Commissioning Issues Log. The Contractor shall correct the item of noncompliance and report completion to the VA and the Commissioning Agent.

b. The need for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test and the test shall be repeated.

5. If there is a dispute about item of noncompliance, regarding whether it is an item of noncompliance, or who is responsible:

a. The item of noncompliance shall be documented on the test form with the Contractor's response. The item of noncompliance with the Contractor’s response shall also be reported on a Commissioning Field Report and on the Master Commissioning Issues Log.

b. Resolutions shall be made at the lowest management level possible. Other parties are brought into the discussions as needed. Final interpretive and acceptance authority is with the Department of Veterans Affairs.

c. The Commissioning Agent will document the resolution process.

d. Once the interpretation and resolution have been decided, the Contractor shall correct the item of noncompliance, report it to the Commissioning Agent. The requirement for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test. Retesting shall be repeated until satisfactory performance is achieved.

C. Cost of Retesting: The cost to retest a System Functional Performance Test shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a

justified reason for a claim of delay or for a time extension by the Contractor.

D. Failure Due to Manufacturer Defect: If 10%, or three, whichever is greater, of identical pieces (size alone does not constitute a difference) of equipment fail to perform in compliance with the Contract Documents (mechanically or substantively) due to manufacturing defect, not allowing it to meet its submitted performance specifications, all identical units may be considered unacceptable by the VA. In such case, the Contractor shall provide the VA with the following:
   1. Within one week of notification from the VA, the Contractor shall examine all other identical units making a record of the findings. The findings shall be provided to the VA within two weeks of the original notice.
   2. Within two weeks of the original notification, the Contractor shall provide a signed and dated, written explanation of the problem, cause of failures, etc. and all proposed solutions which shall include full equipment submittals. The proposed solutions shall not significantly exceed the specification requirements of the original installation.
   3. The VA shall determine whether a replacement of all identical units or a repair is acceptable.
   4. Two examples of the proposed solution shall be installed by the Contractor and the VA shall be allowed to test the installations for up to one week, upon which the VA will decide whether to accept the solution.
   5. Upon acceptance, the Contractor shall replace or repair all identical items, at their expense and extend the warranty accordingly, if the original equipment warranty had begun. The replacement/repair work shall proceed with reasonable speed beginning within one week from when parts can be obtained.

E. Approval: The Commissioning Agent will note each satisfactorily demonstrated function on the test form. Formal approval of the Systems Functional Performance Test shall be made later after review by the Commissioning Agent and by the VA. The Commissioning Agent will evaluate each test and report to the VA using a standard form. The VA

will give final approval on each test using the same form, and provide signed copies to the Commissioning Agent and the Contractor.

3.8 DEFERRED TESTING

A. Unforeseen Deferred Systems Functional Performance Tests: If any Systems Functional Performance Test cannot be completed due to the building structure, required occupancy condition or other conditions, execution of the Systems Functional Performance Testing may be delayed upon approval of the VA. These Systems Functional Performance Tests shall be conducted in the same manner as the seasonal tests as soon as possible. Services of the Contractor to conduct these unforeseen Deferred Systems Functional Performance Tests shall be negotiated between the VA and the Contractor.

B. Deferred Seasonal Testing: Deferred Seasonal Systems Functional Performance Tests are those that must be deferred until weather conditions are closer to the systems design parameters. The Commissioning Agent will review systems parameters and recommend which Systems Functional Performance Tests should be deferred until weather conditions more closely match systems parameters. The Contractor shall review and comment on the proposed schedule for Deferred Seasonal Testing. The VA will review and approve the schedule for Deferred Seasonal Testing. Deferred Seasonal Systems Functional Performances Tests shall be witnessed and documented by the Commissioning Agent. Deferred Seasonal Systems Functional Performance Tests shall be executed by the Contractor in accordance with these specifications.

3.9 OPERATION AND MAINTENANCE TRAINING REQUIREMENTS

A. Training Preparation Conference: Before operation and maintenance training, the Commissioning Agent will convene a training preparation conference to include VA's COR, VA’s Operations and Maintenance personnel, and the Contractor. The purpose of this conference will be to discuss and plan for Training and Demonstration of VA Operations and Maintenance personnel.

B. The Contractor shall provide training and demonstration as required by other Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 sections. The Training and Demonstration shall include, but is not limited to, the following:

1. Review the Contract Documents.
2. Review installed systems, subsystems, and equipment.

3. Review instructor qualifications.
4. Review instructional methods and procedures.
5. Review training module outlines and contents.
6. Review course materials (including operation and maintenance manuals).
7. Review and discuss locations and other facilities required for instruction.
8. Review and finalize training schedule and verify availability of educational materials, instructors, audiovisual equipment, and facilities needed to avoid delays.
9. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.

C. Training Module Submittals: The Contractor shall submit the following information to the VA and the Commissioning Agent:
1. Instruction Program: Submit two copies of outline of instructional program for demonstration and training, including a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module. At completion of training, submit two complete training manuals for VA's use.
2. Qualification Data: Submit qualifications for facilitator and/or instructor.
3. Attendance Record: For each training module, submit list of participants and length of instruction time.
4. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.
5. Demonstration and Training Recording:
   a. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.
   b. Video Format: Provide high quality color DVD color on standard size DVD disks.

c. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.

d. Narration: Describe scenes on video recording by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.

e. Submit two copies within seven days of end of each training module.

6. Transcript: Prepared on 8-1/2-by-11-inch paper, punched and bound in heavy-duty, 3-ring, vinyl-covered binders. Mark appropriate identification on front and spine of each binder. Include a cover sheet with same label information as the corresponding videotape. Include name of Project and date of videotape on each page.

D. Quality Assurance:

1. Facilitator Qualifications: A firm or individual experienced in training or educating maintenance personnel in a training program similar in content and extent to that indicated for this Project, and whose work has resulted in training or education with a record of successful learning performance.

2. Instructor Qualifications: A factory authorized service representative, complying with requirements in Division 01 Section "Quality Requirements," experienced in operation and maintenance procedures and training.

3. Photographer Qualifications: A professional photographer who is experienced photographing construction projects.

E. Training Coordination:

1. Coordinate instruction schedule with VA's operations. Adjust schedule as required to minimize disrupting VA's operations.

2. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.

3. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by the VA.

F. Instruction Program:

1. Program Structure: Develop an instruction program that includes individual training modules for each system and equipment not part of a system, as required by individual Specification Sections, and as follows:
   a. Fire protection systems, including fire alarm, fire pumps, and fire suppression systems.
   b. Intrusion detection systems.
   c. Conveying systems, including elevators, wheelchair lifts, escalators, and automated materials handling systems.
   d. Medical equipment, including medical gas equipment and piping.
   e. Laboratory equipment, including laboratory air and vacuum equipment and piping.
   f. Heat generation, including boilers, feedwater equipment, pumps, steam distribution piping, condensate return systems, heating hot water heat exchangers, and heating hot water distribution piping.
   g. Refrigeration systems, including chillers, cooling towers, condensers, pumps, and distribution piping.
   h. HVAC systems, including air handling equipment, air distribution systems, and terminal equipment and devices.
   i. HVAC instrumentation and controls.
   j. Electrical service and distribution, including switchgear, transformers, switchboards, panelboards, uninterruptible power supplies, and motor controls.
   k. Packaged engine generators, including synchronizing switchgear/switchboards, and transfer switches.
   l. Lighting equipment and controls.
   m. Communication systems, including intercommunication, surveillance, nurse call systems, public address, mass evacuation, voice and data, and entertainment television equipment.
   n. Site utilities including lift stations, condensate pumping and return systems, and storm water pumping systems.

G. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participants are expected to master. For each module, include instruction for the following:

1. Basis of System Design, Operational Requirements, and Criteria: Include the following:
   a. System, subsystem, and equipment descriptions.
   b. Performance and design criteria if Contractor is delegated design responsibility.
   c. Operating standards.
   d. Regulatory requirements.
   e. Equipment function.
   f. Operating characteristics.
   g. Limiting conditions.
   H, Performance curves.
2. Documentation: Review the following items in detail:
   a. Emergency manuals.
   b. Operations manuals.
   c. Maintenance manuals.
   d. Project Record Documents.
   e. Identification systems.
   f. Warranties and bonds.
   g. Maintenance service agreements and similar continuing commitments.
3. Emergencies: Include the following, as applicable:
   a. Instructions on meaning of warnings, trouble indications, and error messages.
   b. Instructions on stopping.
   c. Shutdown instructions for each type of emergency.
   d. Operating instructions for conditions outside of normal operating limits.
   e. Sequences for electric or electronic systems.
   f. Special operating instructions and procedures.
4. Operations: Include the following, as applicable:
   a. Startup procedures.
   b. Equipment or system break-in procedures.
   c. Routine and normal operating instructions.
   d. Regulation and control procedures.
   e. Control sequences.
   f. Safety procedures.
   g. Instructions on stopping.

h. Normal shutdown instructions.
i. Operating procedures for emergencies.
j. Operating procedures for system, subsystem, or equipment failure.
k. Seasonal and weekend operating instructions.
l. Required sequences for electric or electronic systems.
m. Special operating instructions and procedures.

5. Adjustments: Include the following:
   a. Alignments.
   b. Checking adjustments.
   c. Noise and vibration adjustments.
   d. Economy and efficiency adjustments.
6. Troubleshooting: Include the following:
   a. Diagnostic instructions.
   b. Test and inspection procedures.
7. Maintenance: Include the following:
   a. Inspection procedures.
   b. Types of cleaning agents to be used and methods of cleaning.
   c. List of cleaning agents and methods of cleaning detrimental to product.
   d. Procedures for routine cleaning
   e. Procedures for preventive maintenance.
   f. Procedures for routine maintenance.
   g. Instruction on use of special tools.
8. Repairs: Include the following:
   a. Diagnosis instructions.
   b. Repair instructions.
   c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
   d. Instructions for identifying parts and components.
   e. Review of spare parts needed for operation and maintenance.

H. Training Execution:
1. Preparation: Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a combined training manual. Set up instructional equipment at instruction location.
2. Instruction:

a. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and Department of Veterans Affairs for number of participants, instruction times, and location.

b. Instructor: Engage qualified instructors to instruct VA's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.

1) The Commissioning Agent will furnish an instructor to describe basis of system design, operational requirements, criteria, and regulatory requirements.

2) The VA will furnish an instructor to describe VA's operational philosophy.

3) The VA will furnish the Contractor with names and positions of participants.

3. Scheduling: Provide instruction at mutually agreed times. For equipment that requires seasonal operation, provide similar instruction at start of each season. Schedule training with the VA and the Commissioning Agent with at least seven days' advance notice.

4. Evaluation: At conclusion of each training module, assess and document each participant's mastery of module by use of an oral, or a written, performance-based test.

5. Cleanup: Collect used and leftover educational materials and remove from Project site. Remove instructional equipment. Restore systems and equipment to condition existing before initial training use.

I. Demonstration and Training Recording:

1. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.

2. Video Format: Provide high quality color DVD color on standard size DVD disks.

3. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
4. Narration: Describe scenes on videotape by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.

----- END -----

SECTION 02 41 00
DEMOLITION

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies demolition and removal of portions of buildings, utilities, other structures and debris from trash dumps shown.

1.2 RELATED WORK:

A. Safety Requirements: GENERAL CONDITIONS Article, ACCIDENT PREVENTION.

B. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.

C. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.

D. Asbestos Removal: Section 02 82 13.13 GLOVEBAG ASBESTOS ABATEMENT, Section 02 83 13.19 ASBESTOS FLOOR TILE AND MASTIC ABATEMENT.

E. Infectious Control: Section 01 00 00, GENERAL REQUIREMENTS, Article 1.8, INFECTION PREVENTION MEASURES.

F. Construction Waste Management: Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.

1.3 SUBMITTALS

See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.4 PROTECTION:

A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures.

B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations.

C. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in hazardous or objectionable condition such as, but not limited to; ice, flooding, or pollution. Vacuum and dust the work area daily.

D. In addition to previously listed fire and safety rules to be observed in performance of work, include following:

1. No wall or part of wall shall be permitted to fall outwardly from structures.
2. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for

immediate use. Instruct all possible users in use of fire extinguishers.

3. Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4500 mm (15 feet) of fire hydrants.

E. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the COR. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have COR's approval.

F. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article 1.8 INFECTION PREVENTION MEASURES.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 DEMOLITION:

A. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Medical Center Property to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by the COR. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.

B. Remove and legally dispose of all materials. Materials removed shall become property of contractor and shall be disposed of in compliance with applicable federal, state or local permits, rules and/or regulations.

C. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the COR. When Utility

lines are encountered that are not indicated on the drawings, the COR shall be notified prior to further work in that area.

3.2 CLEAN-UP:

A. On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to COR. Clean-up shall include disposal of all items and materials not required to remain property of the Government as well as all debris and rubbish resulting from demolition operations.

- - - E N D - - -

SECTION 02 82 13.13
GLOVEBAG ASBESTOS ABATEMENT

TABLE OF CONTENTS

PART 1 - GENERAL..... 1
1.1 SUMMARY OF THE WORK..... 1
1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS..... 1
1.1.2 EXTENT OF WORK..... 1
1.1.3 RELATED WORK..... 1
1.1.4 TASKS..... 2
1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES..... 2
1.2 VARIATIONS IN QUANTITY..... 2
1.3 STOP ASBESTOS REMOVAL..... 3
1.4 DEFINITIONS..... 3
1.4.1 GENERAL..... 3
1.4.2 GLOSSARY..... 4
1.4.3 REFERENCED STANDARDS ORGANIZATIONS..... 11
1.5 APPLICABLE CODES AND REGULATIONS..... 13
1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS..... 13
1.5.2 CONTRACTOR RESPONSIBILITY..... 14
1.5.3 FEDERAL REQUIREMENTS..... 14
1.5.4 STATE REQUIREMENTS:..... 14
1.5.5 LOCAL REQUIREMENTS..... 14
1.5.6 STANDARDS..... 15
1.5.7 EPA GUIDANCE DOCUMENTS..... 15
1.5.8 NOTICES..... 15
1.5.9 PERMITS/LICENSES..... 16
1.5.10 POSTING AND FILING OF REGULATIONS..... 16
1.5.11 VA RESPONSIBILITIES..... 16
1.5.12 SITE SECURITY..... 17
1.5.13 EMERGENCY ACTION PLAN AND ARRANGEMENTS..... 17
1.5.14 PRE-CONSTRUCTION MEETING..... 19
1.6 PROJECT COORDINATION..... 19
1.6.1 PERSONNEL..... 19
1.7 RESPIRATORY PROTECTION..... 21
1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM..... 21
1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR..... 21
1.7.3 SELECTION AND USE OF RESPIRATORS..... 21
1.7.4 MINIMUM RESPIRATORY PROTECTION..... 21

1.7.5 MEDICAL WRITTEN OPINION..... 22
1.7.6 RESPIRATOR FIT TEST..... 22
1.7.7 RESPIRATOR FIT CHECK..... 22
1.7.8 MAINTENANCE AND CARE OF RESPIRATORS..... 22
1.8 WORKER PROTECTION..... 22
1.8.1 TRAINING OF ABATEMENT PERSONNEL..... 22
1.8.2 MEDICAL EXAMINATIONS..... 22
1.8.3 personal PROTECTIVE EQUIPMENT..... 23
1.8.4 REGULATED AREA ENTRY PROCEDURE..... 23
1.8.5 DECONTAMINATION PROCEDURE - PAPR..... 23
1.8.6 REGULATED AREA REQUIREMENTS..... 24
1.9 DECONTAMINATION FACILITIES..... 24
1.9.1 DESCRIPTION..... 24
1.9.2 GENERAL REQUIREMENTS..... 24
1.9.3 TEMPORARY FACILITIES TO THE PDF and w/EDF..... 24
1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)..... 25
1.9.5 waste/EQUIPMENT DECONTAMINATION FACILITY (w/EDF)..... 27
1.9.6 waste/EQUIPMENT DECONTAMINATION PROCEDURES..... 28
PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT..... 28
2.1 MATERIALS AND EQUIPMENT..... 28
2.1.1 GENERAL REQUIREMENTS (all abatement projects)..... 28
2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA..... 30
2.2.1 GENERAL..... 30
2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA..... 30
2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA..... 30
2.2.4 CRITICAL BARRIERS..... 31
2.2.5 SECONDARY BARRIERS..... 31
2.2.6 EXTENSION OF THE REGULATED AREA..... 31
2.2.7 FIRESTOPPING..... 31
2.3 MONITORING, INSPECTION AND TESTING..... 32
2.3.1 GENERAL..... 32
2.3.2 SCOPE OF SERVICES OF THE VPIH/cih CONSULTANT..... 33
2.3.3 MONITORING, INSPECTION AND TESTING BY ABATEMENT CONTRACTOR CPIH..... 34
2.4 STANDARD OPERATING PROCEDURES..... 35
2.5 SUBMITTALS..... 35
2.5.1 PRE-CONSTRUCTION MEETING SUBMITTALS..... 35
2.5.2 SUBMITTALS DURING ABATEMENT..... 38
2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT..... 38

2.6 ENCAPSULANTS..... 38
2.6.1 TYPES OF ENCAPSULANTS..... 38
2.6.2 PERFORMANCE REQUIREMENTS..... 39
2.7 CERTIFICATES OF COMPLIANCE..... 39
2.8 RECYCLABLE PROTECTIVE CLOTHING..... 39
PART 3 - EXECUTION..... 40
3.1 PRE-ABATEMENT ACTIVITIES..... 40
3.1.1 PRE-ABATEMENT MEETING..... 40
3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS..... 40
3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS..... 41
3.2 REGULATED AREA PREPARATIONS..... 41
3.2.1 OSHA DANGER SIGNS..... 41
3.2.2 SHUT DOWN - LOCK OUT ELECTRICAL..... 42
3.2.3 SHUT DOWN - LOCK OUT HVAC..... 42
3.2.4 SANITARY FACILITIES..... 42
3.2.5 WATER FOR ABATEMENT..... 42
3.2.6 PRE-CLEANING MOVABLE OBJECTS..... 42
3.2.7 PRE-CLEANING FIXED OBJECTS..... 42
3.2.8 PRE-CLEANING SURFACES IN THE REGULATED AREA..... 43
3.3 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA..... 43
3.3.1 GENERAL..... 43
3.3.2 PREPARATION PRIOR TO SEALING OFF..... 43
3.3.3 CONTROLLING ACCESS TO THE REGULATED AREA..... 43
3.3.4 CRITICAL BARRIERS..... 44
3.3.5 EXTENSION OF THE REGULATED AREA..... 44
3.3.6 floor barriers:..... 44
3.4 REMOVAL OF piping ACM..... 45
3.4.1 WETTING MATERIALS..... 45
3.4.2 SECONDARY BARRIER AND WALKWAYS..... 45
3.4.3 WET REMOVAL OF ACM..... 45
3.5 GLOVEBAG REMOVAL PROCEDURES..... 46
3.5.1 GENERAL..... 46
//3.5.2 NEGATIVE PRESSURE GLOVEBAG PROCEDURE..... 47
3.6 LOCKDOWN ENCAPSULATION..... 47
3.6.1 GENERAL..... 47
3.6.2 SEALING EXPOSED EDGES..... 47
3.7 DISPOSAL OF ACM WASTE MATERIALS..... 47
3.7.1 GENERAL..... 47

3.7.2 PROCEDURES..... 48
3.8 PROJECT DECONTAMINATION..... 48
3.8.1 GENERAL..... 48
3.8.2 REGULATED AREA CLEARANCE..... 49
3.8.3 WORK DESCRIPTION..... 49
3.8.4 PRE-DECONTAMINATION CONDITIONS..... 49
3.8.5 FIRST CLEANING..... 49
3.8.6 PRE-CLEARANCE INSPECTION AND TESTING..... 49
3.8.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES..... 50
3.9 FINAL VISUAL INSPECTIOns AND AIR CLEARANCE TESTING..... 50
3.9.1 GENERAL..... 50
3.9.2 FINAL VISUAL INSPECTION..... 50
3.9.3 FINAL AIR CLEARANCE TESTING..... 50
3.9.4 FINAL AIR CLEARANCE PROCEDURES..... 51
3.9.5 CLEARANCE SAMPLING USING PCM..... 51
3.9.7 LABORATORY TESTING OF PCM SAMPLES..... 51
3.10 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE..... 51
3.10.1 COMPLETION OF ABATEMENT WORK..... 51
3.10.2 CERTIFICATE OF COMPLETION BY CONTRACTOR..... 52
3.10.3 WORK SHIFTS..... 52
3.10.4 RE-INSULATION..... 52
ATTACHMENT #1..... 1
ATTACHMENT #2..... 2
ATTACHMENT #3..... 3
ATTACHMENT #4..... 4

PART 1 - GENERAL

1.1 SUMMARY OF THE WORK

1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS

Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor (Contractor) discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Contractor. All cost incurred due to such action are also the responsibility of the Contractor.

1.1.2 EXTENT OF WORK

A. Below is a brief description of the estimated quantities of asbestos containing materials to be abated by the glovebag method. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.

B. Removal, clean-up and disposal of ACM piping and fittings and asbestos contaminated elements in an appropriate regulated area in the following approximate quantities;
(260) fittings 50 - 150 mm (2" - 6") in diameter
4,100 square feet of lead lined in walls

1.1.3 RELATED WORK

A. Section 07 84 00; FIRESTOPPING.
B. Section 02 41 00; DEMOLITION.
C. Division 09; FINISHES.
D. Division 22; PLUMBING.

E. Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION / Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING / Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION

G. Section 23 07 11, HVAC AND PLUMBING INSULATION.

H. Section 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING / Section 22 11 00, FACILITY WATER DISTRIBUTION / Section 22 13 00, FACILITY SANITARY SEWERAGE / Section 22 14 00, FACILITY STORM DRAINAGE.

I. Section 23 21 13, HYDRONIC PIPING.

J. Section 23 31 00, HVAC DUCTS AND CASINGS / Section 23 37 00, AIR OUTLETS AND INLETS.

1.1.4 TASKS

The work tasks are summarized briefly as follows:

A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, work-site preparations, emergency procedures arrangements, and standard operating procedures for glovebag asbestos abatement work.

B. Abatement activities including removal, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.

C. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES

A. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State, and Local regulations and requirements.

B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved pre-abatement work plan. Asbestos abatement drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action.

1.2 VARIATIONS IN QUANTITY

The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimates which are limited

by the physical constraints imposed by occupancy of the buildings. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the Contractor shall provide unit prices for additional footage for newly discovered materials and those prices will be used for additional work under the contract.

1.3 STOP ASBESTOS REMOVAL

If the Contracting Officer or their field representative presents a written **Stop Asbestos Removal Order**, the Abatement Contractor/Personnel shall immediately stop all asbestos removal and adequately wet any exposed ACM. The Contractor shall not resume any asbestos removal activity until authorized to do so by the VA. A stop asbestos removal order may be issued at any time the VA determines abatement conditions/activities are not within specification requirements. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the industrial hygienist's time. The occurrence of any of the following events shall be reported immediately by the Contractor in writing to the VA representative and shall require the Contractor to immediately stop asbestos removal activities and initiate fiber reduction activities:

A. =/> 0.01 f/cc outside a regulated area or >0.05 f/cc inside a regulated area;
B. breach/break in regulated area critical barrier(s)/floor;
C. serious injury/death at the site;
D. fire/safety emergency at the site;
E. respiratory protection system failure;
F. power failure or loss of wetting agent; or
G. any visible emissions observed outside the regulated area.

1.4 DEFINITIONS

1.4.1 GENERAL

Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

1.4.2 GLOSSARY

Abatement - Procedures to control fiber release from asbestos-containing materials, typically during removal. Includes removal,encapsulation, enclosure, demolition and renovation activities related to asbestos.

ACE - Asbestos contaminated elements.

ACM - Asbestos containing material.

Aerosol - Solid or liquid particulate suspended in air.

Adequately wet - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

Aggressive method - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

Aggressive sampling - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

AHERA - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

Aircell - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

Air monitoring - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air.

Air sample filter - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

Amended water - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

Asbestos - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

Asbestos-containing material (ACM) - Any material containing more than one percent asbestos.

Asbestos contaminated elements (ACE) - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

Asbestos-containing waste material - Asbestos-containing material or asbestos contaminated objects requiring disposal.

Asbestos waste decontamination facility - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

Authorized person - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

Authorized visitor - Any person approved by the VA; the contractor; or any government agency having jurisdiction over the regulated area.

Barrier - Any surface the isolates the regulated area and inhibits fiber migration from the regulated area.

Containment Barrier - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

Critical Barrier - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

Primary Barrier - Barriers placed over critical barriers and exposed directly to abatement work.

Secondary Barrier - Any additional sheeting used to isolate and provide protection from debris during abatement work.

Breathing zone - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

Bridging encapsulant - An encapsulant that forms a layer on the surface of the ACM.

Building/facility owner - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

Bulk testing - The collection and analysis of suspect asbestos containing materials.

Certified Industrial Hygienist (CIH) - One certified in practice of industrial hygiene by the American Board of Industrial Hygiene. An industrial hygienist Certified in Comprehensive Practice by the American Board of Industrial Hygiene.

Class I asbestos work - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

Class II asbestos work - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

Clean room/Changing room - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

Clearance sample - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's industrial hygiene consultant (VPIH/CIH).

Closely resemble - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

Competent person - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

Contractor's Professional Industrial Hygienist (CPIH) - The Contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of the PIH.

Count - Refers to the fiber count or the average number of fibers greater than five microns in length per cubic centimeter of air.

Decontamination area/unit - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

Demolition - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

Disposal bag - Typically 6 mil thick siftproof, dustproof, leaktight container used to package and transport asbestos waste from regulated

areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

Disturbance - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag which shall not exceed 60 inches in length or width.

Drum - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be siftproof, dustproof, and leaktight.

Employee exposure - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

Encapsulant - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

Encapsulation - Treating ACM with an encapsulant.

Enclosure - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

Equipment room - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

Fiber - A particulate form of asbestos, 5 microns or longer, with a length to width ratio of at least 3 to 1.

Fibers per cubic centimeter (f/cc) - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

Filter - Media used in respirators, vacuums, or other machines to remove particulate from air.

Firestopping - Material used to close the open parts of a structure in order to prevent a fire from spreading.

Friable asbestos containing material - Any material containing more than 1 percent asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

Glovebag - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

High efficiency particulate air (HEPA) filter - A filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 microns or greater in diameter.

HEPA vacuum - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

Homogeneous area - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

HVAC - Heating, Ventilation and Air Conditioning

Industrial hygienist - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

Industrial hygienist technician - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned.

Intact - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

Lockdown - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

National Emission Standards for Hazardous Air Pollutants (NESHAP's) - EPA's rule to control emissions of asbestos to the environment.

Negative initial exposure assessment - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL's.

Negative pressure - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water gauge inside the negative pressure enclosure.

Negative pressure respirator - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air outside the respirator.

Non-friable ACM - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

Organic vapor cartridge - The type of cartridge used on air purifying respirators for organic vapor exposures.

Outside air - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

Owner/operator - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

Penetrating encapsulant - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

Personal sampling/monitoring - Representative air samples obtained in the breathing zone of the person using a cassette and battery operated pump to determine asbestos exposure.

Permissible exposure limit (PEL) - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the PEL is 0.1 fibers per cc.

Polarized light microscopy (PLM) - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

Polyethylene sheeting - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, sometimes flame retardant in compliance with NFPA 241.

Positive/negative fit check - A method of verifying the fit of a respirator by closing off the filters and breathing in or closing off the exhalation valve and breathing out while detecting leakage of the respirator.

Presumed ACM (PACM) - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (k)(5).

Professional IH - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal

training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH.

Project designer - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B)(5).

Protection factor - A value assigned by OSHA/NIOSH to indicate the assigned protection a respirator should provide if worn properly. The number indicates the reduction of exposure level from outside to inside the respirator.

Qualitative fit test (QLFT) - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

Quantitative fit test (QNFT) - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

Regulated area - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

Regulated ACM (RACM) - Friable ACM; Category I nonfriable ACM that has become friable; Category I nonfriable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II nonfriable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

Removal - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

Renovation - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

Repair - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

Shower room - The portion of the PDF where personnel shower before leaving the regulated area. Also used for bag/drum decontamination in the EDF.

Standard operating procedures (SOP's) - Asbestos work procedures required to be submitted by the contractor before work begins.

Supplied air respirator (SAR) - A respirator that utilizes an air supply separate from the air in the regulated area.

Surfacing ACM - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

Surfactant - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

Thermal system ACM - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

Transmission electron microscopy (TEM) - A microscopy method that can identify and count asbestos fibers.

VA Industrial Hygienist (VPIH/CIH) - Department of Veterans Affairs Professional Industrial Hygienist.

VA Representative - The VA official responsible for on-going project work.

Visible emissions - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM or ACM waste material.

Waste generator - Any owner or operator whose act or process produces asbestos-containing waste material.

Waste/Equipment decontamination facility (W/EDF) - The area in which equipment is decontaminated before removal from the regulated area.

Waste shipment record - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

Wet cleaning - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

1.4.3 REFERENCED STANDARDS ORGANIZATIONS

The following acronyms or abbreviations as referenced in contract/ specification documents are defined to mean the associated names. Names and addresses may be subject to change.

A. VA Department of Veterans Affairs
810 Vermont Avenue, NW
Washington, DC 20420

B. AIHA American Industrial Hygiene Association
2700 Prosperity Avenue, Suite 250
Fairfax, VA 22031
703-849-8888

C. ANSI American National Standards Institute
1430 Broadway
New York, NY 10018
212-354-3300

D. ASTM American Society for Testing and Materials
1916 Race St.
Philadelphia, PA 19103
215-299-5400

E. CFR Code of Federal Regulations
Government Printing Office
Washington, DC 20420

F. CGA Compressed Gas Association
1235 Jefferson Davis Highway
Arlington, VA 22202
703-979-0900

G. CS Commercial Standard of the National Institute of Standards and Technology(NIST)
U. S. Department of Commerce
Government Printing Office
Washington, DC 20420

H. EPA Environmental Protection Agency
401 M St., SW
Washington, DC 20460
202-382-3949

I. MIL-STD Military Standards/Standardization Division
Office of the Assistant Secretary of Defense
Washington, DC 20420

J. MSHA Mine Safety and Health Administration
Respiratory Protection Division
Ballston Tower #3
Department of Labor
Arlington, VA 22203
703-235-1452

K. NIST National Institute for Standards and Technology
U. S. Department of Commerce
Gaithersburg, MD 20234
301-921-1000

L. NEC National Electrical Code (by NFPA)

M. NEMA National Electrical Manufacturer's Association
2101 L Street, NW
Washington, DC 20037

N. NFPA National Fire Protection Association
1 Batterymarch Park
P.O. Box 9101
Quincy, MA 02269-9101
800-344-3555

O. NIOSH National Institutes for Occupational Safety and Health
4676 Columbia Parkway
Cincinnati, OH 45226
513-533-8236

P. OSHA Occupational Safety and Health Administration
U.S. Department of Labor
Government Printing Office
Washington, DC 20402

Q. UL Underwriters Laboratory
333 Pfingsten Rd.
Northbrook, IL 60062
312-272-8800

R. USA United States Army
Army Chemical Corps
Department of Defense
Washington, DC 20420

1.5 APPLICABLE CODES AND REGULATIONS

1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS

A. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.

B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specification exists, the most stringent requirement(s) shall be utilized.

C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

1.5.2 CONTRACTOR RESPONSIBILITY

The Contractor shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the abatement project. The contractor is responsible for providing and maintaining training, accreditation, medical exams, medical records, personal protective equipment as required by applicable Federal, State and Local regulations. The contractor shall hold the VA and VPIH/CIH consultants harmless for any failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The contractor will incur all costs of the CPIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements.

1.5.3 FEDERAL REQUIREMENTS

Federal requirements which govern some aspect of asbestos abatement include, but are not limited to, the following regulations.

A. Occupational Safety and Health Administration **(OSHA)**
   1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
   2. Title 29 CFR 1910.132 - Personal Protective Equipment
   3. Title 29 CFR 1910.134 - Respiratory Protection
   4. Title 29 CFR 1926 - Construction Industry Standards
   5. Title 29 CFR 1910.20 - Access to Employee Exposure and Medical Records
   6. Title 29 CFR 1910.1200 - Hazard Communication
   7. Title 29 CFR 1910.151 - Medical and First Aid

B. Environmental Protection Agency **(EPA)**
   1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
   2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)

C. Department of Transportation **(DOT)**

   Title 49 CFR 100 - 185 - Transportation

1.5.4 STATE REQUIREMENTS:

State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following:

ASBESTOS ABATEMENT CONTRACTOR LICENSING AND TRAINING, OHIO ADMINISTRATIVE CODE, RULES 3701-34-01 THROUGH 3701-34-7

1.5.5 LOCAL REQUIREMENTS

If local requirements are more stringent than federal or state standards, the local standards are to be followed.

1.5.6 STANDARDS

A. Standards which govern asbestos abatement activities include, but are not limited to, the following:
   1. American National Standards Institute (ANSI)Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems Z88.2 - Practices for Respiratory Protection.
   2. Underwriters Laboratories (UL)586-90 - UL Standard for Safety of HEPA filter Units, 7th Edition.

B. Standards which govern encapsulation work include, but are not limited to, the following:
   1. American Society for Testing and Materials (ASTM)

C. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
   1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
   2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
   3. NFPA 101 - Life Safety Code

1.5.7 EPA GUIDANCE DOCUMENTS

A. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.

B. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024

C. Asbestos Waste Management Guidance EPA 530-SW-85-007.

D. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001

E. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

1.5.8 NOTICES

A. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:

   Send written notification as required by USEPA National Emmissions Standards for Hazardous Air Pollutants (NESHAPS) Asbestos regulations (40 CFR 61, Subpart M) to the regional Asbestos NESHAPS Contact at least 10 days prior to beginning any work on asbestos abatement or related work. Send notification to the following address:

   Department of Public Health
   Division of Air Quality
   1925 St. Clair Avenue

Cleveland, Ohio 44114-2080

Send written notification as required by Ohio Department of Health at least 10 days prior to beginning any work on any planned asbestos hazard abatement project as required by chapter 3701-34. Send notification to the following address:

Ohio Department of Health
P.O. Box 15278
Columbus, Ohio 43215

B. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification is given to EPA, State, and Local authorities.

1.5.9 PERMITS/LICENSES

A. The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

B. Contractor shall maintain a current Ohio Department of Health "Asbestos Abatement Contractor" license in accordance with paragraph (C) of rule 3701-34-01 of the Administrative Code

1.5.10 POSTING AND FILING OF REGULATIONS

Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

1.5.11 VA RESPONSIBILITIES

Prior to commencement of work:

A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**

B. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized and method of analysis.

C. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the

abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

1.5.12 SITE SECURITY

A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.

B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent Person shall immediately notify the VA.

C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.

D. Access to the regulated area shall be through a single decontamination unit, if required. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall <u>not</u> be locked from the inside, however, they shall be sealed with poly sheeting and taped until needed.

E. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.

F. The Abatement Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.

G. The regulated area shall be locked during non-working hours and secured by VA security guards.

1.5.13 EMERGENCY ACTION PLAN AND ARRANGEMENTS

A. An Emergency Action Plan shall be developed by the Contractor prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a);(b).

B. Emergency procedures shall be in written form and prominently posted and available in the regulated area. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.

C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule and layout of regulated area, particularly barriers that may affect response capabilities.

D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.

E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.

   1. For non life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.

   2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.

F. Telephone numbers of all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.

G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.

H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the standard operating procedures during abatement. Such incidents include, but are not limited to, fire; accident; and power failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that work is stopped and wetting is continued until correction of the problem.

1.5.14 PRE-CONSTRUCTION MEETING

Prior to commencing the work, the Contractor shall meet with the VPCIH to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

A. Proof of Contractor licensing.

B. Proof the Competent Person is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person shall also be presented.

C. A list of all workers who will participate in the project, including experience and verification of training and accreditation.

D. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.

E. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).

F. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.

G. A copy of the Contractor's Standard Operating Procedures for Class I Glovebag Asbestos Abatement. In these procedures, the following information must be detailed, specific for this project.

1. Regulated area preparation procedures;
2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
3. If required, decontamination area set-up/layout and decontamination procedures for employees;
4. Glovebag abatement methods/procedures and equipment to be used;
5. Personal protective equipment to be used;

H. At this meeting the Contractor shall provide all submittals as required.

I. Procedures for handling, packaging and disposal of asbestos waste.

J. Emergency Action Plan and Contingency Plan Procedures.

1.6 PROJECT COORDINATION

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

1.6.1 PERSONNEL

A. Administrative and supervisory personnel shall consist of a qualified Competent Person as defined by OSHA in the Construction Standards and

the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.

B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.

C. Minimum qualifications for Contractor and assigned personnel are:

1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive standard operating procedures for asbestos work; has adequate materials, equipment and supplies to perform the work.
2. The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
3. The Contractor Professional Industrial Hygienist (CPIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete standard operating procedure for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the

NIOSH 582 Course, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.

4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the standard operating procedures of the Contractor; has one year of asbestos abatement experience; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

1.7 RESPIRATORY PROTECTION

1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM

The Contractor shall develop and implement a Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.132;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program All respirators used must be NIOSH approved for asbestos abatement activities. The written respiratory protection shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c)(1)(i - ix) - Respiratory Protection Program.

1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR

The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years experience coordinating the program. The RPPC must provide a signed statement attesting to the fact that the program meets the above requirements.

1.7.3 SELECTION AND USE OF RESPIRATORS

The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualification. The procedure must written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

1.7.4 MINIMUM RESPIRATORY PROTECTION

Minimum respiratory protection shall be a full face powered air purifying respirator when fiber levels are maintained consistently at or below 0.5 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

1.7.5 MEDICAL WRITTEN OPINION

No employee shall be allowed to wear a respirator unless a physician has determined they are capable of doing so and has issued a written opinion for that person.

1.7.6 RESPIRATOR FIT TEST

All personnel wearing respirators shall have a current quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Fit tests shall be done for PAPR's which have been put into a failure mode.

1.7.7 RESPIRATOR FIT CHECK

The Competent Person shall assure that the positive/negative fit check is done each time the respirator is donned by an employee. Headcoverings must cover respirator headstraps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a fit check shall preclude that person from wearing a respirator until resolution of the problem.

1.7.8 MAINTENANCE AND CARE OF RESPIRATORS

The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) maintenance and care of respirators.

1.8 WORKER PROTECTION

1.8.1 TRAINING OF ABATEMENT PERSONNEL

Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

1.8.2 MEDICAL EXAMINATIONS

Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. The physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the opinion the person has been evaluated for working in a heat stress environment while wearing personal protective equipment and is able to perform the work.

1.8.3 PERSONAL PROTECTIVE EQUIPMENT

Provide whole body clothing, head coverings, foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

1.8.4 REGULATED AREA ENTRY PROCEDURE

Worker protection shall meet the most stringent requirement. The Competent Person shall ensure that each time workers enter the regulated area, they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

1.8.5 DECONTAMINATION PROCEDURE - PAPR

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

A. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.

B. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care must be taken to follow reasonable procedures in removing the respirator to avoid asbestos fibers wile showering. The following procedure is required as a minimum:

   1. Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.
   2. With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay particular attention to cleaning the seal between the face and respirator facepiece and under the respirator straps.
   3. Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.

C. Carefully decontaminate the facepiece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside

of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting water in the battery pack thus preventing destruction. **THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!**

D. Shower and wash body completely with soap and water. Rinse thoroughly.

E. Rinse shower room walls and floor to drain prior to exiting.

F. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

1.8.6 REGULATED AREA REQUIREMENTS

The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for Class I glovebag regulated areas at 29 CFR 1926.1101 (e) are met. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

1.9 DECONTAMINATION FACILITIES

1.9.1 DESCRIPTION

Provide each regulated area with separate personnel (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF is the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

1.9.2 GENERAL REQUIREMENTS

All personnel entering or exiting a regulated area shall follow the requirements at 29 CFR 1926.1101 (j)(1) and these specifications. All equipment and materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weigh sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting.

1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF

The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point

of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141(d)(3). Provide adequate temporary electric power with ground fault protection and overhead wiring in the PDF and W/EDF. Provide a sub-panel for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat to maintain 70°F throughout the PDF and W/EDF..

1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)

The Competent Person shall provide a PDF consisting of shower room which is contiguous to a clean room and equipment room. The PDF must be sized to accommodate the number of personnel scheduled for the project. The shower room, located in the center of the PDF, shall be fitted with as many portable showers as necessary to insure all employees can complete the entire decontamination procedure within 15 minutes. The PDF shall be constructed of opaque poly for privacy. The PDF shall be constructed to eliminate any parallel routes of egress without showering.

1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 2 layers of 6 mil fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide flapped doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. An adequate supply of disposable towels shall be provided. Provide storage lockers per person. A portable fire extinguisher, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.

2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for

the showering of all personnel going from the regulated area to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6 mil fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be changed a minimum of daily or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.

3. Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment, reusable footwear and for use as a change station for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made of 2 layers of 6 mil fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by air tight walls and ceiling constructed of a minimum of 3 layers of 6 mil fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. Provide a temporary electrical sub-panel equipped with GFCI in this room to accommodate any equipment required in the regulated area.
4. The PDF shall consist of the following: Clean room at the entrance followed by a shower room followed by an equipment room leading to the regulated area. Each doorway in the PDF is minimum of 2 layers of 6 mil fire retardant poly.

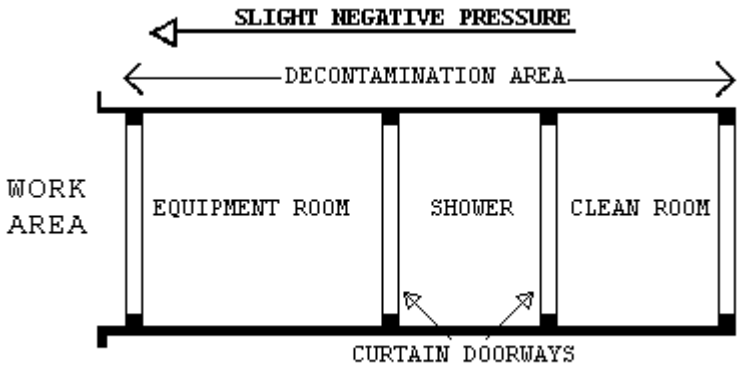

1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF)

The Competent Person shall provide a W/EDF consisting of a wash room, holding room, and clean room for removal of all waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:

1. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment, bag and container cleaning station.
2. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6 mil fire retardant poly.
3. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6 mil fire retardant poly.
4. Clean Room: Provide a clean room to isolate the holding room from the building exterior. Construct the clean room using 2 x 4 wood framing and 2 layers of 6 mil fire retardant poly. The clean room shall be

located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of two layers of 6 mil fire retardant poly.

5. The W/EDF shall be provided as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

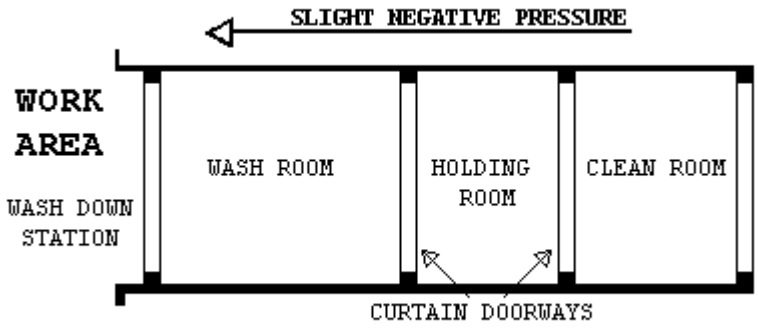

1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES

At washdown station in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. These personnel will not be required to wear PPE. At no time shall personnel from the clean side be allowed to enter the Wash Room.

PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT

2.1 MATERIALS AND EQUIPMENT

2.1.1 GENERAL REQUIREMENTS (ALL ABATEMENT PROJECTS)

Prior to the start of work, the Contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not

start unless the following items have been delivered to the site and the CPIH has submitted verification to the VA's representative to this effect:

A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated/work area until abatement is completed.
C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized place.
D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
E. Poly sheeting put under the glovebag regulated area shall be a minimum of 6 mils in thickness.
F. If required, the method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces.
G. Polyethylene sheeting utilized for personnel decontamination facility shall be opaque white or black in color, 6 mil fire retardant poly.
H. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
I. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements shall be provided. Fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project shall also be provided. All electrically operated hand tools, equipment, electric cords shall be equipped with GFCI protection.
J. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water, and falling material).

K. Disposal bags - 2 layers of 6 mil, for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.

L. The VA shall be provided a copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication. Chlorinated compounds shall not be used with any spray adhesive or other product. Appropriate encapsulant(s) shall be provided.

M. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.

N. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a hazard assessment conducted under 29 CFR 1910.132(d).

2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA

2.2.1 GENERAL

Using critical barriers, seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All horizontal surfaces in the regulated area must be covered with 2 layers of 6 mil fire retardant poly to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated, immediately stop work and clean up the contamination at no additional cost to the Government. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 2.2.8; FIRESTOPPING.

2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA

A. Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Remove all uncontaminated removable furniture, equipment and/or supplies from the regulated area before commencing work, or completely cover with 2 layers of 6-mil fire retardant poly sheeting and secure with duct tape. Lock out and tag out any HVAC systems in the regulated area.

2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA

A. Access to the regulated area is allowed only through the personnel decontamination facility (PDF), if required. All other means of access shall be eliminated and OSHA Danger demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant

poly sheeting to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid.

2.2.4 CRITICAL BARRIERS

A. Completely separate any openings into the regulated area from adjacent areas using fire retardant poly at least 6 mils thick and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects in the regulated area. Heat must be shut off any objects covered with poly.

2.2.5 SECONDARY BARRIERS

A. A loose layer of 6 mil fire retardant poly shall be used as a drop cloth to protect the floor/horizontal surfaces from debris generated during the glovebag abatement. This layer shall be replaced as needed during the work.

2.2.6 EXTENSION OF THE REGULATED AREA

A. If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. If the affected area cannot be added to the regulated area, decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

2.2.7 FIRESTOPPING

A. Through penetrations caused by cables, cable trays, pipes, sleeves must be firestopped with a fire-rated firestop system providing an air tight seal.

B. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The Contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA Representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.

C. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

2.3 MONITORING, INSPECTION AND TESTING

2.3.1 GENERAL

A. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. The CPIH shall periodically inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.

B. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.

C. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH with review and approval of the VPIH/CIH. An agreement between the CPIH and the VPIH/CIH shall be reached on the exact details of the

confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT

A. The purpose of the work of the VPIH/CIH is to: Assure quality; resolve problems; and prevent the spread of contamination beyond the regulated area. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:

1. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
2. Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
3. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
4. Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of unforeseen developments, etc.
5. Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area or building at the conclusion of the abatement and clean-up work to certify compliance with all regulations and the VA requirements/specifications.
6. Task 6: Issue certificate of decontamination for each regulated area or building and project report.

B. All data, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.

C. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during

abatement work and to accept or reject a regulated area or building as decontaminated.

2.3.3 MONITORING, INSPECTION AND TESTING BY ABATEMENT CONTRACTOR CPIH

The CPIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor /Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in air sampling and analysis. The IH Technician shall have a NIOSH 582 Course or equivalent and show proof. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA/State Contractor/Supervisor and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT. A daily log documenting all OSHA requirements for air monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH. The log will contain, at a minimum, information on personnel or area sampled, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH responsibilities.

2.4 STANDARD OPERATING PROCEDURES

The Contractor shall have established Standard Operating Procedures (SOP's) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the ways and procedures to be followed during all phases of the work by the Contractor's personnel. The SOP's must be modified as needed to address specific requirements of the project. The SOP's shall be submitted for review and approval prior to the start of any abatement work. The minimum topics and areas to be covered by the SOP's are:

A. Minimum Personnel Qualifications
B. Contingency Plans and Arrangements
C. Security and Safety Procedures
D. Respiratory Protection/Personal Protective Equipment Program and Training
E. Medical Surveillance Program and Recordkeeping
F. Regulated Area Requirements for Glovebag Abatement
G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
H. Monitoring, Inspections, and Testing
I. Removal Procedures For Piping ACM Using the Glovebag Method
J. Disposal of ACM waste
K. Regulated Area Decontamination/Clean-up
L. Regulated Area Visual and Air Clearance
M. Project Completion/Closeout

2.5 SUBMITTALS

2.5.1 PRE-CONSTRUCTION MEETING SUBMITTALS

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project.

A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
B. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
C. Submit Standard Operating Procedures developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH.

D. Submit the specifics of the materials and equipment to be used for this project with brand names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
   1. HEPA vacuums, air monitoring pumps, calibration devices, and emergency power generating system.
   2. Waste water filtration system, shower system, critical/floor barriers.
   3. Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, fire extinguishers.
   4. Personal protective equipment.
   5. Fire safety equipment to be used in the regulated area.

E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.

F. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.

G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A.

H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
   1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project:
      Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; Completion Date
   2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years:
      Project Name; Reason; Date; Reference Name/Number; Resolution
   3. List asbestos regulatory citations, penalties, damages paid and legal actions taken against the company in the last 3 years. Provide copies and all information needed for verification.

I. Submit information on personnel: Provide a resume; address each item completely; provide references; phone numbers; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.

1. CPIH: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of SOP's developed; medical opinion; current respirator fit test.
2. Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person /Supervisor; list of similar projects as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion; current respirator fit test.
3. Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion; current respirator fit test.

J. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain english the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of SOP's incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who does and how is air monitoring conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and standard operating procedures; copies of monitoring results of the five referenced projects listed and analytical method(s) used.

K. When rental equipment is to be used in regulated areas or used to transport asbestos waste, the contractor shall assure complete decontamination of the rental equipment before return to the rental agency.

1. Submit, before the start of work, the manufacturer's technical data and MSDS for encapsulants used on the project. Provide application instructions also.

2.5.2 SUBMITTALS DURING ABATEMENT

A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as critical barrier breeching, equipment failures, emergencies, and any cause for stopping work; representative air monitoring and results/TWA's/EL's. Submit this daily log to VA's representative.

B. The CPIH shall document and maintain the following during abatement and submit as appropriate to the VA's representative.
   1. Inspection and approval of the regulated area preparation prior to start of work and daily during work.
   2. Removal of any poly critical/floor barriers.
   3. Visual inspection/testing by the CPIH prior to application of lockdown encapsulation.
   4. Packaging and removal of ACM waste from regulated area.
   5. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT

The CPIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. The report shall include a certificate of completion, signed and dated by the CPIH, in accordance with Attachment #1. The VA Representative will forward the abatement report to the Medical Center after completion of the project.

2.6 ENCAPSULANTS

2.6.1 TYPES OF ENCAPSULANTS

A. The following four types of encapsulants must comply with comply with performance requirements as stated in paragraph 2.6.2:
   1. Removal encapsulant - used as a wetting agent to remove ACM.
   2. Bridging encapsulant - provides a tough, durable coating on ACM.
   3. Penetrating encapsulant - penetrates/encapsulates ACM at least 13 mm (1/2").

4. Lockdown encapsulant - seals microscopic fibers on surfaces after ACM removal.

2.6.2 PERFORMANCE REQUIREMENTS

Encapsulants shall meet the latest requirements of EPA; shall not contain toxic or hazardous substances; or solvents; and shall comply with the following performance requirements:

A. General Requirements for all Encapsulants:
   1. ASTM E84: Flame spread of 25; smoke emission of 50.
   2. University of Pittsburgh Protocol: Combustion Toxicity; zero mortality.
   3. ASTM C732: Accelerated Aging Test; Life Expectancy - 20 years.
   4. ASTM E96: Permeability - minimum of 0.4 perms.

B. Bridging/Penetrating Encapsulants:
   1. ASTM E736: Cohesion/Adhesion Test - 24 kPa (50 lbs/ft^2).
   2. ASTM E119: Fire Resistance - 3 hours (Classified by UL for use on fibrous/cementitious fireproofing).
   3. ASTM D2794: Gardner Impact Test; Impact Resistance - minimum 11.5 kg-mm (43 in/lb).
   4. ASTM D522: Mandrel Bend Test; Flexibility - no rupture or cracking.

C. Lockdown Encapsulants:
   1. ASTM E119: Fire resistance - 3 hours (tested with fireproofing over encapsulant applied directly to steel member).
   2. ASTM E736: Bond Strength - 48 kPa (100 lbs/ft^2) (test compatibility with cementitious and fibrous fireproofing).
   3. In certain situations, encapsulants may have to be applied to hot pipes/equipment. The encapsulant must be able to withstand high temperatures without cracking or off-gassing any noxious vapors during application.

2.7 CERTIFICATES OF COMPLIANCE

The Contractor shall submit to the VA representative certification from the manufacturer indicating compliance with performance requirements for encapsulants when applied according to manufacturer recommendations.

2.8 RECYCLABLE PROTECTIVE CLOTHING

If recyclable clothing is provided, all requirements of EPA, DOT and OSHA shall be met.

PART 3 - EXECUTION

3.1 PRE-ABATEMENT ACTIVITIES

3.1.1 PRE-ABATEMENT MEETING

The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS

Before any work begins on the construction of the regulated area, the Contractor will:

A. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.

B. The VA Representative, the Contractor, and the VPIH/CIH must be aware of 10/95 A/E Quality Alert indicating the failure to identify asbestos as applicable to glovebag abatement in the areas listed. Make sure these areas are looked at/reviewed on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside chases/walls; transite piping/ductwork/sheets; behind radiators; below window sills; water/sewer lines; electrical conduit coverings; steam line trench coverings.

C. Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects which the Contractor is required to remove from the regulated area have been cleaned and removed or properly protected from contamination.

D. Shut down and seal with a minimum of 2 layers of 6 mil fire retardant poly all HVAC systems serving the regulated area. The regulated area

critical barriers shall be completely isolated from any other air in the building. The VA's representative will monitor the isolation provision.

E. Shut down and lock out in accordance with 29 CFR 1910.147 all electrical circuits which pose a potential hazard. Electrical arrangements will be tailored to the particular regulated area and the systems involved. All electrical circuits affected will be turned off at the circuit box outside the regulated area, not just the wall switch. The goal is to eliminate the potential for electrical shock which is a major threat to life in the regulated area due to water use and possible energized circuits. Electrical lines used to power equipment in the regulated area shall conform to all electrical safety standards and shall be isolated by the use of a ground fault circuit interrupter (GFCI). All GFCI shall be tested prior to use. The VA's representative will monitor the electrical shutdown.

F. If required, remove and dispose of carpeting from floors in the regulated area.

G. Inspect existing firestopping in the regulated area. Correct as needed.

3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS

A. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.

B. Upon completion of all preparatory work, the CPIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved SOP's, especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation.

C. The CPIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.

D. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification.

3.2 REGULATED AREA PREPARATIONS

3.2.1 OSHA DANGER SIGNS

Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed ambient background

levels. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.

3.2.2 SHUT DOWN - LOCK OUT ELECTRICAL

Shut down and lock out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.

3.2.3 SHUT DOWN - LOCK OUT HVAC

Shut down and lock out heating, cooling, and air conditioning system **(HVAC)** components that are in, supply or pass through the regulated area.

Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil poly disposal bags for disposal as asbestos waste.

3.2.4 SANITARY FACILITIES

The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

3.2.5 WATER FOR ABATEMENT

The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.

3.2.6 PRE-CLEANING MOVABLE OBJECTS

Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location.

3.2.7 PRE-CLEANING FIXED OBJECTS

Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items.

After precleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.

3.2.8 PRE-CLEANING SURFACES IN THE REGULATED AREA

Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

3.3 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA

3.3.1 GENERAL

Seal off any openings at the perimeter of the regulated area with critical barriers to completely isolate the regulated area and to contain all airborne asbestos contamination created by the abatement activities. Should the adjacent area past the regulated area become contaminated due to improper work activities, the Contractor shall suspend work inside the regulated area, continue wetting, and clean the adjacent areas in accordance with procedures described in these specifications. Any and all costs associated with the adjacent area cleanup shall not be borne by the VA.

3.3.2 PREPARATION PRIOR TO SEALING OFF

Place all materials, equipment and supplies necessary to isolate the regulated area inside the regulated area. Remove all movable material/equipment as described above and secure all unmovable material/equipment as described above. Properly secured material/ equipment shall be considered to be outside the regulated area.

3.3.3 CONTROLLING ACCESS TO THE REGULATED AREA

Access to the regulated area shall be permitted only through the PDF. All other means of access shall be closed off by proper sealing and DANGER signs posted on the clean side of the regulated area where it is adjacent to or within view of any occupiable area. An opaque visual barrier of 6 mil poly shall be provided so that the abatement work is not visible to any building occupants. If the area adjacent to the regulated area is accessible to the public, construct a solid barrier on

the public side of the sheeting for protection and isolation of the project. The barrier shall be constructed with nominal 2" x 4" (50mm x 100mm) wood or metal studs 16" (400mm) on centers, securely anchored to prevent movement and covered with a minimum of 1/2" (12.5mm) plywood. Provide an appropriate number of OSHA DANGER signs for each visual and physical barrier. Any alternative method must be given a written approval by the VA's representative.

3.3.4 CRITICAL BARRIERS

The regulated area must be completely separated from the adjacent areas, and the outside by at least 2 layers of 6 mil fire retardant poly and duct tape/spray adhesive. Individually seal all supply and exhaust ventilation openings, lighting fixtures, clocks, doorways, windows, convectors, speakers, and other openings into the regulated area with 2 layers of 6 mil fire retardant poly, and taped securely in place with duct tape/spray adhesive. Critical barriers must remain in place until all work and clearances have been completed. Light fixtures shall not be operational during abatement. Auxiliary lighting shall be provided. If needed, provide plywood squares 6" x 6" x 3/8" (150mm x 150mm x 18mm) held in place with one 6d smooth masonry/galvanized nail driven through the center of the plywood square and duct tape on the poly so as to clamp the poly to the wall/surface. Locate plywood squares at each end, corner, and 4' (1200mm) maximum on centers.

3.3.5 EXTENSION OF THE REGULATED AREA

If the regulated area barrier is breached in any manner that could allow the passage of asbestos fibers or debris, the Competent Person shall immediately stop work, continue wetting, and proceed to extend the regulated area to enclose the affected area as per procedures described in this specification. If the affected area cannot be enclosed, decontamination measures and cleanup shall start immediately. All personnel shall be isolated from the affected area until decontamination/cleanup is completed as verified by visual inspection and air monitoring. Air monitoring at completion must indicate background levels.

3.3.6 FLOOR BARRIERS:

All floors within 10’ of glovebag work shall be covered with 2 layers of 6 mil fire retardant poly.

3.4 REMOVAL OF PIPING ACM

3.4.1 WETTING MATERIALS

A. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP's regulation and OSHA's "wet methods" for the duration of the project. A removal encapsulant may be used instead of amended water with written approval of the VA's representative.

B. Amended Water: Provide water to which a surfactant has been added shall be used to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture must be equal to or greater than the wetting provided by water amended by a surfactant consisting one ounce of 50% polyoxyethylene ester and 50% polyoxyethylene ether mixed with 5 gallons (19L) of water.

C. Removal Encapsulant: Provide a penetrating encapsulant designed specifically for the removal of ACM. The material must, when used, result in adequate wetting of the ACM and retard fiber release during disturbance equal to or greater than the amended water described above in B.

3.4.2 SECONDARY BARRIER AND WALKWAYS

A. Install as a drop cloth a 6 mil poly sheet at the beginning of each work shift where removal is to be done during that shift. Completely floors within 10 feet (3M) of the area where work is to done. Secure the secondary barrier with duct tape to prevent debris from getting behind it. Remove the secondary barrier at the end of the shift or as work in the area is completed. Keep residue on the secondary barrier wetted. When removing, fold inward to prevent spillage and place in a disposal bag.

B. Install walkways using 6 mil poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the floor from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

3.4.3 WET REMOVAL OF ACM

A. Using acceptable glovebag procedures, adequately and thoroughly wet the ACM to be removed prior to removal to reduce/prevent fiber release to the air. Adequate time must be allowed for the amended water to saturate the ACM. Abatement personnel must not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping.

The material must be sprayed repeatedly/continuously during the removal process in order to maintain adequately wet conditions. Removal encapsulants must be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. In no event shall dry removal occur except in the case of electrical hazards or a greater safety issue is possible!

3.5 GLOVEBAG REMOVAL PROCEDURES

3.5.1 GENERAL

All applicable OSHA requirements and glovebag manufacturer’s recommendations shall be met during glove bagging operations.

1. Mix the surfactant with water in the garden sprayer, following the manufacturer's directions.
2. Have each employee put on a HEPA filtered respirator approved for asbestos and check the fit using the positive/negative fit check.
3. Have each employee put on a disposable full-body suit. Remember, the hood goes over the respirator straps.
4. Check closely the integrity of the glove bag to be used. Check all seams, gloves, sleeves, and glove openings. OSHA requires the bottom of the bag to be seamless.
5. Check the pipe where the work will be performed. If it is damaged (broken lagging, hanging, etc.), wrap the entire length of the pipe in poly sheeting and "candy stripe" it with duct tape.
6. Attach glovebag with required tools per manufacturer’s instructions.
7. Using the smoke tube and aspirator bulb, test 10% of glovebags by placing the tube into the water porthole (two-inch opening to glove bag), and fill the bag with smoke and squeeze it. If leaks are found, they should be taped closed using duct tape and the bag should be retested with smoke.
8. Insert the wand from the water sprayer through the water porthole.
9. Insert the hose end from a HEPA vacuum into the upper portion of the glove bag.
10. Wet and remove the pipe insulation.
11. If the section of pipe is covered with an aluminum jacket, remove it first using the wire cutters to cut any bands and the tin snips to remove the aluminum. It is important to fold the sharp edges in to prevent cutting the bag when placing it in the bottom.

12. When the work is complete, spray the upper portion of the bag and clean-push all residue into the bottom of the bag with the other waste material. Be very thorough. Use adequate water.
13. Put all tools, after washing them off in the bag, in one of the sleeves of glove bag and turn it inside out, drawing it outside of the bag. Twist the sleeve tightly several times to seal it and tape it several tight turns with duct tape. Cut through the middle of the duct tape and remove the sleeve. Put the sleeve in the next glove bag or put it in a bucket of water to decontaminate the tools after cutting the sleeve open.
14. Turn on the HEPA vacuum and collapse the bag completely. Remove the vacuum nozzle, seal the hole with duct tape, twist the bag tightly several times in the middle, and tape it to keep the material in the bottom during removal of the glove bag from the pipe.
15. Slip a disposal bag over the glove bag (still attached to the pipe). Remove the tape securing the ends, and slit open the top of the glove bag and carefully fold it down into the disposal bag. Double bag and gooseneck waste materials.

3.5.2 NEGATIVE PRESSURE GLOVEBAG PROCEDURE

1. In addition to the above requirements, the HEPA vacuum shall be run continuously during the glovebag procedure until completion at which time the glovebag will be collapsed by the HEPA vacuum prior to removal from the pipe/component.
2. The HEPA vacuum shall be attached and operated as needed to prevent collapse of the glovebag during the removal process.

3.6 LOCKDOWN ENCAPSULATION

3.6.1 GENERAL

Lockdown encapsulation is an integral part of the ACM removal. At the conclusion of ACM removal and before removal of the primary barriers, all piping surfaces shall be encapsulated with a bridging encapsulant.

3.6.2 SEALING EXPOSED EDGES

Seal edges of ACM exposed by removal work with two coats of encapsulant. Prior to sealing, permit the exposed edges to dry completely to permit penetration of the encapsulant.

3.7 DISPOSAL OF ACM WASTE MATERIALS

3.7.1 GENERAL

Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Disposal shall be done at the approved

landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

3.7.2 PROCEDURES

A. Asbestos waste shall be packaged and moved through the W/EDF into a covered transport container in accordance with procedures in this specification. Waste shall be double-bagged prior to disposal. Wetted waste can be very heavy. Bags shall not be overfilled. Bags shall securely sealed to prevent accidental opening and/or leakage. The top shall be tightly twisted and goosenecked prior to tightly sealing with at least three wraps of duct tape. Ensure that unauthorized persons do not have access to the waste material once it is outside the regulated area. All transport containers must be covered at all times when not in use. NESHAP's signs must be on containers during loading and unloading. Material shall not be transported in open vehicles. If drums are used for packaging, the drums shall be labeled properly and shall not be re-used.

B. Waste Load Out: Waste load out shall be done in accordance with the procedures in W/EDF Decontamination Procedures. Bags shall be decontaminated on exterior surfaces by wet cleaning and/or HEPA vacuuming before being placed in the second bag. C. Asbestos waste with sharp edged components, i.e., nails, screws, lath, strapping, tin sheeting, jacketing, metal mesh, etc., which might tear poly bags shall be wrapped securely in burlap before packaging and, if needed, use a poly lined fiber drum as the second container, prior to disposal.

3.8 PROJECT DECONTAMINATION

3.8.1 GENERAL

A. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH.

B. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleaning of the regulated area surfaces after the primary barrier removal.

C. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

3.8.2 REGULATED AREA CLEARANCE

Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

3.8.3 WORK DESCRIPTION

Decontamination includes the cleaning and clearance of the air in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities.

3.8.4 PRE-DECONTAMINATION CONDITIONS

A. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the secondary barrier of poly removed and disposed of along with any gross debris generated by the work.

B. At the start of decontamination, the following shall be in place:

1. Critical barriers over all openings consisting of two layers of 6 mil poly which is the sole barrier between the regulated area and the rest of the building or outside.
3. Decontamination facilities, if required for personnel and equipment in operating condition.

3.8.5 FIRST CLEANING

Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping methods. Use each surface of a cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. If determined by the CPIH/VPIH/CIH additional cleaning(s) may be needed.

3.8.6 PRE-CLEARANCE INSPECTION AND TESTING

The CPIH and VPIH/CIH will perform a thorough and detailed visual inspection after the first cleaning to determine whether there is any visible residue in the regulated area. If the visual inspection is acceptable, the CPIH will perform pre-clearance sampling using aggressive clearance as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A(III)(B)(7)(d). If the sampling results show values below 0.01 f/cc, then the Contractor shall notify the VA's representative of the results with a brief report from the CPIH documenting the inspection and sampling results and a statement verifying that the regulated area is

ready for lockdown encapsulation. The VA reserves the right to utilize their own VPIH/CIH to perform a pre-clearance inspection and testing for verification.

3.8.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES

With the express written permission of the VA's representative, perform lockdown encapsulation of all surfaces from which asbestos was abated in accordance with the procedures in this specification.

3.9 FINAL VISUAL INSPECTIONS AND AIR CLEARANCE TESTING

3.9.1 GENERAL

Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH after the final cleaning.

3.9.2 FINAL VISUAL INSPECTION

Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

3.9.3 FINAL AIR CLEARANCE TESTING

A. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final testing. Air samples will be collected and analyzed in accordance with procedures for PCM in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures. Additional inspection and testing will be done at the expense of the Contractor.

B. If the results of the PCM are acceptable, remove the critical barriers. Any small quantities of residue material found upon removal of the poly shall be removed with a HEPA vacuum and localized isolation. If significant quantities are found as determined by the VPIH/CIH, then the entire area affected shall be cleaned as specified in the final cleaning.

C. When release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

3.9.4 FINAL AIR CLEARANCE PROCEDURES

A. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured with PCM methods.

B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:

1. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method.
2. Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques. Samples will be collected on 0.8µ MCE filters for PCM analysis and 0.45µ Polycarbonate filters for TEM analysis. Before pumps are started, initiate aggressive sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off.

3.9.5 CLEARANCE SAMPLING USING PCM

The NIOSH 7400 method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 5 PCM clearance samples will be collected.

3.9.7 LABORATORY TESTING OF PCM SAMPLES

The services of an AIHA accredited laboratory will be employed by the VA to perform analysis of the air samples. Samples will be sent by the VPIH/CIH so that verbal/faxed reports can be received within 24 hours. A complete record, certified by the laboratory, of all air monitoring tests and results will be furnished to the VA’s representative and the Contractor.

3.10 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE

3.10.1 COMPLETION OF ABATEMENT WORK

After thorough decontamination, complete asbestos abatement work upon meeting the regulated area clearance criteria and fulfilling the following:

A. Remove all equipment, materials, and debris from the project area.

B. Package and dispose of all asbestos waste as required.

C. Repair or replace all interior finishes damaged during the abatement work.

D. Fulfill other project closeout requirements as specified elsewhere in this specification.

3.10.2 CERTIFICATE OF COMPLETION BY CONTRACTOR

The CPIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

3.10.3 WORK SHIFTS

All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday - Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

3.10.4 RE-INSULATION

If required as part of the contract, replace all asbestos containing insulation with suitable non-asbestos material. Provide MSDS’s for all replacement materials. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.

ATTACHMENT #1

CERTIFICATE OF COMPLETION

DATE:

PROJECT NAME:

VAMC/ADDRESS:

1. I certify that I have personally inspected, monitored and supervised the abatement work of

   (specify regulated area or Building):

   which took place from to.

2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.

3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.

4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.

5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.

6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.

7. That all glovebag work was done in accordance with OSHA requirements and the manufacturer’s recommendations.

   CPIH Name:

   Signature/Date:

   Asbestos Abatement Contractor's Name:

   Signature/Date:

ATTACHMENT #2

CERTIFICATE OF WORKER'S ACKNOWLEDGMENT

DATE:

PROJECT NAME:

PROJECT ADDRESS:

ABATEMENT CONTRACTOR'S NAME:

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature: Social Security Number:

PRINTED NAME: **WITNESS: ATTACHMENT #3**

AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION

VA PROJECT NAME AND NUMBER:

VA MEDICAL FACILITY:

ABATEMENT CONTRACTOR'S NAME AND ADDRESS:

1. I verify that the following individual

   Name: Social Security Number:

   who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

   Address:

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

   Signature of CPIH: Date:

   Printed Name of CPIH:

   Signature of Contractor: Date:

   Printed Name of Contractor:

ATTACHMENT #4

ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS

VA Project Location:

VA Project #:

VA Project Description:

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature Date

Abatement Contractor Competent Person(s) Date

Date

Date

- E N D -

SECTION 02 82 13.19
ASBESTOS FLOOR TILE AND MASTIC ABATEMENT
TABLE OF CONTENTS

PART 1 - GENERAL..... 1
1.1 SUMMARY OF THE WORK..... 1
1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS..... 1
1.1.2 EXTENT OF WORK..... 1
1.1.3 RELATED WORK..... 1
1.1.4 TASKS..... 2
1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES..... 2
1.2 VARIATIONS IN QUANTITY..... 2
1.3 STOP ASBESTOS REMOVAL..... 3
1.4 DEFINITIONS..... 3
1.4.1 GENERAL..... 3
1.4.2 GLOSSARY..... 3
1.4.3 REFERENCED STANDARDS ORGANIZATIONS..... 11
1.5 APPLICABLE CODES AND REGULATIONS..... 13
1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS..... 13
1.5.2 CONTRACTOR RESPONSIBILITY..... 13
1.5.3 FEDERAL REQUIREMENTS..... 14
1.5.4 STATE REQUIREMENTS..... 14
1.5.5 LOCAL REQUIREMENTS..... 14
1.5.6 STANDARDS..... 14
1.5.7 EPA GUIDANCE DOCUMENTS..... 15
1.5.8 NOTICES..... 15
1.5.9 PERMITS/LICENSES..... 16
1.5.10 POSTING AND FILING OF REGULATIONS..... 16
1.5.11 VA RESPONSIBILITIES..... 16
1.5.12 SITE SECURITY..... 17
1.5.13 EMERGENCY ACTION PLAN AND ARRANGEMENTS..... 17
1.5.14 PRE-START MEETING..... 19
1.6 PROJECT COORDINATION..... 19
1.6.1 PERSONNEL..... 19
1.7 RESPIRATORY PROTECTION..... 21
1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM..... 21
1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR..... 21
1.7.3 SELECTION AND USE OF RESPIRATORS..... 21
1.7.4 MINIMUM RESPIRATORY PROTECTION..... 21

1.7.5 MEDICAL WRITTEN OPINION..... 22
1.7.6 RESPIRATOR FIT TEST..... 22
1.7.7 RESPIRATOR FIT CHECK..... 22
1.7.8 MAINTENANCE AND CARE OF RESPIRATORS..... 22
1.8 WORKER PROTECTION..... 22
1.8.1 TRAINING OF ABATEMENT PERSONNEL..... 22
1.8.2 MEDICAL EXAMINATIONS..... 22
1.8.3 PERSONAL PROTECTIVE EQUIPMENT..... 23
1.8.4 REGULATED AREA ENTRY PROCEDURE..... 23
1.8.5 DECONTAMINATION PROCEDURE..... 23
1.8.6 REGULATED AREA REQUIREMENTS..... 23
PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT..... 24
2.1 MATERIALS AND EQUIPMENT..... 24
2.1.1 GENERAL REQUIREMENTS (all abatement projects)..... 24
2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA..... 25
2.2.1 GENERAL..... 25
2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA..... 26
2.2.4 CRITICAL BARRIERS..... 26
2.2.5 secondary barriers:..... 26
2.2.6 EXTENSION OF THE REGULATED AREA..... 26
2.3 MONITORING, INSPECTION AND TESTING..... 27
2.3.1 GENERAL..... 27
2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT..... 28
2.3.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH..... 29
2.4 STANDARD OPERATING PROCEDURES..... 30
2.5 SUBMITTALS..... 30
2.5.1 PRE-start MEETING SUBMITTALS..... 30
2.5.2 SUBMITTALS DURING ABATEMENT..... 33
2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT..... 33
PART 3 - EXECUTION..... 33
3.1 PRE-ABATEMENT ACTIVITIES..... 33
3.1.1 PRE-ABATEMENT MEETING..... 33
3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS..... 34
3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS..... 35
3.2 REGULATED AREA PREPARATIONS..... 35
3.2.1 OSHA DANGER SIGNS..... 35
3.2.2 SHUT DOWN - LOCK OUT ELECTRICAL..... 36
3.2.3 SHUT DOWN - LOCK OUT HVAC..... 36

3.2.4 SANITARY FACILITIES..... 36
3.2.6 PRE-CLEANING MOVABLE OBJECTS..... 36
3.2.7 PRE-CLEANING FIXED OBJECTS..... 36
3.2.8 PRE-CLEANING SURFACES IN THE REGULATED AREA..... 37
3.3 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA..... 37
3.3.1 GENERAL..... 37
3.3.2 PREPARATION PRIOR TO SEALING OFF..... 37
3.3.3 CONTROLLING ACCESS TO THE REGULATED AREA..... 37
3.3.4 CRITICAL BARRIERS..... 38
3.3.5 EXTENSION OF THE REGULATED AREA..... 38
3.4 REMOVAL OF CLASS II FLOORING; ROOFING; AND TRANSITE MATERIALS:..... 38
3.4.1 GENERAL..... 38
3.4.2 REMOVAL OF flooring materials:..... 38
3.4.3 REMOVAL OF MASTIC..... 39
3.5 DISPOSAL OF CLASS ii WASTE MATERIAL:..... 39
3.5.1 GENERAL..... 39
3.6 PROJECT DECONTAMINATION..... 39
3.6.1 GENERAL..... 39
3.6.2 REGULATED AREA CLEARANCE..... 40
3.6.3 WORK DESCRIPTION..... 40
3.6.4 PRE-DECONTAMINATION CONDITIONS..... 40
3.6.5. CLEANING:..... 40
3.7 VISUAL INSPECTION AND AIR CLEARANCE TESTING..... 40
3.7.1 GENERAL..... 40
3.7.2 VISUAL INSPECTION..... 40
3.7.3 AIR CLEARANCE TESTING..... 41
3.7.4 FINAL AIR CLEARANCE PROCEDURES..... 41
3.8 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE..... 41
3.8.1 COMPLETION OF ABATEMENT WORK..... 41
3.8.2 CERTIFICATE OF COMPLETION BY CONTRACTOR..... 42
3.8.3 WORK SHIFTS..... 42
ATTACHMENT #1..... 1
ATTACHMENT #2..... 2
ATTACHMENT #3..... 3
ATTACHMENT #4..... 4

PART 1 - GENERAL

1.1 SUMMARY OF THE WORK

1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS

Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor (Contractor) discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Contractor. All cost incurred due to such action are also the responsibility of the Contractor.

1.1.2 EXTENT OF WORK

A. Below is a brief description of the estimated quantities of asbestos flooring materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.

B. Removal, clean-up and disposal of ACM floor tile mastic in an appropriate regulated area in the following approximate quantities; 730 square feet of mastic and 9”x 9” floor tile, 4,495 square feet of mastic below 12”x12” floor tile, 6,120 square feet of mastic below linoleum, 70 square feet of mastic below laminate and 5,250 square feet of floor tile or mastic below carpeting.

1.1.3 RELATED WORK

A. Section 07 84 00, FIRESTOPPING.

B. Section 02 41 00, DEMOLITION.

C. Division 09; FINISHES.

1.1.4 TASKS

The work tasks are summarized briefly as follows:

A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, work-site preparations, emergency procedures arrangements, and standard operating procedures for Class II asbestos abatement work.

B. Abatement activities including removal, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.

C. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES

A. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.

B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved pre-abatement work plan. Asbestos abatement drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action.

1.2 VARIATIONS IN QUANTITY

The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimates which are limited by the physical constraints imposed by occupancy of the buildings. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the Contractor shall provide unit prices for additional work that is newly discovered materials and those prices will be used for additional work under the contract.

1.3 STOP ASBESTOS REMOVAL

If the Contracting Officer or their field representative presents a written **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and adequately wet any exposed ACM. The Contractor shall not resume any asbestos removal activity until authorized to do so by the VA. A stop asbestos removal order may be issued at any time the VA determines abatement conditions/ activities are not within specification requirements. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the industrial hygienist's time. The occurrence of any of the following events shall be reported immediately by the Contractor in writing to the VA representative and shall require the Contractor to immediately stop asbestos removal activities and initiate fiber reduction activities:

A. =/> 0.01 f/cc outside a regulated area or >0.05 f/cc inside a regulated area;
B. breach/break in regulated area critical barrier(s)/floor;
C. serious injury/death at the site;
D. fire/safety emergency at the site;
E. respiratory protection system failure;
F. power failure loss of wetting agent; or
G. any visible emissions observed outside the regulated area.

1.4 DEFINITIONS

1.4.1 GENERAL

Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

1.4.2 GLOSSARY

Abatement - Procedures to control fiber release from asbestos-containing materials, typically during removal. Includes removal, encapsulation, enclosure, demolition and renovation activities related to asbestos.

ACE - Asbestos contaminated elements.

ACM - Asbestos containing material.

Aerosol - Solid or liquid particulate suspended in air.

Adequately wet - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

Aggressive method - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

Aggressive sampling - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

AHERA - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

Aircell - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

Air monitoring - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air.

Air sample filter - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

Amended water - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

Asbestos - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

Asbestos-containing material (ACM) - Any material containing more than one percent asbestos.

Asbestos contaminated elements (ACE) - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

Asbestos-containing waste material - Asbestos-containing material or asbestos contaminated objects requiring disposal.

Asbestos waste decontamination facility - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

Authorized person - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

Authorized visitor - Any person approved by the VA; the contractor; or any government agency having jurisdiction over the regulated area.

Barrier - Any surface the isolates the regulated area and inhibits fiber migration from the regulated area.

Containment Barrier - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

Critical Barrier - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

Primary Barrier - Barriers placed over critical barriers and exposed directly to abatement work.

Secondary Barrier - Any additional sheeting used to isolate and provide protection from debris during abatement work.

Breathing zone - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

Bridging encapsulant - An encapsulant that forms a layer on the surface of the ACM.

Building/facility owner - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

Bulk testing - The collection and analysis of suspect asbestos containing materials.

Certified Industrial Hygienist (CIH) - One certified in practice of industrial hygiene by the American Board of Industrial Hygiene. An industrial hygienist Certified in Comprehensive Practice by the American Board of Industrial Hygiene.

Class I asbestos work - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

Class II asbestos work - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

Clean room/Changing room - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

Clearance sample - The final air sample taken after all asbestos work has been done and visually inspected.
Performed by the VA's industrial hygiene consultant (VPIH).

Closely resemble - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

Competent person - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

Contractor's Professional Industrial Hygienist (CPIH) - The Contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of the PIH.

Count - Refers to the fiber count or the average number of fibers greater than five microns in length per cubic centimeter of air.

Decontamination area/unit - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

Demolition - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

Disposal bag - Typically 6 mil thick siftproof, dustproof, leaktight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

Disturbance - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be

contained in one glove bag or disposal bag which shall not exceed 60 inches in length or width.

Drum - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be siftproof, dustproof, and leaktight.

Employee exposure - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

Encapsulant - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

Encapsulation - Treating ACM with an encapsulant.

Enclosure - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

Equipment room - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

Fiber - A particulate form of asbestos, 5 microns or longer, with a length to width ratio of at least 3 to 1.

Fibers per cubic centimeter (f/cc) - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

Filter - Media used in respirators, vacuums, or other machines to remove particulate from air.

Firestopping - Material used to close the open parts of a structure in order to prevent a fire from spreading.

Friable asbestos containing material - Any material containing more than 1 percent asbestos as determined using the method specified in Appendix A, Subpart F, 40 CFR 763, Section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

Glovebag - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

High efficiency particulate air (HEPA) filter - A filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 microns or greater in diameter.

HEPA vacuum - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

Homogeneous area - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

HVAC - Heating, Ventilation and Air Conditioning

Industrial hygienist - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

Industrial hygienist technician - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned.

Intact - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

Lockdown - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

National Emission Standards for Hazardous Air Pollutants (NESHAP's) - EPA's rule to control emissions of asbestos to the environment.

Negative initial exposure assessment - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL's.

Negative pressure - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water gauge inside the negative pressure enclosure.

Negative pressure respirator - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air outside the respirator.

Non-friable ACM - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

Organic vapor cartridge - The type of cartridge used on air purifying respirators for organic vapor exposures.

Outside air - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

Owner/operator - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who

owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

Penetrating encapsulant - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

Personal sampling/monitoring - Representative air samples obtained in the breathing zone of the person using a cassette and battery operated pump to determine asbestos exposure.

Permissible exposures limit (PEL) - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the PEL is 0.1 fibers per cc.

Polarized light microscopy (PLM) - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

Polyethylene sheeting - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, sometimes flame retardant in compliance with NFPA 241.

Positive/negative fit check - A method of verifying the fit of a respirator by closing off the filters and breathing in or closing off the exhalation valve and breathing out while detecting leakage of the respirator.

Presumed ACM (PACM) - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (k)(5).

Professional IH - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH.

Project designer - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B)(5).

Protection factor - A value assigned by OSHA/NIOSH to indicate the assigned protection a respirator should provide if worn properly. The

number indicates the reduction of exposure level from outside to inside the respirator.

Qualitative fit test (QLFT) - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

Quantitative fit test (QNFT) - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

Regulated area - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

Regulated ACM (RACM) - Friable ACM; Category I nonfriable ACM that has become friable; Category I nonfriable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II nonfriable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

Removal - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

Renovation - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

Repair - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

Shower room - The portion of the PDF where personnel shower before leaving the regulated area. Also used for bag/drum decontamination in the EDF.

Standard operating procedures (SOP's) - Asbestos work procedures required to be submitted by the contractor before work begins.

Supplied air respirator (SAR) - A respirator that utilizes an air supply separate from the air in the regulated area.

Surfacing ACM - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

Surfactant - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

Thermal system ACM - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

Transmission electron microscopy (TEM) - A microscopy method that can identify and count asbestos fibers.

VA Industrial Hygienist (VPIH/CIH) - Department of Veterans Affairs Professional Industrial Hygienist.

VA Representative - The VA official responsible for on-going project work.

Visible emissions - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM or ACM waste material.

Waste/Equipment decontamination area (W/EDA) - The area in which waste is packaged and equipment is decontaminated before removal from the regulated area.

Waste generator - Any owner or operator whose act or process produces asbestos-containing waste material.

Waste shipment record - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

Wet cleaning - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

1.4.3 REFERENCED STANDARDS ORGANIZATIONS

The following acronyms or abbreviations as referenced in contract/ specification documents are defined to mean the associated names. Names and addresses may be subject to change.

A. VA Department of Veterans Affairs
810 Vermont Avenue, NW
Washington, DC 20420

B. AIHA American Industrial Hygiene Association
2700 Prosperity Avenue, Suite 250
Fairfax, VA 22031
703-849-8888

C. ANSI American National Standards Institute
1430 Broadway
New York, NY 10018
212-354-3300

D. ASTM American Society for Testing and Materials
1916 Race St.

Philadelphia, PA 19103
215-299-5400

E. CFR Code of Federal Regulations
Government Printing Office
Washington, DC 20420

F. CGA Compressed Gas Association
1235 Jefferson Davis Highway
Arlington, VA 22202
703-979-0900

G. CS Commercial Standard of the National Institute of Standards and Technology (NIST)
U. S. Department of Commerce
Government Printing Office
Washington, DC 20420

H. EPA Environmental Protection Agency
401 M St., SW
Washington, DC 20460
202-382-3949

I. MIL-STD Military Standards/Standardization Division
Office of the Assistant Secretary of Defense
Washington, DC 20420

J. MSHA Mine Safety and Health Administration
Respiratory Protection Division
Ballston Tower #3
Department of Labor
Arlington, VA 22203
703-235-1452

K. NIST National Institute for Standards and Technology
U. S. Department of Commerce
Gaithersburg, MD 20234
301-921-1000

L. NEC National Electrical Code (by NFPA)

M. NEMA National Electrical Manufacturer's Association
2101 L Street, NW
Washington, DC 20037

N. NFPA National Fire Protection Association
1 Batterymarch Park
P.O. Box 9101

Quincy, MA 02269-9101
800-344-3555

O. NIOSH National Institutes for Occupational Safety and Health
4676 Columbia Parkway
Cincinnati, OH 45226
513-533-8236

P. OSHA Occupational Safety and Health Administration
U.S. Department of Labor
Government Printing Office
Washington, DC 20402

Q. UL Underwriters Laboratory
333 Pfingsten Rd.
Northbrook, IL 60062
312-272-8800

R. USA United States Army
Army Chemical Corps
Department of Defense
Washington, DC 20420

1.5 APPLICABLE CODES AND REGULATIONS

1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS

A. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.

B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.

C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

1.5.2 CONTRACTOR RESPONSIBILITY

The Contractor shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the abatement project. The Contractor is responsible for providing and maintaining training, accreditations,

medical exams, medical records, personal protective equipment as required by applicable Federal, State and Local regulations. The contractor shall hold the VA and VPIH/CIH consultants harmless for any failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The contractor will incur all costs of the CPIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements.

1.5.3 FEDERAL REQUIREMENTS

Federal requirements which govern some aspect of asbestos abatement include, but are not limited to, the following regulations.

A. Occupational Safety and Health Administration **(OSHA)**
   1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
   2. Title 29 CFR 1910.132 - Personal Protective Equipment
   3. Title 29 CFR 1910.134 - Respiratory Protection
   4. Title 29 CFR 1926 - Construction Industry Standards
   5. Title 29 CFR 1910.20 - Access to Employee Exposure and Medical Records
   6. Title 29 CFR 1910.1200 - Hazard Communication
   7. Title 29 CFR 1910.151 - Medical and First Aid

B. Environmental Protection Agency (EPA)
   1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
   2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)

C. Department of Transportation (DOT)
   Title 49 CFR 100 - 185 - Transportation

1.5.4 STATE REQUIREMENTS

State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following:
State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following:

ASBESTOS ABATEMENT CONTRACTOR LICENSING AND TRAINING, OHIO ADMINISTRATIVE CODE, RULES 3701-34-01 THROUGH 3701-34-7

1.5.5 LOCAL REQUIREMENTS

If local requirements are more stringent than federal or state standards, the local standards are to be followed.

1.5.6 STANDARDS

A. Standards which govern asbestos abatement activities include, but are not limited to, the following:

1. American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems Z88.2 - Practices for Respiratory Protection.
2. Underwriters Laboratories (UL)586-90 - UL Standard for Safety of HEPA filter Units, 7th Edition.

B. Standards which govern encapsulation work include, but are not limited to, the following:
1. American Society for Testing and Materials (ASTM)

C. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
3. NFPA 101 - Life Safety Code

1.5.7 EPA GUIDANCE DOCUMENTS

A. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.

B. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024

C. Asbestos Waste Management Guidance EPA 530-SW-85-007

D. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001

E. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

1.5.8 NOTICES

A. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:

Send written notification as required by USEPA National Emissions Standards for Hazardous Air Pollutants (NESHAPS) Asbestos regulations (40 CFR 61, Subpart M) to the regional Asbestos NESHAPS Contact at least 10 days prior to beginning any work on asbestos abatement or related work. Send notification to the following address:

Department of Public Health
Division of Air Quality
1925 St. Clair Avenue
Cleveland, Ohio 44114-2080

Send written notification as required by Ohio Department of Health at least 10 days prior to beginning any work on any planned asbestos hazard abatement project as required by chapter 3701-34. Send notification to the following address:

Ohio Department of Health
P.O. Box 15278
Columbus, Ohio 43215

B. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification is given to EPA, State, and Local authorities.

1.5.9 PERMITS/LICENSES

A. The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

B. Contractor shall maintain a current Ohio Department of Health "Asbestos Abatement Contractor" license in accordance with paragraph (C) of rule 3701-34-01 of the Administrative Code

1.5.10 POSTING AND FILING OF REGULATIONS

A. Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

1.5.11 VA RESPONSIBILITIES

Prior to commencement of work:

A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**

B. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

1.5.12 SITE SECURITY

A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.

B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent person shall immediately notify the VA.

C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.

D. Access to the regulated area shall be through of a critical barrier doorway. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall <u>not</u> be locked from the inside, however, they shall be sealed with poly sheeting and taped until needed.

E. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.

F. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.

G. The regulated area shall be locked during non-working hours and secured by VA security guards.

1.5.13 EMERGENCY ACTION PLAN AND ARRANGEMENTS

A. An Emergency Action Plan shall be developed by the Contractor prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a);(b).

B. Emergency procedures shall be in written form and prominently posted and available in the regulated area. Everyone, prior to entering the

regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.

C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule and layout of regulated area, particularly barriers that may affect response capabilities.

D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.

E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.

1. For non life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.

F. Telephone numbers of all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.

G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.

H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the standard operating procedures during abatement. Such incidents include, but are not limited to, fire; accident; and power failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that work is stopped and wetting is continued until correction of the problem.

1.5.14 PRE-START MEETING

Prior to commencing the work, the Contractor shall meet with the VPCIH to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

A. Proof of Contractor licensing.

B. Proof the Competent Person is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person shall also be presented.

C. A list of all workers who will participate in the project, including experience and verification of training and accreditation.

D. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.

E. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).

F. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.

G. A copy of the Contractor's Standard Operating Procedures for Class I Glovebag Asbestos Abatement. In these procedures, the following information must be detailed, specific for this project.

1. Regulated area preparation procedures;
2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
3. and Decontamination procedures for employees;
4. Class II abatement methods/procedures and equipment to be used;
5. Personal protective equipment to be used;

H. At this meeting the Contractor shall provide all submittals as required.

I. Procedures for handling, packaging and disposal of asbestos waste.

J. Emergency Action Plan and Contingency Plan procedures.

1.6 PROJECT COORDINATION

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

1.6.1 PERSONNEL

A. Administrative and supervisory personnel shall consist of a qualified Competent Person as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial

Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.

B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.

C. Minimum qualifications for Contractor and assigned personnel are:

1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive standard operating procedures for asbestos work; has adequate materials, equipment and supplies to perform the work.
2. The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
3. The Contractor Professional Industrial Hygienist (CPIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete standard operating procedure for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the

NIOSH 582 Course, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.

4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the standard operating procedures of the Contractor; has one year of asbestos abatement experience; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

1.7 RESPIRATORY PROTECTION

1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM

The Contractor shall develop and implement a Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.132;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written respiratory protection shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c)(1)(i - ix) - Respiratory Protection Program.

1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR

The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years experience coordinating the program. The RPPC must provide a signed statement attesting to the fact that the program meets the above requirements.

1.7.3 SELECTION AND USE OF RESPIRATORS

The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualification. The procedure must written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

1.7.4 MINIMUM RESPIRATORY PROTECTION

Minimum respiratory protection shall be a half face, HEPA filtered, air purifying respirator when fiber levels are maintained consistently at or below 0.1 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

1.7.5 MEDICAL WRITTEN OPINION

No employee shall be allowed to wear a respirator unless a physician has determined they are capable of doing so and has issued a current written opinion for that person.

1.7.6 RESPIRATOR FIT TEST

All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Fit tests shall be done for PAPR's which have been put into a failure mode.

1.7.7 RESPIRATOR FIT CHECK

The Competent Person shall assure that the positive/negative fit check is done each time the respirator is donned by an employee. Headcoverings must cover respirator headstraps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a fit check shall preclude that person from wearing a respirator until resolution of the problem.

1.7.8 MAINTENANCE AND CARE OF RESPIRATORS

The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and care of respirators.

1.8 WORKER PROTECTION

1.8.1 TRAINING OF ABATEMENT PERSONNEL

Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

1.8.2 MEDICAL EXAMINATIONS

Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. The physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the opinion the person has been evaluated for working in a heat stress environment while wearing personal protective equipment and is able to perform the work.

1.8.3 PERSONAL PROTECTIVE EQUIPMENT

Provide whole body clothing, head coverings, foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

1.8.4 REGULATED AREA ENTRY PROCEDURE

Worker protection shall meet the most stringent requirements. The Competent Person shall ensure that each time workers enter the regulated area, they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

1.8.5 DECONTAMINATION PROCEDURE

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

A. When exiting the regulated area, remove all disposable PPE and dispose of in a disposal bag provided in the regulated area.
B. Carefully decontaminate and clean the respirator. Put in a clean container/bag.

1.8.6 REGULATED AREA REQUIREMENTS

The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for Class I glovebag regulated areas at 29 CFR 1926.1101 (e) are met applicable to Class II work. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

1.9 DECONTAMINATION FACILITIES:

1.9.1 DESCRIPTION:

Provide each regulated area with a fiber drum with a disposal bag in it for personnel waste materials.

1.9.2 WASTE/EQUIPMENT DECONTAMINATION AREA (W/EDA) - The Competent Person shall provide a W/EDA for removal of all waste, equipment and contaminated material from the regulated area.

1.9.3 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES: Contain all waste in 6 mil poly bags. Clean/decontaminate bags and pass through a double 6 mil flap

doorway into another bag or fiber drum. Remove to disposal dumpster/gondola/vehicle. At no time shall unprotected personnel from the clean side be allowed to enter the regulated area.

PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT

2.1 MATERIALS AND EQUIPMENT

2.1.1 GENERAL REQUIREMENTS (ALL ABATEMENT PROJECTS)

Prior to the start of work, the Contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH has submitted verification to the VA's representative to this effect:

A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).

B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated/work area until abatement is completed.

C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized place.

D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.

D. Poly sheeting for critical barriers/floors in the regulated area shall be 6 mil.

F. If required, the method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces.

G. An adequate number of infra-red heating units, HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements shall be provided. Fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project shall also be provided. All electrically

operated hand tools, equipment, electric cords shall be equipped with GFCI protection.

H. Special protection for objects in the regulated area shall be detailed. (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water, and falling material.)

I. Impermeable fiberboard drums and disposal bags 2 layers of 6 mil, for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.

J. The VA shall be provided a copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication. Chlorinated compounds shall not be used with any spray adhesive or other product. Appropriate encapsulant(s) shall be provided.

K. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.

L. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a hazard assessment conducted under 29 CFR 1910.132(d).

2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA

2.2.1 GENERAL

A. Using critical barriers, seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All horizontal surfaces, as required, in the regulated area must be covered with 2 layers of 6 mil fire retardant poly to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated, immediately stop work and clean up the contamination at no additional cost to the Government. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 2.2.7; Section 07 92 00, FIRESTOPPING.

2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA

B. Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Remove all uncontaminated removable furniture, equipment and/or supplies from the regulated area before commencing work, or completely cover with two layers of 6-mil fire retardant poly sheeting and secure with duct tape. Lock out and tag out any HVAC systems in the regulated area.

2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA

Access to the regulated area is allowed only through the personnel decontamination facility (PDF), if required. All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly sheeting to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid.

2.2.4 CRITICAL BARRIERS

Completely separate any openings into the regulated area from adjacent areas using fire retardant poly at least 6 mils thick and duct tape. Individually seal with two layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects in the regulated area. Heat must be shut off any objects covered with poly.

2.2.5 SECONDARY BARRIERS:

A loose layer of 6 mil fire retardant poly shall be used as a drop cloth to protect the floor/horizontal surfaces from debris generated during the Class II work, except for floor tile abatement. This layer shall be replaced as needed during the work.

2.2.6 EXTENSION OF THE REGULATED AREA

If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. If the affected area cannot be added to the regulated area, decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

2.2.7 FIRESTOPPING:

A. Through penetrations caused by cables, cable trays, pipes, sleeves must be firestopped with a fire-rated firestop system providing an air tight seal.

B. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The Contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA Representative immediately. All walls, floors and ceilings are

considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.

C. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

2.3 MONITORING, INSPECTION AND TESTING

2.3.1 GENERAL

A. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. The CPIH shall periodically inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.

B. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.

C. If fibers counted by the VPIH/CIH during abatement work inside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed 0.05 f/cc, the Contractor shall stop work. If fiber levels exceed 0.01 f/cc outside the regulated area, the Contractor shall stop work. The

Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH with review and approval of the VPIH/CIH. An agreement between the CPIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT

A. The purpose of the work of the VPIH/CIH is to: assure quality; resolve problems; and prevent the spread of contamination beyond the regulated area. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:

1. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
2. Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
3. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
4. Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of unforeseen developments, etc.
5. Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area or building at the conclusion of the abatement and clean-up work to certify compliance with all regulations and the VA requirements/specifications.

6. Task 6: Issue certificate of decontamination for each regulated area or building and project report.

B. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.

C. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

D. All air sampling and analysis data will be recorded on VA Form 10-0018.

2.3.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH

The CPIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor /Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in air sampling and analysis. The IH Technician shall have a NIOSH 582 Course or equivalent and show proof. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA/State Contractor/Supervisor and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation. The analytic laboratory used by the Abatement Contractor to analyze the samples shall be AIHA accredited for asbestos PAT. A daily log documenting all OSHA requirements for air monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH. The log will contain, at a minimum, information on personnel or area sampled, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH shall

collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH responsibilities.

2.4 STANDARD OPERATING PROCEDURES

The Contractor shall have established Standard Operating Procedures (SOP's) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the ways and procedures to be followed during all phases of the work by the contractor's personnel. The SOP's must be modified as needed to address specific requirements of the project. The SOP's shall be submitted for review and approval prior to the start of any abatement work. The minimum topics and areas to be covered by the SOP's are:

A. Minimum Personnel Qualifications
B. Contingency Plans and Arrangements
C. Security and Safety Procedures
D. Respiratory Protection/Personal Protective Equipment Program and Training
E. Medical Surveillance Program and Recordkeeping
F. Regulated Area Requirements for Class II work
G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
H. Monitoring, Inspections, and Testing
I. Removal Procedures for Class II Materials
J. Disposal of ACM Waste
K. Regulated Area Decontamination/Clean-up
L. Regulated Area Visual and Air Clearance
M. Project Completion/Closeout

2.5 SUBMITTALS

2.5.1 PRE-START MEETING SUBMITTALS

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project.

A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.

B. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.

C. Submit Standard Operating Procedures developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH.

D. Submit the specifics of the materials and equipment to be used for this project with brand names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
   1. HEPA vacuums, air monitoring pumps, calibration devices, infrared heating machines, and emergency power generating system.
   2. Encapsulants, surfactants, hand held sprayers, airless sprayers, fire extinguishers.
   3. Personal protective equipment.
   4. Fire safety equipment to be used in the regulated area.

E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.

F. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.

G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A.

H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
   1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project:

Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; Completion Date

2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years:
   Project Name; Reason; Date; Reference Name/Number; Resolution
3. List asbestos regulatory citations, penalties, damages paid and legal actions taken against the company in the last 3 years. Provide copies and all information needed for verification.

I. Submit information on personnel: Provide a resume; address each item completely; provide references; phone numbers; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.

1. CPIH: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of SOP's developed; medical opinion; current respirator fit test.
2. Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion; current respirator fit test.
3. Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion; current respirator fit test.

J. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain English the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of SOP's incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who does and how is air monitoring conducted; a list of references of

independent laboratories/IH's familiar with your air monitoring and standard operating procedures; copies of monitoring results of the five referenced projects listed and analytical method(s) used.

K. When rental equipment is to be used in regulated areas or used to transport asbestos waste, the contractor shall assure complete decontamination of the rental equipment before return to the rental agency.

2.5.2 SUBMITTALS DURING ABATEMENT

A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/ exiting the regulated area; document and discuss the resolution of unusual events such as critical barrier breeching, equipment failures, emergencies, and any cause for stopping work; representative air monitoring and results/TWA's/EL's. Submit this daily log to VA's representative.

B. The CPIH shall document and maintain the following during abatement and submit as appropriate to the VA's representative.

1. Inspection and approval of the regulated area preparation prior to start of work and daily during work.
2. Removal of any poly critical/floor barriers.
3. Visual inspection/testing by the CPIH.
4. Packaging and removal of ACM waste from regulated area.
5. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT

The CPIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. The report shall include a certificate of completion, signed and dated by the CPIH, in accordance with Attachment #1. The VA Representative will forward the abatement report to the Medical Center after completion of the project.

PART 3 - EXECUTION

3.1 PRE-ABATEMENT ACTIVITIES

3.1.1 PRE-ABATEMENT MEETING

The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH that all

materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/ documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS

Before any work begins on the construction of the regulated area, the Contractor will:

A. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.

B. The VA Representative, the Contractor, and the VPIH/CIH must be aware of 10/95 A/E Quality Alert indicating the failure to identify asbestos as applicable to glovebag abatement in the areas listed. Make sure these areas are looked at/reviewed on the project:
Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside chases/walls; transite piping/ductwork/sheets; behind radiators; below window sills; water/sewer lines; electrical conduit coverings; steam line trench coverings.

C. Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects which the Contractor is required to remove from the regulated area have been cleaned and removed or properly protected from contamination.

D. Shut down and seal with a minimum of 2 layers of 6 mil fire retardant poly all HVAC systems and critical openings in the regulated area. The regulated area critical barriers shall be completely isolate the regulated area from any other air in the building. The VA's representative will monitor the isolation provision.

E. Shut down and lock out in accordance with 29 CFR 1910.147 all electrical circuits which pose a potential hazard. Electrical arrangements will be

tailored to the particular regulated area and the systems involved. All electrical circuits affected will be turned off at the circuit box outside the regulated area, not just the wall switch. The goal is to eliminate the potential for electrical shock which is a major threat to life in the regulated area due to water use and possible energized circuits. Electrical lines used to power equipment in the regulated area shall conform to all electrical safety standards and shall be isolated by the use of a ground fault circuit interrupter (GFCI). All GFCI shall be tested prior to use. The VA's representative will monitor the electrical shutdown.

F. If required, remove and dispose of carpeting from floors in the regulated area.

G. Inspect existing firestopping in the regulated area. Correct as needed.

3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS

A. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.

B. Upon completion of all preparatory work, the CPIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, Contractor's employees perform all major aspects of the approved SOP's, especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation.

C. The CPIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.

D. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the Class II asbestos abatement work in accordance with this specification.

3.2 REGULATED AREA PREPARATIONS

3.2.1 OSHA DANGER SIGNS

Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed ambient background levels. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.

3.2.2 SHUT DOWN - LOCK OUT ELECTRICAL

Shut down and lock out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.

3.2.3 SHUT DOWN - LOCK OUT HVAC

Shut down and lock out heating, cooling, and air conditioning system **(HVAC)** components that are in, supply or pass through the regulated area. Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6 mil poly disposal bags for disposal as asbestos waste.

3.2.4 SANITARY FACILITIES

The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

3.2.5 WATER FOR ABATEMENT

The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.

3.2.6 PRE-CLEANING MOVABLE OBJECTS

Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location.

3.2.7 PRE-CLEANING FIXED OBJECTS

Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation

or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.

3.2.8 PRE-CLEANING SURFACES IN THE REGULATED AREA

Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

3.3 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA

3.3.1 GENERAL

Seal off any openings at the perimeter of the regulated area with critical barriers to completely isolate the regulated area and to contain all airborne asbestos contamination created by the abatement activities. Should the adjacent area past the regulated area become contaminated due to improper work activities, the Contractor shall suspend work inside the regulated area, continue wetting, and clean the adjacent areas in accordance with procedures described in these specifications. Any and all costs associated with the adjacent area cleanup shall not be borne by the VA.

3.3.2 PREPARATION PRIOR TO SEALING OFF

Place all infrared machines, materials, equipment and supplies necessary to isolate the regulated area inside the regulated area. Remove all movable material/equipment as described above and secure all unmovable material/equipment as described above. Properly secured material/equipment shall be considered to be outside the regulated area.

3.3.3 CONTROLLING ACCESS TO THE REGULATED AREA

Access to the regulated area shall be permitted only by the competent person. All other means of access shall be closed off by proper sealing and OSHA DANGER demarcation signs posted on the clean side of the regulated area where it is adjacent to or within view of any occupiable area. An opaque visual barrier of 6 mil poly shall be provided so that the abatement work is not visible to any building occupants. If the area adjacent to the regulated area is accessible to the public, construct a solid barrier on the public side of the sheeting for protection and isolation of the project. The barrier shall be constructed with normal 2” x 4” (50mm x 100mm) wood or metal studs 16” (400mm) on centers, securely anchored to prevent movement and covered with a minimum of ½” (12.5mm) plywood. Provide an appropriate number of OSHA DANGER signs for

each visual and physical barrier. Any alternative method must be given a written approval by the VA's representative.

3.3.4 CRITICAL BARRIERS

The regulated area must be completely separated from the adjacent areas, and the outside by at least 2 layers of 6 mil fire retardant poly and duct tape/spray adhesive. Individually seal all supply and exhaust ventilation openings, lighting fixtures, clocks, doorways, windows, convectors, speakers, and other openings into the regulated area with 2 layers of 6 mil fire retardant poly, and taped securely in place with duct tape/spray adhesive. Critical barriers must remain in place until all work and clearances have been completed.

3.3.5 EXTENSION OF THE REGULATED AREA

If the regulated area barrier is breached in any manner that could allow the passage of asbestos fibers or debris, the Competent Person shall immediately stop work, continue wetting, and proceed to extend the regulated area to enclose the affected area as per procedures described in this specification. If the affected area cannot be enclosed, decontamination measures and cleanup shall start immediately. All personnel shall be isolated from the affected area until decontamination/cleanup is completed as verified by visual inspection and air monitoring. Air monitoring at completion must indicate background levels or less than 0.01 f/cc.

3.3.6 FLOOR BARRIERS

If floor removal is not being done, all floors in the regulated area shall be covered with 2 layers of 6 mil fire retardant poly and brought up the wall 12 inches.

3.4 REMOVAL OF CLASS II FLOORING; ROOFING; AND TRANSITE MATERIALS:

3.4.1 GENERAL

All applicable requirements of OSHA, EPA, and DOT shall be followed during Class II work. Keep materials intact; do not disturb; wet while working with it; wrap as soon as possible with 2 layers of 6 mil plastic for disposal.

3.4.2 REMOVAL OF FLOORING MATERIALS:

A. All requirements of OSHA Flooring agreement provisions shall be followed:
   1. Negative air machine shall be used to effect some negative pressure in the regulated area. A spare machine shall be available.
   2. Flooring shall be removed intact, as much as possible. Do not rip or tear flooring.

3. Mechanical chipping or sanding is not allowed.
4. Flooring shall be removed with an infra-red heating unit operated by trained personnel following the manufacturer's instructions.
5. Wet clean and HEPA vacuum the floor before and after removal of flooring.
6. Place a 6 mil poly layer 4' by 10' adjacent to the regulated area for use as a decontaminated area. All waste must be contained in the regulated area.
7. Package all waste in 6 mil poly lined fiberboard drums.

3.4.3 REMOVAL OF MASTIC

A. Mastic removal material must have a flash point above 140°F.
B. The mastic removal material must be a "low odor" or "no odor" material.
C. A negative air machine as required under flooring removal shall be provided.
D. Follow all manufacturers' instructions in the use of the mastic removal material.
E. Package all waste in 6 mil poly lined fiberboard drums.
F. Prior to application of any liquid material, check the floor for penetrations and seal before removing mastic.

3.5 DISPOSAL OF CLASS II WASTE MATERIAL:

3.5.1 GENERAL

Package and dispose of waste materials as per this specification. All OSHA, EPA, and DOT requirements must be met. Landfill requirements for packaging must also be met. Disposal of non-friable waste must be done in accordance with applicable regulations.

3.6 PROJECT DECONTAMINATION

3.6.1 GENERAL

A. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH.
B. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleaning of the regulated area surfaces after the primary barrier removal.
C. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

3.6.2 REGULATED AREA CLEARANCE

Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

3.6.3 WORK DESCRIPTION

Decontamination includes the cleaning and clearance of the air in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities.

3.6.4 PRE-DECONTAMINATION CONDITIONS

A. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the secondary barrier of poly removal and disposed of along with any gross debris generated by the work.

B. At the start of decontamination, the following shall be in place:

1. Critical barriers over all openings consisting of two layers of 6 mil poly which is the sole barrier between the regulated area and the rest of the building or outside.
2. Decontamination facilities, if required for personnel and equipment in operating condition.

3.6.5. CLEANING:

Clean all surfaces of the regulated area by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping methods. If determined by the CPIH/VPIH/CIH additional cleaning(s) may be needed.

3.7 VISUAL INSPECTION AND AIR CLEARANCE TESTING

3.7.1 GENERAL

Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH after the cleaning.

3.7.2 VISUAL INSPECTION

Final visual inspection will include the entire regulated area, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the cleaning shall be repeated at no cost to the VA. Dust/ material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

3.7.3 AIR CLEARANCE TESTING

A. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final testing. Air samples will be collected and analyzed in accordance with procedures for PCM in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures. Additional inspection and testing will be done at the expense of the Contractor.

B. If the results of the PCM are acceptable, remove the critical barriers. Any small quantities of residue material found upon removal of the poly shall be removed with a HEPA vacuum and localized isolation. If significant quantities are found as determined by the VPIH/CIH, then the entire area affected shall be cleaned as specified in the final cleaning.

C. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

3.7.4 FINAL AIR CLEARANCE PROCEDURES

A. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured with PCM methods.

B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:

1. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method.
2. All clearance air testing samples shall be collected on 0.8μ MCE filters for PCM analysis. Air samples will be collected in areas subject to normal air circulation. A minimum of 5 PCM samples will be collected with at least 1200 Liters of air sampled. All results must be less than 0.01 f/cc for clearance.

3.8 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE

3.8.1 COMPLETION OF ABATEMENT WORK

A. After thorough decontamination, complete asbestos abatement work upon meeting the regulated area clearance criteria and fulfilling the following:

1. Remove all equipment, materials, and debris from the project area.

2. Package and dispose of all asbestos waste as required.
3. Repair or replace all interior finishes damaged during the abatement work.
4. Fulfill other project closeout requirements as specified elsewhere in this specification.

3.8.2 CERTIFICATE OF COMPLETION BY CONTRACTOR

The CPIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

3.8.3 WORK SHIFTS

All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday - Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

ATTACHMENT #1

CERTIFICATE OF COMPLETION

DATE:

PROJECT NAME:

VAMC/ADDRESS:

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):

   which took place from / / to / /

2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.

3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.

4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.

5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.

6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.

7. That all glovebag work was done in accordance with OSHA requirements and the manufacturer’s recommendations.

CPIH Name:

Signature/Date:

Asbestos Abatement Contractor's Name:

Signature/Date:

ATTACHMENT #2

CERTIFICATE OF WORKER'S ACKNOWLEDGMENT

PROJECT NAME: DATE:

PROJECT ADDRESS:

ABATEMENT CONTRACTOR'S NAME:

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

Physical Characteristics and Background Information on Asbestos
Potential Health Effects Related to Exposure to Asbestos
Employee Personal Protective Equipment
Establishment of a Respiratory Protection Program
State of the Art Work Practices
Personal Hygiene
Additional Safety Hazards
Medical Monitoring
Air Monitoring
Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature:

Printed Name:

Social Security Number: Witness:

ATTACHMENT #3

AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION

VA PROJECT NAME AND NUMBER:

VA MEDICAL FACILITY:

ABATEMENT CONTRACTOR'S NAME AND ADDRESS:

1. I verify that the following individual

   Name: Social Security Number:

   who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

   Address:

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

   Signature of CPIH: Date:

   Printed Name of CPIH:

   Signature of Contractor: Date:

   Printed Name of Contractor:

ATTACHMENT #4

ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS

VA Project Location:

VA Project #:

VA Project Description:

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature Date

Abatement Contractor Competent Person(s) Date

Date

Date

- - - END- - - -

SECTION 03 30 53
MISCELLANEOUS CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies cast-in-place structural concrete and material and mixes for other concrete.

1.2 RELATED WORK:

A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

1.3 TOLERANCES:

A. ACI 117.

B. Slab Finishes: ACI 117, F-number method in accordance with ASTM E1155.

1.4 REGULATORY REQUIREMENTS:

A. ACI 315 - Manual of Standard Practice for Detailing Reinforced Concrete Structures.

B. ACI 318 - Building Code Requirements for Reinforced Concrete.

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Concrete Mix Design.

C. Shop Drawings: Reinforcing steel: Complete shop drawings.

D. Manufacturer's Certificates: Chemical admixtures, curing compounds.

E. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.6 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Concrete Institute (ACI):

117-90.....Standard Tolerances for Concrete Construction and Materials

301-99.....Specification for Structural Concrete for Buildings

315-99.....Details and Detailing of Concrete Reinforcement

318/318R-2002.....Building Code Requirements for Reinforced Concrete

C. American Society For Testing And Materials (ASTM):

A185-2002.....Steel Welded Wire, Fabric, Plain for Concrete Reinforcement

A615/A615M(REV.A)-2003..Deformed and Plain Billet-Steel Bars for Concrete Reinforcement

C31/C31M-2003.....Making and Curing Concrete Test Specimens in the Field

C33-2003.....Concrete Aggregates

C39/C39M-2001.....Compressive Strength of Cylindrical Concrete Specimens

C94/C94M-2003.....Ready-Mixed Concrete

C143/C143M-2003.....Slump of Portland Cement Concrete

C150(REV. A)-2002.....Portland Cement

C171-2003.....Sheet Material for Curing Concrete

C172-99.....Sampling Freshly Mixed Concrete

C173-2001.....Air Content of Freshly Mixed Concrete by the Volumetric Method

C192/C192M-2002.....Making and Curing Concrete Test Specimens in the Laboratory

C231-2003.....Air Content of Freshly Mixed Concrete by the Pressure Method

C330-2003.....Lightweight Aggregates for Structural Concrete

C494/C494M(REV. A)-99(E2001) Chemical Admixtures for Concrete

E1155-96(R2001).....Standard Test Method for Determining Floor Flatness and Levelness Using the F Number System

PART 2 - PRODUCTS

2.1 MATERIALS:

A. Portland Cement: ASTM C150, Type I or II.

B. Fly Ash: ASTM C618, Class C or F including supplementary optional requirements relating to reactive aggregates and alkalis, and loss on ignition (LOI) not to exceed 5 percent.

C. Coarse Aggregate: ASTM C33, Size 67. Size 467 may be used for footings and walls over 300 mm (12 inches) thick. Coarse aggregate for applied topping and metal pan stair fill shall be Size 7.

D. Fine Aggregate: ASTM C33.

E. Lightweight Aggregate for Structural Concrete: ASTM C330, Table 1

F. Mixing Water: Fresh, clean, and potable.

G. Chemical Admixtures: ASTM C494.

H. Reinforcing Steel: ASTM A615, deformed. See structural drawings for grade.

I Welded Wire Fabric: ASTM A185.

J. Sheet Materials for Curing Concrete: ASTM C171.

K. Grout, Non-Shrinking: Premixed ferrous or non-ferrous, mixed and applied in accordance with manufacturer's recommendations. Grout shall show no settlement or vertical drying shrinkage at 3 days or thereafter based on initial measurement made at time of placement, and produce a compressive strength of at least 35mpa (5000 psi) at 3 days.

2.2 MIXES:

A. Design of concrete mixes using materials specified shall be the responsibility of the Contractor as set forth under Option C of ASTM C94.

B. Compressive strength at 28 days shall be not less than 30 Mpa (4000 psi).

C. Establish strength of concrete by testing prior to beginning concreting operation. Test consists of average of three cylinders made and cured in accordance with ASTM C192 and tested in accordance with ASTM C39.

D. Maximum slump for vibrated concrete is 100 mm (4 inches) tested in accordance with ASTM C143.

E. Cement and water factor (See Table I):

TABLE I CEMENT AND WATER FACTORS FOR CONCRETE

Concrete: Strength	Air-Entrained	
Min. 28 Day Comp. Str. Mpa (psi)	Min. Cement kg/m^3 (lbs/c. yd)	Max. Water Cement Ratio
30 (4000) [1,3]	340 (570)	0.50

F. Air content shall conform with the following table:

TABLE I TOTAL AIR CONTENT
AIR CONTENT OF LIGHTWEIGHT STRUCTURAL CONCRETE

Nominal Maximum Size of Coarse Aggregate	Total Air Content Percentage by Volume
Greater than 10 mm (3/8 in)	4 to 8
10 mm (3/8 in) or less	5 to 9

2.3 MIXING:

A. Store, batch, and mix materials as specified in ASTM C94.
   1. Job-Mixed: Concrete mixed at job site shall be mixed in a batch mixer in manner specified for stationary mixers in ASTM C94.
   2. Ready-Mixed: Ready-mixed concrete comply with ASTM C94, except use of non-agitating equipment for transporting concrete to the site will not be permitted. With each load of concrete delivered to project, ready-mixed concrete producer shall furnish, in duplicate, certification as required by ASTM C94.
   3. Mixing structural lightweight concrete: Charge mixer with 2/3 of total mixing water and all of the aggregate. Mix ingredients for not less than 30 seconds in a stationary mixer or not less than 10 revolutions at mixing speed in a truck mixer. Add remaining mixing water and other ingredients and continue mixing. Above procedure may be modified as recommended by aggregate producer.

PART 3 - EXECUTION

3.1 FORMWORK:

A. Installation conform to ACI 347. Sufficiently tight to hold concrete without leakage, sufficiently braced to withstand vibration of concrete, and to carry, without appreciable deflection, all dead and live loads to which they may be subjected.
B. Treating and Wetting: Treat or wet contact forms as follows:
   1. Clean and coat removable metal forms with light form oil before reinforcement is placed.
C. Inserts, sleeves, and similar items: anchors, inserts, wires, hangers, sleeves, boxes for floor hinges and other items specified as furnished under this and other sections of specifications and required to be in their final position at time concrete is placed shall be properly located, accurately positioned and built into construction, and maintained securely in place.
D. Construction Tolerances:
   1. Contractor is responsible for setting and maintaining concrete formwork to assure erection of completed work within tolerances specified to accommodate installation or other rough and finish materials. Remedial work necessary for correcting excessive tolerances is the responsibility of the Contractor. Erected work that exceeds specified tolerance limits shall be remedied or removed and replaced, at no additional cost to the Government.

2. Permissible surface irregularities for various classes of materials are defined as "finishes" in specification sections covering individual materials. They are to be distinguished from tolerances specified which are applicable to surface irregularities of structural elements.

3.2 REINFORCEMENT:

Details of concrete reinforcement, unless otherwise shown, in accordance with ACI 318 and 315. Support and securely tie reinforcing steel to prevent displacement during placing of concrete.

3.3 PLACING CONCRETE:

A. Remove hardened concrete, debris and other foreign materials from interior of forms, and from inside of mixing and conveying equipment. Obtain approval of COTR before placing concrete. Provide screeds at required elevations for concrete slabs.

B. Before placing new concrete on or against concrete which has set, existing surfaces shall be roughened and cleaned free from all laitance, foreign matter, and loose particles.

C. Convey concrete from mixer to final place of deposit by method which will prevent segregation or loss of ingredients. Do not deposit in work concrete that has attained its initial set or has contained its water or cement more than 1 1/2 hours. Do not allow concrete to drop freely more than 1500 mm (5 feet) in unexposed work nor more than 900 mm (3 feet) in exposed work. Place and consolidate concrete in horizontal layers not exceeding 300 mm (12 inches) in thickness. Consolidate concrete by spading, rodding, and mechanical vibrator. Do not secure vibrator to forms or reinforcement. Vibration shall be carried on continuously with placing of concrete.

3.4 PROTECTION AND CURING:

Protect exposed surfaces of concrete from premature drying, wash by rain or running water, wind, mechanical injury, and excessively hot or cold temperature. Curing method shall be subject to approval by Resident Engineer.

3.5 FINISHES:

A. Slab Finishes:

1. Scratch Finish: Slab surfaces to receive a bonded applied cementitious application shall all be thoroughly raked or wire broomed after partial setting (within 2 hours after placing) to roughen surface to insure a permanent bond between base slab and applied cementitious materials.

2. Floating: Allow water brought to surface by float used for rough finishing to evaporate before surface is again floated or troweled. Do not sprinkle dry cement on surface to absorb water.
3. Float Finish: Ramps, stair treads, and platforms, both interior and exterior, equipment pads, and slabs to receive non-cementitious materials, except as specified, shall be screened and floated to a smooth dense finish. After first floating, while surface is still soft, surfaces shall be checked for alignment using a straightedge or template. Correct high spots by cutting down with a trowel or similar tool and correct low spots by filling in with material of same composition as floor finish. Remove any surface projections on floated finish by rubbing or dry grinding. Refloat the slab to a uniform sandy texture.
4. Steel Trowel Finish: Applied toppings, concrete surfaces to receive resilient floor covering or carpet, future floor roof and all monolithic concrete floor slabs exposed in finished work and for which no other finish is shown or specified shall be steel troweled. Final steel troweling to secure a smooth, dense surface shall be delayed as long as possible, generally when the surface can no longer be dented with finger. During final troweling, tilt steel trowel at a slight angle and exert heavy pressure on trowel to compact cement paste and form a dense, smooth surface. Finished surface shall be free of trowel marks, uniform in texture and appearance.
5. Broom Finish: Finish all exterior slabs, ramps, and stair treads with a bristle brush moistened with clear water after the surfaces have been floated.
6. Finished slab flatness (FF) and levelness (FL) values comply with the following minimum requirements:

Unshored suspended slabs	
Specified overall value	Ff 25
Minimum local value	Ff 17

3.6 APPLIED TOPPING:

A. Separate concrete topping with thickness and strength shown with only enough water to insure a stiff, workable, plastic mix.
B. Continuously place applied topping until entire section is complete, struck off with straightedge, compact by rolling or tamping, float and steel trowel to a hard smooth finish.

- - - E N D - - -

SECTION 05 12 00
STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies structural steel shown and classified by Section 2, Code of Standard Practice for Steel Buildings and Bridges.

1.2 RELATED WORK:

A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Painting: Section 09 91 00, PAINTING.

C. Steel Decking: Section 05 36 00, COMPOSITE METAL DECKING.

D. Fireproofing: Section 07 81 00, APPLIED FIREPROOFING.

1.3 QUALITY ASSURANCE:

A. Fabricator and erector shall maintain a program of quality assurance in conformance with Section 8, Code of Standard Practice for Steel Buildings and Bridges. Work shall be fabricated in an AISC certified, Category "STD," fabrication plant.

B. Before authorizing the commencement of steel erection, the controlling contractor shall ensure that the steel erector is provided with the written notification required by 29 CFR 1926.752. Provide copy of this notification to the COTR.

1.4 TOLERANCES:

Fabrication tolerances for structural steel shall be held within limits established by ASTM A6, by Section 7, Code of Standard Practice for Buildings and Bridges, and by Standard Mill Practice - General Information AISC Steel Construction Manual, Thirteenth Edition, Pages 1-9.

1.5 DESIGN:

A. Connections: Design and detail all connections for each member size, steel grade and connection type to resist the loads and reactions indicated on the drawings or specified herein. Use details consistent with the details shown on the Drawings, supplementing where necessary. The details shown on the Drawings are conceptual and do not indicate the required weld sizes or number of bolts unless specifically noted. Use rational engineering design and standard practice in detailing, accounting for all loads and eccentricities in both the connection and the members. Promptly notify the COTR of any location where the connection design criteria is not clearly indicated. The design of all

connections is subject to the review and acceptance of the COTR. Submit structural calculations prepared and sealed by a qualified engineer registered in the state where the project is located. Submit calculations for review before preparation of detail drawings.

1.6 REGULATORY REQUIREMENTS:

A. AISC: Specification for Structural Steel Buildings.

B. AISC: Code of Standard Practice for Steel Buildings and Bridges.

1.7 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop and Erection Drawings: Complete

C. Certificates:

1. Structural steel.
2. Steel for all connections.
3. Welding materials.
4. Shop coat primer paint.

D. Test Reports:

1. Welders' qualifying tests.

E. Design Calculations and Drawings:

1. Connection calculations, if required.

F. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.8 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Institute of Steel Construction (AISC):

1. Specification for Structural Steel Buildings - Thirteenth Edition, 2005.
2. Code of Standard Practice for Steel Buildings and Bridges (March 2005).

C. American National Standards Institute (ANSI):

B18.22.1-98.....Plain Washers

B18.22M-00.....Metric Plain Washers

D. American Society for Testing and Materials (ASTM):

A6/A6M-04a.....Standard Specification for General Requirements for Rolled Structural Steel Bars, Plates, Shapes, and Sheet Piling

A36/A36M-04.....Standard Specification for Carbon Structural Steel
A307-03.....Standard Specification for Carbon Steel Bolts and Studs, 60,000 psi Tensile Strength
A325-04.....Standard Specification for Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength
A572/A572M-04.....Standard Specification for High-Strength Low-Alloy Columbium-Vanadium Structural Steel
A992/A992M-04.....Standard Specification for Structural Steel Shapes

E. American Welding Society (AWS):
D1.1-2004.....Structural Welding Code-Steel

F. Research Council on Structural Connections (RCSC) of The Engineering Foundation:
Specification for Structural Joints Using ASTM A325 or A490 Bolts

G. Occupational Safety and Health Administration (OSHA):
29 CFR Part 1926-2001...Safety Standards for Steel Erection

PART 2 - PRODUCTS

2.1 MATERIALS:

A. Structural Steel: ASTM A36, A572, Grade 50 A992.

B. Bolts, Nuts and Washers:
1. High-strength bolts, including nuts and washers: ASTM A325.
2. Bolts and nuts, other than high-strength: ASTM A307, Grade A.
3. Plain washers, other than those in contact with high-strength bolt heads and nuts: ANSI Standard B18.22.1.

PART 3 - EXECUTION

3.1 CONNECTIONS (SHOP AND FIELD):

A. Welding: Welding in accordance with AWS D1.1. Welds shall be made only by welders and welding operators who have been previously qualified by tests as prescribed in AWS D1.1 to perform type of work required.

B. High-Strength Bolts: High-strength bolts tightened to a bolt tension not less than proof load given in Specification for Structural Joints Using ASTM A325 or A490 Bolts. Tightening done with properly calibrated wrenches, by turn-of-nut method or by use of direct tension indicators (bolts or washers). Tighten bolts in connections identified as slip-critical using Direct Tension Indicators or the turn-of-the-nut method. Twist-off torque bolts are not an acceptable alternate fastener for slip critical connections.

3.2 FABRICATION:

Fabrication in accordance with Chapter M, Specification for Steel Buildings - Thirteenth Edition.

3.3 ERECTION:

A. General: Erection in accordance with Section 7, Code of Standard Practice for Steel Buildings and Bridges.

B. Temporary Supports: Temporary support of structural steel frames during erection in accordance with Section 7, Code of Standard Practice for Steel Buildings and Bridges.

Manual.

- - - E N D - - -

SECTION 05 36 00
COMPOSITE METAL DECKING

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies material and services required for installation of composite steel decking including miscellaneous closures required to prepare deck for concrete placement as shown and specified.

1.2 RELATED WORK:

Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

1.3 DESIGN REQUIREMENTS:

A. Design steel decking in accordance with American Iron And Steel Institute publication "Specifications for the Design of Cold Formed Steel Structural Members", except as otherwise shown or specified.

B. Design all elements with the latest published version of applicable codes.

1.4 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings: Shop and erection drawings showing decking unit layout, connections to supporting members, and information necessary to complete the installation as shown and specified, including supplementary framing, cant strips, cut openings, special jointing or other accessories. Show welding, side lap, closure, deck reinforcing and closure reinforcing details. Show openings required for work of other trades, including openings not shown on structural drawings. Indicate where temporary shoring is required to satisfy design criteria.

C. Manufacturer's Literature and Data: Showing steel decking section properties and specifying structural characteristics as specified herein.

D. Manufacturer's written recommendations for:

1. Shape of decking section to be used.
2. Cleaning of steel decking prior to concrete placement.

E. Test Report - Establishing structural characteristics of composite concrete and steel decking system.

F. Test Report - Stud base qualification.

G. Welding power setting recommendation by shear stud manufacturer.

H. Shear Stud Layouts: Submit drawings showing the number, pattern, spacing and configuration of the shear studs for each beam and girder.

I. Certification: For each type and gauge of metal deck supporting concrete slab or fill, furnish certification of the specified fire ratings. Certify that the units supplied are U.L. listed as a "Steel Floor and Form Unit".

J. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.5 QUALITY ASSURANCE:

Underwriters' Label: Provide metal floor deck units listed in Underwriters' Laboratories "Fire Resistance Directory", with each deck unit bearing the UL label and marking for specific system detailed.

1.6 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only. Refer to the latest edition of all referenced Standards and codes.

B. American Iron and Steel Institute (AISI):
Specification and Commentary for the Design of Cold-Formed Steel Structural Members (Latest Edition).

C. American Society of Testing and Materials (ASTM):
A36/A36M.....Standard Specification for Carbon Structural Steel
A108.....Standard Specification for Steel Bars, Carbon, Cold Finished, Standard Quality
A653/A653M.....Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvanized) by the Hot-Dip Process

D. American Institute of Steel Construction (AISC):
1. Specification for Structural Steel Buildings (Latest Edition)

E. American Welding Society (AWS):
D1.1.....Structural Welding Code - Steel
D1.3.....Structural Welding Code - Sheet Steel

F. Military Specifications (Mil. Spec.):
MIL-P-21035B.....Paint, High Zinc Dust Content, Galvanizing Repair

PART 2 - PRODUCTS

2.1 MATERIALS:

A. Steel Decking and all Flashings: ASTM A653, Structural Quality.

B. Galvanizing: ASTM A653, G60.

C. Galvanizing Repair Paint: Mil. Spec. MIL-P-21035B.

D. Miscellaneous Steel Shapes: ASTM A36.

E. Welding Electrode: E60XX minimum.

F. Sheet Metal Accessories: ASTM A653, galvanized, unless noted otherwise. Provide accessories of every kind required to complete the installation of metal decking in the system shown. Finish sheet metal items to match deck including, but not limited to, the following items:

1. Metal Cover Plates: For end-abutting deck units, to close gaps at changes in deck direction, columns, walls and openings. Same quality as deck units but not less than 1.3 mm (18 gauge) sheet steel.
2. Continuous sheet metal edging: at openings and concrete slab edges. Same quality as deck units but not less than 1.3 mm (18 gauge) steel. Side and end closures supporting concrete and their attachment to supporting steel shall be designed by the manufacturer to safely support the wet weight of concrete and construction loads. The deflection of cantilever closures shall be limited to 3 mm (1/8 inch) maximum.
3. Metal Closure Strips: For openings between decking and other construction, of not less than 1.3 mm (18 gauge) sheet steel of the same quality as the deck units. Form to the configuration required to provide tight-fitting closures at open ends of flutes and sides of decking.
4. Seat angles for deck: Where a beam does not frame into a column.

2.2 REQUIREMENTS:

A. Steel decking depth, gage, and section properties to be as shown. Provide edges of deck with vertical interlocking male and female lip providing for a positive mechanical connection.

B. Fabricate deck units with integral embossments to provide mechanical bond with concrete slab. In combination with concrete slab, capable of supporting total design loads on spans shown.

C. Steel decking capable of safely supporting total, normal construction service loads without damage to decking unit.

D. Steel decking units shall include an integral system which provides a simple point of attachment for light duty hanger devices for flexibility for attaching hangers for support of acoustical, lathing, plumbing,

heating, air conditioning and electrical items. System shall provide for minimum spacing pattern of 300 mm (12 inches) on centers longitudinally and 600 mm or 900 mm (24 or 36 inches) on centers transversely. Suspension system shall be capable of safely supporting a maximum allowable load of 45 kg (100 pounds) concentrated at any one hanger

attachment point. System may consist of fold-down type hanger tabs or a lip hanger.

PART 3 - EXECUTION

3.1 ERECTION:

A. Do not start installation of metal decking until corresponding steel framework has been plumbed, aligned and completed and until temporary shoring, where required, has been installed. Remove any oil, dirt, paint, ice, water and rust from steel surfaces to which metal decking will be welded.

B. Coordinate and cooperate with structural steel erector in locating decking bundles to prevent overloading of structural members.

C. Do not use floor deck units for storage or working platforms until permanently secured. Do not overload deck units once placed. Replace any deck units that become damaged after erection and prior to casting concrete at no cost to the Government.

D. Erect steel deck in accordance with manufacturer's printed instructions.

E. Ship steel deck units to project in standard widths and cut to proper length.

F. Provide steel decking in sufficient lengths to extend over 3 or more spans, except where structural steel layout does not permit.

G. Place steel decking units on supporting steel framework and adjust to final position before being permanently fastening. Bring each unit to proper bearing on supporting beams. Place deck units in straight alignment for entire length of run of flutes and with close registration of flutes of one unit with those of abutting unit. Maximum space between ends of abutting units is 13 mm (1/2 inch). If space exceeds 13 mm (1/2 inch), install closure plates at no additional cost to Government.

H. Ceiling hanger loops, if used, must be flattened or removed to obtain bearing of units on structural steel.

I. Fastening Deck Units:

1. Fasten floor deck units to steel supporting members by not less than 16 mm (5/8 inch) diameter puddle welds or elongated welds of equal strength, spaced not more than 305 mm (12 inches) o.c. with a minimum

of two welds per unit at each support. Where two units abut, fasten each unit individually to the supporting steel framework.

2. Tack weld or use self-tapping No. 8 or larger machine screws at 915 mm (3 feet) o.c. for fastening end closures. Only use welds to attach longitudinal end closures.

3. Weld side laps of adjacent floor deck units that span more than 1524 mm (5 feet). Fasten at midspan or 915 mm (3 feet) o.c., whichever is smaller.

J. Welding to conform to AWS D1.3 and done by competent experienced welding mechanics.

K. Areas scarred during erection and welds shall be thoroughly cleaned and touched-up with zinc rich galvanizing repair paint. Paint touch-up is not required for welds or scars that are to be in direct contact with concrete.

L. Provide metal concrete stops at edges of deck as required.

M. Cutting and Fitting:

1. Cut all metal deck units to proper length in the shop prior to shipping.
2. Field cutting by the metal deck erector is restricted to bevel cuts, notching to fit around columns and similar items, and cutting openings that are located and dimensioned on the structural drawings.
3. Other penetrations shown on the approved metal deck shop drawings but not shown on the structural drawings are to be located, cut and reinforced by the trade requiring the opening.
4. Make all cuts neat and trim using a metal saw, drill or punchout device; cutting with torches is expressly prohibited.
5. Do not make any cuts in the metal deck that are not shown on the approved metal deck drawings. If an additional opening not shown on the approved shop drawings is required, submit a sketch, to scale, locating the required new opening and any other openings and supports in the immediate area. Do not cut the opening until the sketch has been reviewed and accepted by the COTR. Provide any additional reinforcing or framing required for the opening at no cost to the Government. Failure to comply with these requirements is cause for rejection of the work and removal and replacement of the affected metal deck.

6. Reinforcement at Openings: Provide additional metal reinforcement and closure pieces as required for strength, continuity of decking and support of other work shown.

3.2 CLEANING:

Clean deck in accordance with manufacturer's recommendation before concrete placement.

- - - E N D - - -

SECTION 06 10 00
ROUGH CARPENTRY

PART 1 - GENERAL

1.1 DESCRIPTION:

Section specifies wood blocking, framing, sheathing, furring, nailers, sub-flooring, rough hardware, and light wood construction.

1.2 RELATED WORK:

A. Milled woodwork: Section 06 20 00, FINISH CARPENTRY AND MILLWORK.

B. Metal backing plate to support wall hung items: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.

C. Gypsum sheathing: Section 09 29 00, GYPSUM BOARD.

1.3 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings showing framing connection details, fasteners, connections and dimensions.

C. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:

A. Protect lumber and other products from dampness both during and after delivery at site.

B. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.

C. Stack plywood and other board products so as to prevent warping.

D. Locate stacks on well drained areas, supported at least 150 mm (6 inches) above grade and cover with well ventilated sheds having firmly constructed over hanging roof with sufficient end wall to protect lumber from driving rain.

1.5 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.

B. American Forest and Paper Association (AFPA):
National Design Specification for Wood Construction
NDS-05.....Conventional Wood Frame Construction

C. American Institute of Timber Construction (AITC):
A190.1-07.....Structural Glued Laminated Timber

D. American Society of Mechanical Engineers (ASME):
B18.2.1-96(R2005).....Square and Hex Bolts and Screws

B18.2.2-87.....Square and Hex Nuts
B18.6.1-97.....Wood Screws
B18.6.4-98(R2005).....Thread Forming and Thread Cutting Tapping Screws and Metallic Drive Screws

E. American Plywood Association (APA):
E30-07.....Engineered Wood Construction Guide

F. American Society for Testing And Materials (ASTM):
A47-99(R2009).....Ferritic Malleable Iron Castings
A48-03(R2008).....Gray Iron Castings
A653/A653M-10.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process
C954-10.....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Studs from 0.033 inch (2.24 mm) to 0.112-inch (2.84 mm) in thickness
C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Metal Studs
D143-09.....Small Clear Specimens of Timber, Method of Testing
D1760-01.....Pressure Treatment of Timber Products
D2559-10.....Adhesives for Structural Laminated Wood Products for Use Under Exterior (Wet Use) Exposure Conditions
D3498-11.....Adhesives for Field-Gluing Plywood to Lumber Framing for Floor Systems
F844-07.....Washers, Steel, Plan (Flat) Unhardened for General Use
F1667-08.....Nails, Spikes, and Staples

G. Federal Specifications (Fed. Spec.):
MM-L-736C.....Lumber; Hardwood

H. Commercial Item Description (CID):
A-A-55615.....Shield, Expansion (Wood Screw and Lag Bolt Self Threading Anchors)

I. Military Specification (Mil. Spec.):
MIL-L-19140E.....Lumber and Plywood, Fire-Retardant Treated

J. Truss Plate Institute (TPI):
TPI-85.....Metal Plate Connected Wood Trusses

K. U.S. Department of Commerce Product Standard (PS)

PS 1-95.....Construction and Industrial Plywood

PS 20-05.....American Softwood Lumber Standard

PART 2 - PRODUCTS

2.1 LUMBER:

A. Unless otherwise specified, each piece of lumber bear grade mark, stamp, or other identifying marks indicating grades of material, and rules or standards under which produced.

1. Identifying marks in accordance with rule or standard under which material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
2. Inspection agency for lumber approved by the Board of Review, American Lumber Standards Committee, to grade species used.

B. Structural Members: Species and grade as listed in the AFPA, National Design Specification for Wood Construction having design stresses as shown.

C. Lumber Other Than Structural:

1. Unless otherwise specified, species graded under the grading rules of an inspection agency approved by Board of Review, American Lumber Standards Committee.
2. Framing lumber: Minimum extreme fiber stress in bending of 1100.
3. Furring, blocking, nailers and similar items 100 mm (4 inches) and narrower Standard Grade; and, members 150 mm (6 inches) and wider, Number 2 Grade.

D. Sizes:

1. Conforming to Prod. Std., PS20.
2. Size references are nominal sizes, unless otherwise specified, actual sizes within manufacturing tolerances allowed by standard under which produced.

E. Moisture Content:

1. At time of delivery and maintained at the site.
2. Boards and lumber 50 mm (2 inches) and less in thickness: 19 percent or less.
3. Lumber over 50 mm (2 inches) thick: 25 percent or less.

F. Fire Retardant Treatment:

1. Mil Spec. MIL-L-19140 with piece of treated material bearing identification of testing agency and showing performance rating.
2. Treatment and performance inspection, by an independent and qualified testing agency that establishes performance ratings.

G. Preservative Treatment:

1. Do not treat Heart Redwood and Western Red Cedar.
2. Treat wood members and plywood exposed to weather or in contact with plaster, masonry or concrete, including framing of open roofed structures; sills, sole plates, furring, and sleepers that are less than 600 mm (24 inches) from ground; nailers, edge strips, blocking, crickets, curbs, cant, vent strips and other members used in connection with roofing and flashing materials.
3. Treat other members specified as preservative treated (PT).
4. Preservative treat by the pressure method complying with ASTM D1760, except any process involving the use of Chromated Copper arsenate (CCA) for pressure treating wood is not permitted.

2.2 PLYWOOD

A. Comply with Prod. Std., PS 1.
B. Bear the mark of a recognized association or independent inspection agency that maintains continuing control over quality of plywood which identifies compliance by veneer grade, group number, span rating where applicable, and glue type.

2.3 STRUCTURAL-USE PANELS

A. Comply with APA.
B. Bearing the mark of a recognized association or independent agency that maintains continuing control over quality of panel which identifies compliance by end use, Span Rating, and exposure durability classification.

2.4 ROUGH HARDWARE AND ADHESIVES:

A. Anchor Bolts:
   1. ASME B18.2.1 and ANSI B18.2.2 galvanized, 13 mm (1/2 inch) unless shown otherwise.
   2. Extend at least 200 mm (8 inches) into masonry or concrete with ends bent 50 mm (2 inches).
B. Miscellaneous Bolts: Expansion Bolts: C1D, A-A-55615; lag bolt, long enough to extend at least 65 mm (2-1/2 inches) into masonry or concrete. Use 13 mm (1/2 inch) bolt unless shown otherwise.
C. Washers
   1. ASTM F844.
   2. Use zinc or cadmium coated steel or cast iron for washers exposed to weather.
D. Screws:
   1. Wood to Wood: ANSI B18.6.1 or ASTM C1002.

2. Wood to Steel: ASTM C954, or ASTM C1002.

E. Nails:

1. Size and type best suited for purpose unless noted otherwise. Use aluminum-alloy nails, plated nails, or zinc-coated nails, for nailing wood work exposed to weather and on roof blocking.
2. ASTM F1667:
   a. Common: Type I, Style 10.
   b. Concrete: Type I, Style 11.
   c. Barbed: Type I, Style 26.
   d. Underlayment: Type I, Style 25.
   e. Masonry: Type I, Style 27.
   f. Use special nails designed for use with ties, strap anchors, framing connectors, joists hangers, and similar items. Nails not less than 32 mm (1-1/4 inches) long, 8d and deformed or annular ring shank.

G. Adhesives:

1. For field-gluing plywood to lumber framing floor or roof systems: ASTM D3498.
2. For structural laminated Wood: ASTM D2559.

PART 3 - EXECUTION

3.1 INSTALLATION OF FRAMING AND MISCELLANEOUS WOOD MEMBERS:

A. Conform to applicable requirements of the following:

1. AFPA National Design Specification for Wood Construction for timber connectors.
2. AITC Timber Construction Manual for heavy timber construction.
3. AFPA WCD-number 1, Manual for House Framing for nailing and framing unless specified otherwise.
4. APA for installation of plywood or structural use panels.
5. ASTM F 499 for wood underlayment.
6. TPI for metal plate connected wood trusses.

B. Fasteners:

1. Nails.
   a. Nail in accordance with the Recommended Nailing Schedule as specified in AFPA Manual for House Framing where detailed nailing requirements are not specified in nailing schedule. Select nail size and nail spacing sufficient to develop adequate strength for the connection without splitting the members.
   b. Use special nails with framing connectors.
   c. For sheathing and subflooring, select length of nails sufficient to extend 25 mm (1 inch) into supports.

d. Use eight penny or larger nails for nailing through 25 mm (1 inch) thick lumber and for toe nailing 50 mm (2 inch) thick lumber.
e. Use 16 penny or larger nails for nailing through 50 mm (2 inch) thick lumber.
f. Select the size and number of nails in accordance with the Nailing Schedule except for special nails with framing anchors.
g. Nailing Schedule; Using Common Nails:
   1) Joist bearing on sill or girder, toe nail three-8d or framing anchor
   2) Bridging to joist, toe nail each end two-8d
   3) Ledger strip to beam or girder three-16d under each joint.
   4) Subflooring or Sheathing:
      a) 150 mm (6 inch) wide or less to each joist face nail two-8d.
      b) Subflooring, more than 150 mm (6 inches) wide, to each stud or joint, face nail three-8d.
      c) Plywood or structural use panel to each stud or joist face nail 8d, at supported edges 150 mm (6 inches) on center and at intermediate supports 250 mm (10 inches) on center. When gluing plywood to joint framing increase nail spacing to 300 mm (12 inches) at supported edges and 500 mm (20 inches) o.c. at intermediate supports.
   5) Sole plate to joist or blocking, through sub floor face nail 20d nails, 400 mm (16 inches) on center.
   6) Top plate to stud, end nail two-16d.
   7) Stud to sole plate, toe nail or framing anchor. Four-8d
   8) Doubled studs, face nail 16d at 600 mm (24 inches) on center.
   9) Built-up corner studs 16d at 600 mm (24 inches) (24 inches) on center.
   10) Doubled top plates, face nails 16d at 400 mm (16 inches) on center.
   11) Top plates, laps, and intersections, face nail two-16d.
   12) Continuous header, two pieces 16d at 400 mm (16 inches) on center along each edge.
   13) Ceiling joists to plate, toenail three-8d or framing anchor.
   14) Continuous header to stud, four 16d.
   15) Ceiling joists, laps over partitions, face nail three-16d or framing anchor.
   16) Ceiling joists, to parallel rafters, face nail three-16d.

17) Rafter to plate, toe nail three-8d. or framing anchor. Brace 25 mm (1 inch) thick board to each stud and plate, face nail three-8d.
18) Built-up girders and beams 20d at 800 mm (32 inches) on center along each edge.

2. Bolts:
   a. Fit bolt heads and nuts bearing on wood with washers.
   b. Countersink bolt heads flush with the surface of nailers.
   c. Embed in concrete and solid masonry or use expansion bolts. Special bolts or screws designed for anchor to solid masonry or concrete in drilled holes may be used.
   d. Use toggle bolts to hollow masonry or sheet metal.
   e. Use bolts to steel over 2.84 mm (0.112 inch, 11 gage) in thickness. Secure wood nailers to vertical structural steel members with bolts, placed one at ends of nailer and 600 mm (24 inch) intervals between end bolts. Use clips to beam flanges.
3. Drill Screws to steel less than 2.84 mm (0.112 inch) thick.
   a. ASTM C1002 for steel less than 0.84 mm (0.033 inch) thick.
   b. ASTM C 954 for steel over 0.84 mm (0.033 inch) thick.
4. Power actuated drive pins may be used where practical to anchor to solid masonry, concrete, or steel.
5. Do not anchor to wood plugs or nailing blocks in masonry or concrete. Use metal plugs, inserts or similar fastening.
6. Screws to Join Wood:
   a. Where shown or option to nails.
   b. ASTM C1002, sized to provide not less than 25 mm (1 inch) penetration into anchorage member.
   c. Spaced same as nails.
7. Installation of Timber Connectors:
   a. Conform to applicable requirements of the NFPA National Design Specification for Wood Construction.
   b. Fit wood to connectors and drill holes for fasteners so wood is not split.

C. Set sills or plates level in full bed of mortar on masonry or concrete walls.
   1. Space anchor bolts 1200 mm (4 feet) on centers between ends and within 150 mm (6 inches) of end. Stagger bolts from side to side on plates over 175 mm (7 inches) in width.

2. Use shims of slate, tile or similar approved material to level wood members resting on concrete or masonry. Do not use wood shims or wedges.
3. Closely fit, and set to required lines.

D. Cut notch, or bore in accordance with NFPA Manual for House-Framing for passage of ducts wires, bolts, pipes, conduits and to accommodate other work. Repair or replace miscut, misfit or damaged work.

E. Blocking Nailers, and Furring:
1. Install furring, blocking, nailers, and grounds where shown.
2. Use longest lengths practicable.
3. Use fire retardant treated wood blocking where shown at openings and where shown or specified.
4. Layers of Blocking or Plates:
   a. Stagger end joints between upper and lower pieces.
   b. Nail at ends and not over 600 mm (24 inches) between ends.
   c. Stagger nails from side to side of wood member over 125 mm (5 inches) in width.

- - - E N D - - -

SECTION 06 20 00
FINISH CARPENTRY AND MILLWORK

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section includes the following:
   1. Plastic-laminate clad cabinets and lockers.
   2. Wood veneer panels and aluminum trim.
   3. Solid surface material (countertops, worktops and backsplashes).
   4. Metal clad countertops and cabinets.

1.2 RELATED WORK

A. Alternate bid items: Section 01 23 00, ALTERNATES.
B. Framing, furring, blocking, shims, and hanging strips required for installing woodwork and concealed within other construction before woodwork installation: Section 06 10 00, ROUGH CARPENTRY.
C. Metal backing plate to support wall hung items: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
D. Quartz countertops and wall panels: Section 09 75 20, QUARTZ SURFACES.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Product Data: For hardboard, medium-density fiberboard, particleboard, plywood, high-pressure decorative laminate, adhesive for bonding plastic laminate, thermoset decorative overlay, cabinet hardware and accessories, and finishing materials and processes. Include data for fire-retardant treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements.
C. Shop Drawings: Show location of each item, dimensioned plans, elevations, sections, and large-scale details, attachment devices, and other components.
   1. Show details full size.
   2. Show locations and sizes of furring, blocking, and hanging strips, including concealed blocking and reinforcement specified in other Sections.
   3. Show locations and sizes of cutouts and holes for plumbing fixtures, faucets, soap dispensers, and other items installed in architectural woodwork.
   4. Show all reveals and trim and indicate method of attachment.
D. Samples for Verification:

1. Lumber with or for transparent finish, full width by 24 inches long, for each species and cut, finished on 1 side and 1 edge.
2. Wood-veneered panel products with transparent finish, 12 by 12 inches, for each species and cut. Include at least one face-veneer seam and finish as specified.
3. Lumber and panel products with shop-applied opaque finish, 24 inches long for lumber and 12 by 12 inches for panels, for each finish system and color.
4. Corner pieces as follows:
   a. Cabinet front frame joints between stiles and rail, as well as exposed end pieces, 18 inches high by 18 inches wide by 6 inches deep.
   b. Miter joints for standing trim.
5. Exposed cabinet hardware and accessories, one unit for each type and finish.

E. Certificates:
1. Indicating preservative treatment and/or fire retardant treatment of materials meet the requirements specified.
2. Indicating moisture content of materials meet the requirements specified.
3. Product Certificates signed by fabricator of woodwork certifying that products furnished comply with requirements.

F. List of acceptable sealers for fire retardant and preservative treated materials.

G. Manufacturer's literature and data:
1. Finish hardware
2. Sinks with fittings
3. Electrical components

H. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.4 DELIVERY, STORAGE AND HANDLING

A. Do not deliver woodwork until painting and similar operations that could damage woodwork have been completed in installation areas. If woodwork must be stored in other than installation areas, store only in areas where environmental conditions comply with requirements specified in "Project Conditions" Article.

B. Protect lumber and millwork from dampness, maintaining moisture content specified both during and after delivery at site.

C. Store finishing lumber and millwork in weathertight well ventilated structures or in space in existing buildings designated by COR. Store at

a minimum temperature of 21^{0}C (70^{0}F) for not less than 10 days before installation.

D. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.

E. Protect finished surfaces from soiling and damage during handling and installation. Keep covered with polyethylene film or other protective covering.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Testing and Materials (ASTM):
A36/A36M-08.....Structural Steel
A53-12.....Pipe, Steel, Black and Hot-Dipped Zinc Coated, Welded and Seamless
A167-99 (R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
B26/B26M-09.....Aluminum-Alloy Sand Castings
B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
C1036-06.....Flat Glass
E84-10.....Surface Burning Characteristics of Building Materials

C. American Hardboard Association (AHA):
A135.4-04.....Basic Hardboard

D. Builders Hardware Manufacturers Association (BHMA):
A156.9-03.....Cabinet Hardware
A156.11-10.....Cabinet Locks
A156.16-08.....Auxiliary Hardware

E. Hardwood Plywood and Veneer Association (HPVA):
HP1-09.....Hardwood and Decorative Plywood

F. National Particleboard Association (NPA):
A208.1-09.....Wood Particleboard

G. American Wood-Preservers' Association (AWPA):
AWPA C1-03.....All Timber Products - Preservative Treatment by Pressure Processes

H. Architectural Woodwork Institute (AWI):
AWI-09.....Architectural Woodwork Quality Standards and Quality Certification Program

I. National Electrical Manufacturers Association (NEMA):

LD 3-05.....High-Pressure Decorative Laminates

J. U.S. Department of Commerce, Product Standard (PS):

PS20-10.....American Softwood Lumber Standard

PS 1-95.....Construction and Industrial Plywood

K. Military Specification (Mil. Spec):

MIL-L-19140E.....Lumber and Plywood, Fire-Retardant Treated

L. Federal Specifications (Fed. Spec.):

A-A-1922A.....Shield Expansion

A-A-55615.....Shield, Expansion; Nail Expansion (Wood Screw and Lag Bolt Self-Threading Anchors)

A-A-1936.....Contact Adhesive

FF-N-836D.....Nut, Square, Hexagon Cap, Slotted, Castle

FF-S-111D(1).....Screw, Wood

MM-L-736(C).....Lumber, Hardwood

M. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-505-06 Series...Metal Finishes Manual

1.6 PROJECT CONDITIONS

A. Environmental Limitations: Do not deliver or install woodwork until building is enclosed, wet work is complete, and HVAC system is operating and will maintaining temperature between 60 and 90 deg F and relative humidity between 25 and 55 percent during the remainder of the construction period.

B. Field Measurements: Where woodwork is indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

1. Locate concealed framing, blocking, and reinforcements that support woodwork by field measurements before being enclosed and indicate measurements on Shop Drawings.
2. Established Dimensions: Where field measurements cannot be made without delaying the Work, establish dimensions and proceed with fabricating woodwork without field measurements. Provide allowance for trimming at site, and coordinate construction to ensure that actual dimensions correspond to established dimensions.

1.7 COORDINATION

A. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of work specified in other sections to ensure that interior architectural woodwork can be supported and installed as indicated.

B. Assure that the following inside clear dimensions are maintained on all wall cabinets: Minimum clear inside dimension of 13 inches front to back, unless specifically noted otherwise.

PART 2 - PRODUCTS

2.1 MATERIALS

A. General: Provide materials that comply with requirements of the AWI quality standard for each type of woodwork and quality grade specified, unless otherwise indicated.

B. Wood Species for Transparent Finish:

1. Wood Species and Cut: Plain sliced Maple to match Architect's sample.
2. Surface Finish Grade: AA
3. Stain: Coordinate with Interior Finish Plan and Schedule.

2.2 LUMBER

A. Grading and Marking:

1. Lumber shall bear the grade mark, stamp, or other identifying marks indicating grades of material.
2. Such identifying marks on a material shall be in accordance with the rule or standard under which the material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
3. The inspection agency for lumber shall be approved by the Board of Review, American Lumber Standards Committee, to grade species used.

B. Sizes:

1. Lumber Size references, unless otherwise specified, are nominal sizes, and actual sizes shall be within manufacturing tolerances allowed by the standard under which product is produced.
2. Millwork, standing and running trim, and rails: Actual size as shown or specified.

C. Hardwood: MM-L-736, species as specified for each item.

D. Softwood: PS-20, exposed to view appearance grades:

1. Use C select or D select, vertical grain for transparent finish including stain transparent finish.
2. Use Prime for painted or opaque finish.

2.3 PLYWOOD

A. Softwood Plywood:

1. Prod. Std.
2. Grading and Marking:

a. Each sheet of plywood shall bear the mark of a recognized association or independent inspection agency that maintains continuing control over the quality of the plywood.
b. The mark shall identify the plywood by species group or identification index, and shall show glue type, grade, and compliance with PS1.

3. Plywood, 13 mm (1/2 inch) and thicker; not less than five ply construction, except 32 mm (1-1/4 inch) thick plywood not less than seven ply.
4. Plastic Laminate Plywood Cores:
   a. Exterior Type, any species group.
   b. Veneer Grade: A-C.
5. Shelving Plywood:
   a. Interior Type, any species group.
   b. Veneer Grade: A-B.
6. Other: As specified for item.

B. Hardwood Plywood:
1. HPVA: HP.1
2. Species of face veneer shall be as shown or as specified in connection with each particular item.
3. Inside of Building:
   a. Use Type II (interior) A grade veneer for transparent finish.
   b. Use Type II (interior) Sound Grade veneer for paint finish.

2.4 PARTICLEBOARD

A. NPA A208.1
B. Plastic Laminate Particleboard Cores:
1. Use Type 1, Grade 1-M-3, or Type 2, Grade 2-M-2, unless otherwise specified.
2. Use Type 2, Grade 2-M-2, exterior bond, for tops with sinks.

C. General Use: Type 1, Grade 1-M-3 or Type 2, Grade 2-M-2.

2.5 PLASTIC LAMINATE

A. NEMA LD-3.
B. Exposed decorative surfaces including countertops, both sides of cabinet doors, and for items having plastic laminate finish. General Purpose, Type HGL.
C. Cabinet Interiors including Shelving: Both of following options to comply with NEMA, CLS as a minimum.
1. Plastic laminate clad plywood or particle board.
2. Resin impregnated decorative paper thermally fused to particle board.

D. Backing sheet on bottom of plastic laminate covered wood tops: Backer, Type HGP.

E. Post Forming Fabrication, Decorative Surfaces: Post forming, Type HGP.

2.6 ADHESIVE

A. For Plastic Laminate: Fed. Spec. A-A-1936.

B. For Interior Millwork: Unextended urea resin, unextended melamine resin, phenol resin, or resorcinol resin.

2.7 STAINLESS STEEL

ASTM A167, Type 302 or 304.

2.8 ALUMINUM CAST

ASTM B26

2.9 HARDWARE AND ACCESSORIES

A. Rough Hardware:

1. Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electric-galvanizing process. Galvanized where specified.
2. Fasteners:
   a. Bolts with Nuts: FF-N-836.
   b. Expansion Bolts: A-A-1922A.
   c. Screws: Fed. Spec. FF-S-111.

B. Finish Hardware

1. Cabinet Hardware: ANSI A156.9.
   a. Door/Drawer Pulls: B02011. Door in seismic zones: B03182.
   b. Drawer Slides: B05051 for drawers over 150 mm (6 inches) deep, B05052 for drawers 75 mm to 150 mm 3 to 6 inches) deep, and B05053 for drawers less than 75 mm (3 inches) deep.
   c. Sliding Door Tracks: B07063.
   d. Adjustable Shelf Standards: B4061 with shelf rest B04083.
   e. Concealed Hinges: B1601, minimum 110 degree opening.
   f. Butt Hinges: B01361, for flush doors, B01381 for inset lipped doors, and B01521 for overlay doors.
   g. Cabinet Door Catch: B0371 or B03172.
   h. Vertical Slotted Shelf Standard: B04103 with shelf brackets B04113, sized for shelf depth.
2. Cabinet Locks: ANSI A156.11.
   a. Drawers and Hinged Door: E07262.
   b. Sliding Door: E07162.
3. Auxiliary Hardware: ANSI A156.16.

a. Shelf Bracket: B04041, japanned or enameled finish.
b. Combination Garment rod and Shelf Support: B04051 japanned or enamel finish.
c. Closet Bar: L03131 chrome finish of required length.

4. Counter Support Brackets:
   a. Wall mounted steel bracket, powder coat finish in color to be selected by Architect.
   b. Provide minimum one bracket for every 48" of unsupported length of counter.
5. Grommets for Cable Passage through Countertops: 2" diameter molded-plastic caps with slot for wire passage.
6. Locker Hardware: (to be included in Alternate Bid item 1)
   a. Butt hinges: 2-3/4", five knuckle steel hinges, back mounted. Provide three hinges per door.
   b. Cam Padlock Hasp: Zinc die-cast plated, matt nickel finish. Basis-of-design: Hafele 235.17.600, or approved equal.
   c. Wire pulls: Back mounted 4 inch long.
   d. Hooks: Provide one double-prong ceiling hook and two side wall mounted single prong wall hooks for each locker.
   e. Numberplates: Etched stainless steel plates with black letters at 1/2 inch high.

2.10 MOISTURE CONTENT

A. Moisture content of lumber and millwork at time of delivery to site.
   1. Interior finish lumber, trim, and millwork 32 mm (1-1/4 inches) or less in nominal thickness: 12 percent on 85 percent of the pieces and 15 percent on the remainder.
   2. Moisture content of other materials shall be in accordance with the standards under which the products are produced.

2.11 FIRE RETARDANT TREATMENT

A. Where wood members and plywood are specified to be fire retardant treated, the treatment shall be in accordance with Mil. Spec. MIL-L19140.
B. Treatment and performance inspection shall be by an independent and qualified testing agency that establishes performance ratings.
C. Each piece of treated material shall bear identification of the testing agency and shall indicate performance in accordance with such rating of flame spread and smoke developed.
D. Treat wood for maximum flame spread of 25 and smoke developed of 25.
E. Fire Resistant Softwood Plywood:
   1. Use Grade A, Exterior, plywood for treatment.

2. Meet the following requirements when tested in accordance with ASTM E84.
   a. Flame spread: 0 to 25.
   b. Smoke developed: 100 maximum

F. Fire Resistant Hardwood Plywood:
1. Core: Fire retardant treated softwood plywood.
2. Hardwood face and back veneers untreated,
3. Factory seal panel edges, to prevent loss of fire retardant salts.

2.12 PRESERVATIVE TREATMENT

A. Wood members and plywood exposed to weather or in contact with plaster, masonry or concrete, including wood members used for rough framing of millwork items except heart-wood Redwood and Western Red Cedar shall be preservative treated in accordance with AWPA Standards.

B. Use Grade A, exterior plywood for treatment.

2.13 FABRICATION

A. GENERAL:
1. Except as otherwise specified, use AWI Custom Grade for architectural woodwork and interior millwork.
2. Finish woodwork shall be free from pitch pockets.
3. Except where special profiles are shown, trim shall be standard stock molding and members of the same species.
4. Plywood shall be not less than 13 mm (1/2 inch), unless otherwise shown or specified.
5. Edges of members in contact with concrete or masonry shall have a square corner caulking rebate.
6. Fabricate members less than 4 m (14 feet) in length from one piece of lumber, back channeled and molded as shown.
7. Interior trim and items of millwork to be painted may be fabricated from jointed, built-up, or laminated members, unless otherwise shown on drawings or specified.
8. Plastic Laminate Work:
   a. Factory glued to either a plywood or a particle board core, thickness as shown or specified.
   b. Cover exposed edges with plastic laminate, except where aluminum, stainless steel, or plastic molded edge strips are shown or specified. Use plastic molded edge strips on 19 mm (3/4-inch) molded thick or thinner core material.
   c. Provide plastic backing sheet on underside of countertops, vanity tops, thru-wall counter and sills including back splashes and end splashes of countertops.

d. Use backing sheet on concealed large panel surface when decorative face does not occur.

9. Sand fire-retardant-treated wood lightly to remove raised grain on exposed surfaces before fabrication.

10. Fabricate woodwork to dimensions, profiles, and details indicated. Ease edges to radius indicated for the following:

a. Edges of Rails and Similar Members More Than 3/4 Inch Thick: 1/8 inch.

b. Corners of Cabinets and Edges of Solid-Wood (Lumber) Members and Rails: 1/16 inch.

11. Metal Work:

a. General:

i. Welding: Comply with AWS Standards.

ii. Reinforce with angles, channels, and gussets to support intended loads, notch tightly, fit and weld joints.

iii. Constructed of sheet steel, except where reinforcing required.

b. Stainless Steel Countertops: made form 0.0625 thick stainless steel sheet.

i. Weld shop-made joints, and grind and polish surfaces to produce uniform, directional, textured, polished finish indicated, free of cross scratches. When polishing is completed, passivate and rinse surfaces. Remove embedded foreign matter and leave surfaces chemically clean.

ii. Sound deaden undersurface with heavy-build mastic coating.

iii. Extend top down to provide a 1-inch- (25-mm-) thick edge with a 1/2-inch (12.7-mm) return flange.

iv. Form backsplash coved to and integral with top surface, with a 1/2-inch- (12.7-mm) thick edge and 1/2-inch (12.7-mm) return flange.

v. Provide raised marine edge around perimeter of tops containing sinks; pitch two ways to sink to provide drainage without channeling or grooving.

vi. Where stainless-steel sinks occur in stainless-steel tops, factory weld into one integral unit, grind welds smooth, and polish, passivate, and rinse.

a) Provide 10x19x16 ID single compartment sink in Hot Lab BC-446.

vii. Fabricate stainless-steel sinks with corners rounded and coved to at least a 5/8-inch (16-mm) radius. Slope sink

bottoms to outlet. Provide double-wall construction for sink partitions with top edge rounded to at least a 1/2-inch (12.7-mm) diameter.

c. Casework Construction:

i. Welded assembly.

ii. Fabricate with enclosed uprights or posts full height or width at front, include sides, backs, bottoms, soffits, ceilings under sloping tops, headers and rail, assembled to form an integral unit.

iii. Form sides to make rabbeted stile 19 to 28 mm (3/4 to 1-1/8 inch) wide, closed by channel containing shelf adjustment slots.

iv. Make bottom of walls units flush, double panel construction.

v. Make top and cross rails of "U" shaped channel.

vi. Provide enclosed backs and bottoms in cabinets, including drawer units.

vii. Provide finish panel on exposed cabinet backs.

viii. Do not use screws and bolts in construction or assembly of casework, except to secure hardware, applied door stops, accessories, removable panels and where casework is required to fastened end to end or back to back.

ix. Fabricate casework, except benches, and desks with finished end panels.

x. Close flush exposed soffits of wall hung shelving, knee spaces in counters, and toe spaces at bases.

xi. In base units with sinks provide one piece, lowered backs.

xii. In base units with doors provide removable backs.

xiii. Provide built-in raceways or tubular or channel shaped members of casework for installation of wiring and electric work. Mount junction boxes on rear of cabinets, Electric work is specified in electrical sections of specifications.

xiv. Provide reinforcing for hardware.

xv. Size Dimensions:

a. Used dimensions shown or specified within tolerances specified.

b. Tolerance:

1) Depth: 325 mm (13 inches) in lieu of 300 mm (12 inches), 450 mm (18 inches) in lieu of 400 mm (16 inches), except wall hung units above counter. 525 mm

(21 inches) to 600 mm (24 inches) in lieu of 550 mm (22 inches).

2) Width: Minus 25 mm (one inch).

3) Height: 25 mm (one inch) plus or minus for wall hung cabinets and counter mounted cabinets, excluding sloping tops. 25 mm (one inch) plus for floor standing cabinets, excluding base and sloping tops. Full height cabinets shown back to back same height.

4) Manufacturer's tolerance for the same length, depth or height: Not to exceed 1.58 mm (0.0625 inches).

d. Doors:

1. Wood doors: 3/4" thick, with particleboard core and stainless steel veneer, with corners welded and ground smooth. Provide rubber bumpers to prevent metal-to-metal contact.
2. Provide sheet steel hinge reinforcement inside doors.

e. Shelves:

1. Capable of supporting an evenly distributed minimum load of 244 kg/m^2 (50 pounds per square foot) without visible distortion.
2. Flange shelves down 19 mm (3/4 inch) on edges, with front and bearing edges flanged back 13 mm (1/2 inch).
3. For shelves over 1050 mm (42 inches) in length and over 300 mm (12 inches) in depth install 38 mm by 13 mm by 0.9 mm (1-1/2 x 1/2 x 0.0359 inch) thick sheet steel hat channel reinforcement welded to underside midway between front and back and extending full length of shelf.
4. Provide means of positive locking shelf in position, and to permit adjustment without use of tools.

12. Lockers (to be included in Alternate Bid Item 1)

a. Fabricate each locker with an individual door and frame, an individual top, a bottom, and a back, and with common intermediate uprights separating compartments.

b. Fabricate components square, rigid, without warp, and with finished faces flat and free of scratches and chips. Accurately machine components for attachments in factory. Make joints tight and true.

1. Fabricate wood lockers with joints that are dadoed or rabbeted, glued full length, and stapled.

c. Venting: Fabricate wood lockers with space between doors and locker assembly of not less than **1/4 inch**.

d. Number Plates: Inlay number plates flush in each wood locker door, near top, centered. Complete fabrication, including assembly, finishing, and hardware application, to maximum extent possible, before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.
   1. Trial fit assemblies at fabrication shop that cannot be shipped completely assembled. Install dowels, screws, bolted connectors, and other fastening devices that can be removed after trial fitting. Verify that various parts fit as intended and check measurements of assemblies against field measurements indicated on Shop Drawings before disassembling for shipment.
e. Shop cut openings, to maximum extent possible, to receive hardware, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.
f. Attach PVC edging to panels by thermally fusing edging to panels after panel fabrication.

13. Complete fabrication, including assembly, finishing, and hardware application, to maximum extent possible, before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.
   a. Notify Architect seven days in advance of the dates and times woodwork fabrication will be complete.
   b. Trial fit assemblies at fabrication shop that cannot be shipped completely assembled. Install dowels, screws, bolted connectors, and other fastening devices that can be removed after trial fitting. Verify that various parts fit as intended and check measurements of assemblies against field measurements indicated on Shop Drawings before disassembling for shipment.
13. Shop cut openings, to maximum extent possible, to receive hardware, appliances, plumbing fixtures, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs. Seal edges of openings in countertops with a coat of varnish.

B. Quartz Counter Tops:

1. Coordinate with Section 09 75 20, QUARTZ SURFACES.

2.14 PLASTIC-LAMINATE CLAD CABINETS

A. Quality Standard: Comply with AWI Section 400 requirements for laminate-clad cabinets. Grade: Premium

B. Cabinet Construction: Flush overlay

1. Cabinet material: Particleboard
2. Drawer front material: Particleboard
3. Door front material: Particleboard

C. Laminate Cladding for Exposed Surfaces: High-pressure decorative laminate complying with the following requirements:

1. Horizontal Surfaces Other than Tops: GP-50, 0.050 inch nominal thickness.
2. Vertical Surfaces: GP-28,0.028 inch nominal thickness.
3. Edges: PVC tape, 0.012 inch minimum thickness matching laminate color, pattern, and finish.

D. Materials for Semi-exposed Surfaces: Provide surface materials indicated below:

1. Surfaces Other than Drawer Bodies: Thermoset decorative overlay.
2. Drawer Sides and Backs: Thermoset decorative overlay.
3. Drawer Bottoms: Thermoset decorative overlay.

E. Colors, Patterns, and Finishes: As indicated on Drawings.

2.15 INTERIOR STANDING AND RUNNING TRIM FOR TRANSPARENT FINISH

A. AWI Grade: Premium.

B. Wood Species and Cut: Plain sliced Maple to match Architect’s sample.

C. Profiles as indicated on drawings and Schedule for Finishes.

1. Coordinate with drawings for locations of each profile.

D. Backout or groove backs of flat trim members and kerf backs of other wide, flat members, except for members with ends exposed in finished work.

E. Provide trim of thickness shown or, if not shown, 3/4-inch minimum thickness.

F. Coordinate location with drawings.

2.16 FLUSH WOOD PANELING FOR TRANSPARENT FINISH

A. AWI Grade: Premium

B. Wood Species and Cut: Plain sliced Maple to match Architect’s sample.

1. Grade: AA
2. Lumber Trim and Edges: At paneling fabricator's option, trim and edges indicated as solid wood (except moldings) may be either lumber or veneered construction of same species and cut as panel faces and compatible with grain and color of panel faces.

C. Matching of Adjacent Veneer Leaves: Book match.

D. Matching within Panel Face: Center-balance match.

E. Panel-Matching Method: Blueprint-matched panels and components within each (+/- 17'-0") bay.

F. Vertical Panel-Matching Method: Continuous match; veneer leaves of upper panels are continuations of veneer leaves of lower panels.

G. Panel Core Construction: Fire-retardant particleboard or fire-retardant, medium-density fiberboard. Panels shall have a flame-spread index of Class A per IBC and a smoke-developed index of 450 or less per ASTM E 84. All substrate materials are to be made with binder containing no urea-formaldehyde resin.

H. Exposed Panel Edges: Solid wood or wood veneer matching faces.

I. Provide paneling of thickness shown or, if not shown, 5/8-inch minimum thickness. Assemble by gluing and concealed fastening.

J. Panel Reveals and Solid Bar Stock Moldings:

1. Material shall be extruded aluminum with sharp corners, 6063 T-5 alloy. Lengths shall be secured to panels with continuous adhesive Material must be securely fastened to panels to prevent movement that would create a visual misalignment of elements. Use continuous lengths without joints to the greatest extent possible. Butt joints (only acceptable where stock lengths will not extend across entire panel) will be neat with tight joints and all corners neatly mitered.
2. Finish is to be satin anodized (020). Finishes must meet or exceed AAMA standards for scratches or blemishes. Any scratches or blemishes in the final installation must be removed and the area repaired to be indistinguishable from adjacent surfaces.
3. HORIZONTAL REVEAL BETWEEN WOOD PANELS: 5/8" x 5/8" x 1/16" thick (1/2" x 1/2" inside dimension) aluminum channel.
4. VERTICAL BAR BETWEEN WOOD PANELS: 1/4" x 1/4" solid aluminum bar stock.

2.17 SHOP FINISHING

A. Quality Standard: Comply with AWI Section 1500, unless otherwise indicated. Grade: Provide finishes of same grades as items to be finished.

B. General: Finish architectural woodwork at fabrication shop as specified in this Section. Defer only final touchup, cleaning, and polishing until after installation.

C. Preparations for Finishing: Comply with referenced quality standard for sanding, filling countersunk fasteners, sealing concealed surfaces, and

similar preparations for finishing architectural woodwork, as applicable to each unit of work.

1. Backpriming: Apply one coat of sealer or primer, compatible with finish coats, to concealed surfaces of woodwork. Apply two coats to back of paneling and to end-grain surfaces. Concealed surfaces of plastic-laminate-clad woodwork do not require backpriming when surfaced with plastic laminate, backing paper, or thermoset decorative overlay.

D. Transparent Finish: Comply with requirements indicated below for grade, finish system, staining, and sheen, with sheen measured on 60-degree gloss meter per ASTM D 523:

1. Grade: Premium.
2. AWI Finish System: two-part UV cured epoxy finish.
3. Staining: As indicated on Drawings.
4. Sheen: As indicated on Drawings.

PART 3 - EXECUTION

3.1 PREPARATION

A. Condition woodwork to average prevailing humidity conditions in installation areas before installation.

B. Before installing architectural woodwork, examine shop-fabricated work for completion and complete work as required, including backpriming and removal of packing.

3.2 ENVIRONMENTAL REQUIREMENTS

A. Maintain work areas and storage areas to a minimum temperature of 21^0C (70^0F) for not less than 10 days before and during installation of interior millwork.

B. Do not install finish lumber or millwork in any room or space where wet process systems such as concrete, masonry, or plaster work is not complete and dry.

3.3 INSTALLATION

A. General:

1. Millwork receiving transparent finish shall be primed and back-painted on concealed surfaces. Set no millwork until primed and back-painted.
2. Secure trim with fine finishing nails, screws, or glue as required. Install molding using a panel adhesive for use on wood moldings to adhere to wall surfaces, and an 18 gauge power nail gun to hold molding in place. When conditions do not permit nailing, use trim

screws to attach to wall framing. Pre-drill and counterbore all screw heads for screw attachment from underside of trim, where applicable.

3. Set nails for putty stopping. Use washers under bolt heads where no other bearing plate occurs.
4. Fill all fastener holes and open joints with matching wax putty sticks provided by the manufacturer. Wipe off excess wax putty with a clean rag and denatured alcohol.
5. Seal cut edges of preservative and fire retardant treated wood materials with a certified acceptable sealer.
6. Coordinate with plumbing and electrical work for installation of fixtures and service connections in millwork items.
7. Install plumb, level, and true; shim as required, using concealed shims. Install level and plumb (including tops) to a tolerance of 1/8 inch in 96 inches. Where millwork abuts other finished work, apply filler strips and scribe for accurate fit, with fasteners concealed where practical.
8. Nail finish at each blocking, lookout, or other nailer and intermediate points; toggle or expansion bolt in place where nails are not suitable.
9. Base Cabinets: Set cabinets straight, plumb, and level. Install without distortion so doors and drawers fit openings properly and are accurately aligned. Adjust subtops within 1/16 inch of a single plane. Fasten cabinets to partition framing, wood blocking, or reinforcements in partitions with fasteners spaced 24 inches o.c. Bolt adjacent cabinets together with joints flush, tight, and uniform. Align similar adjoining doors and drawers to a tolerance of 1/16 inch. Where base cabinets are not installed adjacent to walls, fasten to floor at toe space with fasteners spaced 24 inches o.c. Secure sides of cabinets to floor, where they do not adjoin other cabinets, with not less than 2 fasteners.
10. Wall Cabinets: Hang cabinets straight, plumb, and level. Install without distortion so doors and drawers fit openings properly and are accurately aligned. Adjust fronts and bottoms within 1/16 inch of a single plane. Align similar adjoining doors to a tolerance of 1/16 inch. Fasten wall cabinets through back, near top and bottom, at ends and not more than 16 inches o.c. with No. 10 wafer-head screws sized for 1-inch penetration into wood framing, blocking, or hanging strips.
11. Install hardware uniformly and precisely. Set hinges snug and flat in mortises, unless otherwise indicated. Adjust and align hardware

so moving parts operate freely and contact points meet accurately. Allow for final adjustment after installation.

12. Adjust casework and hardware so doors and drawers operate smoothly without warp or bind. Lubricate operating hardware as recommended by manufacturer to provide unencumbered operation.
13. Countertops: Anchor securely by screwing through corner blocks of base cabinets or other supports into underside of countertop.
    a. Align adjacent quartz material countertops and form seams to comply with manufacturer's written recommendations using adhesive in color to match countertop. Carefully dress joints smooth, remove surface scratches, and clean entire surface.
    b. Install countertops with no more than 1/8 inch in 96-inch sag, bow, or other variation from a straight line.
    c. Secure backsplashes to tops and to walls with adhesive.
    d. Caulk space between backsplash and wall with sealant.
14. Shelves:
    a. Install mounting strip at back wall and end wall for shelves in closets where shown secured with toggle bolts at each end and not over 600 mm (24 inch) centers between ends.
        i. Nail Shelf to mounting strip at ends and to back wall strip at not over 900 mm (36 inches) on center.
        ii. Install metal bracket, ANSI A156.16, B04041, not over 1200 mm (4 feet) centers when shelves exceed 1800 mm (6 feet) in length.
        iii. Install metal bracket, ANSI A156.16, B04051, not over 1200 mm (4 feet) on centers where shelf length exceeds 1800 mm (6 feet) in length with metal rods, clothes hanger bars ANSI A156.16, L03131, of required length, full length of shelf.
    b. Install vertical slotted shelf standards, ANSI A156.9, B04103 to studs with toggle bolts through each fastener opening. Double slotted shelf standards may be used where adjacent shelves terminate.
        i. Install brackets ANSI A156.9, B04113, providing supports for shelf not over 900 mm (36 inches) on center and within 13 mm (1/2 inch) of shelf end unless shown otherwise.
        ii. Install shelves on brackets so front edge is restrained by bracket.
15. Lockers:
    a. Assemble lockers with no exposed fasteners on face frames.
    b. Install wood lockers level, plumb, and true; use concealed shims.

c. Connect groups of wood lockers together with fasteners, through predrilled holes, with no exposed fasteners on face frames. Fit wood lockers accurately together to form flush, tight, hairline joints.

d. Install wood lockers without distortion so doors fit openings properly and are accurately aligned. Adjust hardware to center doors and drawers in openings, providing unencumbered operation. Complete installation of hardware and accessory items as indicated.

   1. Installation Tolerance: No more than 1/8 inch in 96-inch sag, bow, or other variation from a straight line. Shim as required with concealed shims.
   2. Fasten wood lockers through back, near top and bottom, at ends with No. 8 pan- or bugle-head wood screws sized for 1-inch penetration into wood framing, blocking, or furring spaced not more than 16 inches o.c.
   3. Fasten wood lockers through wood locker base, at ends, and not more than 36 inches o.c. with No. 8 flush-head wood screws sized for 1-inch penetration into wood base.

e. Scribe and cut corner and filler panels to fit adjoining work using fasteners concealed where practical. Repair damaged finish at cuts.

f. Attach sloping-top units to wood lockers, with end panels covering exposed ends.

g. Install [number plates] [and] [nameplates] after wood lockers are in place. Attach number plate on each wood locker door, near top, centered, with at least two screws with finish matching number plate.

3.4 ADJUSTING AND CLEANING

A. Repair damaged and defective work, where possible, to eliminate functional and visual defects; where not possible to repair, replace work. Adjust for uniform appearance.

B. Clean, lubricate, and adjust hardware. Adjust doors and drawers to operate easily without binding.

C. Clean woodwork on exposed and semi-exposed surfaces. Touch up shop-applied finishes to restore damaged or soiled areas.

D. Protect millwork items from damage, abuse, dust, dirt, stain, or paint. Do not permit use during construction.

- - - E N D - - -

SECTION 07 21 13
THERMAL AND ACOUSTICAL INSULATION

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies acoustical insulation for buildings.

B. Acoustical insulation is identified by thickness and words "Acoustical Batt Insulation".

1.2 RELATED WORK

A. Safing insulation: Section 07 84 00, FIRESTOPPING.

1.3 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES .

B. Manufacturer's Literature and Data:

1. Insulation, each type used
2. Adhesive, each type used.
3. Tape

C. Certificates: Stating the type, thickness and STC rating.

D. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.4 STORAGE AND HANDLING:

A. Store insulation materials in weathertight enclosure.

B. Protect insulation from damage from handling, weather and construction operations before, during, and after installation.

1.5 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.

B. American Society for Testing and Materials (ASTM):

C270-10.....Mortar for Unit Masonry
C516-08.....Vermiculite Loose Fill Thermal Insulation
C549-06.....Perlite Loose Fill Insulation
C552-07.....Cellular Glass Thermal Insulation.
C553-08.....Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications
C578-10.....Rigid, Cellular Polystyrene Thermal Insulation
C591-09.....Unfaced Preformed Rigid Cellular Polyisocynurate Thermal Insulation

C612-10.....Mineral Fiber Block and Board Thermal Insulation

C665-06.....Mineral Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing

C728-05 (R2010).....Perlite Thermal Insulation Board

C954-10.....Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Base to Steel Studs From 0.033 (0.84 mm) inch to 0.112 inch (2.84 mm) in thickness

C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs

D312-00(R2006).....Asphalt Used in Roofing

E84-10.....Surface Burning Characteristics of Building Materials

F1667-11.....Driven Fasteners: Nails, Spikes and Staples.

PART 2 - PRODUCTS

2.1 ACOUSTICAL INSULATION:

A. Mineral Fiber Batt or Blankets: ASTM C665. Maximum flame spread of 25 and smoke development of 450 when tested in accordance with ASTM E84.

B. Thickness as shown; of widths and lengths to fit tight against framing.

2.2 ADHESIVE:

A. As recommended by the manufacturer of the insulation.

2.3 TAPE:

A. Pressure sensitive adhesive on one face.

PART 3 - EXECUTION

3.1 INSTALLATION - GENERAL

A. Install batt or blanket insulation with tight joints and filling framing void completely. Seal cuts, tears, and unlapped joints with tape.

B. Fit insulation tight against adjoining construction and penetrations, unless specified otherwise.

3.2 ACOUSTICAL INSULATION:

A. Fasten blanket insulation between metal studs and wall furring with continuous pressure sensitive tape along edges or adhesive.

B. Pack insulation around door frames and windows and in cracks, expansion joints, control joints, door soffits and other voids. Pack behind outlets, around pipes, ducts, and services encased in wall or partition. Hold insulation in place with pressure sensitive tape or adhesive.

C. Do not compress insulation below required thickness except where embedded items prevent required thickness.

- - - E N D - - -

SECTION 07 81 00
APPLIED FIREPROOFING

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies mineral fiber and cementitious coverings to provide fire resistance to interior structural steel members shown.

1.2 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Manufacturer's complete and detailed application instructions and specifications.
2. Manufacturer's repair and patching instructions.

C. Certificates:

1. Certificate from testing laboratory attesting fireproofing material and application method meet the specified fire ratings.
   a. List thickness and density of material required to meet fire ratings.
   b. Accompanied by complete test report and test record.
2. Manufacturer's certificate indicating sprayed-on fireproofing material supplied under the Contract is same within manufacturing tolerance as fireproofing material tested.

D. Miscellaneous:

1. Manufacturer's written approval of surfaces to receive sprayed-on fireproofing.
2. Manufacturer's written approval of completed installation.
3. Manufacturer's written approval of the applicators of fireproofing material.

1.3 PRODUCT DELIVERY, STORAGE AND HANDLING

A. Deliver to job-site in sealed containers marked and labeled to show manufacturer's name and brand and certification of compliance with the specified requirements.

B. Remove damaged containers from the site.

C. Store the materials off the ground, under cover, away from damp surfaces.

D. Keep dry until ready for use.

E. Remove materials that have been exposed to water before installation from the site.

1.4 QUALITY CONTROL

A. Test for fire endurance in accordance with ASTM E119, for fire rating specified, in a nationally recognized laboratory.

B. Manufacturer's inspection and approval of surfaces to receive fireproofing as specified under paragraph Examination.

C. Manufacturer's approval of fireproofing applications.

D. Manufacturer's approval of completed installation.

E. Manufacturer's representative shall observe and advise at the commencement of application, and shall visit the site as required thereafter for the purpose of ascertaining proper application.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

C841-03(R2008).....Installation of Interior Lathing and Furring

C847-10.....Metal Lath

E84-10.....Surface Burning Characteristics of Building Materials

E119-10.....Fire Tests of Building Construction and Materials

E605-93(R2006).....Thickness and Density of Sprayed Fire-Resistive Materials Applied to Structural Members

E736-00(R2006).....Cohesion/Adhesion of Sprayed Fire-Resistive Materials Applied to Structural Members

E759-92(R2005).....The Effect of Deflection on Sprayed Fire-Resistive Material Applied to Structural Members

E760-92(R2005).....Impact on Bonding of Sprayed Fire-Resistive Material Applied to Structural Members

E761-92(R2005).....Compressive Strength of Fire-Resistive Material Applied to Structural Members

E859-93(R2006).....Air Erosion of Sprayed Fire-Resistive Materials Applied to Structural Members

E937-93(R2005).....Corrosion of Steel by Sprayed Fire-Resistive Material Applied to Structural Members

E1042-02(R2008).....Acoustically, Absorptive Materials Applied by Trowel or Spray.

G21-09.....Determining Resistance of Synthetic Polymeric Materials to Fungi

C. Underwriters Laboratories, Inc. (UL):

Fire Resistance Directory...Latest Edition including Supplements

D. Warnock Hersey (WH):

Certification Listings..Latest Edition

E. Factory Mutual System (FM):

Approval Guide.....Latest Edition including Supplements

PART 2 - PRODUCTS

2.1 SPRAYED-ON FIREPROOFING

A. ASTM E1042, Class (a), Category A.

1. Type I, factory mixed cementitious materials with approved aggregate.
2. Type II, factory mixed mineral fiber with integral inorganic binders minimum 240 kg/m^3 (15 1b/ft^3) density per ASTM E605 test unless specified otherwise.

B. Materials containing asbestos are not permitted.

C. Fireproofing characteristics when applied in the thickness and density required to achieve the fire-rating specified.

	Characteristic	Test	Results
1.	Deflection	ASTM E759	No cracking, spalling, or delamination when backing to which it is applied has a deflection up to 1/120 in 3m (10 ft.)
2.	Corrosion-Resistance	ASTM E937	No promotion of corrosion of steel.
3.	Bond Impact	ASTM E760	No cracking, spalling, or delamination.
4.	Cohesion/Adhesion (Bond Strength)	ASTM E736	Minimum cohesive/adhesive strength of 9.57 kPa (200 lbf/ft^2) for protected areas. 19.15 kPa (400 lbf/ft^2) for exposed areas.
5.	Air Erosion	ASTM E859	Maximum gain weight of the collecting filter 0.27gm/m^2 (0.025 gm/ft^2).
6.	Compressive Strength	ASTM E761	Minimum compressive strength 36 kPa (5 lbf/in^2).

7.	Surface Burning Characteristics with adhesive and sealer to be used	ASTM E84	Flame spread 25 or less smoke developed 50 or less
8.	Fungi Resistance	ASTM G21	Resistance to mold growth when inoculated with aspergillus niger (28 days for general application)

2.2 ADHESIVE

A. Bonding adhesive for Type II (fibrous) materials as recommended and supplied by the fireproofing material manufacturer.

B. Adhesive may be an integral part of the material or applied separately to surface receiving fireproofing material.

2.3 SEALER

A. Sealer for Type II (fibrous) material as recommended and supplied by the fireproofing material manufacturer.

B. Surface burning characteristics as specified for fireproofing material.

C. Fungus resistant.

D. Sealer may be an integral part of the material or applied separately to the exposed surface. When applied separately use contrasting color pigmented sealer, white preferred.

2.4 WATER

A. Clean, fresh, and free from organic and mineral impurities.

B. pH of 6.9 to 7.1.

2.5 MECHANICAL BOND MATERIAL

A. Expanded Metal Lath: ASTM C847, minimum weight of 0.92 kg/m^2 (1.7 pounds per square yard).

B. Fasteners: ASTM C841.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify surfaces to receive fireproofing are clean and free of dust, soot, oil, grease, water soluble materials or any foreign substance which would prevent adhesion of the fireproofing material.

B. Verify hangers, inserts and clips are installed before the application of fireproofing material.

C. Verify ductwork, piping, and other obstructing material and equipment is not installed that will interfere with fireproofing installation.

D. Verify concrete work on steel decking and concrete encased steel is completed.

E. Verify temperature and enclosure conditions are required by fire-proofing material manufacturer.

3.2 APPLICATION

A. Do not start application until written approval has been obtained from manufacturer of fireproofing materials that surfaces have been inspected by the manufacturer or his representative, and are suitable to receive sprayed-on fireproofing.

B. Coordinate application of fireproofing material with other trades.

C. Application of Metal Lath:

1. Apply to beam and columns having painted surfaces.
2. Apply to beam flanges 300 mm (12-inches) or more in width.
3. Apply to column flanges 400 mm (16-inches) or more in width.
4. Apply to beam or column web 400 mm (16-inches) or more in depth.
5. Tack weld or mechanically fasten on maximum of 300 mm (12-inch) center.
6. Lap and tie lath member in accordance with ASTM C841.

D. Mix and apply in accordance with manufacturer's instructions.

1. Mechanically control material and water ratios.
2. Apply adhesive and sealer, when not an integral part of the materials, in accordance with the manufacturer's instructions.
3. Apply to density and thickness indicated in UL Fire Resistance Directory, FM Approval Guide, or WH Certification Listings unless specified otherwise. Test in accordance with ASTM E119.

E. Application shall be completed in one area, inspected and approved by COR before removal of application equipment and proceeding with further work.

3.3 FIELD TESTS

A. Tests of applied material will be performed by VA retained Testing Laboratory. See Section 01 45 29, TESTING LABORATORY SERVICES.

B. COR will select area to be tested in specific bays on each floor using a geometric grid pattern.

C. Test for thickness and density in accordance with ASTM E605. Areas showing thickness less than that required as a result of fire endurance test will be rejected.

D. Areas showing less than required fireproofing characteristics will be rejected on the following field tests.

1. Test for cohesion/adhesion: ASTM E736.

2. Test for bond impact strength: ASTM E760.

3.3 PATCHING AND REPAIRING

A. Inspect after mechanical, electrical and other trades have completed work in contact with fireproofing material, but before sprayed material is covered by subsequent construction.

B. Perform corrective measures in accordance with fireproofing material Manufacturer's recommendations.

1. Respray areas requiring additional fireproofing material to provide the required thickness, and replace dislodged or removed material.
2. Spray material for patching by machine directly on point to be patched, or into a container and then hand apply.
3. Hand mixing of material is not permitted.

C. Repair:

1. Respray all test and rejected areas.
2. Patch fireproofing material which is removed or disturbed after approval.

D. Perform final inspection of sprayed areas after patching and repair.

3.5 SCHEDULE

A. Apply fireproofing material on interior structural steel members and on underside of interior steel floor and roof decks, except on following surfaces:

1. Structural steel and underside of steel decks in elevator or dumbwaiter machine rooms.
2. Steel members in elevator hoist ways.
3. Areas used as air handling plenums.
4. Steel to be encased in concrete or designated to receive other type of fireproofing.

B. Type I:

1. One hour fire rating.
2. Two hour fire rating.
3. Three hour fire rating.

C. Type II:

1. One hour fire rating.
2. Two hour fire rating.

- - - E N D - - -

SECTION 07 84 00
FIRESTOPPING

PART 1 GENERAL

1.1 DESCRIPTION

A. Closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction.

B. Closure of openings in walls against penetration of gases or smoke in smoke partitions.

1.2 RELATED WORK

A. Spray applied fireproofing: Section 07 81 00, APPLIED FIREPROOFING

B. Sealants and application: Section 07 92 00, JOINT SEALANTS.

C. Fire and smoke damper assemblies in ductwork: Section 23 31 00, HVAC DUCTS AND CASINGS and Section 23 37 00, AIR OUTLETS AND INLETS.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturers literature, data, and installation instructions for types of firestopping and smoke stopping used.

C. List of FM, UL, or WH classification number of systems installed.

D. Certified laboratory test reports for ASTM E814 tests for systems not listed by FM, UL, or WH proposed for use.

1.4 DELIVERY AND STORAGE

A. Deliver materials in their original unopened containers with manufacturer’s name and product identification.

B. Store in a location providing protection from damage and exposure to the elements.

1.5 WARRANTY

Firestopping work subject to the terms of the Article “Warranty of Construction”, FAR clause 52.246-21, except extend the warranty period to five years.

1.6 QUALITY ASSURANCE

FM, UL, or WH or other approved laboratory tested products will be acceptable.

1.7 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):
E84-10.....Surface Burning Characteristics of Building Materials
E814-11.....Fire Tests of Through-Penetration Fire Stops

C. Factory Mutual Engineering and Research Corporation (FM):
Annual Issue Approval Guide Building Materials

D. Underwriters Laboratories, Inc. (UL):
Annual Issue Building Materials Directory
Annual Issue Fire Resistance Directory
1479-10.....Fire Tests of Through-Penetration Firestops

E. Warnock Hersey (WH):
Annual Issue Certification Listings

PART 2 - PRODUCTS

2.1 FIRESTOP SYSTEMS

A. Use either factory built (Firestop Devices) or field erected (through-Penetration Firestop Systems) to form a specific building system maintaining required integrity of the fire barrier and stop the passage of gases or smoke.

B. Through-penetration firestop systems and firestop devices tested in accordance with ASTM E814 or UL 1479 using the "F" or "T" rating to maintain the same rating and integrity as the fire barrier being sealed. "T" ratings are not required for penetrations smaller than or equal to 100 mm (4 in) nominal pipe or 0.01 m^2 (16 sq. in.) in overall cross sectional area.

C. Products requiring heat activation to seal an opening by its intumescence shall exhibit a demonstrated ability to function as designed to maintain the fire barrier.

D. Firestop sealants used for firestopping or smoke sealing shall have following properties:
1. Contain no flammable or toxic solvents.
2. Have no dangerous or flammable out gassing during the drying or curing of products.

3. Water-resistant after drying or curing and unaffected by high humidity, condensation or transient water exposure.
4. When used in exposed areas, shall be capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

E. Firestopping system or devices used for penetrations by glass pipe, plastic pipe or conduits, unenclosed cables, or other non-metallic materials shall have following properties:
1. Classified for use with the particular type of penetrating material used.
2. Penetrations containing loose electrical cables, computer data cables, and communications cables protected using firestopping systems that allow unrestricted cable changes without damage to the seal.
3. Intumescent products which would expand to seal the opening and act as fire, smoke, toxic fumes, and, water sealant.

F. Maximum flame spread of 25 and smoke development of 50 when tested in accordance with ASTM E84.

G. FM, UL, or WH rated or tested by an approved laboratory in accordance with ASTM E814.

H. Materials to be asbestos free.

I. Firetopping system or device in zero hour rated construction shall be white or grey in color. Firestopping system or device in all other rated construction shall be red in color.

2.2 SMOKE STOPPING IN SMOKE PARTITIONS

A. Use silicone sealant in smoke partitions as specified in section 07 92 00, JOINT SEALANTS.

B. Use mineral fiber filler and bond breaker behind sealant.

C. Sealants shall have a maximum flame spread of 25 and smoke developed of 50 when tested in accordance with E84.

D. When used in exposed areas capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

PART 3 - EXECUTION

3.1 EXAMINATION

Submit product data and installation instructions, as required by article, submittals, after an on site examination of areas to receive firestopping.

3.2 PREPARATION

A. Remove dirt, grease, oil, loose materials, or other substances that prevent adherence and bonding or application of the firestopping or smoke stopping materials.

B. Remove insulation on insulated pipe for a distance of 150 mm (six inches) on either side of the fire rated assembly prior to applying the firestopping materials unless the firestopping materials are tested and approved for use on insulated pipes.

3.3 INSTALLATION

A. Do not begin work until the specified material data and installation instructions of the proposed firestopping systems have been submitted and approved.

B. Install firestopping systems with smoke stopping in accordance with FM, UL, WH, or other approved system details and installation instructions.

C. Install smoke stopping seals in smoke partitions.

3.4 CLEAN-UP AND ACCEPTANCE OF WORK

A. As work on each floor is completed, remove materials, litter, and debris.

B. Do not move materials and equipment to the next-scheduled work area until completed work is inspected and accepted by the COR.

C. Clean up spills of liquid type materials.

- - - E N D - - -

SECTION 07 92 00
JOINT SEALANTS

PART 1 - GENERAL

1.1 DESCRIPTION:

Section covers all sealant and caulking materials and their application, wherever required for complete installation of building materials or systems.

1.2 RELATED WORK:

A. Firestopping penetrations: Section 07 84 00, FIRESTOPPING.

B. Glazing: Section 08 80 00, GLAZING.

C. Sound rated gypsum partitions/sound sealants: Section 09 29 00, GYPSUM BOARD.

D. Mechanical Work: Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.3 QUALITY CONTROL:

A. Installer Qualifications: An experienced installer who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance.

B. Source Limitations: Obtain each type of joint sealant through one source from a single manufacturer.

C. VOC: Acrylic latex and Silicon sealants shall have less than 50g/l VOC content.

1.4 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's installation instructions for each product used.

C. Cured samples of exposed sealants for each color where required to match adjacent material.

D. Manufacturer's Literature and Data:

1. Caulking compound
2. Primers
3. Sealing compound, each type, including compatibility when different sealants are in contact with each other.

1.5 PROJECT CONDITIONS:

A. Environmental Limitations:

1. Do not proceed with installation of joint sealants under following conditions:

a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 °C (40 °F).

b. When joint substrates are wet.

B. Joint-Width Conditions:

1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:

1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

1.6 DELIVERY, HANDLING, AND STORAGE:

A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.

B. Carefully handle and store to prevent inclusion of foreign materials.

C. Do not subject to sustained temperatures exceeding 32 °C (90 °F) or less than 5 °C (40 °F).

1.7 DEFINITIONS:

A. Definitions of terms in accordance with ASTM C717 and as specified.

B. Back-up Rod: A type of sealant backing.

C. Bond Breakers: A type of sealant backing.

D. Filler: A sealant backing used behind a back-up rod.

1.8 WARRANTY:

A. General Warranty: Special warranty specified in this Article shall not deprive Government of other rights Government may have under other provisions of Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of Contract Documents.

1.9 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Society for Testing and Materials (ASTM):

C509-06.....Elastomeric Cellular Preformed Gasket and Sealing Material.

C612-10.....Mineral Fiber Block and Board Thermal Insulation.

C717-10.....Standard Terminology of Building Seals and Sealants.

C834-10.....Latex Sealants.

C919-08.....Use of Sealants in Acoustical Applications.

C920-10.....Elastomeric Joint Sealants.

C1021-08.....Laboratories Engaged in Testing of Building Sealants.

C1193-09.....Standard Guide for Use of Joint Sealants.

C1330-02 (R2007).....Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants.

D1056-07.....Specification for Flexible Cellular Materials—Sponge or Expanded Rubber.

E84-09.....Surface Burning Characteristics of Building Materials.

C. Sealant, Waterproofing and Restoration Institute (SWRI).
The Professionals' Guide

PART 2 - PRODUCTS

2.1 SEALANTS:

A. S-1:

1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.

4. Grade NS.
5. Shore A hardness of 20-40

B. S-2:
1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.
4. Grade P.
5. Shore A hardness of 25-40.

C. S-3:
1. ASTM C920, polyurethane or polysulfide.
2. Type S.
3. Class 25, joint movement range of plus or minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-25.
6. Minimum elongation of 700 percent.

D. S-4:
1. ASTM C920 polyurethane or polysulfide.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-40.

E. S-5:
1. ASTM C920, polyurethane or polysulfide.
2. Type S.
3. Class 25.
4. Grade P.
5. Shore hardness of 15-45.

F. S-6:
1. ASTM C920, silicone, neutral cure.
2. Type S.
3. Class: Joint movement range of plus 100 percent to minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-20.
6. Minimum elongation of 1200 percent.

G. S-7:
1. ASTM C920, silicone, neutral cure.
2. Type S.

3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Structural glazing application.

H. S-8:
1. ASTM C920, silicone, acetoxy cure.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Structural glazing application.

I. S-9:
1. ASTM C920 silicone.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Non-yellowing, mildew resistant.

J. S-10:
1. ASTMC C920, coal tar extended fuel resistance polyurethane.
2. Type M/S.
3. Class 25.
4. Grade P/NS.
5. Shore A hardness of 15-20.

K. S-11:
1. ASTM C920 polyurethane.
2. Type M/S.
3. Class 25.
4. Grade P/NS.
5. Shore A hardness of 35 to 50.

L. S-12:
1. ASTM C920, polyurethane.
2. Type M/S.
3. Class 25, joint movement range of plus or minus 50 percent.
4. Grade P/NS.
5. Shore A hardness of 25 to 50.

2.2 CAULKING COMPOUND:

A. C-1: ASTM C834, acrylic latex.

B. C-2: One component acoustical caulking, non drying, non hardening, synthetic rubber.

2.3 COLOR:

A. Color of sealants shall match adjacent surfaces, unless specified otherwise.

B. Caulking shall match adjacent surfaces, unless specified otherwise.

2.4 JOINT SEALANT BACKING:

A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:

1. Type C: Closed-cell material with a surface skin.

C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056, nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32 °C (minus 26 °F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.

D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.5 FILLER:

A. Mineral fiber board: ASTM C612, Class 1.

B. Thickness same as joint width.

C. Depth to fill void completely behind back-up rod.

2.6 PRIMER:

A. As recommended by manufacturer of caulking or sealant material.

B. Stain free type.

2.7 CLEANERS-NON POUROUS SURFACES:

A. Chemical cleaners acceptable to manufacturer of sealants and sealant backing material, free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

PART 3 - EXECUTION

3.1 INSPECTION:

A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.

B. Coordinate for repair and resolution of unsound substrate materials.

C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

3.2 PREPARATIONS:

A. Prepare joints in accordance with manufacturer's instructions and SWRI.

B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.

1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include the following:
   a. Concrete.
   b. Masonry.
   c. Unglazed surfaces of ceramic tile.
3. Remove laitance and form-release agents from concrete.
4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
   a. Metal.
   b. Glass.
   c. Porcelain enamel.
   d. Glazed surfaces of ceramic tile.

C. Do not cut or damage joint edges.

D. Apply masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
   1. Do not leave gaps between ends of sealant backings.
   2. Do not stretch, twist, puncture, or tear sealant backings.
   3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
E. Apply primer to sides of joints wherever required by compound manufacturer's printer instructions.
   1. Apply primer prior to installation of back-up rod or bond breaker tape.
   2. Use brush or other approved means that will reach all parts of joints.
F. Take all necessary steps to prevent three sided adhesion of sealants.

3.3 BACKING INSTALLATION:

A. Install back-up material, to form joints enclosed on three sides as required for specified depth of sealant.
B. Where deep joints occur, install filler to fill space behind the back-up rod and position the rod at proper depth.
C. Cut fillers installed by others to proper depth for installation of back-up rod and sealants.
D. Install back-up rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.
E. Where space for back-up rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.
F. Take all necessary steps to prevent three sided adhesion of sealants.

3.4 SEALANT DEPTHS AND GEOMETRY:

A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.
B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

3.5 INSTALLATION:

A. General:
   1. Apply sealants and caulking only when ambient temperature is between 5 degrees C and 38 degrees C (40 and 100 degrees F).

2. Do not use polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
3. Do not use sealant type listed by manufacture as not suitable for use in locations specified.
4. Apply caulking and sealing compound in accordance with manufacturer's printer instructions.
5. Avoid dropping or smearing compound on adjacent surfaces.
6. Fill joints solidly with compound and finish compound smooth.
7. Tool joints to concave surface unless shown or specified otherwise.
8. Finish paving or floor joints flush unless joint is otherwise detailed.
9. Apply compounds with nozzle size to fit joint width.
10. Test sealants for compatibility with each other and substrate. Use only compatible sealant.

B. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise.

C. Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.
   1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
   2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
   3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.
   4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cut-outs to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
   5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

3.6 FIELD QUALITY CONTROL:

A. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field adhesion test log.

3.7 CLEANING:

A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by the caulking or sealant manufacturer.

B. After filling and finishing joints, remove masking tape.

C. Leave adjacent surfaces in a clean and unstained condition.

3.8 LOCATIONS:

A. Sanitary Joints:

1. Walls to Plumbing Fixtures: Type S-9
2. Counter Tops to Walls: Type S-9
3. Pipe Penetrations: Type S-9

B. High Temperature Joints over 204 degrees C (400 degrees F):

1. Exhaust Pipes, Flues, Breech Stacks: Type S-7 or S-8

C. Interior Caulking:

1. Typical Narrow Joint 6 mm, (1/4 inch) or less at Walls and Adjacent Components: Type C-1, C-2.
2. Perimeter of Doors, Windows, Access Panels which Adjoin Concrete or Masonry Surfaces: Type C-1, C-2.
3. Joints at Masonry Walls and Columns, Piers, Concrete Walls or Exterior Walls: Type C-1, C-2.
4. Exposed Isolation Joints at Top of Full Height Walls: Type C-1, C-2.
5. Exposed Acoustical Joint at Sound Rated Partitions Type C-2
6. Concealed Acoustic Sealant Type S-4, C-1, C-2.

- - - E N D - - -

SECTION 08 11 13
HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies steel doors, steel frames and related components.

B. Terms relating to steel doors and frames as defined in ANSI A123.1 and as specified.

1.2 RELATED WORK

A. Aluminum frames entrance work: Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS.

B. Door Hardware: Section 08 71 00, DOOR HARDWARE.

C. Glazing: Section 08 80 00, GLAZING.

D. Lead lining of frames: Section 13 49 00, RADIATION PROTECTION.

E. Card readers: Section 28 13 00, PHYSICAL ACCESS CONTROL SYSTEM.

1.3 TESTING

A. An independent testing laboratory shall perform testing.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturers Literature and Data:

1. Fire rated doors and frames, showing conformance with NFPA 80 and Underwriters Laboratory, Inc., or Inchcape Testing Services or Factory Mutual fire rating requirements.

1.5 SHIPMENT

A. Prior to shipment label each door and frame to show location, size, door swing and other pertinent information.

B. Fasten temporary steel spreaders across the bottom of each door frame.

1.6 STORAGE AND HANDLING

A. Store doors and frames at the site under cover.

B. Protect from rust and damage during storage and erection until completion.

1.7 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. Federal Specifications (Fed. Spec.):

L-S-125B.....Screening, Insect, Nonmetallic

C. Door and Hardware Institute (DHI):

A115 Series.....Steel Door and Frame Preparation for Hardware, Series A115.1 through A115.17 (Dates Vary)

D. Steel Door Institute (SDI):

113-01 (R2006).....Thermal Transmittance of Steel Door and Frame Assemblies

128-09.....Acoustical Performance for Steel Door and Frame Assemblies

E. American National Standard Institute:

A250.8-2003 (R2008).....Specifications for Standard Steel Doors and Frames

F. American Society for Testing and Materials (ASTM):

A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

A568/568-M-11.....Steel, Sheet, Carbon, and High-Strength, Low-alloy, Hot-Rolled and Cold-Rolled

A1008-10.....Steel, sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy and High Strength Low Alloy with Improved Formability

B209/209M-10.....Aluminum and Aluminum-Alloy Sheet and Plate

B221/221M-12.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles and Tubes

D1621-10.....Compressive Properties of Rigid Cellular Plastics

D3656-07.....Insect Screening and Louver Cloth Woven from Vinyl Coated Glass Yarns

E90-09.....Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions

G. The National Association Architectural Metal Manufactures (NAAMM):

Metal Finishes Manual (AMP 500-06)

H. National Fire Protection Association (NFPA):

80-13.....Fire Doors and Fire Windows

I. Underwriters Laboratories, Inc. (UL):

Fire Resistance Directory

J. Intertek Testing Services (ITS):

Certifications Listings…Latest Edition

K. Factory Mutual System (FM):

Approval Guide

PART 2 - PRODUCTS

2.1 MATERIALS

A. Sheet Steel: ASTM A1008, cold-rolled for panels (face sheets) of doors.

B. Anchors, Fastenings and Accessories: Fastenings anchors, clips connecting members and sleeves from zinc coated steel.

C. Prime Paint: Paint that meets or exceeds the requirements of A250.8.

2.2 FABRICATION GENERAL

A. GENERAL:

1. Follow SDI A250.8 for fabrication of standard steel doors, except as specified otherwise. Doors to receive hardware specified in Section 08 71 00, DOOR HARDWARE. Tolerances as per SDI A250.8. Thickness, 44 mm (1-3/4 inches), unless otherwise shown.
2. When vertical steel stiffeners are used for core construction, fill spaces between stiffeners with mineral fiber insulation.

B. Standard Duty Doors: SDI A250.8, Level 1, Model 2 of size and design shown. Use for interior locations only. Do not use for stairwell doors, security doors and detention doors.

C. Heavy Duty Doors: SDI A250.8, Level 2, Model 2 of size and design shown. Core construction types Kraft honeycomb, unitized steel grid, or vertical steel stiffeners for interior doors.

D. Smoke Doors

1. Close top and vertical edges flush.
2. Provide seamless vertical edges.
3. Apply Steel astragal to the meeting style at the active leaf of pair of doors or double egress doors.
4. Provide clearance at head, jamb and sill as specified in NFPA 80.

E. Fire Rated Doors (Labeled):

1. Conform to NFPA 80 when tested by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual for the class of door or door opening shown.
2. Fire rated labels of metal, with raised or incised markings of approving laboratory shall be permanently attached to doors.
3. Close top and vertical edges of doors flush. Vertical edges shall be seamless. Apply steel astragal to the meeting stile of the active

leaf of pairs of fire rated doors, except where vertical rod exit devices are specified for both leaves swinging in the same direction.

4. Construct fire rated doors in stairwell enclosures for maximum transmitted temperature rise of 230 °C (450 °F) above ambient temperature at end of 30 minutes of fire exposure when tested in accordance with ASTM E152.

F. Custom Metal Hollow Doors:

1. Provide custom hollow metal doors where nonstandard steel doors are indicated. At the Contractor's option, custom hollow metal doors may be provided in lieu of standard steel doors. Door size(s), design, materials, construction, gages and finish shall be as specified for standard steel doors.

2.3 METAL FRAMES

A. General:

1. SDI A250.8, 1.3 mm (0.053 inch) thick sheet steel, types and styles as shown or scheduled.
2. Frames for labeled fire rated doors.
   a. Comply with NFPA 80. Test by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual.
   b. Fire rated labels of approving laboratory permanently attached to frames as evidence of conformance with these requirements. Provide labels of metal or engraved stamp, with raised or incised markings.
3. Frames for lead-lined doors:
   a. Frames for doors 900 mm (3 feet) or less in width and having lead lining of 1 mm or less in thickness, and not shown to have structural steel supports: Minimum 1.7 mm (0.067 inch) thick.
   b. Frames for doors over 900 mm (3 feet) in width or having lead-lining more than 1 mm in thickness shown to be supported by and attached to structural steel subframes: Minimum 1.3 mm (0.053 inch) thick.
   c. Lead-lining and its application are specified in Section 13 49 00, RADIATION PROTECTION.
4. Frames for doors specified to have automatic door operators: minimum 1.7 mm (0.067 inch) thick.

5. Knocked-down frames are not acceptable, unless indicated on drawings.

B. Reinforcement and Covers:

1. SDI A250.8 for, minimum thickness of steel reinforcement welded to back of frames.

C. Terminated Stops: SDI A250.8.

D. Glazed Openings:

a. Integral stop on exterior, corridor, or secure side of door.

b. Design rabbet width and depth to receive glazing material or panel shown or specified.

E. Frame Anchors:

1. Floor anchors:

a. Where floor fills occur, provide extension type floor anchors to compensate for depth of fill.

b. At bottom of jamb use 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive two 6 mm (1/4 inch) floor bolts. Use 50 mm x 50 mm (2 inch by 2 inch) 9 mm by (3/8 inch) clip angle for lead lined frames, drilled for 9 mm (3/8 inch) floor bolts.

c. Where mullions occur, provide 2.3 mm (0.093 inch) thick steel channel anchors, drilled for two 6 mm (1/4 inch) floor bolts and frame anchor screws.

d. Where sill sections occur, provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for 6 mm (1/4 inch) floor bolts and frame anchor screws. Space floor bolts at 50 mm (24 inches) on center.

2. Jamb anchors:

a. Locate anchors on jambs near top and bottom of each frame, and at intermediate points not over 600 mm (24 inches) apart, except for fire rated frames space anchors as required by labeling authority.

b. Form jamb anchors of not less than 1 mm (0.042 inch) thick steel unless otherwise specified.

c. Anchors for stud partitions: Either weld to frame or use lock-in snap-in type. Provide tabs for securing anchor to the sides of the studs.

d. Anchors for observation windows and other continuous frames set in stud partitions.
   1) In addition to jamb anchors, weld clip anchors to sills and heads of continuous frames over 1200 mm (4 feet) long.
   2) Anchors spaced 600 mm (24 inches) on centers maximum.
e. Modify frame anchors to fit special frame and wall construction and provide special anchors where shown or required.

2.4 SHOP PAINTING

SDI A250.8.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Plumb, align and brace frames securely until permanent anchors are set.
   1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.
   2. Use wood spreaders at bottom of frame if the shipping spreader is removed.
   3. Protect frame from accidental abuse.
   4. Where construction will permit concealment, leave the shipping spreaders in place after installation, otherwise remove the spreaders after the frames are set and anchored.
   5. Remove wood spreaders and braces only after the walls are built and jamb anchors are secured.
B. Floor Anchors:
   1. Anchor the bottom of door frames to floor with two 6 mm (1/4 inch) diameter expansion bolts.
   2. Power actuated drive pins may be used to secure frame anchors to concrete floors.
C. Jamb Anchors:
   1. Secure anchors to sides of studs with two fasteners through anchor tabs. Use steel drill screws to steel studs.
D. Install anchors for labeled fire rated doors to provide rating as required.

3.2 INSTALLATION OF DOORS AND APPLICATION OF HARDWARE

Install doors and hardware as specified in Section 08 14 00, WOOD DOORS and Section 08 71 00, DOOR HARDWARE.

- - - E N D - - -

SECTION 08 14 00
INTERIOR WOOD DOORS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies interior flush doors with prefinish, prefit option.

B. Section includes fire rated doors, sound retardant doors, and smoke doors.

1.2 RELATED WORK

A. Metal door frames: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.

B. Door hardware including hardware location (height): Section 08 71 00, DOOR HARDWARE.

C. Installation of doors and hardware: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, Section 08 14 00, INTERIOR WOOD DOORS, or Section 08 71 00, DOOR HARDWARE.

D. Lead lined wood door: Section 13 49 00, RADIATION PROTECTION.

E. Card readers: Section 28 13 00, PHYSICAL ACCESS CONTROL SYSTEM.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Samples:

2. Veneer sample 200 mm (8 inch) by 275 mm (11 inch) by 6 mm (1/4 inch) showing specified wood species sanded to receive a transparent finish. Factory finish veneer sample where the prefinished option is accepted.

C. Shop Drawings:

1. Show every door in project and schedule location in building.
2. Indicate type, grade, finish and size; include detail of glazing sound gasketing and pertinent details.
3. Provide information concerning specific requirements not included in the manufacturer's literature and data submittal.

D. Manufacturer's Literature and Data:

1. Labeled fire rated doors showing conformance with NFPA 80.

E. Laboratory Test Reports:

1. Screw holding capacity test report in accordance with WDMA TM-10.
2. Split resistance test report in accordance with WDMA TM-5.

3. Cycle/Slam test report in accordance with WDMA TM-7.
4. Hinge-Loading test report in accordance with WDMA TM-8.

1.4 WARRANTY

A. Doors are subject to terms of Article titled “Warranty of Construction” of BID SOLICITATION GENERAL CONDITIONS, except that warranty shall be as follows:
   1. For interior doors, manufacturer’s warranty for lifetime of original installation.

1.5 DELIVERY AND STORAGE

A. Factory seal doors and accessories in minimum of 6 mill polyethylene bags or cardboard packages which shall remain unbroken during delivery and storage.
B. Store in accordance with WDMA I.S.1-A, J-1 Job Site Information.
C. Label package for door opening where used.

1.6 APPLICABLE PUBLICATIONS

Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. Window and Door Manufacturers Association (WDMA):
   I.S.1A-11.....Architectural Wood Flush Doors
   I.S.4-09.....Water-Repellent Preservative Non-Pressure Treatment for Millwork
   I.S.6A-11.....Architectural Wood Stile and Rail Doors
   T.M.6-08.....Adhesive (Glue Bond) Durability Test Method
   T.M.7-08.....Cycle-Slam Test Method
   T.M.8-08.....Hinge Loading Test Method
   T.M.10-08.....Screwholding Test Method
C. National Fire Protection Association (NFPA):
   80-10.....Protection of Buildings from Exterior Fire
   252-08.....Fire Tests of Door Assemblies
D. ASTM International (ASTM):
   E90-09.....Laboratory Measurements of Airborne Sound Transmission Loss

PART 2 - PRODUCTS

2.1 FLUSH DOORS

A. General:
   1. Meet requirements of WDMA I.S.1-A, Extra Heavy Duty.

2. Adhesive: Type II
3. Thickness: 45 mm (1-3/4 inches) unless otherwise shown or specified.

B. Face Veneer:
1. In accordance with NWWDA I.S.1-A.
2. One species throughout the project unless indicated otherwise.
3. Wood Veneer Types
a. For typical doors with transparent finishes: Premium Grade, plain-sliced cut red oak.
1. A grade face veneer standard optional.
2. AA grade face veneer
3. Match face veneers for doors for uniform effect of color and grain at joints.
4. Door edges shall be same species as door face veneer except maple may be used for stile face veneer on birch doors.
5. On doors required to have transparent finish on one side and paint finish on other side; use veneers as required for transparent finish on both sides.
b. For maple doors with transparent finishes: Premium Grade, plain-sliced maple.
1. A grade face veneer standard optional.
2. AA grade face veneer
3. Match face veneers for doors for uniform effect of color and grain at joints.
4. Door edges shall be same species as door face veneer.
4. For painted finishes: Custom Grade, mill option close grained hardwood, premium or medium density overlay. Do not use Lauan.

C. Wood for stops, louvers, muntins and moldings of flush doors required to have transparent finish:
1. Solid Wood of same species as face veneer, except maple may be used on birch doors.
2. Glazing:
a. On non-labeled doors use applied wood stops nailed tight on room side and attached on opposite side with flathead, countersunk wood screws, spaced approximately 125 mm (5 inches) on centers.

D. Fire rated wood doors:
1. Fire Performance Rating:
a. “B” label, 1-1/2 hours.

b. “C” label, 3/4 hour.

c. “D” label, 1/3 hour.

2. Labels:

a. Doors shall conform to the requirements of ASTM E2074, or NFPA 252, and, carry an identifying label from a qualified testing and inspection agency for class of door or opening shown designating fire performance rating.

b. Metal labels with raised or incised markings.

3. Performance Criteria for Stiles of doors utilizing standard mortise leaf hinges:

a. Hinge Loading: WDMA TM-8. Average of 10 test samples for Extra Heavy Duty doors.

b. Direct screw withdrawal: WDMA TM-10 for Extra Heavy Duty doors. Average of 10 test samples using a steel, fully threaded #12 wood screw.

c. Cycle Slam: 1,000,000 cycles with no loose hinge screws or other visible signs of failure when tested in accordance with WDMA T.M.7.

4. Additional Hardware Reinforcement:

a. Provide fire rated doors with hardware reinforcement blocking.

b. Size of lock blocks as required to secure hardware specified.

c. Top, bottom and intermediate rail blocks shall measure not less than 125 mm (five inches) minimum by full core width.

d. Reinforcement blocking in compliance with manufacturer's labeling requirements.

e. Mineral material similar to core is not acceptable.

5. Other Core Components: Manufacturer's standard as allowed by the labeling requirements.

6. Provide steel frame approved for use in labeled doors for vision panels.

7. Provide steel astragal on pair of doors.

E. Smoke Barrier Doors:

1. For glazed openings use steel frames approved for use in labeled doors.

2. Provide a steel astragal on one leaf of pairs of doors, including double egress doors.

2.2 PREFINISH, PREFIT OPTION

A. Flush doors shall be factory machined to receive hardware, bevels, undercuts, cutouts, accessories and fitting for frame.

B. Factory fitting to conform to specification for shop and field fitting, including factory application of sealer to edge and routings.

C. Flush doors to receive transparent finish (in addition to being prefit) shall be factory finished as follows:

1. WDMA I.S.1A Section F-3 specification for System TR-4, Conversion Varnish or System TR-5, Catalyzed Vinyl.

2.3 IDENTIFICATION MARK:

A. On top edge of door.

B. Either a stamp, brand or other indelible mark, giving manufacturer's name, door's trade name, construction of door, code date of manufacture and quality.

C. Accompanied by either of the following additional requirements:

1. An identification mark or a separate certification including name of inspection organization.
2. Identification of standards for door, including glue type.
3. Identification of veneer and quality certification.
4. Identification of preservative treatment for stile and rail doors.

2.4 SEALING:

Give top and bottom edge of doors two coats of catalyzed polyurethane or water resistant sealer before sealing in shipping containers.

PART 3 - EXECUTION

3.1 DOOR PREPARATION

A. Field, shop or factory preparation: Do not violate the qualified testing and inspection agency label requirements for fire rated doors.

B. Clearances between Doors and Frames and Floors:

1. Maximum 3 mm (1/8 inch) clearance at the jambs, heads, and meeting stiles, and a 19 mm (3/4 inch) clearance at bottom, except as otherwise specified.
2. Maximum clearance at bottom of sound rated doors, light-proofed doors, doors to operating rooms, and doors designated to be fitted with mechanical seal: 10 mm (3/8 inch).

C. Provide cutouts for special details required and specified.

D. Rout doors for hardware using templates and location heights specified in Section, 08 71 00 DOOR HARDWARE.

E. Fit doors to frame, bevel lock edge of doors 3 mm (1/8 inch) for each 50 mm (two inches) of door thickness undercut where shown.

F. Immediately after fitting and cutting of doors for hardware, seal cut edges of doors with two coats of water resistant sealer.

G. Finish surfaces, including both faces, top and bottom and edges of the doors smooth to touch.

H. Apply a steel astragal on the opposite side of active door on pairs of fire rated doors.

I. Apply a steel astragal to meeting style of active leaf of pair of doors or double egress smoke doors.

3.2 INSTALLATION OF DOORS APPLICATION OF HARDWARE

Install doors and hardware as specified in this Section.

3.3 DOOR PROTECTION

A. As door installation is completed, place polyethylene bag or cardboard shipping container over door and tape in place.

B. Provide protective covering over knobs and handles in addition to covering door.

C. Maintain covering in good condition until removal is approved by COR.

- - - E N D - - -

SECTION 08 31 13
ACCESS DOORS AND FRAMES

PART 1 - GENERAL

1.1 DESCRIPTION:

Section specifies access doors or panels.

1.2 RELATED WORK:

A. Field Painting: Section 09 91 00, PAINTING.

B. Locations of access doors for duct work cleanouts: Section 23 31 00, HVAC DUCTS AND CASINGS.

1.3 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings: Access doors, each type, showing construction, location and installation details.

C. Manufacturer's Literature and Data: Access doors, each type.

1.4 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.

B. American Society for Testing and Materials (ASTM):

A167-99(R-2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip

A1008-10.....Steel Sheet, Cold-Rolled, Carbon, Structural, High Strength Low-Alloy

C. American Welding Society (AWS):

D1.3-08.....Structural Welding Code Sheet Steel

D. National Fire Protection Association (NFPA):

80-10.....Fire Doors and Windows

E. The National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500 Series.....Metal Finishes Manual

F. Underwriters Laboratories, Inc. (UL):

Fire Resistance Directory

PART 2 - PRODUCTS

2.1 FABRICATION, GENERAL

A. Fabricate components to be straight, square, flat and in same plane where required.

1. Slightly round exposed edges and without burrs, snags and sharp edges.
2. Exposed welds continuous and ground smooth.
3. Weld in accordance with AWS D1.3.

B. Number of locks and non-continuous hinges as required to maintain alignment of panel with frame. For fire rated doors, use hinges and locks as required by fire test.

C. Provide anchors or make provisions in frame for anchoring to adjacent construction. Provide size, number and location of anchors on four sides to secure access door in opening. Provide anchors as required by fire test.

2.2 ACCESS DOORS, FLUSH PANEL:

A. Door Panel:
1. Form of 1.9 mm (0.0747 inch) thick steel sheet.
2. Reinforce to maintain flat surface.

B. Frame:
1. Form of 1.5 mm (0.0598 inch) thick steel sheet of depth and configuration to suit material and type of construction where installed.
2. Provide surface mounted units having frame flange at perimeter where installed in concrete, masonry, or gypsum board construction.
3. Weld exposed joints in flange and grind smooth.

C. Hinge:
1. Concealed spring hinge to allow panel to open 175 degrees.
2. Provide removable hinge pin to allow removal of panel from frame.

D. Lock:
1. Flush, screwdriver operated cam lock.

2.3 FINISH:

A. Provide in accordance with NAAMM AMP 500 series on exposed surfaces.

B. Steel Surfaces: Baked-on prime coat over a protective phosphate coating.

C. Field finish paint to match adjacent gypsum board.

2.6 SIZE:

Minimum 600 mm (24 inches) square door unless otherwise shown.

PART 3 - EXECUTION

3.1 LOCATION:

A. Provide access panels or doors wherever any valves, traps, dampers, cleanouts, and other control items of mechanical, electrical and conveyor work are concealed in wall or partition, or are above ceiling of gypsum board or plaster.

B. Use fire rated doors in fire rated partitions and ceilings.

C. Use flush panels in partitions and gypsum board ceilings.

3.2 INSTALLATION, GENERAL:

A. Install access doors in openings to have sides vertical in wall installations, and parallel to ceiling suspension grid or side walls when installed in ceiling.

B. Set frames so that edge of frames without flanges will finish flush with surrounding finish surfaces.

C. Set frames with flanges to overlap opening and so that face will be uniformly spaced from the finish surface.

D. Set recessed panel access doors recessed so that face of surrounding materials will finish on the same plane, when finish in door is installed.

3.3 ANCHORAGE:

A. Secure frames to adjacent construction using anchors attached to frames or by use of bolts or screws through the frame members.

B. Type, size and number of anchoring device suitable for the material surrounding the opening, maintain alignment, and resist displacement during normal use of access door.

C. Anchors for fire rated access doors shall meet requirements of applicable fire test.

3.4 ADJUSTMENT:

A. Adjust hardware so that door panel will open freely.

B. Adjust door when closed so door panel is centered in the frame.

- - - E N D - - -

SECTION 08 33 13
OVERHEAD COILING WOOD COUNTER DOORS

PART 1 -GENERAL

1.1 DESCRIPTION

A. Section specifies overhead wood upward coiling shutters over counter in walls, including frame.

B. Manual push up operation.

1.2 RELATED WORK

A. Guide Rail Supports: Section 06 10 00, ROUGH CARPENTRY.

B. Custom Casework: Section 06 20 00, FINISH CARPENTRY AND MILLWORK.

C. Lock cylinder and keying: Section 08 71 00, DOOR HARDWARE.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:
Coiling Door, each type.
Installation procedures and instructions.

C. Shop Drawings:
Indicate opening sizes, jamb, sill and head conditions.

D. Samples:
1. Minimum 8 inch long curtain slats showing species, grain and finish.

E. Closeout Submittals: for inclusion in Operation and Maintenance Manuals.

1.4 QUALITY ASSURANCE

A. Approval by Contracting Officer is required of product or service of proposed manufacturer and installers, and will be based upon submission by Contractor of certification that:
1. Manufacturer regularly and presently manufactures overhead coiling wood counter doors as specified as one of its principal products.
2. Manufacturer's product submitted has been in satisfactory and efficient operation or three installations similar and equivalent to this project for five years.
3. Manufacturer submits list of installations.

B. Installer Qualifications: Minimum 2 years documented experience in installation similar to this project.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Society for Testing and Materials (ASTM):

A47-99(R2009).....Malleable Iron Castings

A48-03(R2008).....Gray Iron Castings

A53-10.....Pipe, Steel, Black and Hot-Dipped, Zinc-Coated Welded and Seamless

A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip

A653-10.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process

B209-07.....Aluminum and Aluminum-Alloy Sheet and Plate

B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes

F468-10.....Nonferrous Bolts, Hex Cap Screws, and Studs for General Use

F593-02(R2008).....Stainless Steel Bolts, Hex Cap Screws, and Studs

C. American Welding Society (AWS):

D1.1-10.....Structural Welding Code Steel

D1.2-08.....Structural Welding Code Aluminum

D1.3-08.....Structural Welding Code Sheet Steel

D. National Association of Architectural Metal Manufacturers (NAAMM)

AMP 500 Series-2006.....Metal Finishes Manual

E. American Architectural Manufacturers Association (AAMA):

2605-11.....Voluntary Specification for High Performance Organic Coatings on Architectural Extrusions and Panels

F. Federal Specifications (Fed. Spec):

TT-P-645B.....Primer, Paint, Zinc-Molybdates, Alkyd Type

G. U.S. Department of Commerce Product Standards (Prod. Std):

PS 1-95.....Construction And Industrial Plywood

H. Hardwood, Plywood and Veneer Association (HPVA):

HP1-09.....Hardwood and Decorative Plywood

I. Architectural Woodwork Institute (AWI):

AWI-09.....Architectural Woodwork Quality Standards and Quality Certification Program

J. Federal Specifications (Fed. Spec.):

A-A-1922A.....Shield Expansion

A-A-1936.....Contact Adhesive

FF-N-836D.....Nut, Square, Hexagon Cap, Slotted, Castle

FF-S-111D(1).....Screw, Wood

MM-L-736(C).....Lumber, Hardwood

J. Forest Stewardship Council (FSC):

STD-40-004.....Chain of Custody Standard

1.6 DELIVERY, STORAGE AND HANDLING

A. Do not deliver doors until proper protection can be provided, and until needed for installation.

B. Store products in manufacturer's unopened packaging until ready for installation.

1.7 PROJECT CONDITIONS

A. Maintain temperature and humidity within manufacturer’s recommended limits.

B. Do not install products under environmental conditions outside manufacturer’s limits

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Basis-of-Design Product: Subject to compliance with requirements, provide product by Woodfold-Marco Mfg., Inc.; P.O. Box 346, Forest Grove OR 97116 (www.woodfold.com), or comparable product.

2.2 COMPONENTS

A. Curtain

1. Slats: Solid hardwood profiles with long edges rabbeted to interlock to form sight-proof curtain.
2. Bottom rail: Solid wood profile matching grain and species of slat.
3. Wood species: Maple, unless noted otherwise.
4. Interlocking hardware: Manufacturer’s standard, concealed within slat and bottom rail profile.

B. Guides: Manufacturer’s standard guides for indicated counter door mounting and operation.

1. Construct for recessed installation as indicated on Drawings.

C. Operation: Manual, upward coiling.
   1. Provide pole hook for manual pull down of bottom rail.
D. Latching Hardware:
   1. Manufacturer’s standard sidebolt surface mounted to curtain bottom rail at each end of curtain.
E. Counterbalance Assembly:
   1. Spring barrel or shaft of steel pipe of sufficient strength to ensure deflection not exceeding 1 mm (0.03 inch) per 300 mm (1-foot) of span.
   2. Barrel or shaft house oil-tempered, helically wound steel spring, and rotate on grease-sealed ball or roller bearings.
   3. Springs adjustable from outside.
F. Hood: Constructed of plywood, with veneer on sight-exposed face matching species of curtain material, or solid wood of same species as curtain material; concealed fastener construction to facilitate hood removal for servicing counter door.

2.3 FINISH

A. Wood Finish:
   1. Factory finish doors after fabrication.
   2. Sand sight-exposed wood surfaces to smooth finish.
   3. Color of Shutter: As indicated on Drawings. Apply clear water-reducible acrylic lacquer to sight-exposed wood surfaces.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install in accordance with approved shop drawings and manufacturer's instructions.
B. Locate anchors and inserts for guides, brackets, supports, hardware, and other accessories and components accurately and without distortion or stress.
C. Securely attach guides to adjoining construction with not less than 10 mm (3/8-inch) diameter bolts, spaced near each end and not over 600 mm (24 inches) apart.
   1. Use fasteners conforming to ASTM F468 and F593.
   2. Use stainless steel bolts.
D. Fit and align door assembly including hardware, level and plumb, to provide smooth operation.

3.2 ADJUSTING AND CLEANING

A. Lubricate properly, adjust and demonstrate, to operate freely and as specified throughout full operating range.

B. Clean upon completion.

- - - E N D - - -

SECTION 08 41 13
ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies aluminum entrance work including storefront construction, hung doors, and other components to make a complete assembly.

1.2 RELATED WORK:

A. Glass and Glazing: Section 08 80 00, GLAZING.

B. Hardware: Section 08 71 00, DOOR HARDWARE.

C. Automatic Door Operators: Section 08 71 13, AUTOMATIC DOOR OPERATORS.

1.3 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings: (1/2 full scale) showing construction, anchorage, reinforcement, and installation details.

C. Manufacturer’s Literature and Data:

1. Doors, each type.
2. Entrance and Storefront construction.

D. Samples:

1. Two samples of anodized aluminum of each color showing finish and maximum shade range.

E. Manufacturer's Certificates:

1. Stating that aluminum has been given specified thickness of anodizing.
2. Indicating manufacturer's qualifications specified.

1.4 QUALITY ASSURANCE:

A. Approval by Contracting Officer is required of products of proposed manufacturer, or supplier, and will be based upon submission by Contractor certification.

B. Certify manufacturer regularly and presently manufactures aluminum entrances and storefronts as one of their principal products.

1.5 DELIVERY, STORAGE AND HANDLING:

A. Deliver aluminum entrance and storefront material to the site in packages or containers; labeled for identification with the manufacturer's name, brand and contents.

B. Store aluminum entrance and storefront material in weather-tight and dry storage facility.

C. Protect from damage from handling, weather and construction operations before, during and after installation.

1.6 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

B209-07.....Aluminum and Aluminum-Alloy Sheet and Plate

B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes

E283-04.....Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen

E331-00(R2009).....Water Penetration of Exterior Windows, Curtain Walls, and Doors by Uniform Static Air Pressure Difference

F468-10.....Nonferrous Bolts, Hex Cap Screws, and Studs for General Use

F593-02(R2008).....Stainless Steel Bolts, Hex Cap Screws, and Studs

C. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500 Series.....Metal Finishes Manual

D. American Architectural Manufacturer's Association (AAMA):

2604-10.....High Performance Organic Coatings on Architectural Aluminum Extrusions and Panels

E. American Welding Society (AWS):

D1.2-08.....Structural Welding Code Aluminum

1.7 PERFORMANCE REQUIREMENTS:

A. Shapes and thickness of framing members shall be sufficient to withstand a design wind load of not less than 1.4 kilopascals (30 pounds per square foot) of supported area with a deflection of not more than 1/175 times the length of the member and a safety factor of not less than 1.65 (applied to overall load failure of the unit). Provide glazing beads, moldings, and trim of not less than 1.25 mm (0.050 inch) nominal thickness.

B. Air Infiltration: When tested in accordance with ASTM E 283, air infiltration shall not exceed 2.63 x 10-50 cm per square meter (0.06 cubic feet per minute per square foot) of fixed area at a test pressure of 0.30 kPa (6.24 pounds per square foot) 80 kilometers (50 mile) per hour wind.

C. Water Penetration: When tested in accordance with ASTM E 331, there shall be no water penetration at a pressure of 0.38 kPa (8 pounds per square foot) of fixed area.

PART 2 - PRODUCTS

2.1 MATERIALS:

A. Aluminum, ASTM B209 and B221:

1. Alloy 6063 temper T5 for doors, door frames, fixed glass sidelights, storefronts, and transoms.

B. Fasteners:

1. Aluminum: ASTM F468, Alloy 2024.
2. Stainless Steel: ASTM F593, Alloy Groups 1, 2 and 3.

2.2 FABRICATION:

A. Fabricate doors, of extruded aluminum sections not less than 3 mm (0.125 inch) thick. Fabricate glazing beads of aluminum not less than 1.0 mm (0.050 inch) thick.

B. Accurately form metal parts and accurately fit and rigidly assemble joints, except those joints designed to accommodate movement. Seal joints to prevent leakage of both air and water.

C. Make welds in aluminum in accordance with the recommended practice AWA D1.2. Use electrodes and methods recommended by the manufacturers of the metals and alloys being welded. Make welds behind finished surfaces so as to cause no distortion or discoloration of the exposed side. Clean welded joints of welding flux and dress exposed and contact surfaces.

D. Make provisions in doors and frames to receive the specified hardware and accessories. Coordinate schedule and template for hardware specified under Section 08 71 00, DOOR HARDWARE. Where concealed closers or other mechanisms are required, provide the necessary space, cutouts, and reinforcement for secure fastening.

E. Fit and assemble the work at the manufacturer's plant. Mark work that cannot be permanently plant-assembled to assure proper assembly in the field.

2.3 PROTECTION OF ALUMINUM:

A. Isolate aluminum from contact with dissimilar metals other than stainless steel, white bronze, or zinc by any of the following:
   1. Coat the dissimilar metal with two coats of heavy-bodied alkali resistant bituminous paint.
   2. Place caulking compound, or non-absorptive tape, or gasket between the aluminum and the dissimilar metal.
   3. Paint aluminum in contact with mortar, concrete and plaster, with a coat of aluminum paint primer.

2.4 FRAMES:

A. Fabricate doors, frames, mullions, transoms, frames for fixed glass and similar members from extruded aluminum not less than 3 mm (0.125 inch) thick.

B. Provide integral stops and glass rebates and applied snap-on type trim.

C. Use concealed screws, bolts and other fasteners. Secure cover boxes to frames in back of all lock strike cutouts.

2.5 STILE AND RAIL DOORS:

A. Nominal 45 mm (1-3/4 inch) thick, with stile and head rail 90 mm (3-1/2 inches) wide, and bottom rail 250 mm (10 inches) wide.

B. Bevel single-acting doors 3 mm (1/8 inch) at lock, hinge and meeting stile edges. Provide clearances of 2 mm (1/16 inch) at hinge stiles, 3 mm (1/8 inch) at lock stiles and top rails, and 5 mm (3/16 inch) at floors and thresholds. Form glass rebates integrally with stiles and rails. Glazing beads may be formed integrally with stiles and rails or applied type secured with fasteners at 150 mm (six inches) on centers.

C. Construct doors with a system of welded joints or interlocking dovetail joints between stiles and rails. Clamp door together through top and bottom rails with 9 mm (3/8 inch) primed steel rod extending into the stiles, and having a self-locking nut and washer at each end. Reinforce stiles and rails to prevent door distortion when tie rods are tightened. Provide a compensating spring-type washer under each nut to take up any stresses that may develop. Construct joints between rails and stiles to remain rigid and tight when door is operated.

2.6 REINFORCEMENT FOR BUILDERS HARDWARE:

A. Fabricate from stainless steel plates.

B. Hinge and pivot reinforcing: 4.55 mm (0.1793 inch) thick.

C. Reinforcing for lock face, flush bolts, concealed holders, concealed or surface mounted closers: 2.66 mm (0.1046 inch) thick.

D. Reinforcing for all other surface mounted hardware: 1.5 mm (0.0598 inch) thick.

2.7 GLASS:

A. In accordance with Section 08 80 00, GLAZING.

2.8 FINISH

A. In accordance with NAAMM AMP 500 series.

B. Anodized Aluminum:

1. Clear Finish: Chemically etched medium matte, with clear anodic coating, Class I Architectural, 7 mils thick.

PART 3 - EXECUTION

3.1 INSTALLATION:

A. Allowable Installation Tolerances: Install work plumb and true, in alignment and in relation to lines and grades shown. Variation of 3 mm (1/8 inch) in 2400 mm (eight feet), non-accumulative, is maximum permissible for plumb, level, warp, bow and alignment.

B. Anchor aluminum frames to adjoining construction at heads, jambs and bottom and to steel supports, and bracing. Anchor frames with stainless steel or aluminum countersunk flathead, expansion bolts or machine screws, as applicable. Use aluminum clips for internal connections of adjoining frame sections.

C. Where work is installed within masonry or concrete openings, place no parts other than built-in anchors and provision for operating devices located in the floor, until after the masonry or concrete work is completed.

D. Install hardware specified under Section 08 71 00, DOOR HARDWARE.

E. Install hung door operators specified under Section 08 71 13, AUTOMATIC DOOR OPERATORS.

3.2 ADJUSTING:

After installation of entrance and storefront work is completed, adjust and lubricate operating mechanisms to ensure proper performance.

3.3 PROTECTION, CLEANING AND REPAIRING:

Remove all mastic smears and other unsightly marks, and repair any damaged or disfiguration of the work. Protect the installed work against damage or abuse.

- - - E N D - - -

SECTION 08 71 00
DOOR HARDWARE

PART 1 - GENERAL

1.1 DESCRIPTION

Door hardware and related items necessary for complete installation and operation of doors.

1.2 RELATED WORK

A. Caulking: Section 07 92 00 JOINT SEALANTS.

B. Application of Hardware: Section 08 14 00, WOOD DOORS, Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, and Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS.

C. Access doors: Section 08 31 13, ACCESS DOORS AND FRAMES.

C. Application of automatic door operators: Section 08 71 13, AUTOMATIC DOOR OPERATORS.

1.3 GENERAL

A. All hardware shall comply with UFAS, (Uniform Federal Accessible Standards) unless specified otherwise.

B. Provide rated door hardware assemblies where required by most current version of the International Building Code (IBC).

C. Hardware for Labeled Fire Doors and Exit Doors: Conform to requirements of NFPA 80 for labeled fire doors and to NFPA 101 for exit doors, as well as to other requirements specified. Provide hardware listed by UL, except where heavier materials, large size, or better grades are specified herein under paragraph HARDWARE SETS. In lieu of UL labeling and listing, test reports from a nationally recognized testing agency may be submitted showing that hardware has been tested in accordance with UL test methods and that it conforms to NFPA requirements.

D. Hardware for application on metal and wood doors and frames shall be made to standard templates. Furnish templates to the fabricator of these items in sufficient time so as not to delay the construction.

E. The following items shall be of the same manufacturer, if possible, except as otherwise specified:

1. Mortise locksets.
2. Hinges for hollow metal and wood doors.
3. Surface applied overhead door closers.
4. Exit devices.

1.4 WARRANTY

A. Automatic door operators shall be subject to the terms of FAR Clause 52.246-21, except that the Warranty period shall be two years in lieu of one year for all items except as noted below:
   1. Locks, latchsets, and panic hardware: 5 years.
   2. Door closers and continuous hinges: 10 years.

1.5 MAINTENANCE MANUALS

In accordance with section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on all door hardware. Provide installation instructions with the submittal documentation.

1.6 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

B. Hardware Schedule: Prepare and submit hardware schedule in the following form:

Hardware Item	Quantity	Size	Reference Publication Type No.	Finish	Mfr. Name and Catalog No.	Key Control Symbols	UL Mark (if fire rated and listed)	ANSI/BHMA Finish Designation

C. Samples and Manufacturers' Literature:
   1. Samples: All hardware items (proposed for the project) that have not been previously approved by Builders Hardware Manufacturers Association shall be submitted for approval. Tag and mark all items with manufacturer's name, catalog number and project number.
   2. Samples are not required for hardware listed in the specifications by manufacturer's catalog number, if the contractor proposes to use the manufacturer's product specified.

D. Certificate of Compliance and Test Reports: Submit certificates that hardware conforms to the requirements specified herein. Certificates shall be accompanied by copies of reports as referenced. The testing shall have been conducted either in the manufacturer's plant and

certified by an independent testing laboratory or conducted in an independent laboratory, within four years of submittal of reports for approval.

1.7 DELIVERY AND MARKING

Deliver items of hardware to job site in their original containers, complete with necessary appurtenances including screws, keys, and instructions. Tag one of each different item of hardware and deliver to COTR for reference purposes. Tag shall identify items by Project Specification number and manufacturer's catalog number. These items shall remain on file in COTR's office until all other similar items have been installed in project, at which time the COTR will deliver items on file to Contractor for installation in predetermined locations on the project.

1.8 INSTRUCTIONS

A. Hardware Sets: Hardware requirements for each door are included in this section. Each number designates a set of hardware items applicable to a door type.

B. Manufacturers' Catalog Number References: Where manufacturers' products are specified herein, products of other manufacturers which are considered equivalent to those specified may be used. Manufacturers whose products are specified are identified by abbreviations as follows:

Adams-Rite	Adams Rite Mfg. Co.	Glendale, CA
Glynn Johnson	Glynn Johnson Co.	Chicago, IL
LCN	LCN Closers	Princeton, IL
Firemark	Rixon-Firemark Co.	Chicago, IL
Hager	Hager Hinge Company	Saint Louis, MO
Stanley	The Stanley Works	New Britain, CT
Trimco	Triangle Brass Mfg. Co.	Los Angeles, CA
Unican	Simplex Security Systems	Collinsville, CT
Von Duprin	Von Duprin Hardware Co.	Indianapolis, IN
Zero	Zero Weather Stripping Co.	New York, NY

C. Keying: All cylinders shall be keyed into existing Key System. Provide removable core cylinders that are removable only with a special key or tool without disassembly of knob or lockset. Cylinders shall be 6 pin

type. Keying information shall be furnished at a later date by the COTR.

1.9 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. In text, hardware items are referred to by series, types, etc., listed in such specifications and standards, except as otherwise specified.

B. American Society for Testing and Materials (ASTM):

F883-04.....Padlocks

E2180-07.....Standard Test Method for Determining the Activity of Incorporated Antimicrobial Agent(s) In Polymeric or Hydrophobic Materials

C. American National Standards Institute/Builders Hardware Manufacturers Association (ANSI/BHMA):

A156.1-06.....Butts and Hinges

A156.2-03.....Bored and Pre-assembled Locks and Latches

A156.3-08.....Exit Devices, Coordinators, and Auto Flush Bolts

A156.4-08.....Door Controls (Closers)

A156.5-01.....Auxiliary Locks and Associated Products

A156.6-05.....Architectural Door Trim

A156.8-05.....Door Controls-Overhead Stops and Holders

A156.12-05 .....Interconnected Locks and Latches

A156.13-05.....Mortise Locks and Latches Series 1000

A156.14-07 .....Sliding and Folding Door Hardware

A156.15-06.....Release Devices-Closer Holder, Electromagnetic and Electromechanical

A156.16-08.....Auxiliary Hardware

A156.17-04 .....Self-Closing Hinges and Pivots

A156.18-06.....Materials and Finishes

A156.20-06 .....Strap and Tee Hinges, and Hasps

A156.21-09.....Thresholds

A156.22-05.....Door Gasketing and Edge Seal Systems

A156.23-04.....Electromagnetic Locks

A156.24-03.....Delayed Egress Locking Systems

A156.25-07 .....Electrified Locking Devices

A156.26-06.....Continuous Hinges

A156.28-07 .....Master Keying Systems

A156.29-07 .....Exit Locks and Alarms

A156.30-03 .....High Security Cylinders

A156.31-07 .....Electric Strikes and Frame Mounted Actuators

A250.8-03.....Standard Steel Doors and Frames

D. National Fire Protection Association (NFPA):

80-10.....Fire Doors and Fire Windows

101-09.....Life Safety Code

E. Underwriters Laboratories, Inc. (UL):

Building Materials Directory (2008)

PART 2 - PRODUCTS

2.1 BUTT HINGES

A. ANSI A156.1. The following types of butt hinges shall be used for the types of doors listed, except where otherwise specified:

1. Interior Doors: Type 8112 for doors 900 mm (3 feet) wide or less and Type A8111 for doors over 900 mm (3 feet) wide.
2. Automatic doors hung on butts, provide Type A2111 for aluminum doors, and Type A8111 for other doors.
3. Labeled Wood Fire Doors: Type 8411 or Type 8412; these hinges shall be thru bolted to door with hex nuts and bolts.

B. Provide quantity and size of hinges per door leaf as follows:

1. Doors up to 1210 mm (4 feet) high: 2 hinges.
2. Doors 1210 mm (4 feet) to 2260 mm (7 feet 5 inches) high: 3 hinges minimum.
3. Doors greater than 2260 mm (7 feet 5 inches) high: 4 hinges.
4. Doors up to 900 mm (3 feet) wide, standard weight: 114 mm x 114 mm (4-1/2 inches x 4-1/2 inches) hinges.
5. Doors over 900 mm (3 feet) to 1065 mm (3 feet 6 inches) wide, standard weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
6. Doors over 1065 mm (3 feet 6 inches) to 1210 mm (4 feet), heavy weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
7. Provide heavy-weight hinges where specified.
8. At doors weighing 330 kg (150 lbs.) or more, furnish 127 mm (5 inch) high hinges.

C. See Articles "MISCELLANEOUS HARDWARE" and "HARDWARE SETS" for pivots and hinges other than butts specified above and continuous hinges specified below.

2.2 CONTINUOUS HINGES

A. ANSI/BHMA A156.26, Grade 1-300.
   1. Listed under Category N in BHMA's "Certified Product Directory."

B. General: Minimum 0.120-inch- (3.0-mm-) thick, hinge leaves with minimum overall width of 4 inches (102 mm); fabricated to full height of door and frame and to template screw locations; with components finished after milling and drilling are complete:
   1. Fire Pins: Steel pins to hold labeled fire doors in place if required by tested listing.

D. Continuous, Gear-Type Hinges: Extruded-aluminum, pinless, geared hinge leaves; joined by a continuous extruded-aluminum channel cap; with concealed, self-lubricating thrust bearings.
   1. Manufacturers:
      a. Bommer Industries, Inc.
      b. Hager Companies.
      c. McKinney Products Company; an ASSA ABLOY Group company.
      d. Pemko Manufacturing Co.
      e. Select Products Limited.
      f. Zero International.

2.3 DOOR CLOSING DEVICES

Closing devices shall be products of one manufacturer for each type specified.

2.4 OVERHEAD CLOSERS

A. Conform to ANSI A156.4, Grade 1.

B. Closers shall conform to the following:
   1. The closer shall have 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
   2. Closer shall have hold-open feature and delay action closure feature, unless noted otherwise.
   3. Size Requirements: Size closers in accordance with manufacturer’s recommendations or provide multi-size closers, sizes 1 through 6.
   4. Material of closer shall be forged or cast aluminum.

5. Arm and brackets for closers shall be steel, malleable iron or high strength ductile cast iron.
6. Closers shall have full size cover.
7. Closers shall have adjustable hydraulic back-check and separate valves for closing and latching speed.
8. Closer arms or back-check valve shall not be used to stop the door from overswing, except in applications where a separate wall, floor, or overhead stop cannot be used.
9. Provide parallel arm closers with heavy duty rigid arm.
10. Where closers are to be installed on the push side of the door, provide parallel arm type except where conditions require use of top jamb arm.
11. Provide all surface closers with the same body attachment screw pattern for ease of replacement and maintenance.
12. All closers shall have a 1 ½" (38mm) minimum piston diameter.

2.5 DOOR STOPS

A. Conform to ANSI A156.16.
B. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use lead expansion shields for mounting door stops.
C. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.
D. Where the specified wall stop cannot be used, provide concealed overhead stops (surface-mounted where concealed cannot be used).
E. Provide door stops on doors where combination closer magnetic holders are specified.

2.6 OVERHEAD DOOR HOLDERS

Conform to ANSI Standard A156.8. Overhead holders shall be of sizes recommended by holder manufacturer for each width of door. Set overhead holders for 110 degree opening, unless limited by building construction or equipment. Provide Grade 1 overhead concealed slide type: stop-only at rated doors and security doors, hold-open type with exposed hold-open on/off control at all other doors requiring overhead door stops.

2.7 LOCKS AND LATCHES

A. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1-3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not less than six pins. Cylinders for all locksets shall be removable core type. Cylinders shall be furnished with construction removable cores and construction master keys. Cylinder shall be removable by special key or tool. Construct all cores so that they will be interchangeable into the core housings of all mortise locks, rim locks, cylindrical locks, and any other type lock included in the Great Grand Master Key System. Disassembly of lever or lockset shall not be required to remove core from lockset. All locksets or latches on double doors with fire label shall have latch bolt with 19 mm (3/4 inch) throw. Provide temporary keying device or construction core of allow opening and closing during construction and prior to the installation of final cores.

B. In addition to above requirements, locks and latches shall comply with following requirements:

1. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13. Mortise locksets shall be series 1000, minimum Grade 2. All locksets and latchsets shall have lever handles to match building standard. Lever handle shall be fabricated from wrought stainless steel, unless specified otherwise. No substitute lever design or material shall be accepted. All locks and latchsets shall be furnished with curved lip strike and wrought box. Lock function F02 shall be furnished with key plates similar to Russwin's No. A70. Furnish armored fronts for all mortise locks.
2. Cylindrical Lock and Latch Sets: levers shall meet ADA (Americans with Disabilities Act) requirements. Cylindrical locksets shall be series 4000 Grade I. Knobs for series 4000 lock and latch sets shall have 57 mm (2-1/4 inch) diameters. Where two turn pieces are specified for lock F76, turn piece on inside knob shall lock and unlock inside knob, and turn piece on outside knob shall unlock outside knob when inside knob is in the locked position. (This function is intended to allow emergency entry into these rooms without an emergency key or any special tool.)
3. Auxiliary locks shall be as specified under hardware sets and conform to ANSI A156.5.

2.8 PUSH-BUTTON COMBINATION LOCKS

A. ANSI/BHMA A156.13, Grade 1. Battery operated pushbutton entry, unless specified otherwise.

B. Construction: Heavy duty mortise lock housing conforming to ANSI/BHMA A156.13, Grade 1. Lever handles and operating components in compliance with the UFAS and the ADA Accessibility Guidelines. Match lever handles of locks and latchsets on adjacent doors.

C. Special Features: Key override to permit a master keyed security system and a pushbutton security code activated passage feature to allow access without using the entry code.

2.9 KEYS

A. Stamp all keys with change number and key set symbol. Furnish keys in quantities as follows:

Locks/Keys	**Quantity**
Cylinder locks	2 keys each
Cylinder lock change key blanks	100 each different key way
Master-keyed sets	6 keys each
Grand Master sets	6 keys each
Great Grand Master set	5 keys
Control key	1 key

2.10 ARMOR PLATES AND COMBINATION KICK-MOP PLATES

A. Conform to ANSI Standard A156.6.

B. Provide protective plates as specified below:

1. Kick/mop plates and armor plates, stainless steel, Type J100 series.
2. Provide kick/mop plates for both sides of each new door, except where noted as not required. Kick/mop plates shall be sized as indicated under Article "Hardware Sets". On push side of doors where jamb stop extends to floor, make combination kick/mop plates 38 mm (1-1/2 inches) less than width of door, except pairs of metal doors which shall have plates 25 mm (1 inch) less than width of each door. Extend all other combination kick/mop plates to within 6 mm (1/4 inch) of each edge of doors. Kick-mop plates shall butt astragals.
3. Kick/mop plates are not required on following door sides:
   a) Armor plate side of doors;
   b) Closet side of closet doors;

c) Storage side of doors to or from storage spaces; and

d) Both sides of aluminum entrance doors.

4. Armor plates for doors are listed under Article "Hardware Sets". Armor plates shall be 875 mm (35 inches) high and 38 mm (1-1/2 inches) less than width of doors, except on pairs of metal doors. Plates on pairs of metal doors shall be 25 mm (1 inch) less than width of each door. Where top of intermediate rail of door is less than 875 mm (35 inches) from door bottom, extend armor plates to within 13 mm (1/2 inch) of top rail. On doors equipped with panic devices, extend armor plates to within 13 mm (1/2 inch) of panic bolt cross bar.

2.11 EXIT DEVICES

A. Conform to ANSI Standard A156.3. Exit devices shall be Grade 1; type and function are specified in "Hardware Sets". Provide flush with finished floor strikes for vertical rod exit devices in interior of building. Trim shall have lever handles similar to locksets, unless otherwise specified.

B. Exit devices for fire doors shall comply with Underwriters Laboratories, Inc., requirements for Fire Exit Hardware. Submit proof of compliance.

2.12 FLUSH BOLTS (LEVER EXTENSION)

A. Conform to ANSI A156.16. Flush bolts shall be Type L24081 unless otherwise specified. Furnish proper dustproof strikes conforming to ANSI A156.16, for flush bolts required on lower part of doors.

B. Lever extension manual flush bolts shall only be used where specified under Article "Hardware Sets".

C. Face plates for cylindrical strikes shall be rectangular and not less than 25 mm by 63 mm (1 inch by 2-1/2 inches).

D. Friction-fit cylindrical dustproof strikes with circular face plate may be used only where metal thresholds occur.

E. Provide extension rods for top bolt where door height exceeds 2184 mm (7 feet 2 inches).

2.13 COMBINATION PUSH AND PULL PLATES

A. Conform to ANSI 156.6. Type J303, stainless steel 3 mm (1/8 inch) thick, 80 mm (3-1/3 inches) wide by 800 mm (16 inches) high), top and bottom edges shall be rounded. Secure plates to wood doors with 38 mm (1-1/2 inch) long No. 12 wood screws. Cut plates for turn pieces, and cylinders where required. Pull shall be mounted down

2.14 MISCELLANEOUS HARDWARE

A. Mutes: Conform to ANSI A156.16. Provide door mutes or door silencers Type L03011, of light gray color, on each steel door frame, except lead-lined frames, and frames for sound-resistant, lightproof and electromagnetically shielded doors. Furnish 3 mutes for single doors and 2 mutes for each pair of doors, except double-acting doors.

2.15 FINISHES

A. Exposed surfaces of hardware shall have ANSI A156.18, finishes as specified below. Finishes on all hinges, pivots, closers, thresholds, etc., shall be as specified below under "Miscellaneous Finishes." For field painting (final coat) of ferrous hardware, see Section 09 91 00, PAINTING.

B. 626 or 630: All surfaces on interior of buildings, except where other finishes are specified.

C. Miscellaneous Finishes:

1. Hinges --interior doors: 652.
2. Door Closers: Factory applied 689 aluminum powder coated finish.
3. Other primed steel hardware: 652.

D. Color of Plastic Items: Gray to match mill finish aluminum. Color of core material may be different than color of face.

2.16 BASE METALS

Apply specified U.S. Standard finishes on different base metals as following:

Finish	**Base Metal**
652	Steel
626	Brass or bronze
630	Stainless steel

PART 3 - EXECUTION

3.1 HARDWARE HEIGHTS

A. Locate hardware on doors at heights specified below unless otherwise noted:

B. Hardware Heights from Finished Floor:

1. Exit devices centerline of strike (where applicable) 1024 mm (40-5/16 inches).
2. Locksets and latch sets centerline of strike 1024 mm (40-5/16 inches).
3. Deadlocks centerline of strike 1219 mm (48 inches).
4. Hospital arm pull 1168 mm (46 inches) to centerline of bottom supporting bracket.
5. Centerline of door pulls to be 1016 mm (40 inches).
6. Push plates and push-pull shall be 1270 mm (50 inches) to top of plate. Locate push and pull plates to prevent conflict with other hardware.
7. Push-pull latch to be 1024 mm (40-5/16 inches) to centerline of strike.
8. Centerline of deadlock strike to be 840 mm (33 inches) when used with push-pull latch.
9. Locate other hardware at standard commercial heights.

3.2 INSTALLATION

A. Closer devices, including those with hold-open features, shall be equipped and mounted to provide maximum door opening permitted by building construction or equipment. Closers shall be mounted regular arm. Where closers are mounted on doors they shall be mounted with sex nuts and bolts; foot shall be fastened to frame with machine screws.

B. Substitute parallel arm or top jamb mounting for regular arm mounting where the following conditions occur:

1. Where door swing, in full open position, would be limited to less than 90 degrees due to partition construction and closer location.
2. Where door to room opens outward into corridor, except security bedroom, bathroom and anteroom doors which shall have closer installed parallel arm on exterior side of doors.

C. Hinge Size Requirements:

Door Thickness	**Door Width**	**Hinge Height**
45 mm (1-3/4 inch)	900 mm (3 feet) and less	113 mm (4-1/2 inches)
45 mm (1-3/4 inch)	Over 900 mm (3 feet) but not more than 1200 mm (4 feet)	125 mm (5 inches)
35 mm (1-3/8 inch) (hollow core wood doors)	Not over 1200 mm (4 feet)	113 mm (4-1/2 inches)

D. Hinge leaves shall be sufficiently wide to allow doors to swing clear of door frame trim.

E. Where new hinges are specified for new doors in existing frames or existing doors in new frames, sizes of new hinges shall match sizes of existing hinges; or, contractor may reuse existing hinges provided hinges are restored to satisfactory operating condition as approved by COTR. Existing hinges shall not be reused on door openings having new doors and new frames. Coordinate preparation for hinge cut-outs and screw-hole locations on doors and frames.

F. Hinges Required Per Door:

Doors 1500 mm (5 ft) or less in height	2 butts
Doors over 1500 mm (5 ft) high and not over 2280 mm (7 ft 6 in) high	3 butts
Doors over 2280 mm (7 feet 6 inches) high	4 butts
Dutch type doors	4 butts
Doors with spring hinges 1370 mm (4 feet 6 inches) high or less	2 butts
Doors with spring hinges over 1370 mm (4 feet 6 inches)	3 butts

G. Fastenings: Suitable size and type and shall harmonize with hardware as to material and finish. Provide machine screws and lead expansion shields to secure hardware to concrete, ceramic or quarry floor tile, or solid masonry. Fiber or rawl plugs and adhesives are not permitted. All fastenings exposed to weather shall be of nonferrous metal.

H. After locks have been installed; show in presence of COTR that keys operate their respective locks in accordance with keying requirements.

(All keys, Master Key level and above shall be sent Registered Mail to the Medical Center Director along with the bitting list. Also a copy of the invoice shall be sent to the COTR for his records.) Installation of locks which do not meet specified keying requirements shall be considered sufficient justification for rejection and replacement of all locks installed on project.

3.3 HARDWARE SETS

1. MK - McKinney
2. MR - Markar
3. RF - Rixson
4. RO - Rockwood
5. YA - Yale
6. SA - Sargent
7. SU - Securitron
8. RU - Corbin Russwin
9. HS - HES
10. NO - Norton
11. PE - Pemko

Hardware Legend

Mark	Hardware	Mark	Hardware	Mark	Hardware
BB440A	29.0	BB460	23.0	BC448	12.0
BB400AB	30.0	BB461	24.0	BC449	8.0
BB426	25.0	BB462	24.0	BC450	15.0
BB427	25.0	BB463	26.0	BC451	27.0
BB427A	25.0	BB464	26.0	BC452	17.0
BB428	25.0	BB465	24.0	BC453	18.0
BB429	25.0	BB466	24.0	BC454	20.0
BB430	23.0	BB467	24.0	BC454A	21.0
BB431	24.0	BB468	24.0	BC454B	21.0
BB432	24.0	BB481	25.0	BC461	8.0
BB433	24.0	BB482	25.0	BC462	26.0
BB434	24.0	BB483	25.0	BC465	8.0
BB435	26.0	BC402	1.0	BC466	5.0
BB436	26.0	BC402A	2.0	BC467	6.0
BB437	28.0	BC425	3.0	BC468	18.0
BB438	28.0	BC430	4.0	BC470B	4.0
BB440	23.0	BC431	5.0	BC470BA	16.0
BB441	24.0	BC432	6.0	BC471	13.0
BB442	24.0	BC433	10.0	BC471A	10.0
BB443	24.0	BC434	8.0	BC472	26.0
BB444	24.0	BC435	8.0	BC473	6.0
BB445	24.0	BC436	8.0	BC474	22.0
BB450	23.0	BC437	8.0	BC474A	19.0
BB451	24.0	BC441	11.0	BC475	22.0
BB452	24.0	BC442	6.0	BC475A	19.0
BB453	24.0	BC443	6.0	BC479	7.0
BB454	24.0	BC444	6.0	BC500A	4.0
BB455	24.0	BC445	8.0	BC500B	14.0
BB456	24.0	BC446	12.0	N06	9.0
BB457	24.0	BC446A	13.0	N16	9.0
BB458	24.0	BC446B	12.0		
BB459	24.0	BC447	8.0		

Hardware Schedule

Set: 1.0

Doors: BC-402

3	Hinge (A8111)	T4A3786	US26D	MK
1	Exit Device (Type 1, F08)	7200 CR506F	630	YA
2	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Electric Strike	9600-LBM 2004M 2005M	630	HS
1	Door Operator	6030 D	689	NO
1	Frame Wire Harness	QC-C1500P		MK
2	Door Switch (Operator)	506		NO

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock electric strike and activate operator allowing access. Pushing interior door switch will unlock electric strike and activate operator allowing automated egress. Egress is always free by exit device. Emergency access by key. Weatherstrip is by door manufacturer. Contractor to coordinate supplier of door hardware with door manufacturer.
Pushing either wall switch will activate operator.

Set: 2.0

Doors: BC-402A

6	Hinge (swing clear)	T4A3795	US26D	MK
2	Fire Rated Surf Vert Rod (Type 2, F01)	7170F LBR EO YMS	630	YA
2	Surface Closer (C02021)	PR3501 DL M	689	YA
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
2	Electromagnetic Holder (C00011)	998	689	RF
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE
1	Meeting Stile Gasket (ROE155)	S772		PE
2	Wall Stop-Convex (L02101-Cast)	400	US26D	RO

Set: 3.0

Doors: BC-425

3	Hinge (A8112)	TA2714	US26D	MK
1	Continuous Hinge (A51331B)	FM-300 HT MB CTP	630	MR
1	Self Latch Flush Bolt Set (A156.3, Type 27)	2845 / 2945 (as required)	US26D	RO
1	Electrified Mortise Lock	CRR 8891FL REX	626	YA

1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Coordinator (A156.3, Type 21)	1600 Series x Wear Plates	US28	RO
2	Surface Closer (PT 4C-C02011 / C02021)	3501 DL M	689	YA
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
2	Conc. OH Stop-Adj (C01541)	1-X36 Adjustable	630	RF
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE
1	Meeting Stile Gasket (ROE155)	S772		PE
1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK
1	Electric Power Transfer	EL-EPT		SU

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key.

Set: 4.0

Doors: BC-430, BC-470B, BC-500A

6	Hinge (A8111)	T4A3786	US26D	MK
2	Push Plate (J301)	70F	US32D-MS	RO
2	Door Operator	6030 D	689	NO
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
2	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
2	Silencer (L03011)	608		RO
2	Door Switch (Operator)	506		NO

Notes: Pushing either wall switch will activate operator.

Set: 5.0

Doors: BC-431, BC-466

1	Electric Hinge	TA2714-QC12	US26D	MK
2	Hinge (A8112)	TA2714	US26D	MK
1	Electrified Mortise Lock	CRR 8891FL REX	626	YA
1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Surface Closer (PT 4C-C02011 / C02021)	3501 DL M	689	YA
1	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO

1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE
1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key. Vendor to prep door and frame for door position switch supplied by electrical contractor.

Set: 6.0

Doors: BC-432, BC-442, BC-443, BC-444, BC-467, BC-473

1	Electric Hinge	TA2714-QC12	US26D	MK
2	Hinge (A8112)	TA2714	US26D	MK
1	Electrified Mortise Lock	CRR 8891FL REX	626	YA
1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
3	Silencer (L03011)	608		RO
1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key.
Vendor to prep door and frame for door position switch supplied by electrical contractor.

Set: 7.0

Doors: BC-479

1	Electric Hinge	TA2714-QC12	US26D	MK
2	Hinge (A8112)	TA2714	US26D	MK
1	Electrified Mortise Lock	CRR 8891FL REX	626	YA
1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Surface Closer (PT 4C-C02011 / C02021)	3501 DL M	689	YA
1	Conc. OH Stop-Adj (C01541)	1-X36 Adjustable	630	RF
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE
3	Silencer (L03011)	608		RO

1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key.
Vendor to prep door and frame for door position switch supplied by electrical contractor. Mount closer on pull side.

Set: 8.0

Doors: BC-434, BC-435, BC-436, BC-437, BC-445, BC-447, BC-449, BC-461, BC-465

2	Hinge (A8111)	T4A3786	US26D	MK
1	Electric Hinge (A8111)	T4A3786 x QC-12	US26D	MK
1	Electrified Mortise Lock	CRR 8891FL REX	626	YA
1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Surface Closer (C02211)	3501ST DL M	689	YA
1	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE
1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key.
Vendor to prep door and frame for door position switch supplied by electrical contractor.

Set: 9.0

Doors: N06, N16

3	Hinge (A8111)	T4A3786	US26D	MK
1	Mortise Lock (entry F04)	CRR 8807FL LC YMS	626	YA
1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Surface Closer (C02211)	3501ST DL M	689	YA
1	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE

Set: 10.0

Doors: BC-433, BC-471A

2	Hinge (A8111)	T4A3786	US26D	MK
1	Electric Hinge (A8111)	T4A3786 x QC-12	US26D	MK
1	Electrified Mortise Lock	CRR 8891FL REX	626	YA
1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Surface Closer (C02211)	3501ST DL M	689	YA
1	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Conc. OH Stop-Adj (C01541)	1-X36 Adjustable	630	RF
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE
1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key.
Vendor to prep door and frame for door position switch supplied by electrical contractor.

Set: 11.0

Doors: BC-441

3	Hinge (A8112)	TA2714	US26D	MK
1	Keypad Lock (w/ deadbolt)	KP8276 LNJ	US26D	SA
1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO

Set: 12.0

Doors: BC-446, BC-446B, BC-448

1	Pivot	EML19 12 Wires	626	RF
1	Pivot Set	L147	626	RF
1	Electrified Mortise Lock	CRR 8891FL REX Lead Lined	626	YA
1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Surface Closer	3501 DL M LEAD LINED	689	YA
1	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
3	Silencer (L03011)	608		RO

1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key. Power supply by security vendor. Lead lined door.

Set: 13.0

Doors: BC-446A, BC-471

3	Hinge (A8112)	TA2714	US26D	MK
1	Mortise Lock (passage F01)	CRR 8801FL	626	YA
1	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO

Set: 14.0

Doors: BC-500B

4	Hinge (A8111)	T4A3786	US26D	MK
2	Electric Hinge (A8111)	T4A3786 x QC-12	US26D	MK
2	Fire Rated Surf Vert Rod (Type 2, F01)	7170F LBR P EO YMS	630	YA
2	Door Operator	6030 D	689	NO
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE
1	Meeting Stile Gasket (ROE155)	S772		PE
2	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
2	Frame Wire Harness	QC-C1500P		MK
2	Door Switch (Operator)	506		NO
1	Exit Device Power Controller	782		YA
2	Wall Stop-Convex (L02101-Cast)	400	US26D	RO

Notes: Pushing either wall switch will unlock exit device and activate operator.

Set: 15.0

Doors: BC-450

4	Hinge (A8111)	T4A3786	US26D	MK
2	Electric Hinge (A8111)	T4A3786 x QC-12	US26D	MK
2	Magnetic Lock	M62		SU
2	Fire Rated Surf Vert Rod (Type 2, F01)	7170F LBR P EO YMS	630	YA
2	Door Operator	6030 D	689	NO
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE
1	Meeting Stile Gasket (ROE155)	S772		PE
2	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
2	Frame Wire Harness	QC-C1500P		MK
1	Door Switch (Operator)	506		NO
1	Exit Device Power Controller	782		YA
1	***Emergency Exit Button***	***EEB***		***YA***
2	Wall Stop-Convex (L02101-Cast)	400	US26D	RO

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Doors are normally closed and locked with the magnets. Presenting authorized credential to card reader will unlock magnets and activate door switch to operator allowing access FROM ONE DIRECTION. Door switch will activate opener from the other side. Magnets are tied to the fire alarm and will unlock upon fire/smoke detection and then egress is always free by exit device. Emergency access by key.

Set: 16.0

Doors: BC-470BA

4	Hinge (A8111)	T4A3786	US26D	MK
2	Electric Hinge (A8111)	T4A3786 x QC-12	US26D	MK
2	Magnetic Lock	M62		SU
2	Fire Rated Surf Vert Rod (Type 2, F01)	7170F LBR P EO YMS	630	YA
2	Door Operator	6030 D	689	NO
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
2	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE
1	Meeting Stile Gasket (ROE155)	S772		PE
2	Door Wire Harness	QC-C*** (Length / Type as Required)		MK

2	Frame Wire Harness	QC-C1500P	MK
2	Door Switch (Operator)	506	NO
1	***Emergency Exit Button***	***EEB***	***SU***
1	Exit Device Power Controller	782	YA

Notes: Provide Lenel card reader and power supply as specified in section 28 13 00.2.7. Doors are normally closed and locked with the magnets. Presenting authorized credential to card reader (There will be two card readers on side of door and one door switch on the other) will unlock magnets and activate door switch to operator allowing access. Magnets are tied to the fire alarm and will unlock upon fire/smoke detection and then egress is always free by exit device. Emergency access by key.

Set: 17.0

Doors: BC-452

3	Hinge (A8112)	TA2714	US26D	MK
1	Continuous Hinge (A51331B)	FM-300 HT MB CTP	630	MR
2	Flush Bolt (L04251)	555	US26D	RO
1	Dust Proof Strike (L04021)	570	US26D	RO
1	Electrified Mortise Lock	CRR 8891FL REX	626	YA
1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Surface Closer (PT 4C-C02011 / C02021)	3501 DL M	689	YA
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Conc. OH Stop-Adj (C01541)	1-X36 Adjustable	630	RF
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
2	Silencer (L03011)	608		RO
1	Electric Power Transfer	EL-EPT		SU

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock electric trim allowing for manually entrance. Emergency access by key. CLOSER AND STOP ON ACTIVE LEAF ONLY.

Set: 18.0

Doors: BC-453, BC-468

1	Pivot	EML19 12 Wires	626	RF
2	Pivot Set	L147	626	RF
2	Flush Bolt (L04251)	555	US26D	RO
1	Dust Proof Strike (L04021)	570	US26D	RO
1	Electrified Mortise Lock	CRR 8891FL REX Lead Lined	626	YA

1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
2	Surface Closer	3501 DL M LEAD LINED	689	YA
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
2	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
2	Silencer (L03011)	608		RO
1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key. CLOSER ON ACTIVE LEAF ONLY. Lead lined door.

Set: 19.0

Doors: BC-474A, BC-475A

5	Hinge (A8111)	T4A3786	US26D	MK
1	Electric Hinge (A8111)	T4A3786 x QC-12	US26D	MK
2	Flush Bolt (L04251)	555	US26D	RO
1	Dust Proof Strike (L04021)	570	US26D	RO
1	Electrified Mortise Lock	CRR 8891FL REX	626	YA
1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Surface Closer (PT 4C C02091)	3521 DL	689	YA
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
2	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
2	Silencer (L03011)	608		RO
1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. CLOSER ON ACTIVE LEAF ONLY. Emergency access by key.

Set: 20.0

Doors: BC-454

1	Pivot	EML19 12 Wires	626	RF
1	Pivot Set	L147	626	RF
1	Electrified Mortise Lock	CRR 8891FL REX Lead Lined	626	YA

1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Surface Closer	3501 DL M LEAD LINED	689	YA
1	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
3	Silencer (L03011)	608		RO
1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key.
Power supply by security vendor.

Set: 21.0

Doors: BC-454A, BC-454B

1	Pivot	ML19	626	RF
1	Pivot Set	L147	626	RF
1	Mortise Lock (F01 passage)	CRR 8801FL Lead Lined	626	YA
1	Surface Closer	3501H DL M LEAD LINED	689	YA
1	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
3	Silencer (L03011)	608		RO

Set: 22.0

Doors: BC-474, BC-475

1	Pivot	ML19	626	RF
1	Pivot Set	L147	626	RF
1	Mortise Lock (F01 passage)	CRR 8801FL Lead Lined	626	YA
1	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
3	Silencer (L03011)	608		RO

Set: 23.0

Doors: BB430, BB440, BB450, BB460

2	Hinge (A8111)	T4A3786	US26D	MK
1	Electric Hinge (A8111)	T4A3786 x QC-12	US26D	MK
1	Electrified Mortise Lock	CRR 8891FL REX	626	YA

1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Surface Closer	UNI3501 DL M	689	YA
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE
1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key.
Vendor to prep door and frame for door position switch supplied by electrical contractor.

Set: 24.0

Doors: BB431, BB432, BB433, BB434, BB441, BB442, BB443, BB444, BB445, BB451, BB452, BB453, BB454, BB455, BB456, BB457, BB458, BB459, BB461, BB462, BB465, BB466, BB467, BB468

2	Hinge (A8111)	T4A3786	US26D	MK
1	Electric Hinge (A8111)	T4A3786 x QC-12	US26D	MK
1	Electrified Mortise Lock	CRR 8891FL REX	626	YA
1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE
1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key.
Vendor to prep door and frame for door position switch supplied by electrical contractor.

Set: 25.0

Doors: BB426, BB427, BB427A, BB428, BB429, BB481, BB482, BB483

1	Electric Hinge	TA2714-QC12	US26D	MK
2	Hinge (A8112)	TA2714	US26D	MK
1	Electrified Mortise Lock	CRR 8891FL REX	626	YA

1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Surface Closer	UNI3501 DL M	689	YA
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE
1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key.
Vendor to prep door and frame for door position switch supplied by electrical contractor.

Set: 26.0

Doors: BB435, BB436, BB463, BB464, BC-462, BC-472

3	Hinge (A8112)	TA2714	US26D	MK
1	Mortise Lock (F02 privacy w/ indicator)	CRR 8802FL IND YMS	626	YA
1	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE

Set: 27.0

Doors: BC-451

3	Hinge (A8112)	TA2714	US26D	MK
1	Mortise Lock (F02 privacy w/ indicator)	CRR 8802FL IND YMS	626	YA
1	Surface Closer (PT 4C-C02011 / C02021)	3501 DL M	689	YA
1	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE

Set: 28.0

Doors: BB437, BB438

1	Electric Hinge	TA2714-QC12	US26D	MK
2	Hinge (A8112)	TA2714	US26D	MK

1	Electrified Mortise Lock	CRR 8891FL REX Lead Lined	626	YA
1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Surface Closer (PT 4C-C02011 / C02021)	3501 DL M	689	YA
1	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE
1	Door Wire Harness	QC-C*** (Length / Type as Required)		MK
1	Frame Wire Harness	QC-C1500P		MK

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key.
Vendor to prep door and frame for door position switch supplied by electrical contractor.

Set: 29.0

Doors: BB400A

2	Continuous Hinge (A51031B)	FM-300 HT MB	630	MR
2	Push Plate (J301)	70F	US32D-MS	RO
2	Door Operator	6030 D	689	NO
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
2	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
2	Silencer (L03011)	608		RO
3	Door Switch (Operator)	506		NO

Notes: Doors are normally closed. Pushing either door switch automatically opens doors.

Set: 30.0

Doors: BB400AB

2	Hinge (A8111)	T4A3786	US26D	MK
1	Electric Hinge (A8111)	T4A3786 x QC-12	US26D	MK
1	Electrified Mortise Lock	CRR 8891FL REX	626	YA
1	Cylinder	Rim/ Mortise HO5 Keyway	626	RU
1	Surface Closer	UNI3501 DL M	689	YA
2	Kick Plate (J102)	K1050 8" 4BE CSK	US32D	RO
1	Wall Stop-Convex (L02101-Cast)	400	US26D	RO
1	Door Seal (ROE154)	S88 BL (head & jambs)		PE

1	Door Wire Harness	QC-C*** (Length / Type as Required)	MK
1	Frame Wire Harness	QC-C1500P	MK

Notes: Provide Lenel card reader and power supply as specified in Section 28 13 00.2.7. Presenting authorized credential to card reader will unlock exterior trim allowing access. Egress is by inside lever which has RX switch. Emergency access by key.
Vendor to prep door and frame for door position switch supplied by electrical contractor.

- - - E N D - - -

SECTION 08 71 13
AUTOMATIC DOOR OPERATORS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies equipment, controls and accessories for automatic operation of swing doors.

1.2 RELATED WORK

A. Door hardware; Section 08 71 00, DOOR HARDWARE.

B. Glass and glazing of doors and frames; Section 08 80 00, GLAZING.

C. Electric general wiring, connections and equipment requirements; Division 26, ELECTRICAL.

D. Section 28 13 00, PHYSICAL ACCESS CONTROL SYSTEM.

E. Section 28 31 00, FIRE DETECTION AND ALARM.

1.3 QUALITY ASSURANCE

A. Automatic door operators, controls and other equipment shall be products of a manufacturer regularly engaged in manufacturing such equipment for a minimum of three years.

B. One type of automatic door equipment shall be used throughout the building.

C. Equipment installer shall have specialized experience and shall be approved by the manufacturer.

1.4 WARRANTY

Automatic door operators shall be subject to the terms of the "Warranty of Construction" Article of GENERAL CONDITIONS, except that the Warranty period shall be two years in lieu of one year.

1.5 MAINTENANCE MANUALS

In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on automatic door operators.

1.6 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's literature and data describing operators, power units, controls, door hardware and safety devices.

C. Shop Drawings:

1. Showing location of controls and safety devices in relationship to each automatically operated door.

2. Showing layout, profiles, product components, including anchorage, accessories, as applicable.
3. Submit templates, wiring diagrams, fabrication details and other information to coordinate the proper installation of the automatic door operators.

D. Submit in writing to COR that items listed in Article 1.3 are in compliance.

1.7 DESIGN CRITERIA

A. As a minimum automatic door equipment shall comply with the requirements of ANSI 156.10. Except as otherwise noted on drawings, provide operators which will move the doors from the fully closed to fully opened position in five seconds maximum time interval, when speed adjustment is at maximum setting.

B. Equipment: Conforming to UL 325. Provide key operated power disconnect wall switch for each door installation.

C. Electrical Wiring, Connections and Equipment: Provide all motor, starter, controls, associated devices, and interconnecting wiring required for the installation. Equipment and wiring shall be as specified in Division 26, ELECTRICAL.

1.8 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Builders Hardware Manufacturers Association, Inc. (BHMA):
A156.10-05.....Power Operated Pedestrian Doors (BHMA 1601)

C. National Fire Protection Association (NFPA):
101-09.....Life Safety Code

D. Underwriters Laboratory (UL):
325-10.....Door, Drapery, Gate, Louver, and Window Operators and Systems

1.9 DELIVERY AND STORAGE

Delivery shall be in factory’s original, unopened, undamaged container with identification labels attached.

PART 2 - PRODUCTS

2.1 SWING DOOR OPERATORS

A. General: Swing door operators shall be of institutional type, door panel size 600 mm to 1250 mm (2'-0" to 5'-0") width, weight not to

exceed 300 kg (600 pounds), electric operated for overhead mounting within the header or transom. Furnish metal mounting supports, brackets and other accessories necessary for the installation of operators at the head of the door frames. The motor on automatic door operator shall be provided with an interlock so that the motor will not operate when doors are electrically locked from opening.

B. Operators shall have checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle. Operators shall be capable of recycling doors instantaneously to full open position from any point in the closing cycle when control switch is activated. Operators shall, when automatic power is interrupted or shut-off, permit doors to easily open manually without damage to automatic operator system.

C. Operator, enclosed in housing, shall open door by energizing motor and shall stop by electrically reducing voltage and stalling motor against mechanical stop. Door shall close by means of spring energy, and close force shall be controlled by gear system and motor being used as dynamic break without power, or controlled by hydraulic closer in electro-hydraulic operators. System shall operate as manual door control in event of power failure. Opening and closing speeds shall be adjustable.

1. Operator Housing: Housing shall be a minimum of 112 mm (4-1/2 inches) wide by 140 mm (5.5 inches) high aluminum extrusions with enclosed end caps for application to 100 mm (4 inches) and larger frame systems. All structural sections shall have a minimum thickness of 3.2 mm (0.125 inch) and be fabricated of a minimum of 6063-T5 aluminum alloy.
2. Power Operator: Completely assembled and sealed unit which shall include gear drive transmission, mechanical spring and bearings, all located in aluminum case and filled with special lubricant for extreme temperature conditions. Complete unit shall be rubber mounted with provisions for easy maintenance and replacement, without removing door from pivots or frame.
3. Connecting hardware shall have drive arm attached to door with a pin linkage rotating in a self-lubricating bearing. Door shall not pivot on shaft of operator.

4. Electrical Control: Operator shall have a self contained electrical control unit, including necessary transformers, relays, rectifiers, and other electronic components for proper operation and switching of power operator. All connecting harnesses shall have interlocking plugs.

2.2 MICROPRCESSOR CONTROLS

A. The system shall include a multi-function microprocessor control providing adjustable hold open time (1-30 seconds), LED indications for sensor input signals and operator status and power assist close options. Control shall be capable of receiving activation signals from any device with normally open dry contact output. All activation modes shall provide fully adjustable opening speed.

B. The door shall be held open by low voltage applied to the continuous duty motor. The control shall include an adjustable safety circuit that monitors door operation and stops the opening direction of the door if an obstruction is sensed. The motor shall include a recycle feature that reopens the door if an obstruction is sensed at any point during the closing cycle. The control shall include a standard three position toggle switch with functions for ON, OFF, and HOLD OPEN, mounted on operator enclosure.

2.3 POWER UNITS

Each power unit shall be self-contained, electric operated and independent of the door operator. Capacity and size of power circuits shall be in accordance with automatic door operator manufacturer's specifications and Division 26 - ELECTRICAL.

2.4 DOOR CONTROLS

A. Opening and closing actions of doors shall be actuated by controls and safety devices specified, and conform to ANSI 156.10. Controls shall cause doors to open instantly when control device is actuated; hold doors in open positions; then, cause doors to close, unless safety device or reactivated control interrupts operation.

B. Manual Controls:

Push Plate Wall Switch: Recess type, cast aluminum or stainless steel push plate minimum 100 mm by 100 mm (four-inch by four-inch), with 13 mm (1/2-inch) high letters "To Operate Door--Push" engraved on face of plate.

2.5 SAFETY DEVICES

A. General: Area over which doors swing or slide shall be a safety section and anyone standing in path of door's movement shall be protected by a safety device, except where push controls are shown.

B. Each swing door shall have installed on the pull side a presence sensor to detect any person standing in the door swing path and prevent the door from opening.

C. Time delay switches shall be adjustable between 3 to 60 seconds and shall control closing cycle of doors.

D. Decals with sign "In" or "Do Not Enter" shall be installed on both faces of each door where required by COR.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Coordinate installation of equipment with other related work. Manual controls and power disconnect switches shall be recessed or semi-flush mounted in partitions. Secure operator components to adjacent construction with suitable fastenings. Conceal conduits, piping, and electric equipment, in finish work.

B. Install power units in locations shown. Where units are to be mounted on walls, provide metal supports or shelves for the units. All equipment, including time delay switches, shall be accessible for maintenance and adjustment.

C. Operators shall be adjusted and must function properly for the type o£ traffic (pedestrians, carts, stretchers and wheelchairs) expected to pass through doors. Each door leaf of pairs of doors shall open and close in synchronization. On pairs of doors, operators shall allow either door to be opened manually without the other door opening.

D. Install controls at positions shown and make them convenient for particular traffic expected to pass through openings. Maximum height of push plate wall switches from finished floors shall be 40 inches unless otherwise approved by the COR.

3.2 INSTRUCTIONS

A. Following the installation and final adjustments of the door operators, the installer shall fully instruct VA personnel for 2 hours on the operating, servicing and safety requirements for the automatic door operators.

B. Coordinate instruction to VA personnel with COR.

- - - E N D - - -

SECTION 08 80 00
GLAZING

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies glass and related glazing materials and accessories. Glazing products specified apply to factory or field glazed items.

1.2 RELATED WORK

A. Lead glass: Section 13 49 00, RADIATION PROTECTION.

1.3 LABELS

A. Temporary labels:
   1. Provide temporary label on each light of glass identifying manufacturer or brand and glass type, quality and nominal thickness.
   2. Label in accordance with NFRC (National Fenestration Rating Council) label requirements.
   3. Temporary labels shall remain intact until glass is approved by COR.

B. Permanent labels:
   1. Locate in corner for each pane.
   2. Label in accordance with ANSI Z97.1 and SGCC (Safety Glass Certification Council) label requirements.
      a. Tempered glass.

1.4 PERFORMANCE REQUIREMENTS

A. Glass Thickness:
   1. Limit glass deflection to 1/200 or flexure limit of glass, whichever is less, with full recovery of glazing materials.
   2. Test in accordance with ASTM E 330.
   3. Thicknesses listed are minimum. Coordinate thicknesses with framing system manufacturers.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Certificates:
   1. Certificates stating that fire protection rated glazing meets the fire protection ratings indicated based on testing according to NFPA 252 for door assemblies and NFPA 257 for window assemblies.
   2. Certificate on shading coefficient.
   3. Certificate on "R" value when value is specified.

C. Warranty: Submit written guaranty, conforming to General Condition requirements, and to “Warranty of Construction” Article in this Section.

D. Manufacturer's Literature and Data:
   1. Glass, each kind required.
   2. Glazing cushion.
   3. Sealing compound.

E. Samples:
   1. Size: 150 mm by 150 mm (6 inches by 6 inches).
   2. Provide for all glass types other than transparent.

F. Preconstruction Adhesion and Compatibility Test Report: Submit glazing sealant manufacturer’s test report indicating glazing sealants were tested for adhesion to glass and glazing channel substrates and for compatibility with glass and other glazing materials.

1.6 DELIVERY, STORAGE AND HANDLING

A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.

B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.

C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each.

D. Protect glazing units against face and edge damage during entire sequence of fabrication, handling, and delivery to installation location.
   1. Temporary protections: The glass front and polycarbonate/Noviflex back of glazing shall be temporarily protected with compatible, peelable, heat-resistant film which will be peeled for inspections and re-applied and finally removed after doors and windows are installed at destination. Since many adhesives will attack polycarbonate, the film used on exposed polycarbonate surfaces shall be approved and applied by manufacturer.
   2. Edge protection: To cushion and protect glass clad, polycarbonate, and Noviflex edges from contamination or foreign matter, the four edges shall be sealed the depth of glazing with continuous standard-

thickness Santoprene tape. Alternatively, continuous channel shaped extrusion of Santoprene shall be used, with flanges extending into face sides of glazing.

3. Protect "Constant Temperature" units including every unit where glass sheet is directly laminated to or directly sealed with metal-tube type spacer bar to polycarbonate sheet, from exposures to ambient temperatures outside the range of 16 to 24 C, during the fabricating, handling, shipping, storing, installation, and subsequent protection of glazing.

1.7 PROJECT CONDITIONS

Field Measurements: Field measure openings before ordering tempered glass products. Be responsible for proper fit of field measured products.

1.8 WARRANTY

A. Warranty: Conform to terms of "Warranty of Construction" Article in BID SOLICITATION GENERAL CONDITIONS.

1.9 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American National Standards Institute (ANSI):

Z97.1-09.....Safety Glazing Material Used in Building - Safety Performance Specifications and Methods of Test.

C. American Society for Testing and Materials (ASTM):

C542-05.....Lock-Strip Gaskets

C716-06.....Installing Lock-Strip Gaskets and Infill Glazing Materials.

C794-10.....Adhesion-in-Peel of Elastomeric Joint Sealants

C864-05.....Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers

C920-11.....Elastomeric Joint Sealants

C964-07.....Standard Guide for Lock-Strip Gasket Glazing

C1036-06.....Flat Glass

C1048-12.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated and Uncoated Glass.

C1376-10.....Pyrolytic and Vacuum Deposition Coatings on Flat Glass

D635-10.....Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastic in a Horizontal Position

D4802-10.....Poly (Methyl Methacrylate) Acrylic Plastic Sheet

E84-10.....Surface Burning Characteristics of Building Materials

E119-10.....Standard Test Methods for Fire Test of Building Construction and Material

E2190-10.....Insulating Glass Unit

D. Commercial Item Description (CID):

A-A-59502.....Plastic Sheet, Polycarbonate

E. Code of Federal Regulations (CFR):

16 CFR 1201 - Safety Standard for Architectural Glazing Materials; 2010

F. National Fire Protection Association (NFPA):

80-13.....Fire Doors and Windows.

252-12.....Standard Method of Fire Test of Door Assemblies

257-12.....Standard on Fire Test for Window and Glass Block Assemblies

G. National Fenestration Rating Council (NFRC)

H. Safety Glazing Certification Council (SGCC) 2012:

Certified Products Directory (Issued Semi-Annually).

I. Underwriters Laboratories, Inc. (UL):

752-11.....Bullet-Resisting Equipment.

J. Unified Facilities Criteria (UFC):

4-010-01-2012.....DOD Minimum Antiterrorism Standards for Buildings

K. Glass Association of North America (GANA):

Glazing Manual (Latest Edition)

Sealant Manual (2009)

L. American Society of Civil Engineers (ASCE):

ASCE 7-10.....Wind Load Provisions

PART 2 - PRODUCT

2.1 GLASS

A. Use thickness stated unless specified otherwise in assemblies or on drawings.

B. Clear Glass:

1. ASTM C1036, Type I, Class 1, Quality q3.
2. Thickness, 6 mm (1/4 inch).

2.2 HEAT-TREATED GLASS

A. Clear Tempered Glass: **(TG-1)**

1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.
2. Thickness, 6 mm (1/4 inch) unless indicated otherwise on drawings.

B. Tempered Patterned Glass **(PG-2)**

1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.
2. Architect's Sample (Basis for design): Skyline Design custom Modified “Times Square” per sample #24614; etched finish on both sides of glass with Skyline Etch Sealer applied on both sides. Contact Skyline Design at (773) 278-4660. Provided product shall match Architect's sample.
3. Thickness 6 mm (1/4 inch).
4. Install with 'bars' in a vertical orientation.

2.3 FIRE RESISTANT GLASS WITHOUT WIRE MESH (FG-1)

A. Fire-rated glass or glass assembly shall be classified by Underwriters Laboratory (UL), Intertek Testing Services- Warnock Hersey (ITS-WHI) or any other OSHA certified testing laboratory. All glass shall bear a permanent mark of classification.

B. Fire-protective glass products used to protect against smoke and flames only shall be rated for [20] [45] minutes as required by local building code and shall be tested in accordance with NFPA 252 (Standard Methods of Fire Tests of Door Assemblies) and NFPA 257 (Standard on Fire Test for Window and Glass Block Assemblies).

C. Fire-resistive products used to protect against smoke, flame, and the transmission of radiant heat shall be rated for [60] [90] [120] minutes and shall be tested in accordance with NFPA 252, NFPA 257, and ASTM E119 (Standard Test Methods for Fire Tests of Building Construction and Materials).

D. Maximum size is per the manufacturer’s test agency listing for doors, transoms, side lights, borrowed lights, and windows.

E. Basis of Design Products:

1. Product as distributed by Technical Glass Products; Kirkland, WA 98033.
   a. Firelite: UL listing R13377-1, thickness as required for fire rating, unpolished.
   b. Pyrodur (maximum 20-minute fire rating): UL listing R16644, thickness as required for fire rating, unpolished.
   c. Pyrostop: UL listing R16644, thickness as required for fire rating, unpolished.

2.4 GLAZING ACCESSORIES

A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work shall have a finish that will not corrode or stain while in service.

B. Setting Blocks: ASTM C864:
   1. Channel shape; having 6 mm (1/4 inch) internal depth.
   2. Shore a hardness of 80 to 90 Durometer.
   3. Block lengths: 50 mm (two inches) except 100 to 150 mm (four to six inches) for insulating glass.
   4. Block width: Approximately 1.6 mm (1/16 inch) less than the full width of the rabbet.
   5. Block thickness: Minimum 4.8 mm (3/16 inch). Thickness sized for rabbet depth as required.

C. Spacers: ASTM C864:
   1. Channel shape having a 6 mm (1/4 inch) internal depth.
   2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.
   3. Lengths: One to 25 to 76 mm (one to three inches).
   4. Shore a hardness of 40 to 50 Durometer.

D. Sealing Tapes:
   1. Semi-solid polymeric based material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
   2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.

E. Spring Steel Spacer: Galvanized steel wire or strip designed to position glazing in channel or rabbeted sash with stops.

F. Glazing Gaskets: ASTM C864:
   1. Firm dense wedge shape for locking in sash.
   2. Soft, closed cell with locking key for sash key.
   3. Flanges may terminate above the glazing-beads or terminate flush with top of beads.
G. Lock-Strip Glazing Gaskets: ASTM C542, shape, size, and mounting as indicated.
H. Glazing Sealants: ASTM C920, silicone neutral cure:
   1. Type S.
   2. Class 25
   3. Grade NS.
   4. Shore A hardness of 25 to 30 Durometer.
I. Structural Sealant: ASTM C920, silicone acetoxy cure:
   1. Type S.
   2. Class 25.
   3. Grade NS.
   4. Shore a hardness of 25 to 30 Durometer.
J. Neoprene or EPDM Glazing Gasket: ASTM C864.
   1. Channel shape; flanges may terminate above the glazing channel or flush with the top of the channel.
   2. Designed for dry glazing.
K. Color:
   1. Color of glazing compounds, gaskets, and sealants used for clear anodized aluminum frames shall be black and nonstaining.
   2. Color of other glazing compounds, gaskets, and sealants which will be exposed in the finished work and unpainted shall be black, gray, or neutral color, as selected by Architect from manufacturer's full range.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verification of Conditions:
   1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.
   2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer’s approved shop drawings.

B. Advise Contractor of conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation.
   1. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. For sealant glazing, prepare glazing surfaces in accordance with GANA-02 Sealant Manual.
B. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.
C. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.
D. Verify that components used are compatible.
E. Clean and dry glazing surfaces.
F. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

3.3 INSTALLATION - GENERAL

A. Install in accordance with GANA-01 Glazing Manual and GANA-02 Sealant Manual unless specified otherwise.
B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.
C. Set glazing without bending, twisting, or forcing of units.
D. Do not allow glass to rest on or contact any framing member.
E. Glaze doors in a securely fixed or closed and locked position, until sealant, glazing compound, or putty has thoroughly set.
F. Patterned Glass:
   1. Install units with pattern in same direction in all openings and in accordance with specifications.
G. Tempered Glass: Install with roller distortions in horizontal position unless otherwise directed.
H. Fire Resistant Glass:
   1. Glaze in accordance with UL design requirements.

3.4 INSTALLATION - DRY METHOD (TAPE AND GASKET SPLINE GLAZING)

A. Cut glazing tape or spline to length; install on glazing pane. Seal corners by butting and sealing junctions with butyl sealant.
B. Place setting blocks at 1/4 points with edge block no more than 150 mm (6 inches) from corners.

C. Rest glazing on setting blocks and push against fixed stop with sufficient pressure to attain full contact.

D. Install removable stops without displacing glazing spline. Exert pressure for full continuous contact.

E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.

F. Trim protruding tape edge.

3.5 INSTALLATION - INTERIOR WET/DRY METHOD (TAPE AND SEALANT)

A. Cut glazing tape to length and install against permanent stops, projecting 1.6 mm (1/16 inch) above sight line.

B. Place setting blocks at 1/4 points with edge block no more than 150 mm (6 inches) from corners.

C. Rest glazing on setting blocks and push against tape to ensure full contact at perimeter of pane or unit.

D. Install removable stops, spacer shims inserted between glazing and applied stops at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.

E. Fill gaps between pane and applied stop with sealant to depth equal to bite on glazing, to uniform and level line.

F. Trim protruding tape edge.

3.6 INSTALLATION - INTERIOR WET METHOD (COMPOUND AND COMPOUND)

A. Install glazing resting on setting blocks. Install applied stop and center pane by use of spacer shims at 600 mm (24 inch) centers, kept 6 mm (1/4 inch) below sight line.

B. Locate and secure glazing pane using glazers' clips.

C. Fill gaps between glazing and stops with glazing compound until flush with sight line. Tool surface to straight line.

3.7 REPLACEMENT AND CLEANING

A. Clean new glass surfaces removing temporary labels, paint spots, and defacement after approval by COR.

B. Replace cracked, broken, and imperfect glass, or glass which has been installed improperly.

C. Leave glass, putty, and other setting material in clean, whole, and acceptable condition.

3.10 PROTECTION

Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.

- - - E N D - - -

SECTION 09 22 16
NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies steel stud wall systems, shaft wall systems, ceiling or soffit suspended or furred framing, wall furring, fasteners, and accessories for the screw attachment of gypsum board.

1.2 RELATED WORK

Ceiling suspension systems for acoustical tile or panels: Section 09 51 00, ACOUSTICAL CEILINGS.

1.3 TERMINOLOGY

A. Description of terms shall be in accordance with ASTM C754, ASTM C11, ASTM C841 and as specified.

B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, or bar joists.

C. Thickness of steel specified is the minimum bare (uncoated) steel thickness.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Studs, runners and accessories.
2. Hanger inserts.
3. Channels (Rolled steel).
4. Furring channels.
5. Screws, clips and other fasteners.

C. Shop Drawings:

1. Typical ceiling suspension system.
2. Typical metal stud and furring construction system including details around openings and corner details.
3. Typical shaft wall assembly
4. Typical fire rated assembly and column fireproofing showing details of construction same as that used in fire rating test.

D. Test Results: Fire rating test designation, each fire rating required for each assembly.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

In accordance with the requirements of ASTM C754.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society For Testing And Materials (ASTM)

A641-09.....Zinc-Coated (Galvanized) Carbon Steel Wire

C11-10.....Terminology Relating to Gypsum and Related Building Materials and Systems

C635-07.....Manufacture, Performance, and Testing of Metal Suspension System for Acoustical Tile and Lay-in Panel Ceilings

C636-08.....Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels

C645-09.....Non-Structural Steel Framing Members

C754-11.....Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products

C841-03(R2008).....Installation of Interior Lathing and Furring

C954-10.....Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness

E580-11.....Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Moderate Seismic Restraint.

PART 2 - PRODUCTS

2.1 PROTECTIVE COATING

Galvanize steel studs, runners (track), rigid (hat section) furring channels, "Z" shaped furring channels, and resilient furring channels, with coating designation of G-60 minimum, per ASTM 123.

2.2 STEEL STUDS AND RUNNERS (TRACK)

A. ASTM C645, modified for thickness specified and sizes and shown.

1. Use ASTM A525 steel, 0.9 mm (0.0359-inch) thick bare metal (20 gauge).
2. Runners same thickness as studs.

B. Provide not less than two cutouts in web of each stud, approximately 300 mm (12 inches) from each end, and intermediate cutouts on approximately 600 mm (24-inch) centers.

C. Studs 3600 mm (12 feet) or less in length shall be in one piece.

D. Shaft Wall Framing:

1. Conform to rated wall construction.
2. C-H Studs.
3. E Studs.
4. J Runners.
5. Steel Jamb-Strut.

2.3 FURRING CHANNELS

A. Rigid furring channels (hat shape): ASTM C645.

B. Resilient furring channels:
   1. Not less than 0.45 mm (0.0179-inch) thick bare metal.
   2. Semi-hat shape, only one flange for anchorage with channel web leg slotted on anchorage side, channel web leg on other side stiffens fastener surface but shall not contact anchorage surface other channel leg is attached to.

C. "Z" Furring Channels:
   1. Not less than 0.45 mm (0.0179-inch)-thick bare metal, with 32 mm (1-1/4 inch) and 19 mm (3/4-inch) flanges.
   2. Web furring depth to suit thickness of insulation with slotted perforations.

D. Rolled Steel Channels: ASTM C754, cold rolled; or, ASTM C841, cold rolled.

2.4 FLAT STRAP AND BACKING PLATE

A. 8" wide galvanized steel sheet for blocking and bracing in length indicated.

B. Minimum Base-Metal Thickness: 0.033 inch (0.84 mm) unless indicated otherwise on Drawings.

2.4 FASTENERS, CLIPS, AND OTHER METAL ACCESSORIES

A. ASTM C754, except as otherwise specified.

B. For fire rated construction: Type and size same as used in fire rating test.

C. Fasteners for steel studs thicker than 0.84 mm (0.033-inch) thick. Use ASTM C954 steel drill screws of size and type recommended by the manufacturer of the material being fastened.

D. Clips: ASTM C841 (paragraph 6.11), manufacturer’s standard items. Clips used in lieu of tie wire shall have holding power equivalent to that provided by the tie wire for the specific application.

E. Concrete ceiling hanger inserts (anchorage for hanger wire and hanger straps): Steel, zinc-coated (galvanized), manufacturers standard items, designed to support twice the hanger loads imposed and the type of hanger used.

F. Tie Wire and Hanger Wire:
   1. ASTM A641, soft temper, Class 1 coating.
   2. Gage (diameter) as specified in ASTM C754 or ASTM C841.
G. Attachments for Wall Furring:
   1. Manufacturers standard items fabricated from zinc-coated (galvanized) steel sheet.
   2. For concrete or masonry walls: Metal slots with adjustable inserts or adjustable wall furring brackets. Spacers may be fabricated from 1 mm (0.0396-inch) thick galvanized steel with corrugated edges.
H. Power Actuated Fasteners: Type and size as recommended by the manufacturer of the material being fastened.

2.5 SUSPENDED CEILING SYSTEM FOR GYPSUM BOARD (OPTION)

A. Conform to ASTM C635, heavy duty, with not less than 35 mm (1-3/8 inch) wide knurled capped flange face designed for screw attachment of gypsum board.
B. Wall track channel with 35 mm (1-3/8 inch) wide flange.

PART 3 - EXECUTION

3.1 INSTALLATION CRITERIA

A. Where fire rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, the construction shall be same as that used in fire rating test.
B. Construction requirements for fire rated assemblies and materials shall be as shown and specified, the provisions of the Scope paragraph (1.2) of ASTM C754 and ASTM C841 regarding details of construction shall not apply.

3.2 INSTALLING STUDS

A. Install studs in accordance with ASTM C754, except as otherwise shown or specified.
B. Space studs not more than 610 mm (24 inches) on center.
C. Cut studs 6 mm to 9 mm (1/4 to 3/8-inch) less than floor to underside of structure overhead when extended to underside of structure overhead.
D. Where studs are shown to terminate above suspended ceilings, provide bracing as shown or extend studs to underside of structure overhead.
E. Extend studs to underside of structure overhead for fire, rated partitions, smoke partitions, shafts, and sound rated partitions.
F. Openings:
   1. Frame jambs of openings in stud partitions and furring with two studs placed back to back or as shown.

2. Fasten back to back studs together with 9 mm (3/8-inch) long Type S pan head screws at not less than 600 mm (two feet) on center, staggered along webs.
3. Studs fastened flange to flange shall have splice plates on both sides approximately 50 X 75 mm (2 by 3 inches) screwed to each stud with two screws in each stud. Locate splice plates at 600 mm (24 inches) on center between runner tracks.

G. Fastening Studs:
1. Fasten studs located adjacent to partition intersections, corners and studs at jambs of openings to flange of runner tracks with two screws through each end of each stud and flange of runner.
2. Do not fasten studs to top runner track when studs extend to underside of structure overhead.

H. Chase Wall Partitions:
1. Locate cross braces for chase wall partitions to permit the installation of pipes, conduits, carriers and similar items.
2. Use studs or runners as cross bracing not less than 63 mm (2-1/2 inches wide).

I. Form building seismic or expansion joints with double studs back to back spaced 75 mm (three inches) apart plus the width of the seismic or expansion joint.

J. Form control joint, with double studs spaced 13 mm (1/2-inch) apart.

3.3 INSTALLING WALL FURRING FOR FINISH APPLIED TO ONE SIDE ONLY

A. In accordance with ASTM C754, or ASTM C841 except as otherwise specified or shown.

B. Wall furring-Stud System:
1. Framed with 63 mm (2-1/2 inch) or narrower studs, 600 mm (24 inches) on center.
2. Brace as specified in ASTM C754 for Wall Furring-Stud System or brace with sections or runners or studs placed horizontally at not less than three foot vertical intervals on side without finish.
3. Securely fasten braces to each stud with two Type S pan head screws at each bearing.

C. Direct attachment to masonry or concrete; rigid channels or "Z" channels:
1. Install rigid (hat section) furring channels at 600 mm (24 inches) on center, horizontally or vertically.
2. Install "Z" furring channels vertically spaced not more than 600 mm (24 inches) on center.

3. At corners where rigid furring channels are positioned horizontally, provide mitered joints in furring channels.
4. Ends of spliced furring channels shall be nested not less than 200 mm (8 inches).
5. Fasten furring channels to walls with power-actuated drive pins or hardened steel concrete nails. Where channels are spliced, provide two fasteners in each flange.
6. Locate furring channels at interior and exterior corners in accordance with wall finish material manufacturers printed erection instructions. Locate "Z" channels within 100 mm (4 inches) of corner.

D. Installing Wall Furring-Bracket System: Space furring channels not more than 400 mm (16 inches) on center.

3.4 INSTALLING SUPPORTS REQUIRED BY OTHER TRADES

A. Provide for attachment and support of electrical outlets, plumbing, laboratory or heating fixtures, recessed type plumbing fixture accessories, access panel frames, wall bumpers, wood seats, toilet stall partitions, dressing booth partitions, urinal screens, chalkboards, tackboards, wall-hung casework, handrail brackets, recessed fire extinguisher cabinets and other items like auto door buttons and auto door operators supported by stud construction.

B. Provide additional studs where required. Install metal backing plates, or special metal shapes as required, securely fastened to metal studs.

3.5 INSTALLING SHAFT WALL SYSTEM

A. Conform to UL Design No. indicated on drawings.

B. Position J runners at floor and ceiling with the short leg toward finish side of wall. Securely attach runners to structural supports with power driven fasteners at both ends and 600 mm (24 inches) on center.

C. After liner panels have been erected, cut C-H studs and E studs, from 9 mm (3/8-inch) to not more than 13 mm (1/2-inch) less than floor-to-ceiling height. Install C-H studs between liner panels with liner panels inserted in the groove.

D. Install full-length steel E studs over shaft wall line at intersections, corners, hinged door jambs, columns, and both sides of closure panels.

E. Suitably frame all openings to maintain structural support for wall:
1. Provide necessary liner fillers and shims to conform to label frame requirements.
2. Frame openings cut within a liner panel with E studs around perimeter.
3. Frame openings with vertical E studs at jambs, horizontal J runner at head and sill.

3.6 INSTALLING FURRED AND SUSPENDED CEILINGS OR SOFFITS

A. Install furred and suspended ceilings or soffits in accordance with ASTM C754 or ASTM C841.
   1. Space framing at 600 mm (24-inch) centers for gypsum board anchorage.
B. Where bar joists or beams are more than 1200 mm (48 inches) apart, provide intermediate hangers so that spacing between supports does not exceed 1200 mm (48 inches). Use clips, bolts, or wire ties for direct attachment to steel framing.
C. Existing concrete construction exposed or concrete on steel decking:
   1. Use power actuated fasteners either eye pin, threaded studs or drive pins for type of hanger attachment required.
   2. Install fasteners at approximate mid height of concrete beams or joists. Do not install in bottom of beams or joists.
D. Steel decking without concrete topping:
   1. Do not fasten to steel decking 0.76 mm (0.0299-inch) or thinner.
   2. Toggle bolt to decking 0.9 mm (0.0359-inch) or thicker only where anchorage to steel framing is not possible.
E. Installing suspended ceiling system for gypsum board (ASTM C635 Option):
   1. Install only for ceilings to receive screw attached gypsum board.
   2. Install in accordance with ASTM C636.
      a. Install main runners spaced 1200 mm (48 inches) on center.
      b. Install 1200 mm (four foot) tees not over 600 mm (24 inches) on center; locate for edge support of gypsum board.
      c. Install wall track channel at perimeter.
F. Installing Ceiling Bracing System:
   1. Construct bracing of 38 mm (1-1/2 inch) channels for lengths up to 2400 mm (8 feet) and 50 mm (2 inch) channels for lengths over 2400 mm (8 feet) with ends bent to form surfaces for anchorage to carrying channels and over head construction. Lap channels not less than 600 mm (2 feet) at midpoint back to back. Screw or bolt lap together with two fasteners.
   2. Install bracing at an approximate 45 degree angle to carrying channels and structure overhead; secure as specified to structure overhead with two fasteners and to carrying channels with two fasteners or wire ties.
   3. Brace suspended ceiling or soffit framing in seismic areas in accordance with ASTM E580.

3.7 TOLERANCES

A. Fastening surface for application of subsequent materials shall not vary more than 3 mm (1/8-inch) from the layout line.

B. Plumb and align vertical members within 3 mm (1/8-inch.)

C. Level or align ceilings within 3 mm (1/8-inch.)

- - - E N D - - -

SECTION 09 29 00
GYPSUM BOARD

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies installation and finishing of gypsum board.

1.2 RELATED WORK

A. Installation of steel framing members for walls, partitions, furring, soffits, and ceilings: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.

B. Acoustical batt insulation: Section 07 21 13, THERMAL AND ACOUSTICAL INSULATION.

C. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS.

D. Lead lined wallboard: Section 13 49 00, RADIATION PROTECTION.

E. Installation of access doors in gypsum board ceilings and soffits: 08 31 13, ACCESS DOORS AND FRAMES.

F. Installation of tile backer board at wall tile locations: Section 09 30 13, CERAMIC TILING.

1.3 TERMINOLOGY

A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.

B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Cornerbead and edge trim.
2. Finishing materials.
3. Laminating adhesive.
4. Gypsum board, each type.

C. Shop Drawings:

1. Typical gypsum board installation, showing corner details, edge trim details, reveal details and the like.
2. Typical sound rated assembly, showing treatment at perimeter of partitions and penetrations at gypsum board.
3. Typical shaft wall assembly.
4. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.

D. Test Results:
   1. Fire rating test, each fire rating required for each assembly.
   2. Sound rating test.

E. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

In accordance with the requirements of ASTM C840.

1.6 ENVIRONMENTAL CONDITIONS

In accordance with the requirements of ASTM C840.

1.7 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society For Testing And Materials (ASTM):

C11-08.....Terminology Relating to Gypsum and Related Building Materials and Systems

C475-02.....Joint Compound and Joint Tape for Finishing Gypsum Board

C840-08.....Application and Finishing of Gypsum Board

C919-08.....Sealants in Acoustical Applications

C954-07.....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness

C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs

C1047-05.....Accessories for Gypsum Wallboard and Gypsum Veneer Base

C1177-06.....Glass Mat Gypsum Substrate for Use as Sheathing

C1658-06.....Glass Mat Gypsum Panels

C1396-06.....Gypsum Board

E84-08.....Surface Burning Characteristics of Building Materials

C. Underwriters Laboratories Inc. (UL):

Latest Edition.....Fire Resistance Directory

D. Inchcape Testing Services (ITS):

Latest Editions.....Certification Listings

PART 2 - PRODUCTS

2.1 GYPSUM BOARD

A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise.

B. Coreboard or Shaft Wall Liner Panels.

1. ASTM C1396, Type X.
2. ASTM C1658: Glass Mat Gypsum Panels,
3. Coreboard for shaft walls 300, 400, 600 mm (12, 16, or 24 inches) wide by required lengths 25 mm (one inch) thick with paper faces treated to resist moisture.

C. Water Resistant Gypsum Backing Board: ASTM C620, Type X, 16 mm (5/8 inch) thick.

2.2 ACCESSORIES

A. Reveal and trim moldings:

1. BASIS OF DESIGN: All reveals and trim listed are Pittcon Industries “Softforms” series units. Subject to compliance with requirements, provide Basis of Design product listed, or equal product.
   a. Any substitutions to the basis of design are subject to approval by the Architect and VA Interior Designer.
   b. Any substitutions to the basis of design must match the physical and dimensional properties of the units identified.
   c. Use manufacturer’s standard end caps at door frames, corner guards, and all other terminations of the reveal molding.
   d Use factory fabricated units for all terminations, intersections, returns, outside and inside corners, and all conditions other than straight runs. Submit shop drawings indicating all conditions.
   e. FINISH: As indicated: either clear anodized or factory sprayed primer baked-on to serve as a base for field painting.
2. HORIZONTAL AND VERTICAL REVEALS BETWEEN GYPSUM BOARD PANELS TO BE COVERED WITH VINYL WALLCOVERING AND WHERE SHOWN IN DETAILS: SWX-025 wall covering joiner. Supply and install flexible rubber inserts, coordinate diameter with type of wall covering specified. Insert is to be wrapped with wall covering prior to installation.
3. HORIZONTAL REVEAL BETWEEN GYPSUM BOARD PANELS: SWR-050-050.
4. HORIZONTAL REVEAL BETWEEN GYPSUM BOARD & QUARTZ PANELS: STR-050-050.
5. CORNER TRIM WHERE WALLCOVERING ENDS AT AN OUTSIDE CORNER: SO-R060-90 Tuck Corner.

B. ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.

C. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.

2.3 FASTENERS

A. ASTM C1002 and ASTM C840, except as otherwise specified.

B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).

C. Select screws of size and type recommended by the manufacturer of the material being fastened.

D. For fire rated construction, type and size same as used in fire rating test.

E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

2.4 FINISHING MATERIALS AND LAMINATING ADHESIVE

ASTM C475 and ASTM C840.

PART 3 - EXECUTION

3.1 GYPSUM BOARD HEIGHTS

A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring:

1. Two sides of partitions:
   a. Fire rated partitions.
   b. Smoke partitions.
   c. Sound rated partitions.
   d. Full height partitions.
   e. Corridor partitions.
2. One side of partitions or furring:
   a. Inside of exterior wall furring or stud construction.
   b. Room side of room without suspended ceilings.
   c. Furring for pipes and duct shafts, except where fire rated shaft wall construction is shown.
3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.

B. In locations other than those specified or shown on drawings, extend gypsum board from floor to heights as follows:

1. Not less than 100 mm (4 inches) above suspended acoustical ceilings.
2. At ceiling of suspended gypsum board ceilings.
3. At existing ceilings.

3.2 INSTALLING GYPSUM BOARD

A. Coordinate installation of gypsum board with other trades and related work.

B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.
C. Use gypsum boards in maximum practical lengths to minimize number of end joints.
D. Bring gypsum board into contact, but do not force into place.
E. Ceilings:
   1. For single-ply construction, use perpendicular application.
   2. For two-ply assembles:
      a. Use perpendicular application.
      b. Apply face ply of gypsum board so that joints of face ply do not occur at joints of base ply with joints over framing members.
F. Walls (Except Shaft Walls):
   1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
   2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
   3. Stagger screws on abutting edges or ends.
   4. For single-ply construction, apply gypsum board with long dimension parallel to framing members.
   5. For two-ply gypsum board assemblies, apply base ply of gypsum board vertically to assure minimum number of joints in face layer. Apply face ply of wallboard vertically to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.
   6. For three-ply gypsum board assemblies, apply plies in same manner as for two-ply assemblies, except that heads of fasteners need only be driven flush with surface for first and second plies. Apply third ply of wallboard in same manner as second ply of two-ply assembly, except use fasteners of sufficient length enough to have the same penetration into framing members as required for two-ply assemblies.
   7. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.
   8. Control Joints ASTM C840 and as follows:
      a. Locate at both side jambs of openings. Use one system throughout.
      b. Locate where wall lengths exceed 9000 mm (30 feet) and which do not contain openings with control joints or change in direction such as a column enclosure.

c. Extend control joints the full height of the wall or length of soffit/ceiling membrane.

G. Acoustical or Sound Rated Partitions, Fire and Smoke Partitions:

1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.
2. Coordinate for application of caulking or sealants to space prior to taping and finishing.
3. Follow ASTM E497 for sound rated partitions. STC minimum values as shown.

H. Accessories:

1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified or per manufacturer's written instructions.
2. Install in one piece, without the limits of the longest commercially available lengths.
3. Corner Beads:
   a. Install at all vertical and horizontal external corners and where shown.
   b. Use screws only. Do not use crimping tool.
4. Edge Trim (casings Beads):
   a. At both sides of expansion and control joints unless shown otherwise.
   b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
   c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.
   d. Where shown.

3.3 CAVITY SHAFT WALL

A. Coordinate assembly with Section 09 22 16, NON-STRUCTURAL METAL FRAMING, for erection of framing and gypsum board.

B. Conform to UL Design No. indicated on drawings.

C. Cut coreboard (liner) panels 25 mm (one inch) less than floor-to-ceiling height, and erect vertically between J-runners on shaft side.

1. Where shaft walls exceed 4300 mm (14 feet) in height, position panel end joints within upper and lower third points of wall.
2. Stagger joints top and bottom in adjacent panels.
3. After erection of J-struts of opening frames, fasten panels to J-struts with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.

D. Gypsum Board:
   1. Two hour wall:
      a. Erect base layer (backing board) vertically on finish side of wall with end joints staggered. Fasten base layer panels to studs with 25 mm (one inch) long screws, spaced 600 mm (24 inches) on center.
      b. Use laminating adhesive between plies in accordance with UL or FM if required by fire test.
      c. Apply face layer of gypsum board required by fire test vertically over base layer with joints staggered and attach with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.
   2. One hour wall with one layer on finish side of wall: Apply face layer of gypsum board vertically. Attach to studs with screws of sufficient length to secure to framing, spaced 300 mm (12 inches) on center in field and along edges.
   3. Where coreboard is covered with face layer of gypsum board, stagger joints of face layer from those in the coreboard base.
E. Treat joints, corners, and fasteners in face layer as specified for finishing of gypsum board.

3.4 FINISHING OF GYPSUM BOARD

A. Finish joints, edges, corners and fastener heads in accordance with ASTM C840. Use Level 4 finish for all finished areas open to public view.
B. Before proceeding with installation of finishing materials, assure the following:
   1. Gypsum board is fastened and held close to framing or furring.
   2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.
C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings to seal surface of non decorated smoke barrier, fire rated and sound rated gypsum board construction. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain the integrity of the smoke barrier, and fire rated and sound rated construction. Sanding is not required of non decorated surfaces.

3.5 REPAIRS

A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.

B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.

C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.

D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non decorated surface to provide smoke tight construction, fire protection equivalent to the fire rated construction, and STC equivalent to the sound rated construction.

- - - E N D - - -

SECTION 09 30 13
CERAMIC TILING

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies ceramic, edge-protection, transition profiles for floors and movement joints.

1.2 RELATED WORK

A. Sealing of joints where specified: Section 07 92 00, JOINT SEALANTS.

B. Metal and resilient edge strips at joints with new resilient flooring: Section 09 65 19, RESILIENT TILE FLOORING.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Samples:

1. Base tile, each type, each color, each size.
2. Porcelain tile, each type, color, patterns and size.
3. Trim shapes, bullnose cap and cove including bullnose cap and base pieces at internal and external corners of vertical surfaces, each type, color, and size.
4. Expansion Joints.

C. Product Data:

1. Ceramic tile, marked to show each type, size, and shape required.
2. Chemical resistant mortar and grout.
3. Dry-set, Latex-Portland cement mortar.
4. Elastomeric membrane.
5. Reinforcing tape.
6. Leveling compound.
7. Slip resistant tile.
8. Fasteners.
9. Divider Strips.
10. Movement joints.

D. Certification:

1. Master grade, ANSI A137.1.
2. Manufacturer's certificates indicating that the following materials comply with specification requirements:
   a. Chemical resistant mortar and grout.
   b. Elastomeric membrane and bond coat.
   c. Reinforcing tape.
   d. Leveling compound.

E. Shop Drawings:

1. Indicate tile layout, patterns, color arrangement, perimeter conditions and junctions with dissimilar material and setting details.

F. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.4 DELIVERY AND STORAGE

A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.

B. Store material to prevent damage or contamination.

1.5 MAINTENANCE DATA

A. Include cleaning methods, cleaning solutions recommended; stain removal methods, and polishes and waxes approved for use by tile and installation manufacturers.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.

B. American National Standards Institute (ANSI):

A10.20-05.....Safety Requirements for Ceramic Tile, Terrazzo, and Marble Works

A108.1A-05.....Installation of Ceramic Tile in the Wet-Set Method with Portland Cement Mortar

A108.1B-05.....Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with dry-Set or latex-Portland Cement Mortar

A108.1C-05.....Contractors Option; Installation of Ceramic Tile in the Wet-Set method with Portland Cement Mortar or Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar

A108.4-05.....Installation of Ceramic Tile with Organic Adhesives or Water Cleanable Tile Setting Epoxy Adhesives

A108.5-05.....Installation of Ceramic Tile with Dry-Set Portland Cement Mortar or Latex-Portland Cement Mortar

A108.6-05.....Installation of Ceramic Tile with Chemical Resistant, Water Cleanable Tile-Setting and Grouting Epoxy

A108.10-05.....Installation of Grout in Tilework

A108.11-05.....Interior Installation of Cementitious Backer Units

A108.13-05.....Installation of Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone

A118.1-05.....Dry-Set Portland Cement Mortar

A118.3-05.....Chemical Resistant, Water Cleanable Tile-Setting Epoxy and Water Cleanable Tile-Setting and Grouting Epoxy Adhesive

A118.4-05.....Latex-Portland Cement Mortar

A118.5-05.....Chemical Resistant Furan Mortars and Grouts for Tile Installation

A118.6-05.....Standard Cement Grouts for Tile Installation

A118.9-05.....Cementitious Backer Units

A118.10-05.....Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone Installation

A136.1-05.....Organic Adhesives for Installation of Ceramic Tile

A137.1-88.....Ceramic Tile

C. American Society For Testing And Materials (ASTM):

A185-07.....Steel Welded Wire Fabric, Plain, for Concrete Reinforcing

C241-90 (R2005).....Abrasion Resistance of Stone Subjected to Foot Traffic

C627-93(R2007).....Evaluating Ceramic Floor Tile Installation Systems Using the Robinson-Type Floor Tester

C954-07.....Steel Drill Screws for the Application of Gypsum Board on Metal Plaster Base to Steel Studs from 0.033 in (0.84 mm) to 0.112 in (2.84 mm) in thickness

C979-05.....Pigments for Integrally Colored Concrete

C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Panel Products

C1027-99(R2004).....Determining "Visible Abrasion Resistance on Glazed Ceramic Tile"

C1028-07.....Determining the Static Coefficient of Friction of Ceramic Tile and Other Like Surfaces by the Horizontal Dynamometer Pull Meter Method

C1127-01.....Standard Guide for Use of High Solids Content, Cold Liquid-Applied Elastomeric Waterproofing Membrane with an Integral Wearing Surface

C1178/C1178M-06.....Standard Specification for Coated Glass Mat Water-Resistant Gypsum Backing Panel

D4397-02.....Standard Specification for Polyethylene Sheeting for Construction, Industrial and Agricultural Applications

D. Marble Institute of America (MIA): Design Manual III-2007

E. Tile Council of North America, Inc. (TCNA):

2008.....Handbook for Ceramic Tile Installation

PART 2 - PRODUCTS

2.1 TILE

A. Comply with ANSI A137.1, Standard Grade, except as modified:

1. Inspection procedures listed under the Appendix of ANSI A137.1.
2. Abrasion Resistance Classification:
   a. Tested in accordance with values listed in Table 1, ASTM C 1027.
   b. Class V, 12000 revolutions for floors in Corridors, Kitchens, Storage including Refrigerated Rooms
   c. Class IV, 6000 revolutions for remaining areas.
3. Slip Resistant Tile for Floors:
   a. Coefficient of friction, when tested in accordance with ASTM C1028, required for level of performance:
      1) Not less than 0.7 (wet condition) for bathing areas.
      2) Not less than 0.8 on ramps for wet and dry conditions.
      3) Not less than 0.6, except 0.8 on ramps as stated above, for wet and dry conditions for other areas.
   b. Porcelain Paver Tile: Matte surface finish
4. Factory Blending: For tile with color variations, within the ranges selected during sample submittals blend tile in the factory and package so tile units taken from one package show the same range in colors as those taken from other packages and match approved samples.

B. Porcelain Paver Tile: Nominal 8 mm (5/16 inch) thick and Nominal 9.525mm (3/8 inch), cushion edges.

C. Glazed Wall Tile: Cushion edges, glazing, as specified.

D. Trim Shapes:

1. Conform to applicable requirements of adjoining floor and wall tile.
2. Use trim shapes sizes conforming to size of adjoining field wall tile unless detailed or specified otherwise.
3. Internal and External Corners:
   a. Square internal and external corner joints are not acceptable.
   b. External corners including edges: Use bullnose shapes.
   c. Internal corners: Use cove shapes.
   d. Wall top edge internal corners: Use special shapes providing integral cove vertical joint with bullnose top edge.
   e. Wall top edge external corners: Use special shapes providing bullnose vertical and horizontal joint edge.
   f. For unglazed ceramic mosaic and glazed wall tile installed in dry-set Portland cement mortar, latex-Portland cement mortar, and organic adhesive (thin set methods).
   g. Provide cove and bullnose shapes where shown and required to complete tile work.

2.2 EDGE-PROTECTION AND TRANSITION PROFILES FOR FLOORS

A. L-shaped profile with 1/8 inch (3.2 mm) wide visible surface integrated trapezoid-perforated anchoring leg, and integrated grout joint spacer.

B. Material and Finish: AE - Satin Anodized Aluminum

C. Height: Coordinate with tile specification.

2.3 MOVEMENT JOINTS AND COVE-SHAPED PROFILES

A. Description: profile with integrated trapezoid-perforated anchoring legs, connected by a 3/4 inch (20mm) or 1 3/16 inch (30 mm) wide replaceable thermoplastic rubber movement zone, which together form the visible surface.

B. Anchoring Leg Material: A Aluminum

C. Movement Zone Color: To match flooring material; submit samples to architect.

C. Height: As required.

D. Width: As required.

2.4 FASTENERS

A. Washers: Galvanized steel, 13 mm (1/2 inch) minimum diameter.

2.5 SETTING MATERIALS OR BOND COATS

A. Conform to TCNA Handbook for Ceramic Tile Installation.

B. Latex-Portland Cement Mortar: ANSI A118.4.

1. For wall, Interior applications; provide non-sagging, latex-Portland cement mortar complying with ANSI A118.4.
   a. MAPEI, Ultralite Mortar, or approved equal.
2. For Floor Interior applications; Prepackaged Dry-Mortar Mix: Factory-prepared mixture of Portland cement; dry, redispersible, ethylene vinyl acetate additive; and other ingredients to which only water needs to be added at Project site.
   a. MAPEI, Keralastic System; consisting of: Kerabond, dry-set mortar and Keralastic, latex admixture, or approved equal.

C. Organic Adhesives: ANSI A136.1, Type 1.
   a. MAPEI, Type 1 Tile Adhesive, or approved equal.

D. Chemical-Resistant Bond Coat:
1. Epoxy Resin Type: ANSI A118.3.
   a. MAPEI, Kerapoxy 410, or approved equal.

E. Elastomeric Waterproofing Membrane:
1. ANSI A118.10.
2. Liquid applied, waterproofing/Crack isolation membrane:
   a. MAPEI, Mapelastic 400, or approved equal.
3. Waterproofing membrane to be installed in all Showers.

2.6 GROUTING MATERIALS

A. Chemical-Resistant Grout:
1. Pre-mixed Urethane and quartz based grout.
2. Unsanded grout mixture for joints 3.2 mm (1/8 inch) and narrower.
3. Sanded grout mixture for joints 3.2 mm (1/8 inch) and wider.

2.7 PATCHING AND LEVELING COMPOUND

A. Portland cement base, polymer-modified, self-leveling compound, manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.

B. Shall have minimum following physical properties:
1. Compressive strength - 25 MPa (3500 psig) per ASTM C109/C109M.
2. Flexural strength - 7 MPa (1000 psig) per ASTM C348 (28 day value).

C. Capable of being applied in layers up to 38 mm (1-1/2 inches) thick without fillers and up to 100 mm (four inches) thick with fillers, being brought to a feather edge, and being trowelled to a smooth finish.

D. Primers, fillers, and reinforcement as required by manufacturer for application and substrate condition.

E. Ready for use in 48 hours after application.
1. Self-leveling underlayment: Mapei, Ultraplan M20 Plus, or approved equal.

2. Patching: Mapei, Quickpatch, or approved equal.

2.8 WATER

Clean, potable and free from salts and other injurious elements to mortar and grout materials.

2.9 CLEANING COMPOUNDS

A. Specifically designed for cleaning masonry and concrete and which will not prevent bond of subsequent tile setting materials including patching and leveling compounds and elastomeric waterproofing membrane and coat.

B. Materials containing acid or caustic material not acceptable.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

A. Maintain ambient temperature of work areas at not less than 16 degree C (60 degrees F), without interruption, for not less than 24 hours before installation and not less than three days after installation.

B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation and ANSI Specifications for installation.

C. Do not install tile when the temperature is above 38 degrees C (100 degrees F).

D. Do not install materials when the temperature of the substrate is below 16 degrees C (60 degrees F).

E. Do not allow temperature to fall below 10 degrees C (50 degrees F) after fourth day of completion of tile work.

3.2 ALLOWABLE TOLERANCE

A. Variation in Plane of Wall Surfaces:

1. Not more than 1 in 400 (1/4 inch in eight feet) from required plane where Portland cement mortar setting bed is used.
2. Not more than 1 in 800 (1/8 inch in eight feet) where dry-set or latex-Portland cement mortar or organic adhesive setting materials is used.

3.3 SURFACE PREPARATION

A. Patching and Leveling:

1. Mix and apply patching and leveling compound in accordance with manufacturer's instructions.
2. Fill holes and cracks and align concrete floors that are out of required plane with patching and leveling compound.
   a. Thickness of compound as required to bring finish tile system to elevation shown.
   b. Float finish except finish smooth for elastomeric waterproofing.

c. At substrate expansion, isolation, and other moving joints, allow joint of same width to continue through underlayment.

3. Apply patching and leveling compound to concrete and masonry wall surfaces that are out of required plane.
4. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.

B. Cleavage Membrane:

1. Install polythene sheet as cleavage membrane in depressed slab when waterproof membrane is not scheduled or indicated.
2. Turn up at edge of depressed floor slab to top of floor.

C. Existing Floors and Walls:

1. Remove existing composition floor finishes and adhesive. Prepare surface by grinding, chipping, self-contained power blast cleaning or other suitable mechanical methods to completely expose uncontaminated concrete or masonry surfaces. Follow safety requirements of ANSI A10.20.
2. Remove existing concrete fill or topping to structural slab. Clean and level the substrate for new setting bed and waterproof membrane or cleavage membrane.
3. Where new tile bases are required to finish flush with plaster above or where they are extensions of similar bases in conjunction with existing floor tiles cut channel in floor slab and expose rough wall construction sufficiently to accommodate new tile base and setting material.

3.4 METAL DIVIDER STRIPS

A. Install metal divider strips in floor joints between ceramic and adjacent flooring of other materials where the finish floors are flush unless shown otherwise.

B. Set divider strip in mortar bed to line and level centered under doors or in openings.

C. At preformed sealant joint:

1. Comply with recommendations in TCA "Handbook for Ceramic Tile Installation" Vertical and Horizontal Joint Design Essentials. TCA System EJ 171-02.
   a. Locate joint in tile surfaces directly above joint in sub-floor or where indicated when used with isolation membranes to allow off-setting of joint location from sub-floor joint.
   b. Fasten full length to sub-floor using a construction adhesive.

c. Trowel setting material with full coverage over the entire leg.

2. Set tile up against the joint ensuring that the top edge of the joint is flush or slightly below the top of the tile.

3.5 CERAMIC TILE - GENERAL

A. Comply with ANSI A108 series of tile installation standards in "Specifications for Installation of Ceramic Tile" applicable to methods of installation.

B. Comply with TCNA Installation Guidelines

C. Setting Beds or Bond Coats:

1. Where recessed or depressed floor slabs are filled with Portland cement mortar bed, set ceramic mosaic floor tile in either Portland cement paste over plastic mortar bed or latex-Portland cement mortar over cured mortar bed except as specified otherwise, ANSI A108-1C, TCNA System F121-02 or F111-02.
2. Set floor tile in elastomeric bond coat over elastomeric membrane ANSI 108. 13, TCNA System F122 where scheduled.
3. Set trim shapes in same material specified for setting adjoining tile.

D. Workmanship:

1. Lay out tile work so that no tile less than one-half full size is used. Make all cuts on the outer edge of the field.
2. Set tile firmly in place with finish surfaces in true planes. Align tile flush with adjacent tile unless shown otherwise.
3. Form intersections and returns accurately.
4. Cut and drill tile neatly without marring surface.
5. Cut edges of tile abutting penetrations, finish, or built-in items:
   a. Fit tile closely around electrical outlets, piping, fixtures and fittings, so that plates, escutcheons, collars and flanges will overlap cut edge of tile.
   b. Seal tile joints water tight as specified in Section 07 92 00, JOINT SEALANTS, around electrical outlets, piping fixtures and fittings before cover plates and escutcheons are set in place.
6. Completed work shall be free from hollow sounding areas and loose, cracked or defective tile.
7. Remove and reset tiles that are out of plane or misaligned.
8. Floors:
   a. Extend floor tile beneath casework and equipment, except those units mounted in wall recesses.

b. Align finish surface of new tile work flush with other and existing adjoining floor finish where shown.
c. In areas where floor drains occur, slope to drains where shown.
d. Shove and vibrate tiles over 200 mm (8 inches) square to achieve full support of bond coat.

9. Joints:
a. Keep all joints in line, straight, level, perpendicular and of even width unless shown otherwise.
b. Make joints in Paver tile, porcelain type; maximum 3.175 mm (1/8” inch) wide.

10. Back Buttering: For installations indicated below, obtain 100 percent mortar coverage by complying with applicable special requirements for back buttering of tile in referenced ANSI A108 series of tile installation standards:
a. Tile wall installations in wet areas, including showers.
b. Tile installed with epoxy grouts.
c. Tile wall installations composed of tiles 304.8 by 304.8 mm (12 by 12 inches or larger.

3.6 CERAMIC TILE INSTALLED WITH PORTLAND CEMENT MORTAR

A. Mortar Mixes for Floor, Wall and Base Tile (including Showers): ANSI A108.1.except specified otherwise.
B. Installing Wall and Base Tile: ANSI A108.1, except specified otherwise.
C. Installing Floor Tile: ANSI A108.1, except as specified otherwise. Slope mortar beds to floor drains a minimum of 1 in 100 (1/8 inch per foot).

3.7 THIN SET CERAMIC TILE INSTALLED WITH DRY-SET PORTLAND CEMENT AND LATEX-PORTLAND CEMENT MORTAR

A. Installation of Tile: ANSI A108.5, except as specified otherwise.
8. Slope tile work to drains not less than 1 in 100 (1/8 inch per foot).

3.9 THIN SET CERAMIC TILE INSTALLED WITH CHEMICAL-RESISTANT BOND COAT

A. Epoxy Resin Type: Install tile in accordance with Installation of Tile with Epoxy Mortar; ANSI A108.6.

3.9 CERAMIC TILE INSTALLED WITH ELASTOMERIC BOND COAT

A. Surface Preparation: Prepare surfaces as specified in paragraph 3.3.
B. Installation of Elastomeric Membrane: ANSI A108.13 and TCA F122-02.
1. Prime surfaces, where required, in accordance with manufacturer's instructions.
2. Install first coat of membrane material in accordance with manufacturer's instructions, in thickness of 0.75 to 1.3 mm (30 to 50 mils).

3. Extend material over flashing rings of drains and turn up vertical surfaces not less than 100 mm (four inches) above finish floor surface.
4. When material has set, recoat areas with a second coat of elastomeric membrane material for a total thickness of 1.3 to 1.9 mm (50 to 75 mils).
5. After curing test for leaks with 25 mm (one inch) of water for 24 hours.

C. Installation of Tile in Elastomeric Membrane:
1. Spread no more material than can be covered with tile before material starts to set.
2. Apply tile in second coat of elastomeric membrane material in accordance with the coating manufacturer's instructions in lieu at aggregate surfacing specified in ASTM C1127. Do not install top coat over tile.

3.10 GROUTING

A. Grout Type and Location:
1. Grout for floor tile to be pre-mixed urethane grout.

B. Workmanship:
1. Install and cure grout in accordance with the applicable standard.

3.11 MOVEMENT JOINTS

A. Prepare tile expansion, isolation, construction and contraction joints for installation of sealant. Refer to Section 07 92 00, JOINT SEALANTS.
B. TCA details EJ 171-02.
C. At expansion joints, rake out joint full depth of tile and setting bed and mortar bed. Do not cut waterproof or isolation membrane.
D. Rake out grout at joints between tile, tub, service sink, at toe of base, and where shown not less than 6 mm (1/4 inch) deep.

3.12 CLEANING

A. Thoroughly sponge and wash tile. Polish glazed surfaces with clean dry cloths.
B. Methods and materials used shall not damage or impair appearance of tile surfaces.
C. The use of acid or acid cleaners on glazed tile surfaces is prohibited.
D. Clean tile grouted with urethane and tile set in elastomeric bond coat as recommended by the manufacturer of the grout and bond coat.

3.13 PROTECTION

A. Keep traffic off tile floor, until grout and setting material is firmly set and cured.

B. Where traffic occurs over tile floor, cover tile floor with not less than 9 mm (3/8 inch) thick plywood, wood particle board, or hardboard securely taped in place. Do not remove protective cover until time for final inspection. Clean tile of any tape, adhesive and stains.

3.14 TESTING FINISH FLOOR

A. Test floors in accordance with ASTM C627 to show compliance with codes 1 through 10.

- - - E N D - - -

SECTION 09 51 00
ACOUSTICAL CEILINGS

PART 1- GENERAL

1.1 DESCRIPTION

A. Metal ceiling suspension system for acoustical ceilings.

B. Acoustical units.

C. Adhesive application.

1.2 SUBMITTAL

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Samples:

1. Acoustical units, each type, with label indicating conformance to specification requirements.
2. Colored markers for units providing access.

C. Manufacturer's Literature and Data:

1. Ceiling suspension system, each type, showing complete details of installation.
2. Acoustical units, each type
3. Runners designed for snap-in attachment of metal pans.

D. Manufacturer's Certificates: Acoustical units, each type, in accordance with specification requirements.

F. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.3 DEFINITIONS

A. Standard definitions as defined in ASTM C634.

B. Terminology as defined in ASTM E1264.

1.4 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.

B. American Society for Testing and Materials (ASTM):

A641/A641M-03.....Zinc-coated (Galvanized) Carbon Steel Wire

A653/A653M-07.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-coated (Galvannealed) by the Hot-Dip Process

C423-07.....Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method

C634-02 (E2007).....Standard Terminology Relating to Environmental Acoustics

C635-04.....Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings

C636-06.....Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels

E84-07.....Surface Burning Characteristics of Building Materials

E119-07.....Fire Tests of Building Construction and Materials

E413-04.....Classification for Rating Sound Insulation.

E580-06.....Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Seismic Restraint

E1264-(R2005).....Classification for Acoustical Ceiling Products

PART 2- PRODUCTS

2.1 METAL SUSPENSION SYSTEM

A. ASTM C635, heavy-duty system, except as otherwise specified.
   1. Ceiling suspension system members may be fabricated from either of the following unless specified otherwise.
      a. Galvanized cold-rolled steel, bonderized.
      b. Extruded aluminum.
      c. Fire resistant plastic (glass fiber) having a flame spread and smoke developed rating of not more than 25 when tested in accordance with ASTM E84.
   2. Use same construction for cross runners as main runners. Use of lighter-duty sections for cross runners is not acceptable.
   3. Use aluminum suspension in kitchens and aluminum or fire resistant plastic in toilets adjacent to shower areas, hydrotherapy, and swimming pools.

B. Exposed grid suspension system for support of lay-in panels:
   1. Exposed grid width not less than 22 mm (7/8 inch) with not less than 8 mm (5/16 inch) panel bearing surface.
   2. Fabricate wall molding and other special molding from the same material with same exposed width and finish as the exposed grid members.
   3. On exposed metal surfaces apply baked-on enamel flat texture finish in color to match adjacent acoustical units unless specified otherwise.

C. Suspension system for support of Metal Type V, VI, and VII tiles: Concealed grid type having runners designed for the snap-in attachment of metal tile (pans).

2.2 PERIMETER SEAL

A. Vinyl, polyethylene or polyurethane open cell sponge material having density of 1.3 plus or minus 10 percent, compression set less than 10 percent with pressure sensitive adhesive coating on one side.

B. Thickness as required to fill voids between back of wall molding and finish wall.

C. Not less than 9 mm (3/8 inch) wide strip.

2.3 WIRE

A. ASTM A641.

B. For wire hangers: Minimum diameter 2.68 mm (0.1055 inch).

C. For bracing wires: Minimum diameter 3.43 mm (0.1350 inch).

2.4 ANCHORS AND INSERTS

A. Use anchors or inserts to support twice the loads imposed by hangers attached thereto.

B. Hanger Inserts:

1. Fabricate inserts from steel, zinc-coated (galvanized after fabrication).
2. Nailing type option for wood forms:
   a. Upper portion designed for anchorage in concrete and positioning lower portion below surface of concrete approximately 25 mm (one inch).
   b. Lower portion provided with not less than 8 mm (5/16 inch) hole to permit attachment of hangers.
3. Flush ceiling insert type:
   a. Designed to provide a shell covered opening over a wire loop to permit attachment of hangers and keep concrete out of insert recess.
   b. Insert opening inside shell approximately 16 mm (5/8 inch) wide by 9 mm (3/8 inch) high over top of wire.
   c. Wire 5 mm (3/16 inch) diameter with length to provide positive hooked anchorage in concrete.

C. Clips:

1. Galvanized steel.
2. Designed to clamp to steel beam or bar joists, or secure framing member together.
3. Designed to rigidly secure framing members together.
4. Designed to sustain twice the loads imposed by hangers or items supported.

2.5 CARRYING CHANNELS FOR SECONDARY FRAMING

A. Fabricate from cold-rolled or hot-rolled steel, black asphaltic paint finish, free of rust.

B. Weighing not less than the following, per 300 m (per thousand linear feet):

Size mm	Size Inches	Cold-rolled		Hot-rolled	
		Kg	Pound	Kg	Pound
38	1 1/2	215.4	475	508	1120
50	2	267.6	590	571.5	1260

2.6 ADHESIVE

A. ASTM D1779, having flame spread index of 25 or less when tested in accordance with ASTM E84.

B. Developing minimum strength of 7 kg/m^2 (one psi) of contact surface 48 hours after installation in temperature of 21 °C (70 °F).

2.7 ACOUSTICAL UNITS

A. General:

1. ASTM E1264, weighing 3.6 kg/m^2 (3/4 psf) minimum for mineral fiber panels or tile.
2. Class A Flame Spread: ASTM 84
3. Minimum NRC (Noise Reduction Coefficient): 0.55 unless specified otherwise: ASTM C423.
4. Minimum CAC (Ceiling Attenuation Class): 40-44 range unless specified otherwise: ASTM E413.
5. Manufacturers standard finish, minimum Light Reflectance (LR) coefficient of 0.75 on the exposed surfaces, except as specified otherwise. Colored units integrally colored throughout.
6. Lay-in panels: Sizes as shown, with square edges reveal edges.
7. Perforated metal facing (pan); tile or panels:
   a. Tiles: Size of units optional, 150 by 900, 300 by 300, 300 by 600, 300 by 900, and 300 by 1200 mm (6 by 48, 12 by 12, 12 by 24, 12 by 36, and 12 by 48 inches). Cross score units larger than 300 by 300 mm (12 by 12 inches) to simulate 300 by 300 mm (12 by 12 inch) units. Use beveled edge units. Design joints for snap-in attachment to suspension system.
   b. Panels: Sizes as shown with recessed reveal edges flat panel with square edges to finish flush with exposed grid suspension system.

c. Sound absorbent element; either non-sifting mineral wool or glass fiber (free of formaldehyde) of density and thickness to provide specified noise reduction coefficient. Enclosure sound absorbent elements within plastic envelopes.

d. Support sound absorbent elements on wire spacer about 6 mm (1/4 inch) high. Fit both the sound absorbent element and the spacer into the unit.

B. Type V Units - Perforated steel facing (pan) with mineral or glass fiber base backing.

1. Steel ASTM A653, not less than 0.38 mm (0.015 inch) thick, minimum G30 galvanizing.
2. Bonderize both sides of sheet and apply two coats of baked-on enamel finish, free from gloss or sheen, on surfaces exposed to view and at least one coat on concealed surfaces.

C. Type VI Units - Perforated stainless steel facing (pan) with mineral or glass fiber base backing.

D. Type VII Units - Perforated aluminum facing (pan) with mineral or glass fiber base backing.

1. Fabricated from aluminum sheets not less than 0.635 mm (0.025 inch) thick.
2. Apply two coats of baked-on enamel finish, free from gloss or sheen, on face and flanges.

2.7 METAL PERIMETER TRIM

A. Components

1. Edge trim system for suspended ceiling system, extruded aluminum alloy 6063 trim channel for acoustical and drywall applications.

   a. Basis-of-Design: Armstrong World Industries, Inc., Axiom-Classic Custom Perimeter Trim.

   b. Provide Basis-of-Design product or equivalent product by, but not limited to, one of the following:

      i. CertainTeed
      ii. Chicago Metallic Corporation
      iii Fry Reglet Corporation
      iv. USG Interors, Inc.

2. Perimeter Trim Channel: Face channel in size as indicated on drawings with 3/4 inch horizontal legs, straight or curved sections with special bosses formed for attachment to the tee-bar connection clip or hanging clip; commercial quality, factory-finished in white.
3. Inside and Outside Corner Units: Match profile and color of Perimeter Trim Channel.

2.8 ACCESS IDENTIFICATION

A. Markers:
   1. Use colored markers with pressure sensitive adhesive on one side.
   2. Make colored markers of paper of plastic, 6 to 9 mm (1/4 to 3/8 inch) in diameter.

B. Use markers of the same diameter throughout building.

C. Color Code: Use following color markers for service identification:

Color.....Service
Red.....Sprinkler System: Valves and Controls
Green.....Domestic Water: Valves and Controls
Yellow.....Chilled Water and Heating Water
Orange.....Ductwork: Fire Dampers
Blue.....Ductwork: Dampers and Controls
Black.....Gas: Laboratory, Medical, Air and Vacuum

PART 3 EXECUTION

3.1 CEILING TREATMENT

A. Treatment of ceilings shall include sides and soffits of ceiling beams, furred work 600 mm (24 inches) wide and over, and vertical surfaces at changes in ceiling heights unless otherwise shown. Install acoustic tiles after wet finishes have been installed and solvents have cured.

B. Lay out acoustical units symmetrically about center lines of each room or space unless shown otherwise on reflected ceiling plan.

C. Moldings:
   1. Install metal wall molding at perimeter of room, column, or edge at vertical surfaces.
   2. Install special shaped molding at changes in ceiling heights and at other breaks in ceiling construction to support acoustical units and to conceal their edges.
      a. Armstrong, Axiom Classic Straight Trim. Coordinate edge trim height with change in ceiling height.

D. Perimeter Seal:
   1. Install perimeter seal between vertical leg of wall molding and finish wall, partition, and other vertical surfaces.
   2. Install perimeter seal to finish flush with exposed faces of horizontal legs of wall molding.

E. Existing ceiling:
   1. Where extension of existing ceilings occurs, match existing.
   2. Where acoustical units are salvaged and reinstalled or joined, use salvaged units within a space. Do not mix new and salvaged units

within a space which results in contrast between old and new acoustic units.

3. Comply with specifications for new acoustical units for new units required to match appearance of existing units.

3.2 CEILING SUSPENSION SYSTEM INSTALLATION

A. General:

1. Install metal suspension system for acoustical tile and lay-in panels in accordance with ASTM C636, except as specified otherwise.
2. Use direct or indirect hung suspension system or combination thereof as defined in ASTM C635.
3. Support a maximum area of 1.48 m^2 (16 sf) of ceiling per hanger.
4. Prevent deflection in excess of 1/360 of span of cross runner and main runner.
5. Provide extra hangers, minimum of one hanger at each corner of each item of mechanical, electrical and miscellaneous equipment supported by ceiling suspension system not having separate support or hangers.
6. Provide not less than 100 mm (4 inch) clearance from the exposed face of the acoustical units to the underside of ducts, pipe, conduit, secondary suspension channels, concrete beams or joists; and steel beam or bar joist unless furred system is shown,
7. Use main runners not less than 1200 mm (48 inches) in length.
8. Install hanger wires vertically. Angled wires are not acceptable except for seismic restraint bracing wires.

B. Anchorage to Structure:

1. Concrete:
   a. Use eye pins or threaded studs with screw-on eyes in existing or already placed concrete structures to support hanger and bracing wire. Install in sides of concrete beams or joists at mid height.
2. Steel:
   a. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels for attachment of hanger wires.
      (1) Size and space carrying channels to insure that the maximum deflection specified will not be exceeded.
      (2) Attach hangers to steel carrying channels, spaced four feet on center, unless area supported or deflection exceeds the amount specified.
   b. Attach carrying channels to the bottom flange of steel beams spaced not 1200 mm (4 feet) on center before fire proofing is

installed. Weld or use steel clips to attach to beam to develop full strength of carrying channel.

c. Attach hangers to bottom chord of bar joists or to carrying channels installed between the bar joists when hanger spacing prevents anchorage to joist. Rest carrying channels on top of the bottom chord of the bar joists, and securely wire tie or clip to joist.

C. Direct Hung Suspension System:

1. As illustrated in ASTM C635.
2. Support main runners by hanger wires attached directly to the structure overhead.
3. Maximum spacing of hangers, 1200 mm (4 feet) on centers unless interference occurs by mechanical systems. Use indirect hung suspension system where not possible to maintain hanger spacing.

D. Indirect Hung Suspension System:

1. As illustrated in ASTM C635.
2. Space carrying channels for indirect hung suspension system not more than 1200 mm (4 feet) on center. Space hangers for carrying channels not more than 2400 mm (8 feet) on center or for carrying channels less than 1200 mm (4 feet) or center so as to insure that specified requirements are not exceeded.
3. Support main runners by specially designed clips attached to carrying channels.

E.Seismic Ceiling Bracing System:

1. Construct system is accordance with ASTM E580.
2. Connect bracing wires to structure above as specified for anchorage to structure and to main runner or carrying channels of suspended ceiling at bottom.

3.3 ACOUSTICAL UNIT INSTALLATION

A. Cut acoustic units for perimeter borders and penetrations to fit tight against penetration for joint not concealed by molding.

B. Install lay-in acoustic panels in exposed grid with not less than 6 mm (1/4 inch) bearing at edges on supports.

1. Install tile to lay level and in full contact with exposed grid.
2. Replace cracked, broken, stained, dirty, or tile not cut for minimum bearing.
3. Paint exposed edges of cut tile white to match finished tile surface. No unpainted, unfinished edges shall be exposed upon complete installation.

C. Markers:

1. Install markers of color code specified to identify the various concealed piping, mechanical, and plumbing systems.
2. Attach colored markers to exposed grid on opposite sides of the units providing access.
3. Attach marker on exposed ceiling surface of upward access acoustical unit.

3.4 CLEAN-UP AND COMPLETION

A. Replace damaged, discolored, dirty, cracked and broken acoustical units.

B. Leave finished work free from defects.

- - - E N D - - -

SECTION 09 54 70
METAL PANEL CEILINGS

PART 1 - GENERAL

1.1 DESCRIPTION

A. Section Includes:
   1. Decorative formed metal ceiling panels, mechanically mounted on a ceiling suspension system.
   2. Accessories:
      a. Closures, trim, edge molding and all other items required to provide complete installation.

B. Unit size, texture, finish, and color as specified.

C. Location and extent of acoustical treatment as shown.

1.2 RELATED WORK

A. Batt, Blanket and Acoustical Insulation: Section 07 21 13, THERMAL INSULATION.

B. Access Doors: Section 08 31 13, ACCESS DOORS AND FRAMES.

C. Acoustical Ceilings: Section 09 51 00, ACOUSTICAL CEILINGS.

D. Interior Lighting: Section 26 51 00, INTERIOR LIGHTING.

1.3 QUALITY CONTROL

A. Qualifications:
   1. Installer: Approved in writing by manufacturer.

B. Coordination of Work: Coordinate layout and installation of metal panel ceiling units and suspension system components with other work.
   1. Sprinkler heads, HVAC Air Outlets and Inlets, and light fixtures shall be located at the perimeter of the metal panel ceiling system and shall not penetrate the exposed face of the panels.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Product Data:
   1. Manufacturer’s standard details and fabrication methods.
   2. Data on finishing, hardware, components, and accessories.
   3. Recommendations for maintenance and cleaning of finish surfaces.

C. Shop Drawings:
   1. Submit complete composite fabrication, and installation shop drawings including associated components.
   2. Identify panel sections, baffles, edge trim, other component parts, not included in manufacturer’s product data, by name and material and showing design, construction, installation, and anchorage.

3. Layout and installation details, including relation to adjacent work such as walls and bulkheads.
4. Composite reflected ceiling plans, at 1:50 (1/4 inch) scale, showing location of all accessories. Indicate following:
   a. Joint pattern.
   b. Ceiling suspension members.
   c. Method of attaching hangers to building structure.
   d. Special moldings at walls and other junctures with adjoining construction.
5. Detail sections of typical composite members at wall surfaces.
6. Provisions for expansion and contraction.
7. Anchors and reinforcements.

D. Samples:
1. Submit pairs of samples of each specified color and finish for following:
   a. Metal panel ceiling.
   b. Each exposed molding and trim sections.
   c. Suspension system members.
   d. Insulation.
2. Prefinished Aluminum:
   a. Sheet not less than 200 mm by 250 mm (eight inches by ten inches).

E. Certificates:
1. Stating that metal panel ceiling system material has been given specified thickness of finish.
2. Indicating installer’s meet qualifications as specified.

F. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.5 DELIVERY, STORAGE AND HANDLING

A. Materials: Deliver to site in manufacturer's original unopened containers with brand name and type clearly marked.
B. Materials: Carefully handle and store in dry, watertight enclosures.
C. Immediately before installation, metal panel ceiling units shall be stored for not less than 48 hours at same temperature and relative humidity as space where they will be installed to assure temperature and moisture conditions in accordance with manufacturer’s recommendations.
D. Handle product in accordance with manufacturer's written instructions.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referred to in text by basic designation only.

B. American Architectural Manufacturers Association (AAMA):
2605-11.....High Performance Organic Coatings on Architectural Extrusions and Panels.

C. American Society for Testing and Materials (ASTM):
A641/641M-09.....Zinc-coated (Galvanized) Carbon Steel Wire.
A653/A653M-10.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by Hot-Dip Process.
A1008.....Standard Specification for Steel, Sheet, Cold Rolled, Carbon, Structural, High-Strength Low-Alloy and High-Strength Low-Alloy with Improved Formability.
B209/B209M-07.....Aluminum and Aluminum-Alloy Sheet and Plate.
C423.....Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method.
C635-07.....Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-In Panel Ceilings.
C636-08.....Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-In Panels.
E84.....Standard Test Method for Surface Burning Characteristics of Building Materials.
E90-09.....Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions.
E580-10.....Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Seismic Restraint.

D. National Association of Architectural Metal Manufacturers (NAAMM): Metal Finishes Manual (2006).

E. International Code Council Evaluation Service AC156 - Acceptance Criteria for Seismic Qualification Testing of Non-structural Components.

1.7 ENVIRONMENTAL REQUIREMENTS

Uniform temperature of not less than 16 °C, (60 °F) nor more than 27 °C, (80 °F) and a relative humidity of not more than 70 percent shall be maintained for a period of 48 hours before, during, and for 48 hours after installation of metal panel ceiling units. After above period, room temperature shall not fall below 13 °C (55 °F).

1.8 SCHEDULING

Interior finish work such as gypsum board finishing, painting, concrete and terrazzo work shall be complete and dry before installation. Mechanical, electrical, and other work above ceiling line shall be completed and heating, ventilating, and air conditioning systems shall be installed and operating in order to maintain temperature and humidity requirements.

1.9 WARRANTY

Submit written warranty, in accordance with FAR clause 52.246-21, Warranty of Construction requirements except that warranty period shall be extended to five (5) years.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Basis of design: 'Radian' panels as manufactured by Ceilings Plus - 6711 E. Washington Blvd., Los Angeles, CA 90040. 800-822-3411 - www.ceilingsplus.com.
   1. Any substitutions must match basis of design product in material, finish, profile perforation size and spacing.

B. Metal Panel Ceiling System, General:
   1. Panels are to be manufactured from single sheets of aluminum selected for surface flatness, smoothness and freedom from surface blemishes where exposed to view in a finished unit. Do not use material where the exposed surface exhibit pitting, seam marks, roller marks, stains, discolorations, or variations in flatness exceeding those permitted by referenced standards for stretcher-leveled aluminum alloy sheets.
   2. Panels are to be die formed with a minimum 1 ¼" integral return edge on each of the four panel sides. Steel clips that locate and align panels to the grid with torsion springs, are to be factory machine riveted to the return edge of the panels using counter sunk rivet holes that allow the flat heads of the counter sunk rivets to be flush the face of the panel return. No fasteners of any kind shall be visible on exposed face surfaces of ceiling panels or support tees. Down light openings and other ceiling penetrations shall be factory precision cut whenever viable.
   3. Panel material shall be primed aluminum sheet type 5005 series alloy that has a minimum 50% recycled content. It shall be machine stretcher-leveled and a minimum of .032" thickness, or greater if required, so that the panel deflection does not exceed L/360.

4. The panel finish shall be: Sateen.
5. Panel sizes as per drawings. No field cutting will be permitted.
6. All panels to have 1-1/2" return on all 4 sides. Provide perimeter trim as indicated on drawings.
7. Panels to be factory pre-curved as required.
8. Edge Profile: Panel joints are butt condition (concealed tee - as per ASTM A 1264) both directions (as per drawings) unless specified otherwise.
9. Perforation shall be SD-8, or as selected by the Architect from Ceilings Plus' standard patterns. Panels to have solid non-perforated borders along each of the four sides.
10. Sound-Absorptive Fabric Layer: Provide manufacturer's acoustic pads sized to fit concealed surface of panel. Material shall be both non-flammable and sound-absorptive.
    a. Fire Class shall be Class A, with surface-burning characteristics for flame-spread rating of 25 or less and smoke developed rating of 50 or less.. Provide independent accredited lab test results showing compliance with Class A rating as per ASTM E 84.
    b. Acoustical metal panel ceilings to provide recycled "Soundtex" fiber fleece.
    e. Install acoustical pads to the backside of the perforated panels, unless otherwise directed by the Architect.
11. The plenum shall be 100% accessible. Every panel must be removable. Progressive panel access is not acceptable. Heavy duty torsion springs and steel clip assemblies to be mounted to every panel for downward access, without potential for damage to panel face or hinge assembly. Hinge assembly shall be mounted to every panel with minimum two flush to face, counter sunk chamfered fasteners. Attaching torsion spring directly to panel with fastener will not be acceptable.
12. Fire Tests: Complete system test including suspension, primed aluminum and finish shall meet ASTM E 84 Class A.
13. Provide and install matching finish trim on each side of each suspended area (or as specified). Profile of trim to be minimum 4 ½" tall @ floating conditions or as detailed.

C. Metal Suspension Systems, General:
1. Metal Suspension Standard: Provide panel manufacturer's pre-curved metal suspension systems of types, structural classifications, materials, and finishes indicated that comply with applicable ASTM C 635 requirements.

a. Main and cross runners to be Standard “Heavy Duty” tee bar (as per ASTM C 635).
b. Face of main and cross runners to be factory finished matte black unless known otherwise.
c. Face of main runners to be factory slotted to receive torsion springs
d. Provide suspension system made from steel sheet with an average recycled content such that post consumer recycled content plus one half or pre consumer content is not less than 25 percent.

2. Suspension Systems: Provide complete suspensions systems with main runners, cross runners, hangers, trim molding, seismic retention clips, load resisting struts and other suspension components required to support ceiling and other ceiling supported construction (some of these parts may be supplied by the installer).
3. Attachment Devices: Size for five times design load indicated in ASTM C 635, Table 1, “Direct-Hung”, unless otherwise indicated (supplied by installer)
   a. Provide anchor, for use in the particular application.
   b. Anchors specified must provide corrosion resistance as per metal type and application.
   d. “Direct-Hung” Suspensions Systems: System composed of main runners supported by hangers attached directly to building structure.

2.2 FINISHES

A. Comply with NAAMM “Metal Finishes Manual”.
B. Protect mechanical finishes on exposed surfaces from damage by application of strippable, temporary protective covering before shipment.
C. Appearance of Finished Work: Variations in appearance of abutting or adjacent ceiling units not acceptable. Noticeable variations in same piece not acceptable.

PART 3 - EXECUTION

3.1 INSPECTION

A. Examine substrates and structural framing to which acoustical metal panels attach or abut, with Installer present, for compliance with requirements specified in this and other Sections that affect installation and anchorage, and other conditions affecting performance of metal panel ceilings.
B. Proceed with installation only after unsatisfactory conditions have been repaired to Installer’s satisfaction.

3.2 PREPARATION

Measure each ceiling area and establish layout of acoustical metal pan units to balance border widths at opposite edges of each ceiling. Avoid using less-than-half-width units at borders, and comply with layout shown on reflected ceiling plans.

3.3 INSTALLATION

A. General: Install acoustical metal pan ceilings, per manufacturers shop drawings provided, per manufacturer's written instructions and to comply with publications referenced below.
   1. ClSCA "Ceiling Systems Handbook.
   2. Standard for Ceiling Suspension System Installations - ASTM C 636.
   3. Standard for Ceiling Suspension Systems Requiring Seismic Restraint - ASTM E 580
   4. IBC (International Building Code) standard for Seismic Zone for local area.

B. Suspend ceiling hangers from building's approved structural substrates and as follows:
   1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structure or of ceiling suspension system.
   2. Splay hangers only where required to miss obstructions; offset resulting horizontal forces by bracing, counter-splaying, or other equally effective means.
   3. Where width of ducts and other construction within ceiling plenum produce hanger spacings that interfere with location of hangers at spacing required to support standard suspension system members, install supplemental suspension members and hangers in form of trapezes or equivalent devices. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced standards and publications.
   4. Where used secure wire hangers to ceiling suspension members and to supports above with a minimum of three tight turns. Connect hangers directly either to structures or to inserts, eye screws, or other devices that are secure; that are appropriate for substrate; and that will not deteriorate or otherwise fail due to age, corrosion, or elevated temperatures.
   5. Space hangers not more than 48 inches on center, along each member supported directly from hangers, unless otherwise indicated; and provide hangers not more than 8 inches from ends of each member. Supply supporting calculations from licensed Structural Engineer

verifying hanger spacing meets all requirements, when spacing exceed those recommended.

6. Fine level grid to 1/8 inch in 10 feet from specified elevation(s), square and true.
7. Adjust suspension system runners so they are square (within .5 degree from 90 degrees) and securely interlocked with one another. Remove and replace dented, bent, or kinked members.

C. Secure bracing wires to ceiling suspension members and to supports acceptable to Architect / Engineer and or inspector. Suspend bracing from building's structural members and / or structural deck, as required for hangers, without attaching to permanent metal forms, steel deck, or steel deck tabs(unless directed otherwise).

D. Install edge moldings and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal edges of acoustical metal pan. Method of edge trim attachment and design of edge trims to be approved by Architect.

1. Screw attach moldings to substrate at intervals not more than 18” O.C. and not more than 6” from ends, leveling with ceding suspension system to a tolerance of 1/8” in 10’. Miter corners accurately and connect securely.
2. Do not use exposed fasteners, including pop rivets, on moldings and trim without prior written approval. Or unless detailed otherwise.

F. Scribe and cut acoustical metal panel units for accurate fit at penetrations by, other work through ceilings. Stiffen edges of cut units as required to eliminate evidence of buckling or variations in flatness exceeding referenced standards for stretcher-leveled metal sheet.

G. Install acoustical metal panel units in coordination with suspension system.

1. Align joints in adjacent courses to form uniform, straight joints parallel to room axis in both directions, unless otherwise indicated. Install directionally patterned or textured panels in directions indicated on approved shop drawings. Panel-joints shall flow smoothly and in a straight line within 1/8” in 10’. Intersections shall be continuous.
2. Fit adjoining units to form flush, tight joints. Scribe and cut units for accurate fit at borders and around construction penetrating ceiling.
3. Remove protective film from panels only when space is completely clean and free of airborne particles. Use white cotton gloves for final installation of panels into grid system

3.4 ADJUSTING AND CLEANING

A. Adjust ceiling components to provide a consistent finish and appearance in conformity with established tolerances and requirements.

B. Clean exposed surfaces of acoustical metal panel ceilings and walls. Comply with manufacturer's written instructions for cleaning and touchup of minor finish damage.

C. Remove and replace work that cannot be successfully cleaned and repaired to permanently eliminate evidence of damage, including dented and bent units.

- - - END - - -

SECTION 09 65 13
RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the installation of rubber base.

1.2 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Base material manufacturer's recommendations for adhesives.
3. Application and installation instructions.

C. Samples:

1. Base: 150 mm (6 inches) long, each type and color.
2. Adhesive: Literature indicating each type.

D. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.3 DELIVERY

A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.

B. Materials from containers which have been distorted, damaged or opened prior to installation will be rejected.

1.4 STORAGE

A. Store materials in weather tight and dry storage facility.

B. Protect material from damage by handling and construction operations before, during, and after installation.

1.5 APPLICABLE PUBLICATIONS

A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

F1861-02.....Resilient Wall Base

PART 2 - PRODUCTS

2.1 GENERAL

Use only products by the same manufacturer and from the same production run.

2.2 RESILIENT BASE

A. ASTM F1861, 3 mm (1/8 inch) thick, 100 mm (4 1/4 inches) high, Type TP Rubber, Thermoplastics, Group 2-layered with molded top. Style toe and toeless.

2.2 RESILIENT TRANSITIONS

A. ASTM E 648 Class I, polyvinyl chloride (PVC)

2.3 ADHESIVES

Use products recommended by the material manufacturer for the conditions of use.

PART 3 - EXECUTION

3.1 PROJECT CONDITIONS

A. Maintain temperature of materials above 21° C (70 °F), for 48 hours before installation.
B. Maintain temperature of rooms where work occurs, between 21° C and 27° C (70°F and 80°F) for at least 48 hours, before, during, and after installation.
C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.

3.2 INSTALLATION REQUIREMENTS

A. The respective manufacturer's instructions for application and installation will be considered for use when approved by the COR.
B. Submit proposed installation deviation from this specification to the COR indicating the differences in the method of installation.
C. The COR reserves the right to have test portions of material installation removed to check for non-uniform adhesion and spotty adhesive coverage.

3.3 PREPARATION

A. Examine surfaces on which material is to be installed.
B. Fill cracks, pits, and dents with leveling compound.
C. Level to 3 mm (1/8 inch) maximum variations.
D. Do not use adhesive for leveling or filling.
E. Grind, sand, or cut away protrusions; grind high spots.
F. Clean substrate area of oil, grease, dust, paint, and deleterious substances.
G. Substrate area dry and cured. Perform manufacturer’s recommended bond and moisture test.
H. Preparation of existing installation:
   1. Remove existing base and stair treads including adhesive.
   2. Do not use solvents to remove adhesives.

3. Prepare substrate as specified.

3.4 BASE INSTALLATION

A. Location:
   1. Unless otherwise specified or shown, where base is scheduled, install base over toe space of base of casework.
   2. Extend base scheduled for room into adjacent closet, alcoves, and around columns.

B. Application:
   1. Apply adhesive uniformly with no bare spots.
   2. Set base with joints aligned and butted to touch for entire height.
   3. Before starting installation, layout base material to provide the minimum number of joints with no strip less than 600 mm (24 inches) length.
      a. Short pieces to save material will not be permitted.
      b. Locate joints as remote from corners as the material lengths or the wall configuration will permit.

C. Form corners and end stops as follows for Style B-cove:
   1. Score back of outside corner.
   2. Score face of inside corner and notch cove.

D. Form corners and end stops as follows for Style Millwork:
   1. Miter cut for outside corner.
   2. Miter cut for inside corner.

E. Roll base for complete adhesion.

3.5 CLEANING AND PROTECTION

A. Clean all exposed surfaces of base and adjoining areas of adhesive spatter before it sets.

B. Keep traffic off resilient material for at least 72 hours after installation.

C. Clean and polish materials in the following order:
   1. After two weeks, scrub resilient base materials with a minimum amount of water and a mild detergent. Leave surfaces clean and free of detergent residue. Polish resilient base to a gloss finish.

D. Where protective materials are removed and immediately prior to acceptance, replace damaged materials and re-clean resilient materials. Damaged materials are defined as having cuts, gouges, scrapes or tears and not fully adhered.

- - - E N D - - -

SECTION 09 65 16
RESILIENT SHEET FLOORING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This Section specifies the installation of sheet flooring and integral cove base.

B. Grades of resilient sheet vinyl floor covering without backing having vinyl plastic wearlayer with backing.

C. Installation of sheet flooring including following:

1. Heat welded seams.
2. Integral cove base: Installed at intersection of floor and vertical surfaces.

1.2 RELATED WORK

A. Resilient base over base of lockers, equipment and casework: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

1.3 QUALITY CONTROL-QUALIFICATIONS:

A. The Contracting Officer shall approve products or service of proposed manufacturer, suppliers, and installers, and the Contractor shall submit certification that:

1. Heat welded seaming is manufacturers prescribed method of installation.
2. Installer is approved by manufacturer of materials and has technical qualifications, experience, trained personnel, and facilities to install specified items.
3. Manufacturer's product submitted has been in satisfactory operation, on three installations similar and equivalent in size to this project for three years. Submit list of installations.

B. The sheet vinyl floor coverings shall meet fire performance characteristics as determined by testing products, per ASTM test method, indicated below by Underwriters Laboratories, Inc. (UL) or another recognized testing and inspecting agency acceptable to authorities having jurisdiction.

1. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E648.
2. Smoke Density: Less than 450 per ASTM E662.

C. The floor covering manufacturer shall certify that products supplied for installation comply with local regulations controlling use of volatile organic compounds (VOC’s).

1.4 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, submit following:

B. Manufacturer's Literature and Data:

1. Description of resilient material and accessories to be provided.
2. Resilient material manufacturer's recommendations for adhesives, weld rods, sealants, and underlayment.
3. Application and installation instructions.

C. Samples:

1. Sheet material, 38 mm by 300 mm (1-1/2 inch by 12 inch), of each color and pattern with a welded seam using proposed welding rod 300 mm (12 inches) square for each type, pattern and color.
2. Cap strip and fillet strip, 300 mm (12 inches) for integral base.
3. Shop Drawings and Certificates: Layout of joints showing patterns where joints are expressed, and type and location of obscure type joints. Indicate orientation of directional patterns.
4. Certificates: Quality Control Certificate Submittals and lists specified in paragraph, QUALIFICATIONS.
5. Edge strips: 150 mm (6 inches) long each type.
6. Adhesive, underlayment and primer: Pint container, each type.

D. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.5 PROJECT CONDITIONS

A. Maintain temperature of floor materials and room, where work occurs, above 21 ° C (70 °F) and below 29 °C (85 °F) for one week before including week-end hours, during and for 7 days after installation. After above period, room temperature shall not fall below 13 °C (55 °F) or above 29 °C (85 °F).

B. Construction in or near areas to receive flooring work shall be complete, dry and cured. Do not install resilient flooring over slabs until they have been cured and are sufficiently dry to achieve a bond with adhesive. Follow flooring manufacturer’s recommendations for bond and moisture testing.

C. Building shall be permanently enclosed. Schedule construction so that floor receives no construction traffic when completed.

1.6 DELIVERY, STORAGE AND HANDLING

A. Deliver materials to site in original sealed packages or containers; labeled for identification with manufacturer's name and brand.

B. Deliver sheet flooring full width roll, completely enclosed in factory wrap, clearly marked with the manufacturer's number, type and color, production run number and manufacture date.

C. Store materials in weathertight and dry storage facility. Protect from damage due to handling, weather, and construction operations before, during and after installation. Store sheet flooring on end with ambient temperatures maintained as recommended by manufacturer.

D. Store sheet flooring on end.

E. Move sheet vinyl floor coverings and installation accessories into spaces where they will be installed at least 48 hours in advance of installation.

1.7 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Society For Testing Materials (ASTM):

E648-06.....Critical Radiant Flux of Floor-Covering Systems Using a Radiant Energy Source.

E662-06.....Specific Optical Density of Smoke Generated by Solid Materials.

E1907-06.....Evaluating Moisture Conditions of Concrete Floors to Receive Resilient Floor Coverings

F710-05.....Practice for Preparing Concrete Floors and Other Monolithic Floors to Receive Resilient Flooring.

F1303-04.....Sheet Vinyl Floor Covering with Backing.

F1913-04.....Sheet Vinyl Flooring without Backing

C. Resilient Floor Covering Institute (RFCI):

Recommended Work Practices for Removal of Resilient Floor Coverings.

1.8 SCHEDULING

Interior finish work such as plastering, drywall finishing, concrete, terrazzo, ceiling work, and painting work shall be complete and dry before installation. Mechanical, electrical, and other work above ceiling line shall be completed. Heating, ventilating, and air conditioning systems shall be installed and operating in order to maintain temperature and humidity requirements.

1.9 GUARANTY:

Submit written guaranty, in accordance with General Condition requirements except that guarantee period shall be extended to include two (2) years.

PART 2 - PRODUCTS

2.1 SHEET VINYL FLOOR COVERINGS

A. Sheet Vinyl Floor Coverings: Smooth face, minimum thickness nominal 3.175 mm non-cushioned (0.125 inch). Sheet flooring shall conform to ASTM F1913, backing classification not applicable. Foam backed sheet flooring is not acceptable.

B. Size: Provide maximum size sheet vinyl material produced by manufacturer to provide minimum number of joints. Minimum size width acceptable - 72 inches.

C. Each color and pattern of sheet flooring shall be of same production run.

2.2 WELDING ROD:

Product of floor covering manufacturer in color shall match field color of sheet vinyl covering, unless accented welding rod is called for.

2.3 APPLICATION MATERIALS AND ACCESSORIES

A. Floor and Base Adhesive: Type recommended by sheet flooring material manufacturer for conditions of use.

B. Mastic Underlayment (for concrete floors): Provide products with latex. Condition to be corrected shall determine type of underlayment selected for use.

C. Base Accessories:

1. Fillet Strip: 19 mm (3/4 inch) radius fillet strip compatible with resilient sheet material.
2. Cap Strip: Extruded flanged zero edge vinyl reducer strip approximately 25 mm (one inch) exposed height with 13 mm (1/2 inch) flange.

2.4 SHEET FLOORING

A. Minimum nominal thickness 3.175 mm (0.125 inch); 1800 mm (6 ft) minimum width.

B. Critical Radiant Flux: 0.45 watts per sq.cm or more, class I, per ASTM E648.

C. Smoke density: less than 450 per ASTM E662.

D. Color and pattern of sheet flooring of the same production run.

2.5 ADHESIVES

Water resistant type (two part polyurethane) recommended by the sheet flooring manufacturer for the conditions of use.

2.6 BASE CAP STRIP AND COVE STRIP

A. Extruded vinyl compatible with the sheet flooring.

B. Cap strip "J" shape with feathered edge flange approximately 25 mm (one inch) wide; top designed to receive sheet flooring with 13 mm (1/2 inch) flange lapping top of flooring

C. Cove strip 70 mm (2-3/4 inch) radius.

2.7 LEVELING COMPOUND (FOR CONCRETE FLOORS)

Provide cementitious products with latex or polyvinyl acetate resins in the mix. Minimum of 3500 psi.

2.8 PRIMER (FOR CONCRETE SUBFLOORS)

As recommended by the adhesive or sheet flooring manufacturer.

2.9 EDGE STRIPS

A. Extruded aluminum, mill finish, mechanically cleaned.

B. 28 mm (1-l/8 inch) wide, 6 mm (1/4 inch) thick, bevel one edge to 3 mm (1/8 inch) thick.

C. Drill and counter sink edge strips for flat head screws. Space holes near ends and approximately 225 mm (9 inches) on center in between.

2.10 SEALANT

A. As specified in Section 07 92 00, JOINT SEALANTS.

B. Compatible with sheet flooring.

2.11 WARRANTY

A. Ten (10) year limited warranty commencing on date of substantial completion.

2.12 INSTALLER

A. The installer shall be a certified installer for the specified product(s).

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine subfloor surfaces to determine that they are dry, clean, and smooth.

B. Perform bond and moisture tests on concrete subfloors to determine if surfaces are sufficiently cured and dry as well as to ascertain presence of curing compound. Do not use curing compounds on concrete subfloors.

C. Submit moisture and concrete pH tests to Flooring Distributor before ordering flooring product

D. Perform bond test at the rate of one per 50 square feet.

E. Do not allow resilient sheet flooring work to proceed until subfloor surfaces are satisfactory. **Indicate adverse conditions of any type by letter to Architect and Flooring Distributor.**

3.2 PROJECT CONDITIONS

A. Maintain temperature of sheet flooring above 21 ° C (70 °F), for one week before installation including week-end hours.

B. Maintain temperature of rooms where sheet flooring work occurs above 21 ° C (70 °F), for one week before installation including week-end hours, during and for 7 days after installation.

C. After installation, maintain temperature that shall not fall below 13 °C (55 °F) or above 29 °C (85 °F).

D. Building is permanently enclosed.

E. Wet construction in or near areas to receive sheet flooring is complete, dry and cured.

3.3 SUBFLOOR PREPARATION

A. Concrete Subfloors: Verify that concrete slabs comply with ASTM F710.

1. Installer shall examine surfaces on which resilient sheet flooring is to be installed, and shall advise Contractor, in writing, of areas which are unacceptable for installation of flooring material. Installer shall advise Contractor which methods are to be used to correct conditions that will impair proper installation. Installation shall not proceed until unsatisfactory conditions have been corrected.

2. Slab substrates dry, free of curing compounds, sealers, hardeners, and other materials which would interfere with bonding of adhesive. Determine adhesion and dryness characteristics by performing bond and moisture tests recommended by Resilient Floor Covering Institute recommendations in manual RFCI-MRP.

3. Inspect substrate for any contamination, such as oil drippings, cutback adhesives, etc. Encapsulate contamination with an encapsulator before progressing with the installation of the floor covering. The use of solvent-based adhesive removers is NOT recommended. Mapei’s Plan/Patch Plus and Ardex 15 are acceptable coverings. Self-leveling underlayments can have very high moisture contents and require longer curing times, some up to 10 days. Check with a moisture meter before starting installation.

B. Broom or vacuum clean substrates to be covered by sheet vinyl floor coverings immediately before installation. Following cleaning, examine substrates to determine if there is visually any evidence of moisture, alkaline salts, carbonation, or dust.

C. Primer: If recommended by flooring manufacturer, prior to application of adhesive, apply concrete slab primer in accordance with manufacturer's directions.

D. Correct conditions which will impair proper installation, including trowel marks, pits, dents, protrusions, cracks or joints.

E. Fill cracks, joints, depressions, and other irregularities in concrete with leveling compound.
   1. Do not use adhesive for filling or leveling purposes.
   2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
   3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joint lines.

F. Clean floor of oil, paint, dust and deleterious substances. Leave floor dry and cured free of residue from existing curing or cleaning agents.

G. Concrete Subfloor Testing:
   Determine adhesion and dryness of the floor by bond and moisture tests as recommended by RFCI manual MPR.

H. Preparation shall include the removal of existing resilient floor and existing adhesive. Do not use solvents to remove adhesives. Coordinate with Asbestos Abatement Section if asbestos abatement procedures will be involved.

3.4 INSTALLATION OF FLOORING

A. Install work in strict compliance with manufacturer's instructions and approved layout drawings.

B. Maintain uniformity of sheet vinyl floor covering direction and avoid cross seams, unless noted otherwise.

C. Arrange for a minimum number of seams and place them in inconspicuous and low traffic areas, but in no case less than 150 mm (6 inches) away from parallel joints in flooring substrates.

D. Match edges of resilient floor coverings for color shading and pattern at seams.

E. Where resilient sheet flooring abuts other flooring material floors shall finish level. Provide ramp down from resinous flooring a minimum of 18" - 24" to create a flush transition between the two products.

F. Extend sheet vinyl floor coverings into toe spaces, door reveals, closets, and similar openings.

G. Sheet vinyl to abut tightly to wall surface. Seal joint with waterproof cement or sealant.

H. Inform the COR of conflicts between this section and the manufacturer's instructions or recommendations for auxiliary materials, or installation methods, before proceeding.

I. Install sheet in full coverage adhesives.
   1. Air pockets or loose edges will not be accepted.
   2. Trim sheet materials to touch in the length of intersection at pipes and vertical projections; seal joints at pipe with waterproof cement or sealant.

J. Scribe, cut and fit resilient sheet flooring to permanent fixtures, built-in furniture and cabinets, pipes, outlets and permanent columns, walls and partitions. Floor shall be tight to door bucks.

K. Keep joints to a minimum; avoid small filler pieces or strips.

L. Follow manufacturer’s recommendations for seams at butt joints. Do not leave any open joints that would be readily visible from a standing position.

M. Follow manufacturer’s recommendations regarding pattern match, if applicable.

N. Installation of Edge Strips:
   1. Locate edge strips under center lines of doors unless otherwise indicated.
   2. Set aluminum strips in adhesive, anchor with lead anchors and stainless steel Phillips screws.

O. Integral Cove Base Installation:
   1. Set preformed fillet strip to receive base.
   2. Install the base with adhesive, terminate expose edge with the cap strip.
   3. Form internal and external corners to the geometric shape generated by the cove at either straight or radius corners.
   4. Solvent weld joints as specified for the flooring. Seal cap strip to wall with an adhesive type sealant.
   5. Unless otherwise specified or shown where sheet flooring is scheduled, provide integral base at intersection of floor and vertical surfaces. Provide sheet flooring and base scheduled for room on floors and walls under and behind areas where casework, laboratory and pharmacy furniture and other equipment occurs, except where mounted in wall recesses.

P. Floor covering should not be installed over expansion joints. Expansion joint covers compatible with floor covering should be used.

Q. Roll out resilient sheet flooring material with top surface up. Trim off all damage edges. Allow material to relax for twenty four (24) hours.

3.5 INSTALLATION OF INTEGRAL COVED BASE

A. Set preformed cove to receive base. Install base material with adhesive and terminate exposed edge with cap strip. Integral base shall be 100 mm (4 inches) high.

B. Internal and external corners shall be formed to geometric shape generated by cove at either square or radius corners.

3.6 WELDING

A. Heat weld all joints of flooring and base using equipment and procedures recommended by flooring manufacturer.

B. Welding shall consist of routing joint, inserting a welding rod into routed space, and terminally fusing into a homogeneous joint.

C. Upon completion of welding, surface across joint shall finish flush, free from voids, and recessed or raised areas.

D. Fusion of Material: Joint shall be fused a minimum of 65 percent through thickness of material, and after welding shall meet specified characteristics for flooring.

3.7 CLEANING

A. Clean small adhesive marks during application of sheet flooring and base before adhesive sets, excessive adhesive smearing will not be accepted.

B. Remove visible adhesive and other surface blemishes using methods and cleaner recommended by floor covering manufacturers.

C. Clean materials per flooring manufacturer’s written recommendations.

D. Vacuum floor thoroughly.

E. Do not wash floor until after period recommended by floor covering manufacturer and then prepare in accordance with manufacturer’s recommendations.

F. Upon completion, COR shall inspect floor and base to ascertain that work was done in accordance with manufacturer's printed instructions.

G. Perform initial maintenance according to flooring manufacturer’s written recommendations.

3.8 PROTECTION:

A. Protect installed flooring as recommended by flooring manufacturer against damage from rolling loads, other trades, or placement of fixtures and furnishings.

B. Keep foot traffic off sheet flooring for 24 hours after installation and no heavy fixtures or rolling carts are to be used on the floor for 72 hours.

C. Where construction traffic is anticipated, cover sheet flooring with reinforced kraft paper properly secured and maintained until removal is authorized by the COR.

D. Where protective materials are removed and immediately prior to acceptance, repair any damage, re-clean sheet flooring, lightly re-apply polish and buff floor.

- - - E N D - - -

SECTION 09 65 19
RESILIENT TILE FLOORING

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the installation of solid vinyl tile flooring, vinyl composition tile flooring and accessories.

1.2 RELATED WORK

A. Resilient Base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Resilient material manufacturer’s recommendations for adhesives, underlayment, primers and polish.
3. Application and installation instructions.

C. Samples:

1. Tile: 457.2 mm x 457.2mm (18” x 18”) and 101.6 mm x 914.4 mm (4” x 36”) tile for each type, pattern and color.
2. Edge Strips: 150 mm (6 inches) long, each type.
3. Feature Strips: 150 mm (6 inches) long.

D. Shop Drawings:

1. Layout of patterns shown on the drawings.
2. Edge strip locations showing types and detail cross sections.

E. Test Reports:

1. Abrasion resistance: Depth of wear for each tile type and color and volume loss of tile, certified by independent laboratory.
2. Tested per ASTM F510.

F. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.4 DELIVERY

A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.

B. Materials from containers which have been distorted, damaged or opened prior to installation will be rejected.

1.5 STORAGE

A. Store materials in weathertight and dry storage facility.

B. Protect from damage from handling, water, and temperature.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

D4078-02.....Water Emulsion Floor Finish

D3564-95 (R 2002).....Application of Floor Polishes to Maintain Vinyl Composition Tile or Flooring

E648-06.....Critical Radiant Flux of Floor Covering Systems Using a Radiant Energy Source

E662-06.....Specific Optical Density of Smoke Generated by Solid Materials

E1155-96 (R2001).....Determining Floor Flatness and Floor Levelness Numbers

E1907-06.....Evaluating Moisture Conditions of Concrete Floors to Receive Resilient Floor Coverings

F510-93 (R 2004).....Resistance to Abrasion of Resilient Floor Coverings Using an Abrader with a Grit Feed Method

F710-05.....Preparing Concrete Floors to Receive Resilient Flooring

F1066-04.....Vinyl Composition Floor Tile

F1344-04.....Rubber Floor Tile

F1700-04.....Solid Vinyl Floor Tile

C. Resilient Floor Covering Institute (RFCI):

IP #2.....Installation Practice for Vinyl Composition Tile (VCT)

PART 2 - PRODUCTS

2.1 GENERAL

A. Furnish product type, materials of the same production run and meeting following criteria.

B. Use adhesives, underlayment, primers and polish recommended by the floor resilient material manufacturer.

C. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E 648.

D. Smoke density: Less than 450 per ASTM E662.

2.3 LUXURY VINYL TILE

A. ASTM Specification 1700, The product shall have a wearlayer thickness of .020 inches (0.51mm) nominal and be available in 18” x 18” (457.2 mm x 457.2mm and 4” x 36” (101.6 mm x 914.4 mm).

B. Color and Pattern uniformly distributed throughout thickness.

C. Product to be installed with adhesive per manufacturers recommendations.

2.4 PRIMER (FOR CONCRETE SUBFLOORS)

Follow flooring manufacturer’s installation methods per recommended guidelines.

2.5 LEVELING COMPOUND (FOR CONCRETE FLOORS)

A. Provide cementitious products with a non-shrinking water resistant Portland cement patching compound.

B. Determine the type of underlayment selected for use by the condition to be corrected.

2.6 EDGE STRIPS

A. 28 mm (1-1/8 inch) wide unless shown otherwise.

B. Bevel from maximum thickness to minimum thickness for flush joint unless shown otherwise.

C. Extruded aluminum, mill finish, mechanically cleaned:

1. Drill and counter sink edge strip for flat head screws.
2. Space holes near ends and approximately 225 mm (9 inches) on center between.

D. Resilient Edge Strip or Reducer Strip: Fed. Specs. SS-T-312, Solid vinyl.

2.7 POLISH AND CLEANERS

A. Cleaners: Per manufacturer’s recommendations.

B. Polish: Per manufacturer’s recommendations.

2.8 SCREWS

Stainless steel flat head screw.

PART 3 - EXECUTION

3.1 PROJECT CONDITIONS

A. Maintain temperature of materials a minimum of 21 °C (65 °F,) for 48 hours before installation.

B. Maintain temperature of rooms where work occurs between 21 °C and 27 °C (70 °F and 80 °F), for at least 48 hours, before, during and after installation.

C. Do not install flooring until building is permanently enclosed and wet construction in or near areas to receive tile materials is complete, dry and cured.

3.2 SUBFLOOR PREPARATION

A. Verify that concrete slabs comply with ASTM F710. At existing slabs, determine levelness by F-number method in accordance with ASTM E1155. Overall value shall not exceed as follows:
   FF30/FL20

B. Correct conditions which will impair proper installation.

C. Fill cracks, joints and other irregularities in concrete with leveling compound:
   1. Do not use adhesive for filling or leveling purposes.
   2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
   3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joints.

D. Clean floor of oil, paint, dust, and deleterious substances: Leave floor dry and cured free of residue from existing curing or cleaning agents.

E. Concrete Subfloor Testing:
   Determine Adhesion and dryness of the floor by bond and moisture tests as recommended by RFCI manual MRP.

F. Perform additional subfloor preparation to obtain satisfactory adherence of flooring if subfloor test patches allows easy removal of tile.

G. Prime the concrete subfloor if the primer will seal slab conditions that would inhibit bonding, or if priming is recommended by the tile or adhesive manufacturers.

H. Preparation of existing installation shall include the removal of existing resilient floor and existing adhesive. Do not use solvents to remove adhesives.

3.3 INSTALLATION

A. Install in accordance with manufacturer's instructions for application and installation unless specified otherwise.

B. Mix tile from at least two containers. An apparent line either of shades or pattern variance will not be accepted.

C. Tile Layout:
   1. If layout is not shown on drawings, lay tile symmetrically about center of room or space with joints aligned.
   2. No tile shall be less than 150 mm (6 inches) and of equal width at walls. Refer to drawing for layout.

3. Place tile pattern in the same direction; do not alternate tiles.

D. Trim tiles to touch for the length of intersections at pipes and vertical projections, seal joints at pipes with waterproof cement.

E. Application:

1. Apply adhesive uniformly with no bare spots.
   a. Conform to RFC1-TM-6 for joint tightness and for corner intersection unless layout pattern shows random corner intersection.
   b. More than 5 percent of the joints not touching will not be accepted.
2. Roll tile floor with a minimum 45 kg (100 pound) roller. No exceptions.
3. The COR may have test tiles removed to check for non-uniform adhesion, spotty adhesive coverage, and ease of removal. Install new tile for broken removed tile.

F. Installation of Edge Strips:

1. Locate edge strips under center line of doors unless otherwise shown.
2. Set resilient edge strips in adhesive. Anchor metal edge strips with anchors and screws specified.
3. Where tile edge is exposed, butt edge strip to touch along tile edge.
4. Where thin set ceramic tile abuts resilient tile, set edge strip against floor file and against the ceramic tile edge.

3.4 CLEANING AND PROTECTION

A. Clean adhesive marks on exposed surfaces during the application of resilient materials before the adhesive sets. Exposed adhesive is not acceptable.

B. Keep traffic off resilient material for a minimum 48 hours after installation.

C. Clean and polish materials in the following order:

1. For the first two weeks sweep and damp mopped only.
2. After two weeks, scrub resilient materials with a minimum amount of water and a mild detergent. Leave surface clean and free of detergent residue.

D. When construction traffic occurs over tile, cover resilient materials with reinforced kraft paper properly secured and maintained until removal is directed by COR. At entrances and where wheeled vehicles or carts are used, cover tile with plywood, hardboard, or particle board over paper, secured and maintained until removal is directed by COR.

E. When protective materials are removed and immediately prior to acceptance, replace any damage tile, re-clean resilient materials.

3.5 LOCATION

A. Unless otherwise specified or shown, install tile flooring, on floor under areas where casework and other equipment occurs, except where mounted in wall recesses.

- - - E N D - - -

SECTION 09 66 13
PORTLAND CEMENT TERRAZZO FLOORING

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies installation and finishing of thin-set epoxy-resin terrazzo flooring.

1.2 RELATED WORK

A. Concrete Sub Floor: Section 03 30 53, MISCELLANEOUS CAST-IN-PLACE CONCRETE.

B. Sealants installed with terrazzo: Section 07 92 00, JOINT SEALANTS.

1.3 SUBMITTALS

A. Product Data: For each type of product indicated.

B. Shop Drawings: Include terrazzo installation requirements. Include plans, elevations, sections, component details, and attachments to other work. Show layout of the following:

1. Divider strips.
2. Control-joint strips.
3. Accessory strips.
4. Abrasive strips.
5. Stair treads, risers, and landings.
6. Precast terrazzo jointing and edge configurations.
7. Terrazzo patterns.

C. Samples for Initial Selection:

1. Manufacturer's color plates showing the full range of colors and patterns available for each terrazzo type indicated.
2. Samples must match Owner's sample.

D. Samples for Verification:

1. For each type, material, color, and pattern of terrazzo and accessory required showing the full range of color, texture, and pattern variations expected. Label each terrazzo sample to identify manufacturer's matrix color and aggregate types, sizes, and proportions. Prepare samples of same thickness and from same material to be used for the Work in size indicated below:
   a. Terrazzo: 6 inch square Samples.
   b. Precast Terrazzo: 6 inch square Samples.
   c. Accessories: 6 inch long samples of each exposed strip item required.
2. Samples must be submitted until approved by Owner and Architect.

E. Installer Certificates: Signed by manufacturer(s) certifying that installers comply with manufacturer's requirements.
F. Qualification Data: For qualified Installer.
G. Material Certificates: For each type of terrazzo material or product, from manufacturer.
H. Maintenance Data: For terrazzo to include in maintenance manuals.
I. Terrazzo contractor is responsible to provide sequencing floor plan and time schedule for the terrazzo installation, to be coordinated with COR and Architect. Provide floor plan detailing each area and the time associated with its completion. Installation and sequencing must keep all disruptions to a minimum.
F. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.4 QUALITY ASSURANCE

A. Installer Qualifications: A qualified installer who is acceptable to terrazzo manufacturer to install manufacturer's products.
   1. Engage an installer who is certified in writing by terrazzo manufacturer as qualified to install manufacturer's products.
   2. Engage an installer who is a 5 year contractor member of NTMA.
      a. Installer must provide examples of work for review by Owner and Architect.
B. Source Limitations: Obtain primary terrazzo materials from one source from a single manufacturer. Provide secondary materials including patching and fill material, joint sealant, and repair materials of type and from source recommended by manufacturer of primary materials.
C. Source Limitations for Aggregates: Obtain each color, grade, type, and variety of granular materials from one source with resources to provide materials of consistent quality in appearance and physical properties.
D. NTMA Standards: Comply with NTMA's "Terrazzo Specifications and Design Guide" and with written recommendations for terrazzo type indicated unless more stringent requirements are specified.
E. Mockups: Build mockups to verify selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
   1. Build mockups for terrazzo including accessories.
      a. Size: Minimum 100 sq. ft of typical poured-in-place flooring condition for each color and pattern locations directed by Architect.
   2. Approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

F. Flooring installer to provide template of terrazzo layout for Architect approval prior to installation.

G. Pre-installation Conference: Conduct conference at Project site.

1. Review methods and procedures related to terrazzo including, but not limited to, the following:

a. Inspect and discuss condition of substrate and other preparatory work performed by other trades.

b. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.

c. Review special terrazzo designs and patterns.

d. Review dust-control procedures.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Environmental Limitations: Comply with manufacturer's written instructions for substrate temperature, ambient temperature, moisture, ventilation, and other conditions affecting terrazzo installation.

B. Field Measurements: Verify actual dimensions of construction contiguous with precast terrazzo by field measurements before fabrication.

C. Provide permanent lighting or, if permanent lighting is not in place, simulate permanent lighting conditions during terrazzo installation.

D. Close spaces to traffic during terrazzo application and for not less than 24 hours after application unless manufacturer recommends a longer period.

E. Control and collect dust produced by grinding operations. Protect adjacent construction from detrimental effects of grinding operations.

1. Provide dustproof partitions and temporary enclosures to limit dust migration and to isolate areas from noise.

PART 2 - PRODUCTS

2.1 EXPOXY-RESIN TERRAZZO

A. Products: Subject to compliance with requirements, provide comparable products by one of the following that match Owner's sample:

1. Crossfield Products Corp., Dex-O-Tex Division; Terrazzo.
2. General Polymers Corporation; Terrazzo 1100.
3. Key Resin Company; Key Epoxy Terrazzo.
4. Master Terrazzo Technologies LLC; Morricite.
5. Polymerica Incorporated; MasterPiece ETS.
6. Quadrant Chemical Corporation; Quadset Epoxy Terrazzo.
7. TEC Specialty Construction Brands, Inc.; Tuff-Lite Epoxy Terrazzo.
8. Terrazzo & Marble Supply Companies; Terroxy Resin Systems.

9. Other, as approved.

B. Materials:

1. Flexible Reinforcing Membrane: Manufacturer's resinous membrane for substrate crack preparation and reflective crack reduction.
   a. Reinforcement: Fiberglass scrim.
   b. Address substrate cracks with 20% fiberglass scrim.
2. Primer: Manufacturer's product recommended for substrate and use indicated
3. Epoxy-Resin Matrix: Manufacturer's standard recommended for use indicated and in color required for mix indicated.
   a. Physical Properties without Aggregates:
      1. Hardness: 60 to 85 per ASTM D 2240, Shore D.
      2. Minimum Tensile Strength: 3000 psi per ASTM D 638 for a 2-inch specimen made using a "C" die per ASTM D 412.
      3. Minimum Compressive Strength: 10,000 psi per ASTM D 695, Specimen B cylinder.
      4. Chemical Resistance: No deleterious effects by contaminants listed below after seven-day immersion at room temperature per ASTM D 1308.
         a. Distilled water.
         b. Mineral water.
         c. Isopropanol.
         d. Ethanol.
         e. 0.025 percent detergent solution.
         f. 1.0 percent soap solution.
         g. 10 percent sodium hydroxide.
         h. 10 percent hydrochloric acid.
         i. 30 percent sulfuric acid.
         j. 5 percent acetic acid.
   b. Physical Properties with Aggregates: For resin blended with Georgia white marble, ground, grouted, and cured per requirements in NTMA's "Terrazzo Specifications and Design Guide," comply with the following:
      1. Flammability: Self-extinguishing, maximum extent of burning 0.25 inch per ASTM D 635.
      2. Thermal Coefficient of Linear Expansion: 0.0025 inch/inch per deg F for temperature range of minus 12 to plus 140 deg F per ASTM D 696.
4. Aggregates: Complying with NTMA gradation standards for mix indicated and containing no deleterious or foreign matter.

a. Abrasion and Impact Resistance: Less than 40 percent loss per ASTM C 131.
b. 24-Hour Absorption Rate: Less than 0.75 percent.
c. Dust Content: Less than 1.0 percent by weight.
d. Recycled Content: Provide products with average recycled content such that postconsumer recycled content plus one-half of preconsumer recycled content is not less than 10 percent.

5. Finishing Grout: Resin based.

C. Terrazzo: Comply with NTMA's "Terrazzo Specifications and Design Guide" and manufacturer's written instructions for matrix, aggregate and marble-chip proportions and mixing.
1. Formulated Mix Color and Pattern: As indicated on Drawings.

2.2 STRIP MATERIALS

A. Thin-Set Divider Strips:
1. Coordinate size and shape with drawings.
2. Material: Aluminum
3. Radiused version may occur, coordinate with drawings.

B. Heavy-Top Divider Strips: L-type angle in depth required for topping thickness indicated.
1. Bottom-Section Material: Galvanized steel
2. Top-Section Material: Aluminum
3. Top-Section Width: 1/8 inch

C. Control-Joint Strips: Separate, double L-type angles, positioned back to back, that match material, thickness, and color of divider strips and in depth required for topping thickness indicated.
1. All existing substrate saw cuts shall be honored with control-joint strips.
2. Any control-joint strips required based on existing conditions shall be submitted and approved by Architect prior to pouring.
3. Any control-joint strips required based on existing conditions shall be masked and not visible.

2.3 MISCELLANEOUS ACCESSORIES

A. Strip Adhesive: Epoxy-resin adhesive recommended by adhesive manufacturer for this use and acceptable to terrazzo manufacturer.
1. Use adhesives that have a VOC content of 70 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

B. Anchoring Devices:
1. Strips: Provide mechanical anchoring devices for strip materials as required for secure attachment to substrate.

2. Precast Terrazzo: Provide mechanical anchoring devices as recommended by fabricator for proper anchorage and support of units for conditions of installation and support.

C. Patching and Fill Material: Terrazzo manufacturer's resinous product approved and recommended by manufacturer for application indicated.

D. Joint Compound: Terrazzo manufacturer's resinous product approved and recommended by manufacturer for application indicated.

E. Cleaner: Chemically neutral cleaner with pH factor between 7 and 10 that is biodegradable, phosphate free, and recommended by sealer manufacturer for use on terrazzo type indicated.

F. Sealer: Slip- and stain-resistant penetrating-type sealer that is chemically neutral with pH factor between 7 and 10; does not affect color or physical properties of terrazzo; is recommended by sealer manufacturer; and complies with NTMA's "Terrazzo Specifications and Design Guide" for terrazzo type indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and areas, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance.

B. Proceed with installation only after unsatisfactory conditions, including levelness tolerances, have been corrected.

3.2 PREPERATION

A. Clean substrates of substances, including oil, grease, and curing compounds, that might impair terrazzo bond. Provide clean, dry, and neutral substrate for terrazzo application.

B. Concrete Slabs:

1. Provide sound concrete surfaces free of laitance, glaze, efflorescence, curing compounds, form-release agents, dust, dirt, grease, oil, and other contaminants incompatible with terrazzo.
   a. Shot-blast surfaces with an apparatus that abrades the concrete surface, contains the dispensed shot within the apparatus, and recirculates the shot by vacuum pickup.
   b. Repair damaged and deteriorated concrete according to terrazzo manufacturer's written recommendations.
   c. Use patching and fill material to fill holes and depressions in substrates according to terrazzo manufacturer's written instructions.
2. Verify that concrete substrates are visibly dry and free of moisture.

3. Moisture Testing:
   a. Test for moisture content by method recommended in writing by terrazzo manufacturer. Proceed with installation only after substrates pass testing.

C. Protect other work from dust generated by grinding operations. Control dust to prevent air pollution and comply with environmental protection regulations.
   1. Erect and maintain temporary enclosures and other suitable methods to limit dust migration and to ensure adequate ambient temperatures and ventilation conditions during installation.

D. Installation of terrazzo indicates acceptance of surfaces and conditions.

E. Flooring installer to provide template of terrazzo layout for Architect approval prior to installation.

F. Field layout of epoxy-resin terrazzo and divider materials must be approved by Owner and Architect prior to start of pouring.

G. Coordinate final grinding, polishing and clean up terrazzo flooring with installation of adjacent wall finishes and bases.

3.3 EPOXY-RESIN TERRAZZO INSTALLATION

A. General:
   1. Comply with NTMA's written recommendations for terrazzo and accessory installation.
   2. All finish work to be completed in full 750 days from notice to proceed. Note: final wall/base finish installation to be completed after the terrazzo installation. Additional temporary partitions may be required due to the sequencing schedule. Maintain public access/egress throughout terrazzo installation, work may need to be done off-hours, coordinate with COR.
   3. Place, rough grind, grout, cure grout, fine grind, and finish terrazzo according to manufacturer's written instructions and NTMA's "Terrazzo Specifications and Design Guide."
   4. Installation Tolerance: Limit variation in terrazzo surface from level to 1/4 inch in 10 feet; noncumulative.
   5. Ensure that matrix components and fluids from grinding operations do not stain terrazzo by reacting with divider and control-joint strips.
   6. Delay fine grinding until heavy trade work is complete and construction traffic through area is restricted.

B. Thickness: 3/8 inch nominal.

C. Flexible Reinforcing Membrane:
   1. Prepare and pre-fill substrate cracks with membrane material.

2. Install membrane to produce full substrate coverage in areas to receive terrazzo.
3. Reinforce membrane with fiberglass scrim.
4. Prepare membrane according to manufacturer's written instructions before applying substrate primer.

D. Primer: Apply to terrazzo substrates according to manufacturer's written instructions.

E. Strip Materials:
1. Divider and Control-Joint Strips:
a. Locate divider strips in locations indicated.
b. Install control-joint strips back to back directly above concrete-slab control joints.
c. Install control-joint strips with 1/8-inch gap between strips, and install sealant in gap.
d. Install strips in adhesive setting bed without voids below strips, or mechanically anchor strips as required to attach strips to substrate, as recommended by strip manufacturer.
2. Accessory Strips: Install accessory strips as required to provide a complete installation.
3. Abrasive Strips: Install with surface of abrasive strip positioned 1/16 inch higher than terrazzo surface.

F. Fine Grinding: Grind with stones 120 grit or finer until all grout is removed from surface. Repeat rough grinding, grout coat, and fine grinding if large voids exist after initial fine grinding. Produce surface with a minimum of 70 percent aggregate exposure.

G. Repair: Remove and replace terrazzo areas that evidence lack of bond with substrate. Cut out terrazzo areas in panels defined by strips and replace to match adjacent terrazzo, or repair panels according to NTMA's written recommendations, as approved by Architect.

3.4 CLEANING AND PROTECTION

A. Cleaning:
1. Remove grinding dust from installation and adjacent areas.
2. Wash surfaces with cleaner according to NTMA's written recommendations and manufacturer's written instructions; rinse surfaces with water and allow to dry thoroughly.

B. Sealing:
1. Seal surfaces according to NTMA's written recommendations.
2. Apply sealer according to sealer manufacturer's written instructions.

C. Protection: Provide final protection and maintain conditions, in a manner acceptable to Installer, that ensure that terrazzo is without damage or deterioration at time of Substantial Completion.

- - - E N D - - -

SECTION 09 68 00
CARPETING

PART 1 - GENERAL

1.1 DESCRIPTION

Section specifies carpet, edge strips, adhesives, and other items required for complete installation.

1.2 RELATED WORK

A. Resilient wall base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

B. Wood base: Section 06 20 00, FINISH CARPENTRY AND MILLWORK.

1.3 QUALITY ASSURANCE

1. Carpet installed by mechanics certified by the Floor Covering Installation Board.
2. Certify and label the carpet that it has been tested and meets criteria of CRI IAQ Carpet Testing Program for indoor air quality.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Product Data:

1. Manufacturer’s catalog data and printed documentation stating physical characteristics, durability, resistance to fading and flame resistance characteristics for each type of carpet material and installation accessory.
2. Manufacturer’s printed installation instructions for the carpet, including preparation of installation substrate, seaming techniques and recommended adhesives and tapes.
3. Manufacturer’s certificate verifying carpet containing recycled materials include percentage of recycled materials as specified.

C. Samples:

1. Carpet: "Production Quality" samples 300 x 300 mm (12 x 12 inches) of carpets, showing quality, pattern and color specified on finish plan and material legend.
2. Floor Edge Strip (Molding): 150 mm (6 inches) long of each color and type specified.
3. Base Edge Strip (Molding): 150 mm (6 inches) long of each color specified.

D. Shop Drawings: Installers layout plan showing seams and cuts for carpet module.

E. Maintenance Data: Carpet manufacturer's maintenance instructions describing recommended type of cleaning equipment and material, spotting and cleaning methods and cleaning cycles.

F. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.5 DELIVERY AND STORAGE

A. Deliver carpet in manufacturer's original wrappings and packages clearly labeled with manufacturer's name, brand, name, size, dye lot number and related information.

B. Deliver adhesives in containers clearly labeled with manufacturer's name, brand name, number, installation instructions, safety instructions and flash points.

C. Store in a clean, dry, well ventilated area, protected from damage and soiling. Maintain storage space at a temperature above 16 degrees C (60 degrees F) for 2 days prior to installation.

1.6 ENVIRONMENTAL REQUIREMENTS

Areas in which carpeting is to be installed shall be maintained at a temperature above 18 degrees C (65 degrees F) to 35 degrees C (95 degrees F) for 24 hours before installation, during installation and after installation. Traffic or movement of furniture or equipment in carpeted area shall not be permitted for 24 hours after installation. Other work which would damage the carpet shall be completed prior to installation of carpet.

1.7 WARRANTY

Carpet and installation subject to terms of "Warranty of Construction" article in Bid Solicitation GENERAL CONDITIONS except that warranty period is extended to two years. Carpet to have Lifetime Limited Wear and Backing Warranty.

1.8 APPLICABLE PUBLICATIONS

A. Publication listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Association of Textile Chemists and Colorists (AATCC):

AATCC 16-98.....Colorfastness to Light

AATCC 129-01.....Colorfastness to Ozone in the Atmosphere under High Humidities

AATCC 134-01.....Electric Static Propensity of Carpets

AATCC 165-99.....Colorfastness to Crocking: Carpets-AATCC Crockmeter Method

C. American Society for Testing and Materials (ASTM):

ASTM D1335-98.....Tuft Bind of Pile Yarn Floor Coverings

ASTM D3278-97.....Flash Point of Liquids by Small Scale Closed-Cup Apparatus

ASTM D5252-98.....Operation of the Hexapod Tumble Drum Tester

ASTM D5417-99.....Operation of the Vettermann Drum Tester

ASTM E648-00.....Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source

D. The Carpet and Rug Institute (CRI):

CRI 104-96.....Installation of Commercial Carpet

PART 2 - PRODUCTS

2.1 CARPET

A. Physical Characteristics:

1. Carpet free of visual blemishes, streaks, poorly dyed areas, fuzzing of pile yarn, spots or stains and other physical and manufacturing defects.
2. Manufacturers standard construction commercial carpet:
   a. Modular Tile: 61 cm (24 inches) or 45.75 cm(18 inches)square tile.
3. Provide static control to permanently control static build up to less than 3.5 KV when tested at 20 percent relative humidity and 21 degrees C (70 degrees F) in accordance with AATCC 134.
4. Pile Height: .132 or .103 inches.
5. Pile Fiber: 100% Antron Legacy.
6. Pile Type: multilevel pattern loop and multilevel pattern cut/loop.
7. Backing materials: Manufacturer’s Standard for glue-down installation.
8. Flammability and Critical Radiant Flux Requirements:
   a. Test Carpet in accordance with ASTM E 648.
   b. Class I: Not less than 0.45 watts per square centimeter.
   c. Class II: Not less than 0.22 watts per square centimeter.
   d. Carpet in corridors, exits and Medical Facilities: Class I.
9. Density: Average Pile Yarn Density (APYD):
   a. Corridors, lobbies, entrances, common areas or multipurpose rooms, open offices, waiting areas and dining areas: Minimum APYD 6000.
   b. Other areas: Minimum APYD 4000.

2.2 ADHESIVE AND CONCRETE PRIMER

A. Release adhesives for modular tile carpet in accordance with written instructions by carpet manufacturer. Adhesive to be manufacturer’s

recommended adhesive. Install per manufacturer's installation recommendations.

2.3 SEAMING TAPE

A. Permanently resistant to carpet cleaning solutions, steam, and water.
B. Recommended by carpet manufacturer.

2.4 EDGE STRIPS (MOLDING)

A. Vinyl Edge Strip:
   1. Beveled floor flange minimum 50 mm (2 inches) wide.
   2. Beveled surface to finish flush with carpet for tight joint and other side to floor finish.

2.5 LEVELING COMPOUND (FOR CONCRETE FLOORS)

A. Provide Portland cement bases polymer modifier with latex or polyvinyl acetate resin manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.
B. Determine the type of underlayment selected for use by condition to be corrected.

PART 3 - EXECUTION

3.1 SURFACE PREPARATION

A. Examine surfaces on which carpeting is to be installed.
B. Clean floor of oil, waxy films, paint, dust and deleterious substances that prevent adhesion, leave floor dry and cured, free of residue from curing or cleaning agents and existing carpet materials.
C. Correct conditions which will impair proper installation, including trowel marks, pits, dents, protrusions, cracks or joints.
D. Fill cracks, joints depressions, and other irregularities in concrete with leveling compound.
   1. Do not use adhesive for filling or leveling purposes.
   2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
   3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joint lines.
E. Test new concrete subfloor prior to adhesive application for moisture and surface alkalinity per CRI 104 Section 6.3.1 or per ASTM E1907.

3.2 CARPET INSTALLTION

A. Do not install carpet until work of other trades including painting is complete and dry.
B. Install in accordance with CRI 104 direct glue down installation.
   1. Relax carpet in accordance with Section 6.4.
   2. Comply with indoor air quality recommendations noted in Section 6.5.

3. Maintain temperature in accordance with Section 15.3.

C. Secure carpet to subfloor of spaces with adhesive applied as recommended by carpet manufacturer.

D. Follow carpet manufacturer's recommendations for matching pattern and texture directions.

E. Cut openings in carpet where required for installing equipment, pipes, outlets, and penetrations.

1. Bind or seal cut edge of sheet carpet and replace flanges or plates.
2. Use additional adhesive to secure carpets around pipes and other vertical projections.

F. Carpet Modules:

1. Install per CRI 104, Section 13, Adhesive Application.
2. Lay carpet modules as indicated on finish drawings.
3. Install carpet modules so that cleaning methods and solutions do not cause dislocation of modules.
4. Lay carpet modules uniformly to provide tight flush joints free from movement when subject to traffic.

3.3 EDGE STRIPS INSTALLATION

A. Install edge strips over exposed carpet edges adjacent to uncarpeted finish flooring.

B. Anchor vinyl edge strip to floor with adhesive apply adhesive to edge strip and insert carpet into lip and press lip down over carpet.

3.4 PROTECTION AND CLEANING

A. Remove waste, fasteners and other cuttings from carpet floors.

B. Vacuum carpet and provide suitable protection. Do not use polyethylene film.

C. Do not permit traffic on carpeted surfaces for at least 48 hours after installation. Protect the carpet in accordance with CRI 104.

D. Do not move furniture or equipment on unprotected carpeted surfaces.

E. Just before final acceptance of work, remove protection and vacuum carpet clean.

- - - E N D - - -

SECTION 09 72 31
POLYPROPYLENE FABRIC WALL COVERINGS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies fabric wall covering of melded non-woven textile and woven xorel wallcovering.

1.2 RELATED WORK

A. Color, pattern, type and location of wall fabric are indicated on drawings.

B. Reveals and moldings: Section 06 20 00, FINISH CARPENTRY AND MILLWORK, and Section 09 29 00, GYPSUM BOARD.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Samples:

1. Fabric wall covering, each type and pattern as specified on finish plan, size, 450 mm (18 inch) long, full width of mill run, each color.

C. Manufacturer's Literature and Data:

1. Primer and adhesive.
2. Complete instructions for installation of wall covering.
3. Maintenance instructions for each type of wall covering.

D. Certificate: Flame spread, and smoke density factors.

E. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.4 QUALITY ASSURANCE

A. Before proceeding with the work under this Section, and in coordination with other trades, finish one complete space of each type (color and pattern) of wall covering showing selected colors, textures, materials and workmanship.

B. After approval, the sample spaces or items shall serve as a standard for similar work throughout the building.

1.5 DELIVERY, STORAGE AND HANDLING

A. Deliver wall coverings, sealers, adhesive and accessories specified, to the job site in sealed, labeled containers, each bearing the manufacturer's names, brand names and color designations.

B. Store wall covering materials laid flat, not upright, in a dry area with heat maintained at 16 °C (60 °F) minimum with humidity normal to the space or area where wall covering is to be installed.

1.6 JOB CONDITIONS

A. Temperatures:
   1. Do not start wall covering work until surfaces and materials have been maintained at 16 °C (60 °F) minimum, or higher if recommended by wall covering manufacturer, for three days before work begins.
   2. Maintain minimum temperature of 16 °C (60 °F) during the work and until primers and adhesives have fully dried or cured.

B. Ventilation: Provide continuous ventilation as required to rid the spaces in which the wall coverings are being installed of volatile compounds given off by the wall coverings, sealers and adhesives and as recommended by the product manufacturer for full drying or curing.

C. Protect other surfaces from damage which may be caused by this work. Provide drop cloths, shields and protective equipment to prevent primers, adhesives or wall covering from fouling adjacent surfaces and in particular, storage and preparation areas.

D. Store flammable rubbish, waste, cloths and materials which may constitute a fire hazard, in closed metal containers. Daily remove and properly dispose of flammable wastes from the site.

PART 2 - PRODUCTS

2.1 FABRIC WALL COVERING

A. Thermally Bonded Composition in 100% Polyester-Melded and 100% Polyethylene.

B. Xorel Wallcovering (or Equal), Paper Backed.
   1. Utilize un-backed product for wrap around filler in joiner reveal.

C. Flame spread rating of 0-20 and smoke development rating of 0-25 when tested in accordance with ASTM E84.

D. Mildew Resistant

E. Fabric Type Properties:

1. Construction	100% Polyester Thermally Bonded Composition or 100% Xorel
2. Face Yarn Surface Texture-	Gentle Emboss
3. Weight	14 oz. yd and 12 oz. yd.
4. Width	54” and 52”2.2 PRIMER AND ADHESIVE

Mildew resistant type recommended by the wall covering manufacturer for use on substrate to receive the fabric wall covering.

PART 3 - EXECUTION

3.1 SURFACE CONDITION

1. Do not apply wall covering to rough surfaces or which have stains that will bleed through the wall covering. Fill cracks and holes and sand rough spots smooth. Masonry and concrete walls shall have flush joints. Coat these walls with cement plaster or wall/liner as substrate preparation.
2. Surfaces to receive wall covering shall be thoroughly dry. Test moisture content of plaster, concrete, and masonry walls with an electric moisture meter. The moisture shall not be more than 5 percent.
3. Prime surfaces of walls as required by manufacturer's instructions. Primer shall be completely dry before adhesive is applied.
4. Existing surfaces should be clean; free of mildew or loose or flakey paint; and, smooth before the application of primer, and adhesive.

3.2 INSTALLATION

A. Install according to manufacturer's installation instructions. Clean up adhesive spillage with recommended cleaners.

B. When installation is complete, clean per manufacturer’s instructions.

3.3 CLEAN-UP

Upon completion of work, leave wall covering free of dirt or soil.

- - - E N D - - -

SECTION 09 75 20
QUARTZ SURFACES

PART 1-GENERAL

1.1 DESCRIPTION

This section specifies vertical and trim quartz surface products used as base, countertops and backsplash, wall cladding/wainscoting.

1.2 RELATED WORK

A. Section 06 20 00, FINISH CARPENTRY AND MILLWORK.

1.3 SUBMITTALS

A. Product data:
   1. For each type of product indicated.

B. Shop drawings:
   1. Show location of each item, dimensioned plans and elevations, large-scale details, attachment devices and other components.
      a. Show full-size details, edge details, attachments, etc.

C. Samples:
   1. For each type of product indicated:
      a. Submit minimum 6-inch by 6-inch sample in specified color.
      b. Cut sample and seam together for representation of exposed seam.
      c. Indicate full range of color and pattern variation.
   2. Approved samples will be retained as a standard for work.

D. Product data:
   1. Indicate product description, fabrication information and compliance with specified performance requirements.

E. Product certificates:
   1. For each type of product, signed by product manufacturer.

F. Fabricator/installer qualifications:
   1. Provide copy of registration number.

G. Manufacturer certificates:
   1. Signed by manufacturers certifying that they comply with requirements.

H. Maintenance data:

1. Submit manufacturer's care and maintenance data.
   a. Maintenance kit for finishes shall be submitted.
2. Include in project closeout documents.

E. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.4 QUALITY ASSURANCE

A. Qualifications:
   1. Shop that employs skilled workers who custom fabricate products similar to those required for this project and whose products have a record of successful in-service performance.

B. Fabricator/installer qualifications:
   1. Work of this section shall be by a certified fabricator/installer, certified in writing by the manufacturer.

C. Applicable standards:
   1. Standards of the following, as referenced herein:
      a. American National Standards Institute (ANSI)
      b. American Society for Testing and Materials (ASTM)
      c. National Electrical Manufacturers Association (NEMA)
   2. Fire test response characteristics:
      a. Provide with the following Class A (Class I) surface burning characteristics as determined by testing identical products per UL 723 (ASTM E 84) or another testing and inspecting agency acceptable to authorities having jurisdiction:
         1) Flame Spread Index: 25 or less.
         2) Smoke Developed Index: 450 or less.

D. Coordination drawings:
   1. Shall be prepared indicating:
      a. Electrical work
      b. Miscellaneous steel for the general work.
      c. Indicate location of all walls (rated and non-rated), blocking locations and recessed wall items, etc.
   2. Content:
      a. Project-specific information, based on field verified dimensions; drawn accurately to scale.
      b. Do not base coordination drawings on reproductions of the contract documents or standard printed data.

c. Indicate dimensions shown on the contract drawings and make specific note of dimensions that appear to be in conflict with submitted equipment and minimum clearance requirements.

d. Provide alternate sketches to designer for resolution of such conflicts.

1) Minor dimension changes and difficult installations will not be considered changes to the contract.

3. Drawings shall:

a. Be produced in 1/2-inch scale for all fabricated items.

4. Drawings must be complete and submitted to the architect within 60 days after award of contract for record only.

a. No review or approval will be forthcoming.

b. Coordination drawings are required for the benefit of contractor's fabricators/installers as an aid to coordination of their work so as to eliminate or reduce conflicts that may arise during the installation of their work.

E. Job mock-up:

1. Prior to fabrication of architectural millwork, erect sample unit to further verify selections made under sample submittals and to demonstrate the quality of materials and execution.

2. Mock-up shall be edging, seams, butt joints, etc.

3. Build the mock-up to comply with the contract documents and install in a location as directed by the architect.

4. Notify the architect two weeks in advance of the date of when the mock-up will be delivered.

5. Should mock-up not be approved, re-fabricate and reinstall until approval is secured.

a. Remove rejected units from project site.

6. After approval, the mock-up may become a part of the project.

7. This mock-up, once approved, shall serve as a standard for judging quality of all completed units of work.

F. Pre-installation conference:

1. Conduct conference at project site to comply with requirements in Division 1.

G. Field verification:

1. Contractor to field verify all dimensions in field prior

to ordering material.

1.5 DELIVERY, STORAGE AND HANDLING

A. Deliver no components to project site until areas are ready for installation.

B. Store components indoors prior to installation.

C. Handle materials to prevent damage to finished surfaces.

1. Provide protective coverings to prevent physical damage or staining following installation for duration of project.

1.6 WARRANTY

A. Provide manufacturer's 10-year warranty against defects in materials.

1. Warranty shall provide material to repair or replace defective materials.

2. Damage caused by physical or chemical abuse or damage from excessive heat will not be warranted.

1.7 MAINTENANCE

A. Provide maintenance requirements as specified by the manufacturer.

PART 2 — PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers:

1. Subject to compliance with requirements, provide products by one of the following:

a. Zodiaq, Silestone, Cambria basis of design, or approved equal.

2.2 MATERIALS

A. Material:

1. Homogeneous quartz surfaces material.

2. Material shall have minimum physical and performance properties specified.

B. Thickness:

1. 2 cm (3/4") for wall base, panels and backsplash.

2. 3 cm (1 1/8") for countertops.

C. Edge treatment:

1. As indicated.

D. Seam width:

1. 1/8" unless otherwise specified.

E. Performance characteristics: physical properties data sheet:

Property	**Typical Result**	**Test Procedure**
Flexural Strength	>5,300 psi	ASTM D 790
Flexural Modulus	5.3-5.7E^{6} psi	ASTM D 790
Flexural Elongation	>0.1%	ASTM D 790
Compression Strength (Dry)	~27,000 psi	ASTM C 170
Compression Strength (Wet)	~24,000 psi	ASTM C 170
Hardness	7	Mohs' Hardness Scale
Thermal Expansion	1.45 x 10^{-5} in./in./°C	ASTM D 696
Gloss (60° Gardner)	45-50	ANSI Z 124
Colorfastness	Passes	ANSI Z 124.6.5.1
Wear and Cleanability	Passes	ANSI Z 124.6.5.3
Stain Resistance	Passes	ANSI Z 124.6 (stain 5.2, chemical 5.5, cigarette 5.4 resistances)
Fungal and Bacterial Resistance	No growth	ASTM G 21 & G 22
High Temperature Resistance (356°F)	None to slight effect	NEMA LD 3.3.6*
Boiling Water Resistance	None to slight effect	NEMA LD 3.3.5*
Freeze-Thaw Cycling	Unaffected	ASTM C 1026
Point Impact	Passes	ANSI Z 124.6.4.2
Ball Impact	164 inches	NEMA LD 3.3.8*
Slip Resistance	Above 0.80 for textured models	ASTM C 1028
Static Coefficient of Friction (as received)	0.89/0.61 (wet/dry)	ASTM C 1028
Static Coefficient of Friction (with renovator)	0.87/0.65 (wet/dry)	ASTM C 1028
Abrasion Resistance	139	ASTM C 501
Specific Gravity	2.44	ASTM D 792
Density	~2400 kg/m3	
Water Absorption	0.12%	ASTM C 373
Long- and Short-Term	<0.04%	ASTM D 570
Moisture Expansion	<0.01% on average	ASTM C 370
Toxicity	Passes, LC50=68-128	Pittsburgh Protocol

Flammability	For all colors tested (Class I and Class A)	ASTM E 84, UL 723 and NFPA 255
Flame Spread Index	FSI <10 for 3 cm and <15 for 2 cm	
Smoke Developed Index	SDI <50 for 3 cm and <100 for 2 cm	
Nominal Thickness	2 cm and 3 cm	
Nominal Weight	10 lb./ft.2 (2 cm) 15 lb./ft.2 (3 cm)	

* NEMA results based on the NEMA LD 3-2000

2.3 ACCESSORIES

A. Joint adhesive:

1. Manufacturer's approved adhesive to create color-matched seam.

B. Panel adhesive:

1. Manufacturer's standard panel adhesive.

2.4 FACTORY FABRICATION

A. Shop assembly:

1. Fabricate components to greatest extent practical to sizes and shapes indicated, in accordance with approved shop drawings and manufacturer's printed instructions and technical bulletins.
2. Form joints, if required, between components using manufacturer's standard joint adhesives.
3. Provide factory cutouts for plumbing fittings and bath accessories as indicated on the drawings.
4. Rout and finish component edges with clean, sharp returns.
   a. Rout cutouts, radii and contours to template.
   b. Smooth edges.

PART 3 — EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions, with fabricator present for compliance with requirements for installation tolerances, and other conditions affecting performance of work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install components plumb, level and rigid, scribed to adjacent finishes, in accordance with approved shop drawings and product data.

1. Provide product in the largest pieces available.
2. Form field joints using manufacturer's recommended adhesive, with joints inconspicuous in finished work.
   a. Exposed joints/seams shall not be allowed.
3. Reinforce field joints as required using manufacturer's written instructions.
4. Cut and finish component edges with clean, sharp returns.
5. Route radii and contours to template.
6. Carefully dress joints smooth, remove surface scratches and clean entire surface.

3.3 REPAIR

A. Repair or replace damaged work that cannot be repaired to architect's satisfaction.

3.4 CLEANING AND PROTECTION

A. Keep components clean during installation.

B. Remove adhesives, sealants and other stains.

- - - E N D - - -

SECTION 09 91 00
PAINTING

PART 1-GENERAL

1.1 DESCRIPTION

A. Section specifies field painting.

B. Section specifies prime coats which may be applied in shop under other sections.

C. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.

D. Section includes identification for Smoke and Fire Barriers and Partitions in accordance with the Life Safety Plan.

1.2 RELATED WORK

A. Shop prime painting of steel and ferrous metals: Division 05 - METALS, Division 08 - DOORS AND WINDOWS, Division 10 - SPECIALTIES, Division 21 - FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 - HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, Division 27 - COMMUNICATIONS, and Division 28 - ELECTRONIC SAFETY AND SECURITY sections.

B. Contractor option: Prefinished flush doors with transparent finishes: Section 08 14 00, INTERIOR WOOD DOORS.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:
Before work is started, or sample panels are prepared, submit manufacturer's literature, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.

C. Sample Panels:

1. After painters' materials have been approved and before work is started submit sample panels showing each type of finish and color specified.
2. Panels to show color: Composition board, 100 by 250 by 3 mm (4 inch by 10 inch by 1/8 inch).

3. Panel to show transparent finishes: Wood of same species and grain pattern as wood approved for use, 100 by 250 by 3 mm (4 inch by 10 inch face by 1/4 inch) thick minimum, and where both flat and edge grain will be exposed, 250 mm (10 inches) long by sufficient size, 50 by 50 mm (2 by 2 inch) minimum or actual wood member to show complete finish.
4. Attach labels to panel stating the following:
   a. Federal Specification Number or manufacturers name and product number of paints used.
   b. Specification code number specified on Finish Plan and Material Legend.
   c. Product type and color.
   d. Name of project.
5. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.

D. Sample of identity markers if used.

E. Manufacturers' Certificates indicating compliance with specified requirements:
   1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.

F. Submit Ohio VOC EPA compliant products only.

G. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.4 DELIVERY AND STORAGE

A. Deliver materials to site in manufacturer's sealed container marked to show following:
   1. Name of manufacturer.
   2. Product type.
   3. Batch number.
   4. Instructions for use.
   5. Safety precautions.
   6. VOC content

B. In addition to manufacturer's label, provide a label legibly printed as following:
   1. Federal Specification Number, where applicable, and name of material.
   2. Surface upon which material is to be applied.
   3. If paint or other coating, state coat types; prime, body or finish.

C. Maintain space for storage, and handling of painting materials and equipment in a neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.

D. Store materials at site at least 24 hours before using, at a temperature between 18 and 30 degrees C (65 and 85 degrees F).

1.5 MOCK-UP PANEL

A. Before starting application of water paint mixtures, apply paint as specified to an area, not to exceed 9 m^2 (100 ft^2), selected by COR.

B. Finish and texture approved by COR will be used as a standard of quality for remainder of work.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. American Conference of Governmental Industrial Hygienists (ACGIH):
ACGIH TLV-BKLT-1992.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)
ACGIH TLV-DOC.....Documentation of Threshold Limit Values and Biological Exposure Indices, (Sixth Edition)

C. American National Standards Institute (ANSI):
A13.1-96.....Scheme for the Identification of Piping Systems

D. American Society for Testing and Materials (ASTM):
D260-86.....Boiled Linseed Oil

E. Commercial Item Description (CID):
A-A-1555.....Water Paint, Powder (Cementitious, White and Colors) (WPC) (cancelled)
A-A-3120.....Paint, For Swimming Pools (RF) (cancelled)

F. Federal Specifications (Fed Spec):
TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For Waterproofing Concrete and Masonry Walls) (CEP)

G. Steel Structures Painting Council (SSPC):
SSPC SP 1-00.....Solvent Cleaning
SSPC SP 2-00.....Hand Tool Cleaning
SSPC SP 3-00.....Power Tool Cleaning

PART 2 - PRODUCTS

2.1 MATERIALS

A. Wood Sealer: MPI 128 (satin) or MPI 130 (gloss)

C. Identity markers options:
1. Pressure sensitive vinyl markers.
2. Snap-on coil plastic markers.

D. Interior Primer Sealer: MPI 45.

E. Interior Enamel Undercoat: MPI 107.

F. Interior Latex Primer Sealer: MPI 50.

G. Interior Latex, MPI Gloss Level Eg-Shell: MPI 144.

H. Interior Latex, Flat, MPI Gloss Level 1: MPI 143.

I. Interior Latex, Flat, MPI Gloss Level 3: MPI 147.

J. Interior Wood Stain, Semi-Transparent (WS): MPI 90.

K. Wood Filler Paste: MPI 91.

2.2 PAINT PROPERTIES

A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.

B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

2.3 REGULATORY REQUIREMENTS

A. Paint materials shall conform to the restrictions of the local Environmental and Toxic Control jurisdiction.

1. Volatile Organic Compounds (VOC): Use MPI GPS-2-08 compliant products only.
2. Lead-Base Paint:
   a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
3. Asbestos: Materials shall not contain asbestos.
4. Chromate, Cadmium, Mercury, and Silica: Materials shall not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
5. Human Carcinogens: Materials shall not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
6. Use high performance acrylic paints in place of alkyd paints, where possible.

PART 3 - EXECUTION

3.1 JOB CONDITIONS

A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.

1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.

2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each days work.

B. Atmospheric and Surface Conditions:

1. Do not apply coating when air or substrate conditions are:
   a. Less than 3 degrees C (5 degrees F) above dew point.
   b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the Contracting Officer and the product manufacturer. Under no circumstances shall application conditions exceed manufacturer recommendations.
2. Maintain interior temperatures until paint dries hard.
3. Do no exterior painting when it is windy and dusty.
4. Do not paint in direct sunlight or on surfaces that the sun will soon warm.
5. Apply only on clean, dry and frost free surfaces except as follows:
   a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces where allowed by manufacturer's printed instructions.
   b. Dampened with a fine mist of water on hot dry days concrete and masonry surfaces to which water thinned acrylic and cementitious paints are applied to prevent excessive suction and to cool surface.
6. Varnishing:
   a. Apply in clean areas and in still air.
   b. Before varnishing vacuum and dust area.
   c. Immediately before varnishing wipe down surfaces with a tack rag.

3.2 SURFACE PREPARATION

A. Method of surface preparation is optional, provided results of finish painting produce solid even color and texture specified with no overlays.

B. General:

1. Remove prefinished items not to be painted such as lighting fixtures, escutcheon plates, hardware, trim, and similar items for reinstallation after paint is dried.
2. Remove items for reinstallation and complete painting of such items and adjacent areas when item or adjacent surface is not accessible or finish is different.
3. See other sections of specifications for specified surface conditions and prime coat.
4. Clean surfaces for painting with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry.

C. Wood:
   1. Sand to a smooth even surface and then dust off.
   2. Sand surfaces showing raised grain smooth between each coat.
   3. Wipe surface with a tack rag prior to applying finish.
   4. Surface painted with an opaque finish:
      a. Coat knots, sap and pitch streaks with MPI 36, E Range of E3 (Knot Sealer) before applying paint.
      b. Apply two coats of MPI 36, E Range of E3 (Knot Sealer) over large knots.
   5. After application of prime or first coat of stain, fill cracks, nail and screw holes, depressions and similar defects with wood filler paste. Sand the surface to make smooth and finish flush with adjacent surface.
   6. Before applying finish coat, reapply wood filler paste if required, and sand surface to remove surface blemishes. Finish flush with adjacent surfaces.
   7. Fill open grained wood such as oak, walnut, ash and mahogany with MPI 91 (Wood Filler Paste), colored to match wood color.
      a. Thin filler in accordance with manufacturer's instructions for application.
      b. Remove excess filler, wipe as clean as possible, dry, and sand as specified.

D. Ferrous Metals:
   1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
   2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning). Exception: where high temperature aluminum paint is used, prepare surface in accordance with paint manufacturer's instructions.
   3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
      a. This includes flat head countersunk screws used for permanent anchors.
      b. Do not fill screws of item intended for removal such as glazing beads.

4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.

E. Gypsum Plaster and Gypsum Board:
1. Remove efflorescence, loose and chalking plaster or finishing materials.
2. Remove dust, dirt, and other deterrents to paint adhesion.
3. Fill holes, cracks, and other depressions with CID-A-A-1272A [Plaster, Gypsum (Spackling Compound) finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

3.3 PAINT PREPARATION

A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
D. Mix two component and two part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.
E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

3.4 APPLICATION

A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.
B. Unless otherwise specified, apply paint in three coats; prime, body, and finish. When two coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.
C. Apply each coat evenly and cover substrate completely.
D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by COR.
E. Finish surfaces to show solid even color, free from runs, lumps, brushmarks, laps, holidays, or other defects.
F. Apply by brush, roller or spray, except as otherwise specified.

G. Do not spray paint in existing occupied spaces unless approved by COR, except in spaces sealed from existing occupied spaces.

H. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

3.5 PRIME PAINTING

A. After surface preparation prime surfaces before application of body and finish coats, except as otherwise specified.

B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.

C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.

D. Prime rebates for stop and face glazing of wood, and for face glazing of steel.

E. Wood and Wood Particleboard:

1. Use same kind of primer specified for exposed face surface.
   a. Interior wood except for transparent finish: MPI 45 (Interior Primer Sealer), thinned if recommended by manufacturer.
   b. Transparent finishes as specified under Transparent Finishes on Wood except Floors and Finish for Wood Floors.
2. Apply MPI 67 (Interior Latex Fire Retardant, Top-Coat (ULC Approved) (FR) to wood for fire retardant finish.

F. Gypsum Board and Hardboard:

1. Surfaces scheduled to have MPI 143 (Interior Latex, Flat), MPI Gloss Level 1 LE) MPI 144 (Interior Latex, MPI Gloss Level Eg-Shell (LE)MPI 147(Interior Latex, Semi-Gloss
2. Primer: MPI 50(Interior Latex Primer Sealer) except use MPI 45 (Interior Primer Sealer) in shower and bathrooms.
3. Surfaces scheduled to receive vinyl coated fabric wallcovering: Use MPI 45 (Interior Primer Sealer).

G. Gypsum Plaster and Veneer Plaster:

1. Surfaces scheduled to receive vinyl coated fabric wallcovering: Use MPI 45 (Interior Primer Sealer).
2. Use MPI 50 (Interior Latex Primer Sealer).

3.6 INTERIOR FINISHES

A. Apply following finish coats over prime coats in spaces or on surfaces.

B. Metal Work:

1. Apply to exposed surfaces.

2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
3. Ferrous Metal, Galvanized Metal, and Other Metals Scheduled:
   a. One coat of MPI 107 (Interior Enamel Undercoat) plus one coat of MPI 151; also acceptable Sherwin Williams Pro Industrial Pre-Catalyzed Epoxy

C. Gypsum Board:
1. One coat of MPI 50(Interior Primer Sealer) MPI 143 (Interior Latex, Flat), MPI Gloss Level 1 LE) MPI 144 (Interior Latex, MPI Gloss Level Eg-Shell (LE) MPI 147(Interior Latex, Semi-Gloss).

D. Wood:
1. Transparent Finishes on Wood Except Floors.
   a. Natural Finish:
      1) One coat of sealer as written in 2.1 E.
      2) Two coats of MPI 130 (Gloss), MPI 128 (Satin).
   b. Stain Finish:
      1) One coat of MPI 90 (Interior Wood Stain, Semi-Transparent (WS)).
      2) Use wood stain of type and color required to achieve finish specified. Do not use varnish type stains.
      3) One coat of sealer as written in 2.1 E.
      4) Two coats of MPI 128 satin or MPI 130 Gloss

3.7 REFINISHING EXISTING PAINTED SURFACES

A. Clean, patch and repair existing surfaces as specified under surface preparation.
B. Remove and reinstall items as specified under surface preparation.
C. Remove existing finishes or apply separation coats to prevent non compatible coatings from having contact.
D. Patched or Replaced Areas in Surfaces and Components: Apply spot prime and body coats as specified for new work to repaired areas or replaced components.
E. Except where scheduled for complete painting apply finish coat over plane surface to nearest break in plane, such as corner, reveal, or frame.
F. In existing rooms and areas where alterations occur, clean existing stained and natural finished wood retouch abraded surfaces and then give entire surface one coat of MPI 128 (Satin) MPI 130 (Gloss).
G. Refinish areas as specified for new work to match adjoining work unless specified or scheduled otherwise.
H. Coat knots and pitch streaks showing through old finish with MPI 36 (Knot Sealer) before refinishing.
I. Sand or dull glossy surfaces prior to painting.

J. Sand existing coatings to a feather edge so that transition between new and existing finish will not show in finished work.

3.8 PAINT COLOR

A. Color and gloss of finish coats as specified on finish drawings and materials legend.

B. For additional requirements regarding color see Articles, REFINISHING EXISTING PAINTED SURFACE and MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE.

C. Coat Colors:

1. Color of priming coat: Lighter than body coat.
2. Color of body coat: Lighter than finish coat.
3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.

D. Painting, Caulking, Closures, and Fillers Adjacent to Casework:

1. Paint to match color of casework where casework has a paint finish.
2. Paint to match color of wall where casework is stainless steel, plastic laminate, or varnished wood.

3.9 MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE

A. Field painting of mechanical and electrical consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.

B. In spaces not scheduled to be finish painted on finish plan paint as specified under paragraph H, colors.

C. Paint various systems specified in Division 02 - EXISTING CONDITIONS, Division 21 - FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 - HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, Division 27 - COMMUNICATIONS, and Division 28 - ELECTRONIC SAFETY AND SECURITY.

D. Paint after tests have been completed.

E. Omit prime coat from factory prime-coated items.

F. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more.

G. Omit field painting of items specified in paragraph, Building and Structural WORK NOT PAINTED.

H. Color:

1. Paint items having no color specified on finish plan to match surrounding surfaces.
2. Paint colors as specified on finish plan except for following:
   a. White: Exterior unfinished surfaces of enameled plumbing fixtures. Insulation coverings on breeching and uptake inside boiler house, drums and drum-heads, oil heaters, condensate tanks and condensate piping.
   b. Gray: Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces), and water and sewage treatment equipment and sewage ejection equipment.
   c. Aluminum Color: Ferrous metal on outside of boilers and in connection with boiler settings including supporting doors and door frames and fuel oil burning equipment, and steam generation system (bare piping, fittings, hangers, supports, valves, traps and miscellaneous iron work in contact with pipe).
   d. Federal Safety Red: Exposed fire protection piping hydrants, post indicators, electrical conducts containing fire alarm control wiring, and fire alarm equipment.
   e. Federal Safety Orange: .Entire lengths of electrical conduits containing feeders 600 volts or more.
   f. Color to match brickwork sheet metal covering on breeching outside of exterior wall of boiler house.

I. Apply paint systems on properly prepared and primed surface as follows:
1. Interior Locations:
   a. Apply one coat of MPI 107 (Interior, Enamel Undercoat) plus one coat of MPI 151; also acceptable Sherwin Williams Pro Industrial Pre-Catalyzed Epoxy to following items:
      1) Metal under 94 degrees C (200 degrees F) of items such as bare piping, fittings, hangers and supports.
      2) Equipment and systems such as hinged covers and frames for control cabinets and boxes, cast-iron radiators, electric conduits and panel boards.
      3) Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.
2. Other exposed locations:
   a. Metal surfaces, except aluminum, of cooling towers exposed to view, including connected pipes, rails, and ladders: Two coats of MPI 1 (Aluminum Paint (AP).
   b. Cloth jackets of insulation of ducts and pipes in connection with plumbing, air conditioning, ventilating refrigeration and heating

systems: One coat of MPI 50 (Interior Latex Primer Sealer) and one coat of MPI 10 (Exterior Latex, Flat (AE) MPI 11 (Exterior Latex Semi-Gloss (AE) MPI 119 (Exterior Latex, High Gloss (acrylic)(AE)

3.10 BUILDING AND STRUCTURAL WORK FIELD PAINTING

A. Painting and finishing of interior and exterior work except as specified under paragraph 3.11 B.
   1. Painting and finishing of new and existing work including colors and gloss of finish selected is specified on finish plan.
   2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
   3. Painting of ferrous metal and galvanized metal.
   4. Painting of wood with fire retardant paint exposed in attics, when used as mechanical equipment space except shingles.
   5. Identity painting and safety painting.

B. Building and Structural Work not Painted:
   1. Prefinished items:
      a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.
      b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.
   2. Finished surfaces:
      a. Hardware except ferrous metal.
      b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.
      c. Signs, fixtures, and other similar items integrally finished.
   3. Concealed surfaces:
      a. Inside dumbwaiter, elevator and duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, above ceilings, attics, except as otherwise specified.
      b. Inside walls or other spaces behind access doors or panels.
      c. Surfaces concealed behind permanently installed casework and equipment.
   4. Moving and operating parts:
      a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices.
      b. Tracks for overhead or coiling doors, shutters, and grilles.
   5. Labels:

a. Code required label, such as Underwriters Laboratories Inc., Inchcape Testing Services, Inc., or Factory Mutual Research Corporation.
b. Identification plates, instruction plates, performance rating, and nomenclature.

6. Galvanized metal:
   a. Exterior chain link fence and gates, corrugated metal areaways, and gratings.
   b. Gas Storage Racks.
   c. Except where specifically specified to be painted.
7. Metal safety treads and nosings.
8. Gaskets.
9. Structural steel encased in concrete, masonry, or other enclosure.
10. Structural steel to receive sprayed-on fire proofing.
11. Ceilings, walls, columns in interstitial spaces.
12. Ceilings, walls, and columns in pipe basements.

3.11 IDENTITY PAINTING SCHEDULE

A. Identify designated service in accordance with ANSI A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels.
   1. Legend may be identified using 2.1 G options or by stencil applications.
   2. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories such as valves, regulators, strainers and cleanouts a minimum of 12 000 mm (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.
   3. Locate Legends clearly visible from operating position.
   4. Use arrow to indicate direction of flow.
   5. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert working pressure shown on drawings where asterisk appears for High, Medium, and Low Pressure designations as follows:
      a. High Pressure - 414 kPa (60 psig) and above.
      b. Medium Pressure - 104 to 413 kPa (15 to 59 psig).
      c. Low Pressure - 103 kPa (14 psig) and below.
      d. Add Fuel oil grade numbers.
   6. Legend name in full or in abbreviated form as follows:

PIPING	COLOR OF EXPOSED PIPING	COLOR OF BACKGROUND	COLOR OF LETTERS	LEGEND BBREVIATIONS
Blow-off		Yellow	Black	Blow-off
Boiler Feedwater		Yellow	Black	Blr Feed
A/C Condenser Water Supply		Green	White	A/C Cond Wtr Sup
A/C Condenser Water Return		Green	White	A/C Cond Wtr Ret
Chilled Water Supply		Green	White	Ch. Wtr Sup
Chilled Water Return		Green	White	Ch. Wtr Ret
Shop Compressed Air		Yellow	Black	Shop Air
Air-Instrument Controls		Green	White	Air-Inst Cont
Drain Line		Green	White	Drain
Emergency Shower		Green	White	Emg Shower
High Pressure Steam		Yellow	Black	H.P. _____*
High Pressure Condensate Return		Yellow	Black	H.P. Ret ____*
Medium Pressure Steam		Yellow	Black	M. P. Stm ____*
Medium Pressure Condensate Return		Yellow	Black	M.P. Ret _____*
Low Pressure Steam		Yellow	Black	L.P. Stm _____*
Low Pressure Condensate Return		Yellow	Black	L.P. Ret _____*
High Temperature Water Supply		Yellow	Black	H. Temp Wtr Sup
High Temperature Water Return		Yellow	Black	H. Temp Wtr Ret
Hot Water Heating Supply		Yellow	Black	H. W. Htg Sup
Hot Water Heating Return		Yellow	Black	H. W. Htg Ret
Gravity Condensate Return		Yellow	Black	Gravity Cond Ret
Pumped Condensate Return		Yellow	Black	Pumped Cond Ret
Vacuum Condensate Return		Yellow	Black	Vac Cond Ret
Fuel Oil - Grade		Green	White	Fuel Oil-Grade __*
Boiler Water Sampling		Yellow	Black	Sample
Chemical Feed		Yellow	Black	Chem Feed
Continuous Blow-Down		Yellow	Black	Cont. B D
Pumped Condensate		Black		Pump Cond
Pump Recirculating		Yellow	Black	Pump-Recirc.
Vent Line		Yellow	Black	Vent
Alkali		Yellow	Black	Alk
Bleach		Yellow	Black	Bleach
Detergent		Yellow	Black	Det
Liquid Supply		Yellow	Black	Liq Sup

Reuse Water		Yellow	Black	Reuse Wtr
Cold Water (Domestic)	White	Green	White	C.W. Dom
Hot Water (Domestic)				
Supply	White	Yellow	Black	H.W. Dom
Return	White	Yellow	Black	H.W. Dom Ret
Tempered Water	White	Yellow	Black	Temp. Wtr
Ice Water				
Supply	White	Green	White	Ice Wtr
Return	White	Green	White	Ice Wtr Ret
Reagent Grade Water		Green	White	RG
Reverse Osmosis		Green	White	RO
Sanitary Waste		Green	White	San Waste
Sanitary Vent		Green	White	San Vent
Storm Drainage		Green	White	St Drain
Pump Drainage		Green	White	Pump Disch
Chemical Resistant Pipe				
Waste		Yellow	Black	Acid Waste
Vent		Yellow	Black	Acid Vent
Atmospheric Vent		Green	White	ATV
Silver Recovery		Green	White	Silver Rec
Oral Evacuation		Green	White	Oral Evac
Fuel Gas		Yellow	Black	Gas
Fire Protection Water				
Sprinkler		Red	White	Auto Spr
Standpipe		Red	White	Stand
Sprinkler		Red	White	Drain

7. Electrical Conduits containing feeders over 600 volts, paint legends using 50 mm (2 inch) high black numbers and letters, showing the voltage class rating. Provide legends where conduits pass through walls and floors and at maximum 6100 mm (20 foot) intervals in between. Use labels with yellow background with black border and words Danger High Voltage Class, 5000 15000 25000.
8. See Sections for methods of identification, legends, and abbreviations of the following:
   a. Conduits containing high voltage feeders over 600 volts: Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS, Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS.

B. Life Safety Partition Identification:

1. Identify partitions above ceilings on both sides of partitions, except within shafts, as indicated by this section.
   a. Locate no more than 6” above finished ceilings.
   b. If no finished ceilings exist, locate in permanently visible location between 7’-6” and 8’-0” above the finished floor.
   c. Stenciled message shall occur not more than 10 feet on center, and no less than once per wall.
2. Stenciled message shall read as follows
   a. "0 HR SMOKE PARTITION"
   b. "1 HR SMOKE BARRIER"
   c. "1 HR FIRE BARREIER"
   d. "2 HR FIRE BARRIER"
   e. Other designations identified in the Life Safety Drawings.
3. Stenciling shall occur in accordance with the Life Safety Plan.
   a. Partitions with more than one rating shall be clearly delineated as to the extent of each rating.
   b. Stencil letter height shall be no less than 2-1/2 inches.
   c. Utilize semi-gloss paint of a color which contrasts with color of substrate.

C. Identify columns in pipe basements and interstitial space:
1. Apply stenciled number and letters to correspond with grid numbering and lettering shown.
2. Paint numbers and letters 100 mm (4 inches) high, locate 450 mm (18 inches) below overhead structural slab.
3. Apply on four sides of interior columns and on inside face only of exterior wall columns.
4. Color:
   a. Use black on concrete columns.
   b. Use white or contrasting color on steel columns.

3.12 PROTECTION CLEAN UP, AND TOUCH-UP

A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

SECTION 10 26 00
WALL AND DOOR PROTECTION

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies corner guards and wall protection.

1.2 RELATED WORK

A. Wood and plastics not specified in this section: Section 06 20 00, FINISH CARPENTRY AND MILLWORK.

B. Gypsum Wallboard not specified in this section: Section 09 29 00, GYPSUM BOARD.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings: Show design and installation details.

C. Manufacturer's Literature and Data:

1. Corner Guards.
2. Hand Rails.

D. Test Report: Showing that resilient material complies with specified fire and safety code requirements.

E. See Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for additional submittal requirements.

1.4 QUALITY ASSURANCE

A. Qualifications:

1. Shop that employs skilled workers who custom fabricate products similar to those required for this project and whose products have a record of successful in-service performance.

B. Fabricator/installer qualifications:

1. Work of this section shall be by a certified fabricator/installer, certified in writing by the manufacturer.

C. Applicable standards:

1. Standards of the following, as referenced herein:
   a. American National Standards Institute (ANSI)
   b. American Society for Testing and Materials (ASTM)
   c. National Electrical Manufacturers Association (NEMA)

D. Pre-installation meeting

1. Prior to the beginning of work, conduct a pre-job conference at the job site; to comply with requirements in Division 1.

1.5 DELIVERY AND STORAGE

A. Deliver materials to the site in original sealed packages or containers marked with the name and brand, or trademark of the manufacturer.

B. Protect from damage from handling and construction operations before, during and after installation.

C. Store in a dry environment of approximately 21° C (70 degrees F) for at least 48 hours prior to installation. Follow manufacturer's storing recommendations.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Society for Testing and Materials (ASTM):

A167-99(R2004).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

B221-06.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes

D256-06.....Impact Resistance of Plastics

D635-06.....Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastics in a Horizontal Position

E84-07.....Surface Burning Characteristics of Building Materials

C. The National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500 Series.....Metal Finishes Manual

D. National Fire Protection Association (NFPA):

80-06.....Standard for Fire Doors and Windows

E. Society of American Automotive Engineers (SAE):

J 1545-05.....Instrumental Color Difference Measurement for Exterior Finishes.

F. Underwriters Laboratories Inc. (UL):

Annual Issue.....Building Materials Directory

PART 2 - PRODUCTS

2.1 MATERIALS

A. Stainless Steel: ASTM A167, Type 302B.

B. Aluminum Extruded: ASTM B221, Alloy 6063, Temper T5 or T6. Aluminum alloy used for colored anodizing coating shall be as required to produce specified color.

2.2 CORNER GUARDS

A. Stainless Steel Corner Guards (CG-1): Fabricate of 1.6 mm (0.0625-inch) thick stainless steel. Form guards of dimensions and to contour shown. Standard dimensions are 3" x 3" angles at 80" tall. Verify actual measurements of guards by field measurement prior to fabrication.

2.3 WALL GUARDS AND HANDRAILS

A. Stainless Steel Wall Guards: Construct wall guard, including brackets, of minimum 4.75 mm (0.1875-inch) thick stainless steel to design shown.

2.4 FASTENERS AND ANCHORS

A. Provide fasteners and anchors as required for each specific type of installation.

B. Where type, size, spacing or method of fastening is not shown or specified, submit shop drawings showing proposed installation details.

2.5 FINISH

A. In accordance with NAAMM AMP 500 series.

B. Stainless Steel: NAAMM finish Number 4.

C. Aluminum

1. Exposed aluminum: AAC22A31 chemically etched medium matte, with clear anodic coating, Class II Architectural, 0.4 mil thick. AA-C22A32 chemically etched medium matte with integrally colored anodic coating, Class II Architectural 0.4 mil thick.
2. Concealed aluminum: Mill finish as fabricated, uniform in color and free from surface blemishes.

D. Resilient Material: Embossed texture and color in accordance with SAE J 1545.

2.6 FABRICATION

A. Comply with requirements indicated for design, dimensions, details, finish, and member sizes, including wall thicknesses of components.

B. Shop-assemble components to the greatest extent possible. Disassemble only as necessary for shipping and handling.

C. Fabricate components with tight seams and joints with exposed edges rolled. Provide surfaces free of evidence of wrinkling, chipping, uneven coloration, dents, and other imperfections. Fabricate members and fittings to produce flush, smooth, and rigid hairline joints.

D. Brackets, Flanges, Fittings, and Anchors: Provide wall brackets, flanges, miscellaneous fittings, and anchors for interconnection of members to other construction.

PART 3 - INSTALLATION

3.1 EXAMINATION

A. Examine areas and conditions in which wall surface protection components and wall protection systems will be installed.

B. Complete finishing operations, including painting, before beginning installation of wall surface protection system materials.

C. Wall surfaces to receive impact-resistant wall covering materials shall be dry and free from dirt, grease, loose paint, and scale.

D. Do not proceed with installations until unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Properly prepare substrate and clean to remove dust, debris, and loose particles.

3.3 INSTALLATION

A. Mount guards on external corners of interior walls, partitions and columns as shown.

B. Where corner guards are installed on gypsum board, clean surface and anchor guards with a neoprene solvent-type contact adhesive specifically manufactured for use on gypsum board construction. Provide continuous 16 gauge perforated, galvanized Z-shape steel anchors welded to back edges of corner guards and wired to metal stud expansion bolted to concrete or masonry with four 9.5 mm (3/8-inch) diameter bolts, spaced 400 mm (16 inches) on centers. Remove excess adhesive from around edge of guard and allow to cure undisturbed for 24 hours.

C. Install wall surface protection units plumb, level, and true to line without distortions.

D. Do not use materials with chips, cracks, voids, stains, or other defects that might be visible in the finished work.

E. Install aluminum retainers, mounting brackets, and other accessories in strict accordance with the manufacturer’s instructions.

F. Where splices occur in horizontal runs of over 20 feet (6 m), splice aluminum retainer and stainless steel cover at same locations along the run.

3.4 STAINLESS STEEL CORNER GUARDS

A. Mount guards on external corners of interior walls, partitions and columns as shown.

1. GYPSUM BOARD:
   a. Surface must be clean and properly sealed.
   b. Anchor guards with a neoprene solvent-type contact adhesive specifically manufactured for use on gypsum board construction.
   b. Remove excess adhesive from around edges of guard and allow to cure undisturbed for 24 hours.
   c. Remove the protective plastic covering from the exposed surface of the corner guard.
2. QUARTZ SURFACE WALL CLADDING:
   a. Surface must be dry, clean and properly sealed.
   b. Install corner guards to surface securely using a heavy duty mastic construction adhesive in a zigzag pattern over the back of each wing of the corner guard. Position corner guard on surface and apply pressure until a tight fit is achieved.
   d. Remove excess adhesive from around edges of guard and allow to cure undisturbed for 24 hours.
   c. Remove the protective plastic covering from the exposed surface of the corner guard.

3.6 STAINLESS STEEL WALL GUARDS

Space brackets at not more than three feet on centers and anchor to the wall in accordance with manufacturer's installation instructions.

3.7 CLEANING

A. Clean plastic covers and accessories using a standard non-ammonia based household cleaning agent.

B. Clean metal components in accordance with the manufacturer’s recommendations. Do not use acid solution, steel wool, or other harsh abrasives.

C. Remove excess adhesive in manner recommended by manufacturer.

- - - E N D - - -

SECTION 10 28 00
TOILET ACCESSORIES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies manufactured items usually used in dressing rooms, toilets, baths, locker rooms and at sinks in related spaces.

B. Items Specified:

1. Paper Towel Dispenser (PTD-1 & PTD-2).
2. Soap Dispenser (SD-1).
3. Robe Hooks (RH-1).
4. Metal framed mirrors (FM-1).
5. Hand Sanitizer (HS-1).
6. Toilet Tissue Dispenser (TTD-1).
7. Grab Bars (GB-18, GB-36, GB-41).
8. Glove Dispenser and Disposal.
9. Combination Glove/Cap/Shoe/Face Mask Dispenser.
10. Sharps Needle Disposal.
11. Toilet Seat Cover Dispenser (SCD-1).
12. Sanitary Napkin Disposal (SND-1).

1.2 RELATED WORK

A. Blocking for Toilet Accessories: Section 06 10 00, ROUGH CARPENTRY.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. All accessories specified.
2. Show type of material, gages or metal thickness in inches, finishes, and when required, capacity of accessories.
3. Show working operations of spindle for toilet tissue dispensers.

1.4 QUALITY ASSURANCE

A. Each product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.

B. Each accessory type shall be the same and be made by the same manufacturer.

C. Each accessory shall be assembled to the greatest extent possible before delivery to the site.

D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

1.5 PACKAGING AND DELIVERY

A. Pack accessories individually to protect finish.

B. Deliver accessories to the project only when installation work in rooms is ready to receive them.

C. Deliver inserts and rough-in frames to site at appropriate time for building-in.

D. Deliver products to site in sealed packages of containers; labeled for identification with manufacturer's name, brand, and contents.

1.6 STORAGE

A. Store products in weathertight and dry storage facility.

B. Protect from damage from handling, weather and construction operations before, during and after installation in accordance with manufacturer's instructions.

1.7 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip.

A176-99(R2009).....Stainless and Heat-Resisting Chromium Steel Plate, Sheet, and Strip

A269-10.....Seamless and Welded Austenitic Stainless Steel Tubing for General Service

A312/A312M-09.....Seamless and Welded Austenitic Stainless Steel Pipes

A653/A653M-10.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes

B456-03(R2009).....Electrodeposited Coatings of Copper Plus Nickel Plus Chromium and Nickel Plus Chromium

C1036-06.....Flat Glass

C1048-04.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated and Uncoated Glass

D635-10.....Rate of Burning and/or Extent and Time of Burning of Self Supporting Plastics in a Horizontal Position

F446-85(R2009).....Consumer Safety Specification for Grab Bars and Accessories Installed in the Bathing Area.

D3453-07.....Flexible Cellular Materials - Urethane for Furniture and Automotive Cushioning, Bedding, and Similar Applications

D3690-02(R2009).....Vinyl-Coated and Urethane-Coated Upholstery Fabrics

C. The National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500 Series.....Metal Finishes Manual

D. American Welding Society (AWS):

D10.4-86 (R2000).....Welding Austenitic Chromium-Nickel Stainless Steel Piping and Tubing

E. Federal Specifications (Fed. Specs.):

A-A-3002.....Mirrors, Glass

FF-S-107C (2).....Screw, Tapping and Drive

FF-S-107C.....Screw, Tapping and Drive.

WW-P-541E(1).....Plumbing Fixtures (Accessories, Land Use) Detail Specification

PART 2 - PRODUCTS

2.1 MATERIALS

A. Aluminum: ASTM B221, alloy 6063-T5 and alloy 6463-T5.

B. Stainless Steel:

1. Plate or sheet: ASTM A167, Type 302, 304, or 304L, except ASTM A176 where Type 430 is specified, 0.0299-inch thick unless otherwise specified.
2. Tube: ASTM A269, Alloy Type 302, 304, or 304L.

C. Stainless Steel Tubing: ASTM A269, Grade 304 or 304L, seamless or welded.

D. Stainless Steel Pipe: ASTM A312; Grade TP 304 or TP 304L.

E. Steel Sheet: ASTM A653, zinc-coated (galvanized) coating designation G90.

F. Glass:

1. ASTM C1036, Type 1, Class 1, Quality q2, for mirrors.

G. Foam Rubber: ASTM D3453, Grade BD, Type 2.

H. Vinyl Covering: ASTM D3690, Vinyl coated fabric, Class A.

2.2 FASTENERS

A. Exposed Fasteners: Stainless steel or chromium plated brass, finish to match adjacent surface.

B. Concealed Fasteners: Steel, hot-dip galvanized (except in high moisture areas such as showers or bath tubs use stainless steel).

C. Toggle Bolts: For use in hollow masonry or frame construction.

D. Hex bolts: For through bolting on thin panels.

E. Expansion Shields: Lead or plastic as recommended by accessory manufacturer for component and substrate for use in solid masonry or concrete.

F. Screws:

1. ASME B18.6.4.
2. Fed Spec. FF-S-107, Stainless steel Type A.

G. Adhesive: As recommended by manufacturer for products to be joined.

2.3 FINISH

A. In accordance with NAAMM AMP 500 series.

B. AA-M32 Mechanical finish, medium satin.

1. Chromium Plating: ASTM B456, satin or bright as specified, Service Condition No. SC2.
2. Stainless Steel: NAAMM AMP 503, finish number 4.
3. Ferrous Metal:
   a. Shop Prime: Clean, pretreat and apply one coat of primer and bake.
   b. Finish: Over primer apply two coats of alkyd or phenolic resin enamel, and bake.
4. Nylon Coated Steel: Nylon coating powder formulated for a fluidized bonding process to steel to provide a hard smooth, medium gloss finish, not less than 0.3 mm (0.012-inch) thick, rated as self-extinguishing when tested in accordance with ASTM D635.

2.4 FABRICATION - GENERAL

A. Welding, AWS D10.4.

B. Grind dress, and finish welded joints to match finish of adjacent surface.

C. Form exposed surfaces from one sheet of stock, free of joints.

D. Provide steel anchors and components required for secure installation.

E. Form flat surfaces without distortion. Keep exposed surfaces free from scratches and dents. Reinforce doors to prevent warp or twist.

F. Isolate aluminum from dissimilar metals and from contact with building materials as required to prevent electrolysis and corrosion.

G. Hot-dip galvanized steel, except stainless steel, anchors and fastening devices.
H. Shop assemble accessories and package with all components, anchors, fittings, fasteners and keys.
I. Key items alike.
J. Provide templates and rough-in measurements as required.
K. Round and deburr edges of sheets to remove sharp edges.

2.5 PRODUCTS - GENERAL

A. Basis of Design Product: Subject to compliance with requirements, provide basis of design product listed, or comparable product by, but not limited to, one of the following:
   1. American Specialties
   2. Bobrick Washroom Equipment, Inc.
   3. Bradley Corporation
B. Provided product shall be compatible with Owner's resupply product.
C. Provided product shall include the listed characteristics, shall be fabricated of the material and gauge indicated, and shall have the same finish as the basis of design product.

2.6 PAPER TOWEL DISPENSERS (PTD-1)

A. Automated touchless wall surface mounted type.
B. Battery operated, controlled delivery of paper rolls in adjustable preset lengths.
C. Basis of design: Georgia-Pacific enMotion Model 59460, color: Splash Blue.

2.7 PAPER TOWEL DISPENSERS (PTD-2)

A. Surface mounted type with sloping top.
B. Dispensing capacity for 275 sheets of any type of paper toweling.
C. Fabricate of stainless steel.
D. Provide door with continuous hinge at bottom, and knob latch.
E. Basis of design: Bobrick Model B2620.

2.8 SOAP DISPENSER (SD-1)

A. This item will be furnished and installed by owner.

2.9 ROBE HOOKS (RH-1)

A. Fabricate hook units either of chromium plated brass with a satin finish, or stainless steel, using 6 mm (1/4 inch) minimum thick stock, with edges and corners rounded smooth to the thickness of the metal, or 3 mm (1/8 inch) minimum radius.

B. Fabricate each unit as a double hook on a single shaft, integral with or permanently fastened to the wall flange, provided with concealed fastenings.

C. Basis of Design: Bobrick B76727.

2.10 METAL FRAMED MIRRORS (FM-1, FM-2)

A. Fed. Spec. A-A-3002 metal frame; stainless steel, type 302 or 304.

B. Mirror Glass:

1. Minimum 6 mm (1/4 inch) thick.
2. Set mirror in a protective vinyl glazing tape.

C. Frames:

1. Channel or angle shaped section with face of frame not less than 9 mm (3/8 inch) wide. Fabricate with square corners.
2. Use either 0.9 mm (0.0359 inch) thick stainless steel.
3. Shelf for Mirrors: None.

D. Back Plate:

1. Fabricate backplate for concealed wall hanging of either zinc-coated, or cadmium plated 0.9 mm (0.036 inch) thick sheet steel, die cut to fit face of mirror frame, and furnish with theft resistant concealed wall fastenings.
2. Use set screw type theft resistant concealed fastening system for mounting mirrors.

E. Mounting Bracket:

1. Designed to support mirror tight to wall.
2. Designed to retain mirror with concealed set screw fastenings.

F. Basis of Design: Bobrick B-290.

1. Size as indicated on Drawings.

2.11 HAND SANITIZER (HS-1)

A. This item will be furnished and installed by owner.

2.12 TOILET TISSUE DISPENSER (TTD-1)

A. Twin jumbo roll surface mounted type.

B. Fabricate of type 304, 20-gauge stainless steel with satin finish.

C. Mount on continuous concealed backplate.

D. Tumbler lock.

E. Dispensing mechanism: high-impact ABS

F. Basis of design: Bobrick Model B2892.

2.13 GRAB BARS (GB-18, GB-36 AND GB-42)

A. Fed. Spec WW-P-541/8B, Type IV, bars, surface mounted, Class 2, grab bars and ASTM F446.

B. Fabricate of stainless steel:

1. Stainless steel: Grab bars, flanges, mounting plates, supports, screws, bolts, and exposed nuts and washers.

C. Concealed mount.

D. Bars:

1. Fabricate from 38 mm (1-1/2 inch) outside diameter tubing.
   a. Stainless steel, minimum 1.2 mm (0.0478 inch) thick.
2. Fabricate in one continuous piece with ends turned toward walls.
3. Length as shown on drawings.
4. Finish: satin.

E. Flange for Concealed Mounting:

1. Minimum of 2.65 mm (0.1046 inch) thick, approximately 75 mm (3 inch) diameter by 13 mm (1/2 inch) deep, with provisions for not less than three set screws for securing flange to back plate.
2. Insert grab bar through center of the flange and continuously weld perimeter of grab bar flush to back side of flange.

F. In lieu of providing flange for concealed mounting, and back plate as specified, grab rail may be secured by being welded to a back plate and be covered with flange.

H. Back Plates:

1. Minimum 2.65 mm (0.1046 inch) thick metal.
2. Fabricate in one piece, approximately 6 mm (1/4 inch) deep, with diameter sized to fit flange. Provide slotted holes to accommodate anchor bolts.

2.14 GLOVE DISPENSER AND DISPOSAL

A. This item will be furnished and installed by owner.

2.15 COMBINATION GLOVE/CAP/SHOE/FACE MASK DISPENSER

A. This item will be furnished and installed by owner.

2.16 SHARPS NEEDLE DISPOSAL

A. This item will be furnished and installed by owner.

2.17 TOILET SEAT COVER DISPENSER (TSD-1)

A. Surface mounted type, Type 304, 22 gauge stainless steel all welded construction with beveled opening.

B. Exposed surfaces shall have satin finish.

C. Concealed opening in bottom for filling. Dispensing capacity for 250 paper toilet seat covers.

D. Basis of design: Bobrick B-221.

2.18 SANITARY NAPKIN DISPOSAL (SND-1)

A. Surface mounted type, Type 304, 22 gauge stainless steel all welded construction.

B. Exposed surfaces shall have satin finish.

C. Cover shall be drawn, one piece, seamless construction and secured to container with a full-length stainless steel piano-hinge.

D. Container shall have integral finger depression for opening cover.

E. Basis of design: Bobrick B270.

PART 3 - EXECUTION

3.1 PREPARATION

A. Before starting work notify COR in writing of any conflicts detrimental to installation or operation of units.

B. Verify with the COR the exact location of accessories.

3.2 INSTALLATION

A. Set work accurately, in alignment and where shown. Items shall be plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.

B. Toggle bolt to steel anchorage plates in frame partitions or hollow masonry. Expansion bolt to concrete or solid masonry.

C. Install accessories in accordance with the manufacturer's printed instructions and ASTM F446.

D. Install accessories plumb and level and securely anchor to substrate.

E. Install accessories in a manner that will permit the accessory to function as designed and allow for servicing as required without hampering or hindering the performance of other devices.

F. Align mirrors, dispensers and other accessories even and level, when installed in battery.

G. Install accessories to prevent striking by other moving, items or interference with accessibility.

H. Install grab bars to withstand a downward load of at least 250 lbf (1112N), when tested according to ASTM F 446.

3.3 SCHEDULE OF ACCESSORIES

Refer to Toilet Accessories Schedule on Drawings.

3.4 CLEANING

After installation, clean as recommended by the manufacturer and protect from damage until completion of the project.

- - - E N D - - -

SECTION 10 44 13
FIRE EXTINGUISHER CABINETS

PART 1 - GENERAL

1.1 DESCRIPTION

This section covers recessed fire extinguisher cabinets.

1.2 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data: Fire extinguisher cabinet including installation instruction and rough opening required.

1.3 APPLICATION PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Testing and Materials (ASTM):
D4802-10.....Poly (Methyl Methacrylate) Acrylic Plastic Sheet

PART 2 - PRODUCTS

2.1 FIRE EXTINGUISHER CABINET

A. Recessed type with flat trim and full glass door.

B. Basis of design: Larsen Architectural Series 2409-R2 w/ (FS 2409-R2 at fire rated walls). Provide basis of design product, or equal.

2.2 FABRICATION

A. Form body of cabinet from 0.9 mm (0.0359 inch) thick sheet steel.

B. Fabricate door and trim from 1.2 mm (0.0478 inch) thick sheet steel with all face joints fully welded and ground smooth.

1. Glaze doors with 6 mm (1/4 inch) thick ASTM D4802, clear acrylic sheet, Category B-1, Finish 1.
2. Design doors to open 180 degrees.
3. Provide continuous hinge, pull handle, and adjustable roller catch.

2.3 FINISH

A. Finish interior of cabinet body with baked-on semigloss white enamel.

B. Finish door, frame with manufacturer's standard baked-on semigloss white enamel.

PART 3 - EXECUTION

A. Install fire extinguisher cabinets in prepared openings and secure in accordance with manufacturer's instructions.

B. Install cabinet to be ADA accessible.

- - - E N D - - -

SECTION 13 49 00
RADIATION PROTECTION

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies lead radiation shielding.

B. Construction of products and assemblies used for radiation shielding complying with applicable requirements of NCRP Reports 35, 49 and 102.

C. This section includes the following items:

1. Lead Lined Wood Doors
2. Lead Glass
3. Lead Lined Frames
4. Lead Lined Gypsum Wallboard

1.2 RELATED WORK

A. Wood Veneer finish for doors: Section 08 14 00, WOOD DOORS, and Refer to drawings for FINISH SCHEDULE

B. Steel door frames: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.

C. Hardware for doors: Section 08 71 00, DOOR HARDWARE.

D. Installation of Doors and Hardware: Section 08 11 13, HOLLOW METAL DOORS Section 08 71 00, DOOR HARDWARE.

1.3 MANUFACTURERS QUALIFICATIONS

A. Approval by Contracting Officer is required of product or service of proposed manufacturer and suppliers, and will be based upon submission by Contractor of certification that:

1. Manufacturer regularly and presently manufactures lead radiation shielding as specified as one of its principal products.
2. Manufacturer's product submitted has been in satisfactory and efficient operation or three installations similar and equivalent to this project for three years.
3. Manufacturer submits list of installations.

1.4 TESTS

A. Lead radiation shielding will be tested at the expense of the Government after X-ray equipment is installed.

B. Any additional testing required due to correction and replacement of defective work will be done by the Government at Contractor's expense. **NOTE:** Lead glass and lead lined gypsum wallboard and will not be tested prior to installation.

1.5 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings: Each lead radiation shielding item specified showing thickness of lead, details of construction and installation.

C. Samples:

1. Lead lined gypsum wallboard.
2. Bottom corner section of lead lined door, 300 mm (12 inches) square showing bottom and side edge strips.

D. Manufacturers' Literature and Data: Each lead radiation shielding item specified.

1.6 WARRANTY

A. Warranty lead lined doors against defects in workmanship and materials for a period of two years.

B. Warp or twist of lead lined flush veneered doors may not exceed 6 mm (1/4 inch) in any face dimension of door (including full diagonal), measured not less than six months after doors have been hung and finished.

1.7 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Federal Specifications (Fed. Spec.):

QQ-L-201F(2).....Lead Sheet

C. American Society for Testing and Materials (ASTM):

A167-99(2009).....Stainless and Heat Resisting Chromium-Nickel Steel Plate, Sheet and Strip

C1396/C1396M-04.....Gypsum Wallboard/Gypsum Lath

C90-11.....Load-Bearing Concrete Masonry Units

C1002-07.....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases

D1187-97(R2002).....Asphalt-Base Emulsions for Use as Protective Coatings for Metal

D. United States Department of Commerce Product Standard (PS):

FED PSI 83-84.....Construction and Industrial Plywood

E. Military Specifications (Mil. Spec.):

MIL-C-36373.....Cabinet, Cassette Transfer, Wall Mounted

F. National Council on Radiation Protection and Measurements (NCRP):

Report 147.....Structural Shielding Design for Medical X-Ray Imaging Facilities (2004)

Report 102.....Medical X-Ray, Electron Beam and Gamma-Ray Protection for Energies up to 50 MeV (Equipment Design, Performance and Use), (1989)

PART 2 - PRODUCTS

2.1 MATERIALS

A. Lead Sheet: Fed. Spec. QQ-L-201, Grade C, of thickness shown on drawings.

B. Lead Lined Gypsum Wallboard:

1. ASTM C36, Type X, 16 mm (5/8 inch) thick.
2. Factory bond sheet lead to one side of wallboard.
3. Apply sheet lead in thicknesses shown, unpierced and in one piece.

C. Stainless Steel: ASTM A167.

D. Lead Glass: Clear, X-ray proof, of sufficient thickness to provide X-ray protection equivalent to that provided by partition or door in which glass occurs.

E. Lead Control Windows: Cast lead, rigid, single unit type without joints, with or without voice passage as shown and with lead stop beads and lead glass.

F. Fasteners:

1. Cadmium or chromium plated steel screws for securing lead louvers.
2. Standard steel drill screws, ASTM C1002, with lead washers for application of lead lined sheet materials to metal studs and attach washers in accordance with shielding manufacturer's instructions.
3. Nails:
   a. Use barbed lead head nails for application of lead lined materials to wood furring strips.
   b. Long enough to penetrate furring strips not less than 25 mm (one inch).
   c. Cast-lead head sufficiently thick to equal lead shielding of room provided.

G. Lead Discs: Same thickness as lead lining, diameter 25 mm (1 inch) larger than fastener.

2.2 FABRICATION

A. General: Lead lining of frames, doors and other items occurring in partitions shall provide an X-ray absorption equivalent to that of partitions in which they occur.

B. Clearance between Doors and Frames and Floors:

1. Jambs and Heads: A maximum 3 mm (1/8 inch) clearance.
2. Bottom of door to finish floor: Maximum 19 mm (3/4 inch) clearance.

C. Lead Lined Wood Doors:

1. Flush veneered construction.

2. Construct doors of two separate solid wood cores with a single sheet of lead lining through center.
3. Doors shall have filler strips, crossbanding, face veneers and hardwood edge strips, all glued together with unextended urea resin glue applied under heavy pressure.
4. Extend sheet lead lining to all door edges, providing X-ray absorption equal to partition in which door occurs.
5. Fasten wood cores together with either countersunk steel bolts through lead with bolt heads and nuts covered with poured lead, or with poured lead dowels.
6. Bolts or dowels shall be located 38 mm (1-1/2 inches) from door edges, and at not more than 200 mm (eight inches) on center in each direction over door area.
7. Finish face of dowels and lead covering of bolt heads and nuts flush with wood cores.
8. Edge strips:
   a. Same species of wood as face veneer.
   b. Minimum thickness of edge strips shall be 38 mm (1-1/2 inches) at top edge and 63 mm (2-1/2 inches) at bottom edge.
   c. Glue strips to cores before face veneer is applied.
   d. Extend vertical edge strips full height of door and bevel 3 mm (1/8 inch) for each 50 mm (two inches) of door thickness.
   e. Give top and bottom edges of doors to receive transparent finish two coats of water resistant sealer before shipment to site.
9. Crossbanding of hardwood:
   a. Not less than 2 mm (1/12 inch) thick and face veneer not less than 1 mm (1/28 inch) thick, after sanding.
   b. When straight grain stock such as Basswood, Aspen or Poplar is used for crossbanding, its thickness may be 1.6 mm (1/16 inch) in lieu of 2 mm (1/12 inch).
10. Face veneer for doors specified in SECTION 08 14 00 INTERIOR WOOD DOORS.
    a. Use identical face veneer on both sides of door. Apply face veneer with grain vertical.

D. Hardware:
1. Hardware for doors is specified in Section 08 71 00, DOOR HARDWARE.
2. Stagger bolts to door pulls on plates which penetrate lead lining relative to opposite plate and recess on side of door opposite pull.
3. Provide lead plugs or discs over recessed nut ends of such bolts, unless otherwise shown.

4. Nut ends of bolts for door closures shall be countersunk and covered with lead lined 16 gage stainless steel pans.
5. Provide round head screws with dull chromium plated finish to secure stainless steel pans.
6. Provide mortises for flushbolts, floor hinge arms, and top pivots with sheet lead on each side. Enclose floor boxes of floor hinges with sheet lead at sides and bottom.
7. Make recesses for lock and latch cases at mill and line with lead butted tightly to lead in door.
8. Make total thickness of sheet lead used for lining hardware, equivalent to thickness of sheet lead core of door.
9. Protection and installation of doors and hardware is specified in Section, 08 71 00 DOOR HARDWARE.

E. Lead Lining of Frames:
1. Line or cover steel frames, stops for doors, and corner type control windows with sheet lead.
2. Install sheet lead free of waves, lumps and wrinkles with as few joints as possible.
3. Make joints in sheet lead to obtain X-ray absorption equivalent to adjacent sheet lead. Finish joints smooth and neat.
4. Metal door frames for lead lined doors are specified in Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.

PART 3 - EXECUTION

3.1 LEAD LINED GYPSUM WALLBOARD PANELS

A. Apply lead lined gypsum wallboard to metal studs as shown.
B. Predrill or drill pilot holes for nails or screws as necessary to prevent deformation of the fastener and lead shielding and to prevent distortion of the wallboard.
C. Apply wallboard vertically with lead linings placed next to supports.
D. Install sheet lead strips behind joints not less than the thickness used for the wallboard.
1. The lead strips: 45 mm (1-3/4 inches) wide, except at corner joints, 45 mm by 45 mm (1-3/4 by 1-3/4 inch) lead angles shall be used.
2. Secure the lead strips to supports at outer edges of strips.

E. Wallboard:
1. Fastened to supports with screws and lead washers or discs at approximately 250 mm (ten inches) on centers.
2. Make provisions for connection with lead lined door frames and for cutouts for vision panels.

3. Joint treatment of lead lined gypsum board panels and fastening depressions shall be as specified for wallboard in Section 09 29 00, GYPSUM BOARD.

3.2 SUPPLEMENTAL LEAD SHIELDING

A. Line or cover penetrations of wall lead, pipe chases, columns fasteners and elsewhere where shown with sheet lead. Install sheet lead free of waves, lumps and wrinkles and with as few joints as possible. Joints in sheet lead shall provide X-ray absorption equivalent to adjacent sheet lead finished smooth and neat.

B. Where plaster finish is required over columns or other vertical surfaces covered with sheet lead, drive bolts or other fasteners securing the sheet lead to backing surface half way, and wrap an 18 gage stainless steel tie wire around fasteners. Both ends of each tie wire shall be of sufficient length so that when fastener is fully driven, fastening of metal lath may be accomplished. Locate fasteners not over 400 mm (16 inches) on centers both ways and cover heads with lead strips or discs if washers are not used.

C. Provide sufficient lead shielding for spaces around outlet boxes, junction boxes, film illuminators, and pipes, to obtain a net radiation protection at these spaces equaling net radiation protection specified for wall or partition in which they occur.

- - - E N D - - -