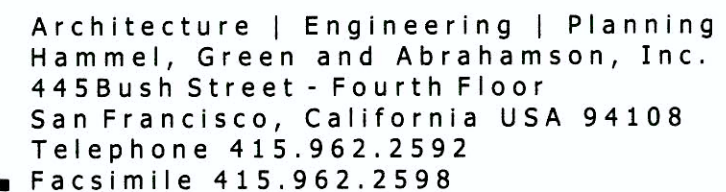

$$1/4'' = 1' - 0''$$
[illegible]

| | |
|-------------------|--|
| STRUCTURAL: | DEGENKOLB ENGINEERS; 235 MONTGOMERY STREET, SUITE 500; SAN FRANCISCO, CA 94104 |
| MECHANICAL: | HTE ENGINEERS; 1529 CYPRESS ST., SUITE 103; WALNUT CREEK, CA 94596 |
| ELECTRICAL: | BAY AREA CONSULTING ENGINEERS; 311 CALIFORNIA STREET, SUITE 720; SAN FRANCISCO, CA 94104 |
| CIVIL ENGINEER: | GHD CIVIL ENGINEERS; 2235 MERCURY WAY, SUITE 150; SANTA ROSA, CA 95407 |
| ESTIMATING: | CUMMING CORPORATION; 1970 BROADWAY, SUITE 630; OAKLAND, CA 94612 |
| SURVEYORS: | MARTIN M. RON ASSOCIATES, INC.; 859 HARRISON ST., SUITE 200; SAN FRANCISCO, CA 94107 |
| UTILITY LOCATORS: | CRUZ BROTHERS LOCATORS; P.O. BOX 66768; SCOTTS VALLEY, CA 95067 |



Approved: Project Director

| | |
|--|----------|
| | |
| | Location |

Drawing Number

 Department of
Veterans Affairs

- 1 SEE CIVIL ENGINEER'S DRAWINGS FOR CONTINUATION.
- 2 SEE CIVIL ENGINEER'S DRAWINGS FOR BACK FLOW PREVENTER, AND PRV.
- 3 SEE CIVIL ENGINEER'S DRAWINGS FOR DOUBLE DETECTOR CHECK, PIV, AND FIRE DEPARTMENT CONNECTION.
- 4 PROVIDE AND INSTALL SEISMIC GAS SHUTOFF VALVE. PROVIDE PRV AS REQUIRED.
- 5 REFER TO DESIGN/BUILD FIRE PROTECTION PACKAGE FOR DETAILS.
- 6 STORM DRAIN SEE CIVIL ENGINEER'S DRAWINGS FOR CONTINUATION.
- 7 VALVE BOX WITH ACCESS.

1. INSTALLATION INSTRUCTIONS FOR ALL LISTED EQUIPMENT SHALL BE PROVIDED TO THE FIELD INSPECTOR AT TIME OF INSPECTION.
2. MINIMUM OF 2% SLOPE FOR THE HORIZONTAL DRAINAGE PIPING.
3. ADEQUATE PROTECTION AGAINST BREAKAGE FOR PIPING PASSING THROUGH CONCRETE FLOORS AND WALLS. SLEEVES SHALL BE PROVIDED TO PROTECT ALL PIPES THROUGH CONCRETE OR MASONRY EXTERIOR BEARING WALLS.
4. PROVIDE ACCESS DOORS TO ALL VALVES.
5. PROVIDE DOMESTIC WATER WITH AN ISOLATION VALVE TO SERVE AUTO ICE MAKER IN KITCHENETTE.