



three inches = one foot  
one and one half inches = one foot  
one inch = one foot  
three quarters inch = one foot  
one half inch = one foot  
three eighths inch = one foot  
one quarter inch = one foot  
one eighth inch = one foot  
one sixteenth inch = one foot

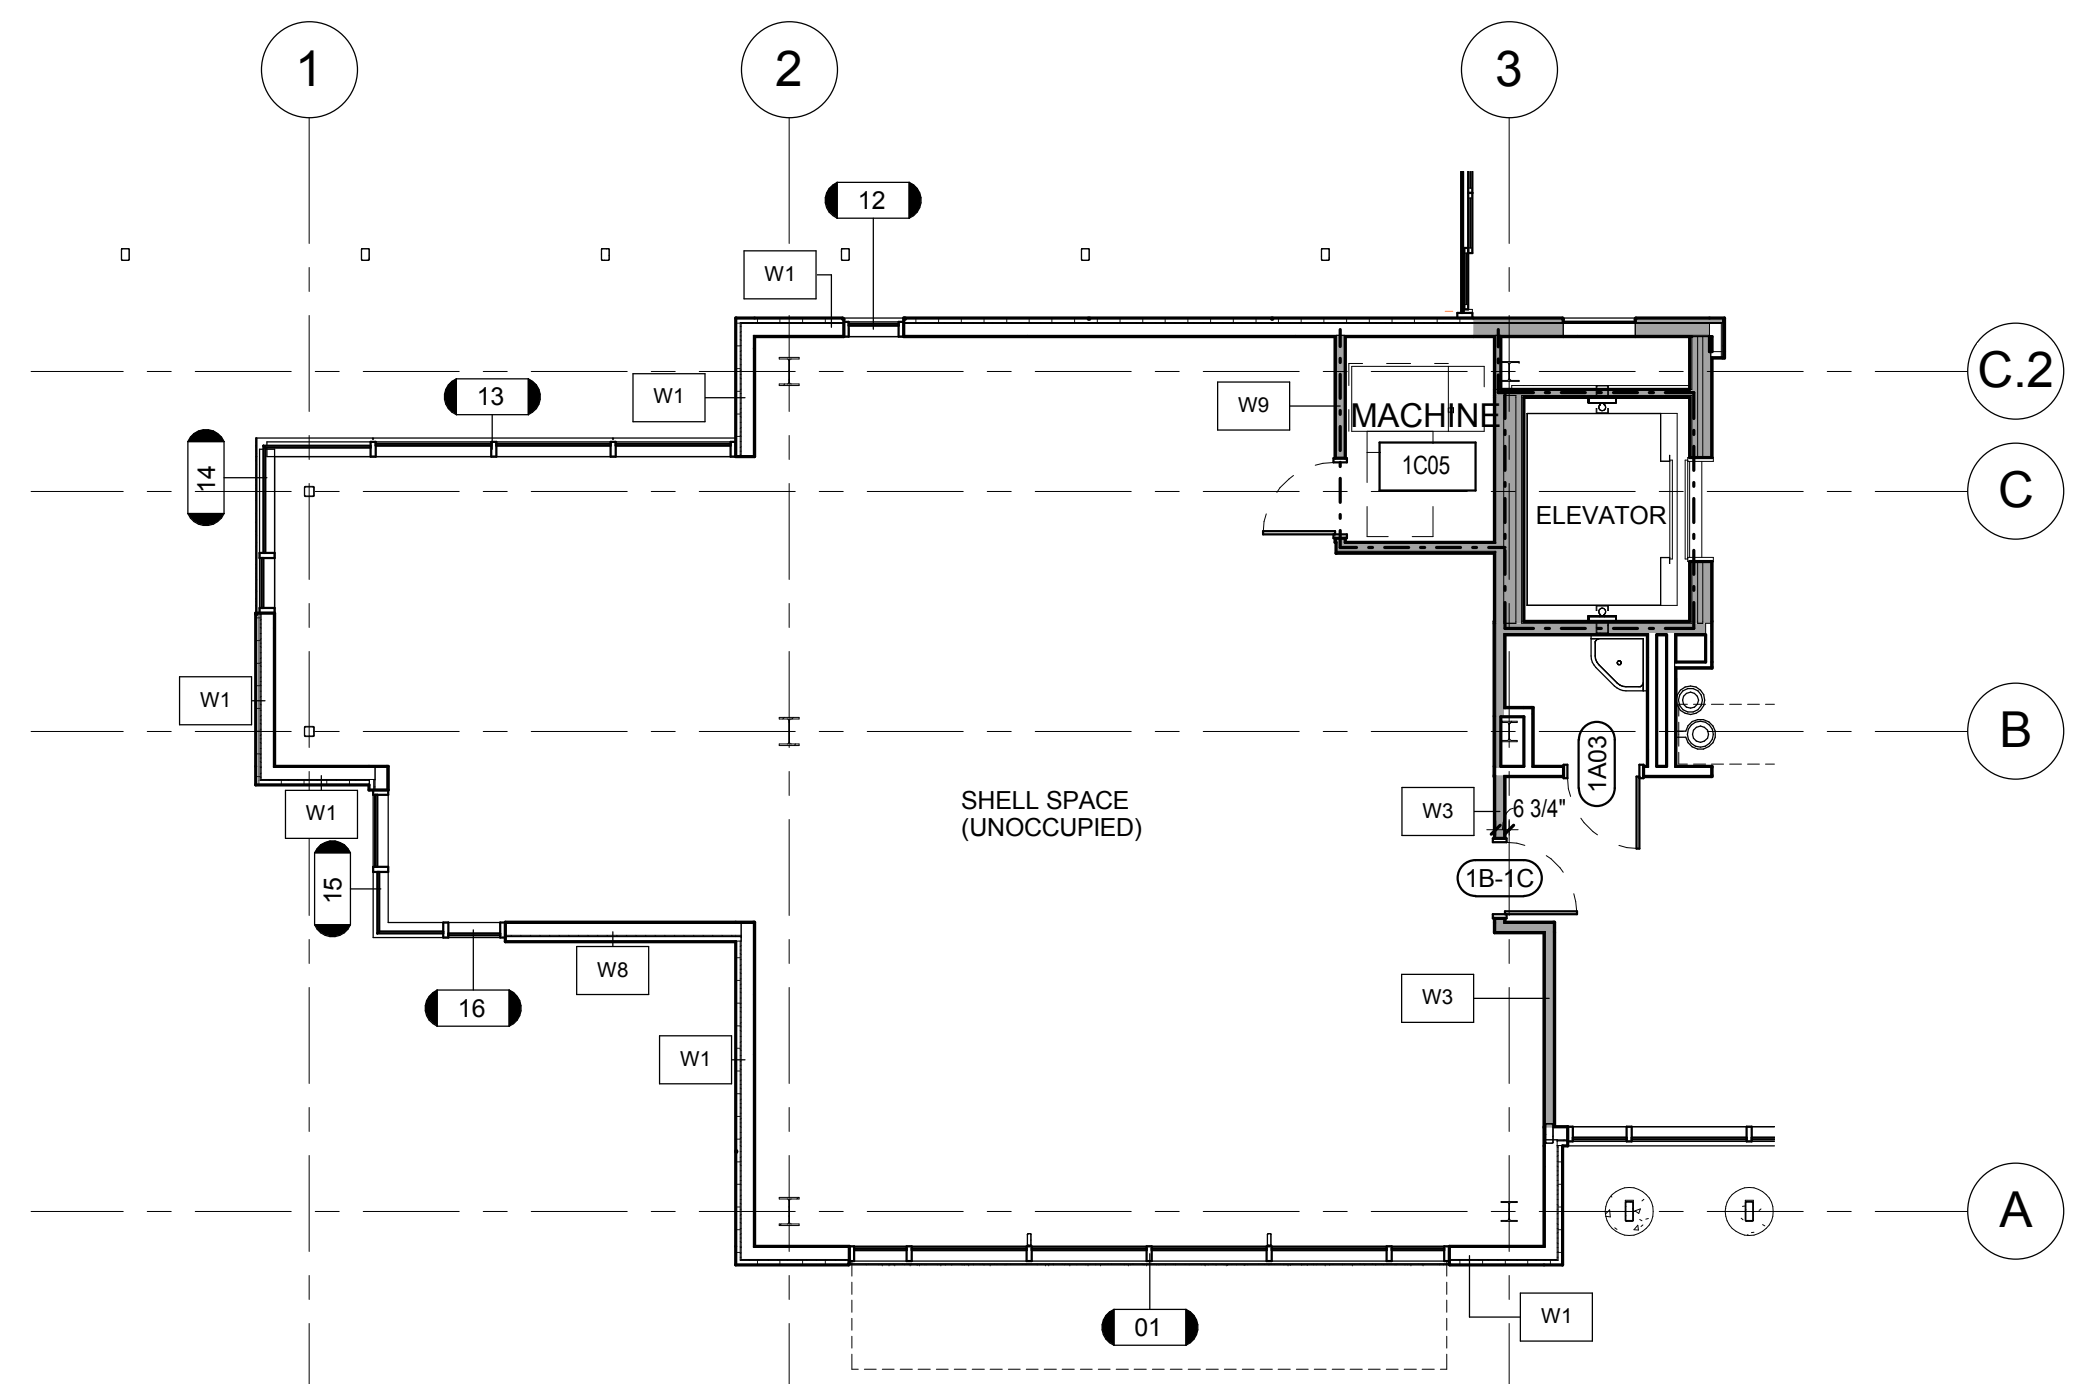

2 FIRST FLOOR PLAN - DEDUCTIVE ALT #19  
1/8" = 1'-0"

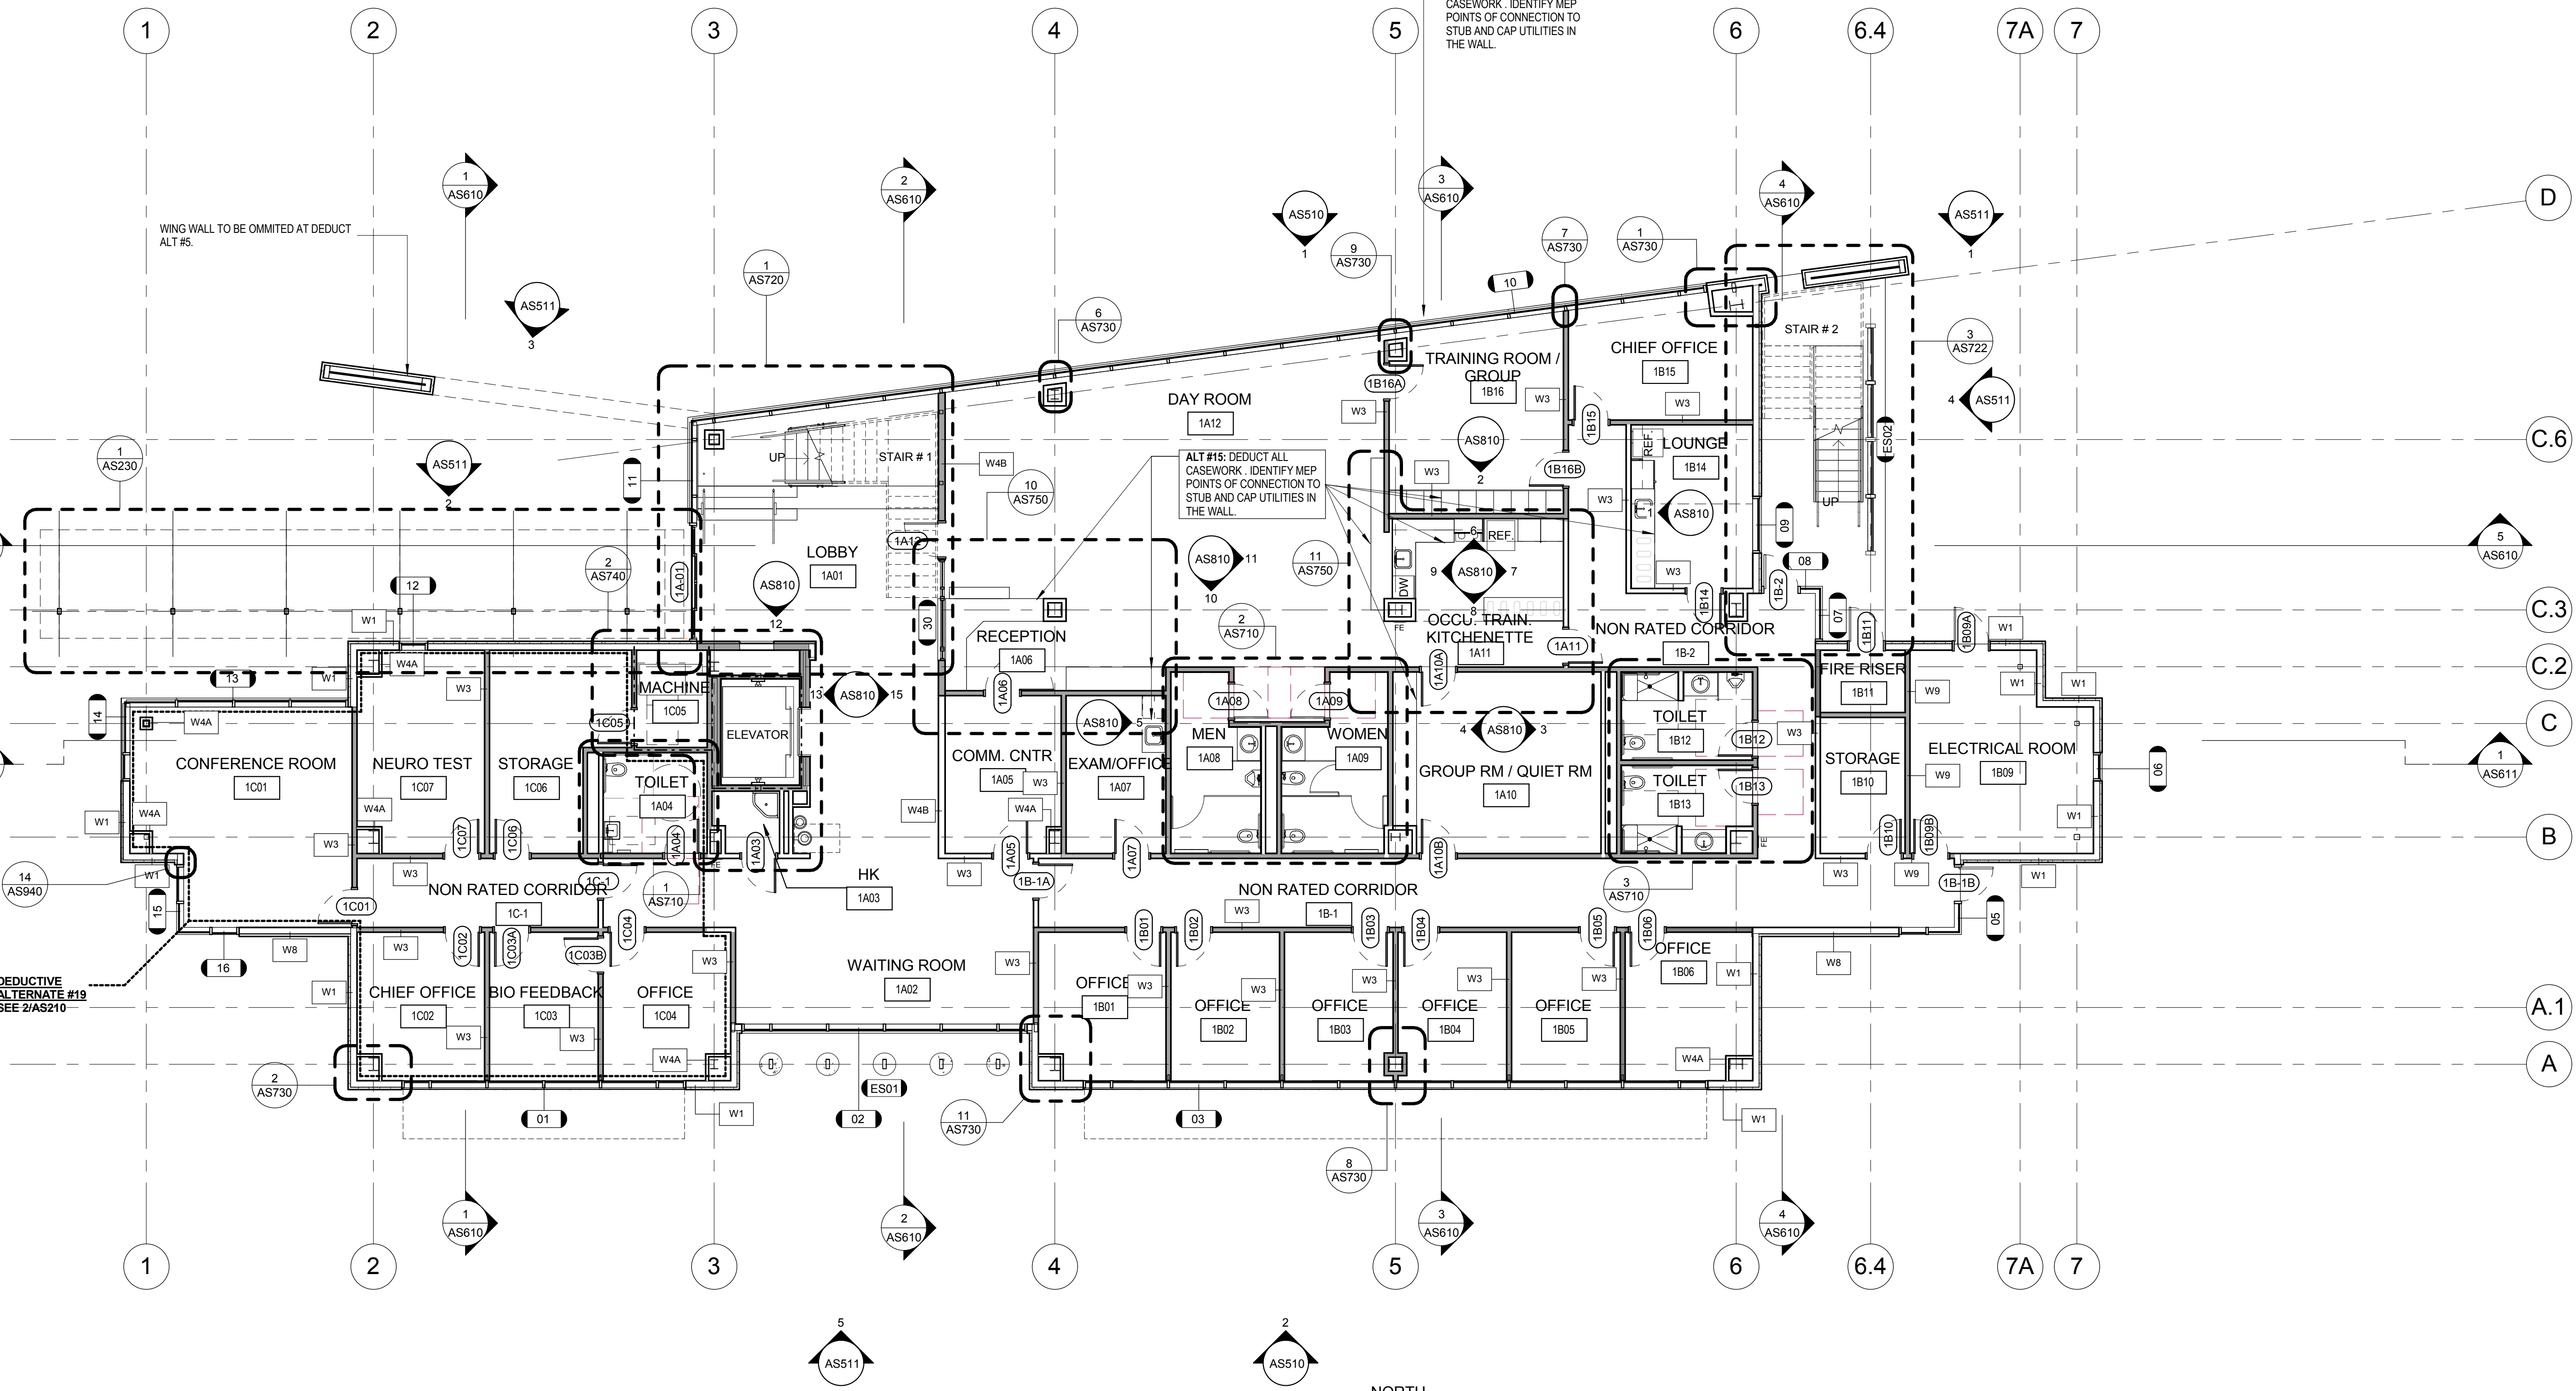

1 FIRST FLOOR PLAN  
1/8" = 1'-0"

### GENERAL NOTES

1. REFER TO SHEET G001 FOR TYPICAL SYMBOLS AND ABBREVIATIONS
- FLOOR PLAN LEGEND**
- FULL HEIGHT INTERIOR WALL ASSEMBLY: (SEE AS960 FOR WALL TYPES) METAL STUDS TO EXTEND FROM FLOOR TO UNDER SIDE OF DECK OR ROOF ABOVE. GYPSUM BOARD (1 SIDE) AND SOUND BATT. INSULATION TO EXTEND FROM FLOOR TO DECK OR ROOF ABOVE. GYPSUM BOARD (1 SIDE) TO EXTEND FROM FLOOR TO 6" ABOVE FINISH CEILING. EXTEND GYP. BOARD TO DECK ABOVE AT FIRE RATED CONDITION
  - FULL HEIGHT INTERIOR WALL ASSEMBLY: (SEE AS960 FOR WALL TYPES) METAL STUDS TO EXTEND FROM FLOOR TO UNDER SIDE OF DECK OR ROOF ABOVE. GYPSUM BOARD (2 SIDES) TO EXTEND FROM FLOOR TO 6" ABOVE FINISH CEILING.
  - INDICATES 1 HOUR RATED FIRE BARRIER WALL. WALL ASSEMBLY EXTENDS FROM FLOOR TO UNDER SIDE OF DECK OR ROOF ABOVE.
  - W1 DENOTES WALL TYPE. REFER TO 1 AS960
  - A101 DENOTES DOOR. REFER TO DOOR SCHEDULE AS920
  - 01 DENOTES WINDOW. REFER TO WINDOW SCHEDULE SEE AS930, AS931 & AS932
  - FIRE EXTINGUISHER RECESSED CABINET w/ F.E. HANDLE AT 48" AFF MAX. REFER TO DETAIL 4 AS940
  - AREA OF DEDUCTIVE ALTERNATE #19**  
THIS SPACE TO BE LABELED AS 'UNFINISHED'. DEDUCT ALL INTERIOR WALLS, FINISHES, CEILINGS, FF&E, PLUMBING FIXTURES, TOILET ROOM ACCESSORIES, ETC. PROVIDE CODE REQUIRED EXIT LIGHTING, HVAC (AND ACCESS) TO MACHINE ROOM 1C05 AND IDENTIFY MEP POINTS OF CONNECTION FOR FUTURE BUILD OUT OF THIS AREA.

FLOOR PLAN KEY NOTES

NO.	Key Notes

### LIST OF ALTERNATES

ALT #	PRIORITY	DESCRIPTION
2	11	EFIS IN LIEU OF CENTRIA
3	10	EFIS IN LIEU OF PLASTIC
4	9	CEILING SOFFIT, FINISHES & QUARTZ SURFACE
5	8	REMOVE WING WALL @ ENTRY
6	7	REMOVE SUN SHADES
7	6	REDUCE ECO SCREENS
8	5	REMOVE TRELLIS
9	1	REDUCE HARDSCAPING
15	3	REDUCED AMOUNT FOR FIXED FURNISHING (CASEWORK)
16	4	CHANGE GLASS GUARDRAIL @ INTERIOR STAIR TO STEEL GUARDRAIL
17	12	REDUCE EXTERIOR GLAZING AND CHANGE EXTERIOR WALL FINISHES TO PAINTED CEMENT PLASTER
19	2	PORTION OF 1ST AND 2ND FLOOR AS UNFINISHED SPACE

NOTE: REFER TO SHEET G001 FOR DESCRIPTIVE INFORMATION REGARDING EACH ALTERNATIVE

### FULLY SPRINKLERED

CONSULTANTS:			ARCHITECT/ENGINEERS: <b>HMC Architects</b> 1827 E. Fir Avenue / Studio 103 / Fresno, CA 93720 T 559 322 2444 / www.hmcarchitects.com HMC PROJECT #1393002-000		Drawing Title <b>FIRST FLOOR PLAN</b>	Project Title <b>Mental Health Psychosocial Rehab Recovery and Health Care for Homeless Veteran Center</b>		Project Number <b>570-217</b>	Office of Construction and Facilities Management 
			Approved: Project Director			Location <b>2615 E. CLINTON AVE, FRESNO, CA 93703</b>	Date <b>08/11/2014</b>	Checked <b>WB, GV</b>	