


8" STONE RIP-RAP
IN CUT SWALE

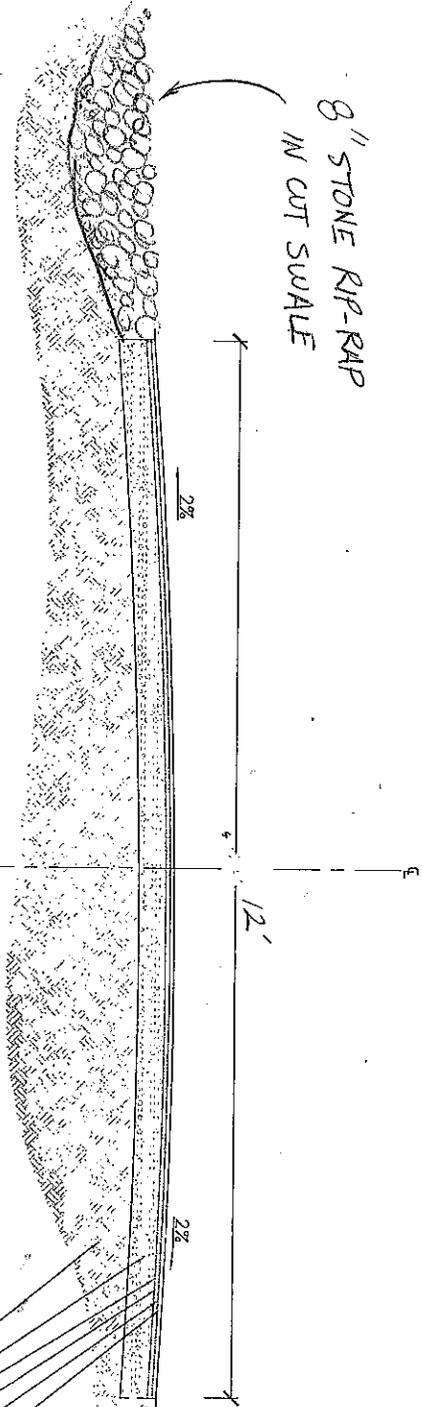


- BITUMINOUS CONCRETE WEARING COURSE, 2" THICK, [REDACTED]
- BITUMINOUS TACK COAT, 0.04 GAL./SY
- BITUMINOUS CONCRETE BINDER
- COURSE, 3" THICK, [REDACTED]
- BITUMINOUS PRIME COAT, 0.40 GAL./SY
- SUBBASE, 8" THICK
- STABLE AND NON-YIELDING SUBGRADE

FINISHED GRADE OR
SUBBASE OF MAINTENANCE
YARD

NOT TO SCALE
/MAINTENANCE YARD ROAD

8" STONE RIP-RAP
IN CUT SWALE

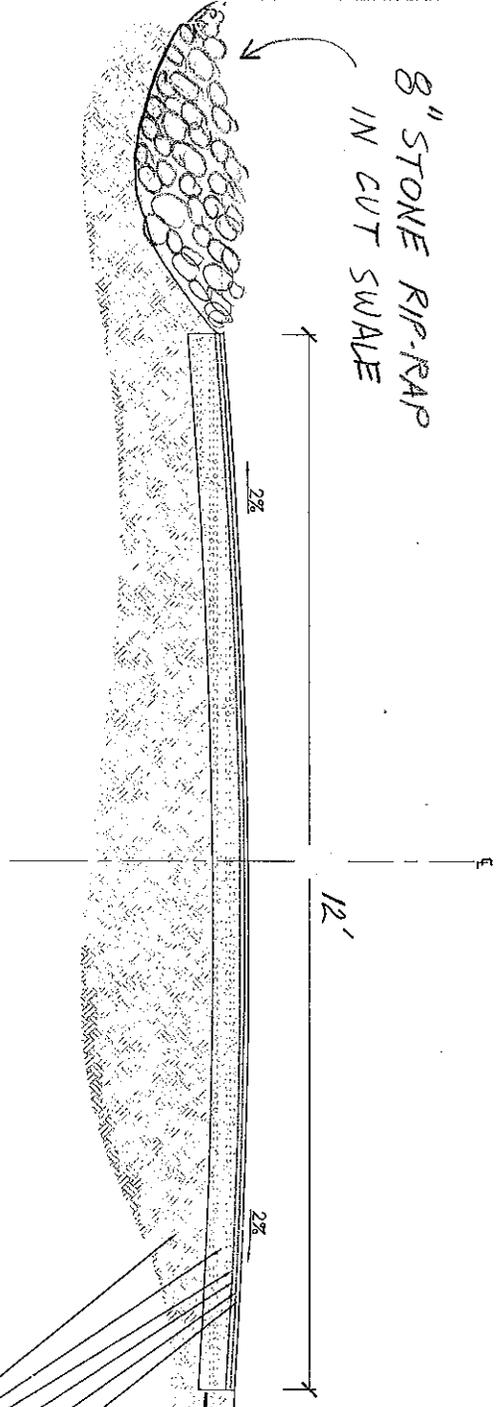

- BITUMINOUS CONCRETE WEARING COURSE, 2" THICK, [REDACTED]
- BITUMINOUS TACK COAT, 0.04 GAL./SY
- BITUMINOUS CONCRETE BINDER
- COURSE, 3" THICK, [REDACTED]
- BITUMINOUS PRIME COAT, 0.40 GAL./SY
- SUBBASE, 8" THICK
- STABLE AND NON-YIELDING SUBGRADE

2% GRADE TO MAIN
CREEK EMBANKMENT

FINISHED
GRADE OF 8" THICK
SUBBASE

NOT TO SCALE
/MAINTENANCE YARD ROAD

MATCH PROPOSED ASPHALT
PAVEMENT

2%

TAPERED

2%

WIDTH


GRAVELED MAINTENANCE YARD

not to scale


STABLE SUBGRADE
SUBBASE, 8" THICK

TO MAIN CREEK
EMBANKMENT

FINISHED
GRADE

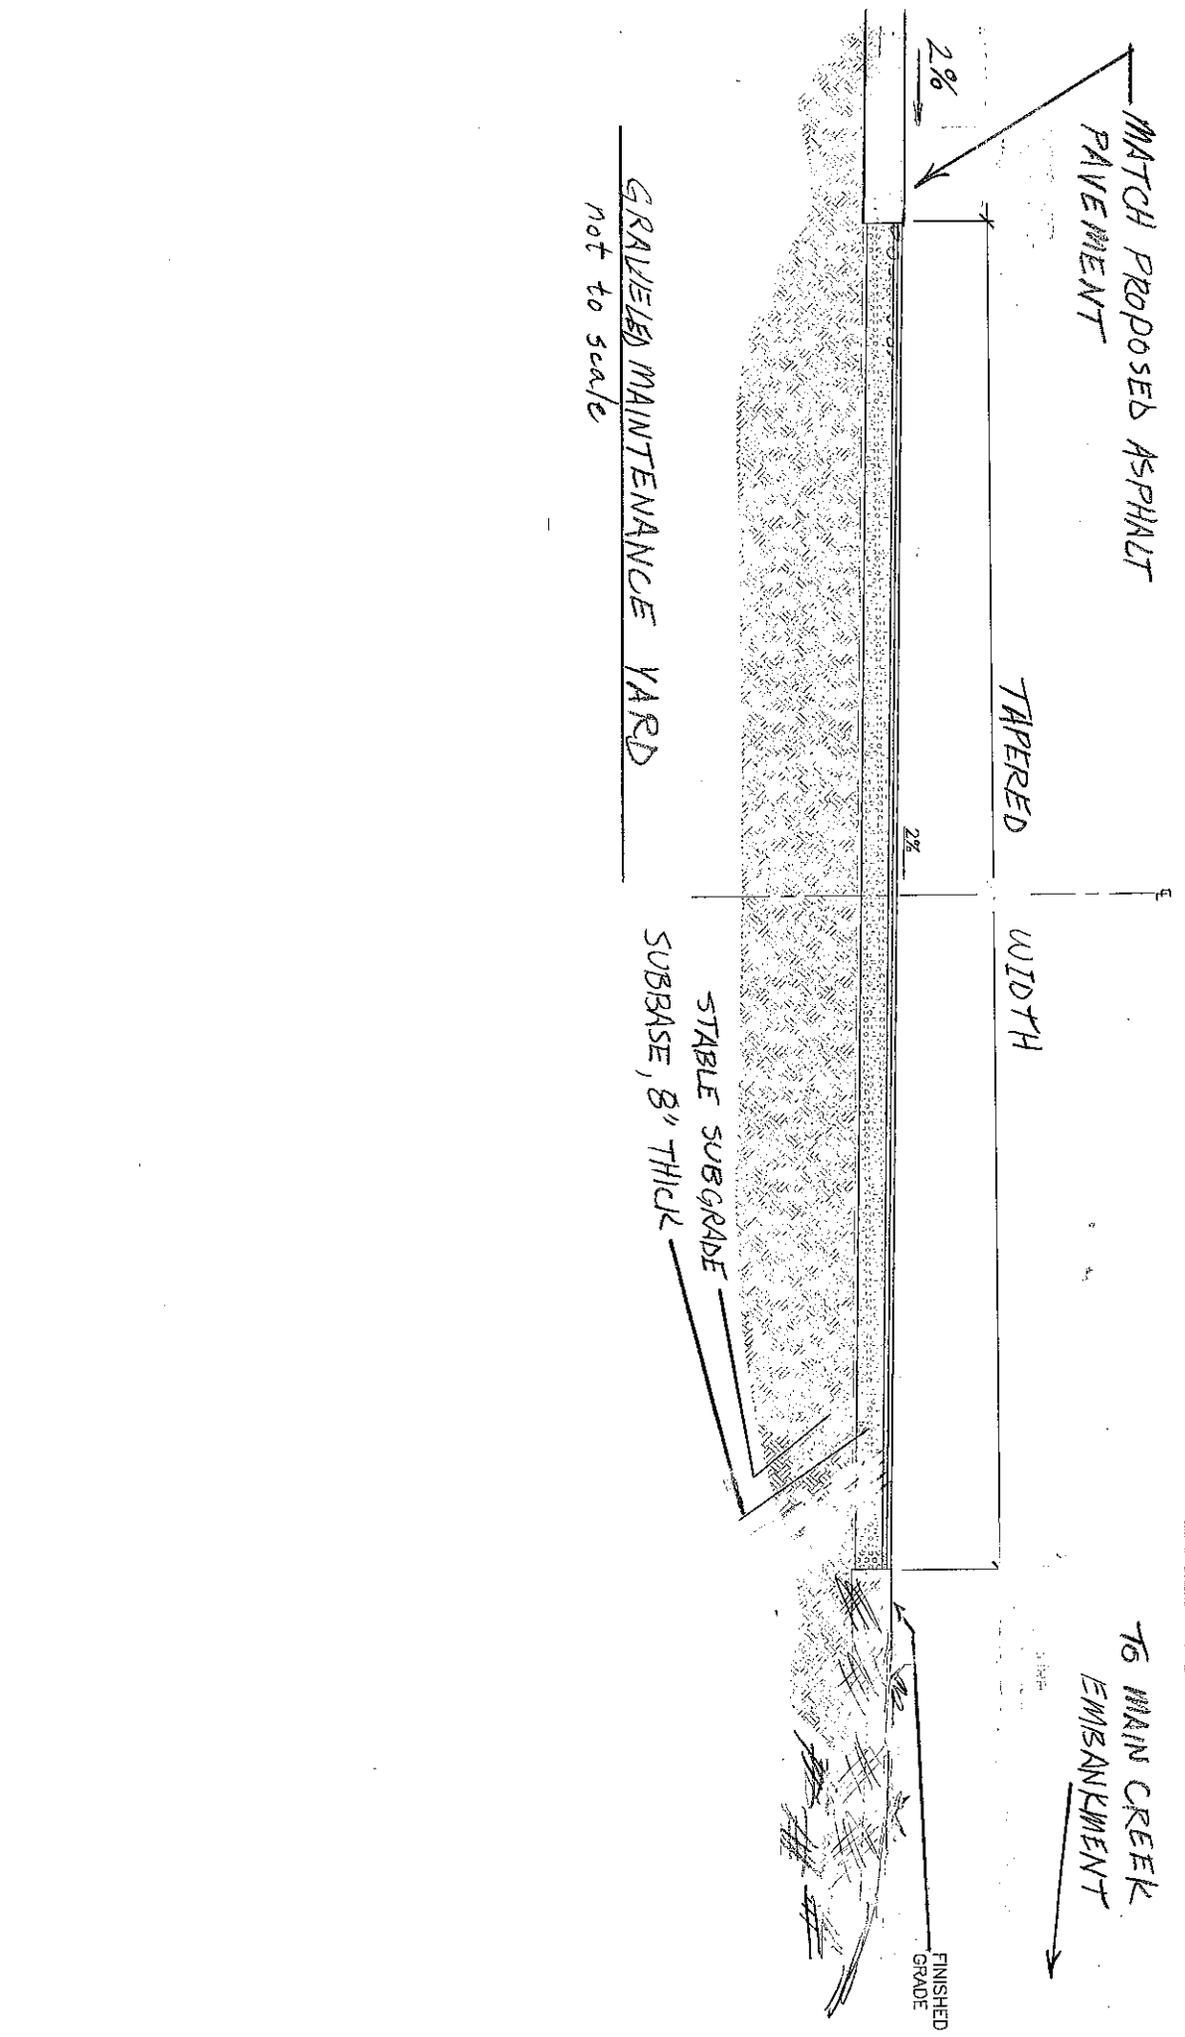

Maintenance Yard Site Plan

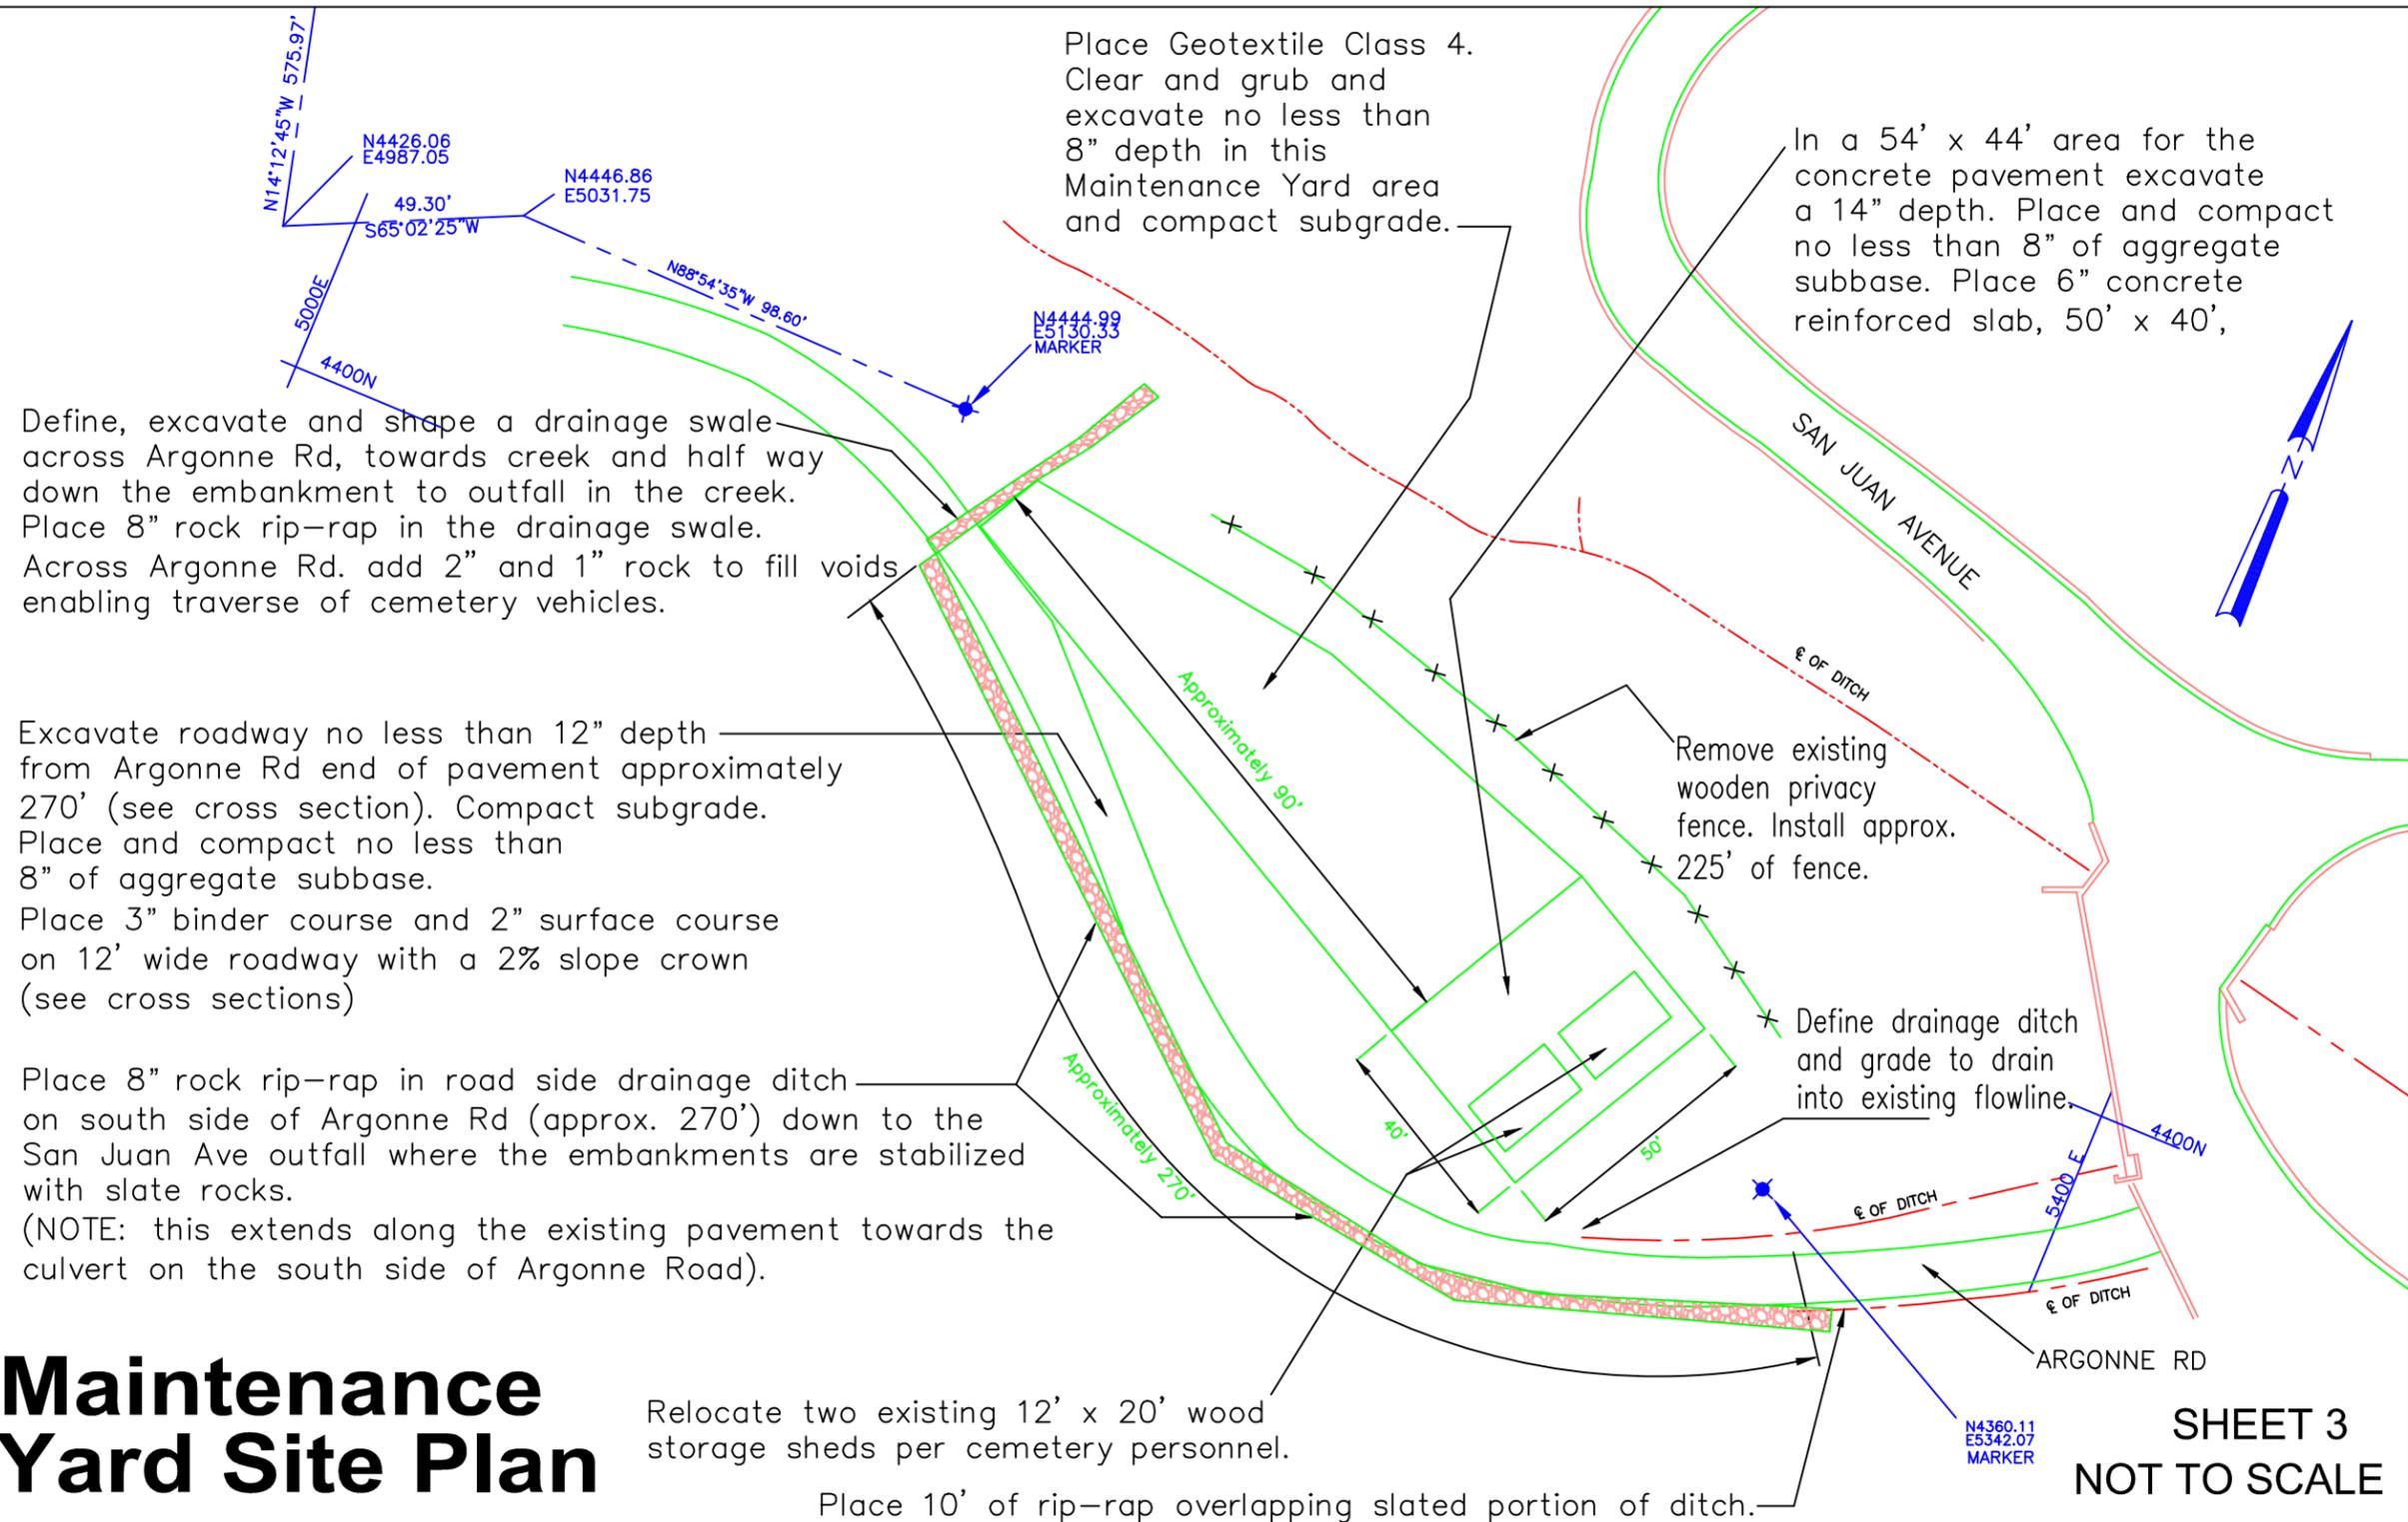

SHEET 3
NOT TO SCALE

GENERAL NOTES:


1. COR SHALL BE CONSULTED BEFORE ANY WORK SHALL COMMENCE AND FOR INFORMATION REGARDING THE TEMPORARY FIELD OFFICES.
2. CONTRACTOR SHALL VERIFY ALL CONDITIONS IN THE FIELD AND REPORT ANY DISCREPANCIES BETWEEN PLANS AND ACTUAL CONDITIONS TO THE COR.
3. PRIOR TO ANY EARTHWORK OPERATIONS, CONTRACTOR SHALL INSTALL ALL EROSION & SEDIMENT CONTROL MEASURES INDICATED.
4. CONTRACTOR SHALL ESTABLISH TWO (2) PERMANENT SECONDARY BENCHMARKS PRIOR TO THE START OF CONSTRUCTION. ALL SECONDARY BENCHMARKS SHALL BE SO LOCATED THAT THEY WILL NOT BE DISTURBED BY CONSTRUCTION.
5. THE CONTRACTOR SHALL BE RESPONSIBLE TO COORDINATE HIS EFFORTS OF DEMOLITION, REMOVALS AND OR RELOCATION WORK WITH ALL TRADES AND COR, AS APPLICABLE.
6. CONTRACTOR SHALL SCHEDULE AND CONTROL HIS GRADING OPERATION TO PREVENT ORGANIC MATERIALS LEFT ON THE SITE FROM BECOMING PART OF THE FILL IN ANY STRUCTURAL FILL AREAS.
7. CONTRACTOR SHALL COORDINATE WITH COR TO DISPOSE OF ALL REMOVED ORGANIC MATERIALS (I.E. BRANCHES, TREES OR SHRUBS).
8. CONTRACTOR SHALL NOTE ACCESS TO THE SITE IS RESTRICTED BY ONE ACCESS. CONSTRUCTION SHALL NOT INTERFERE WITH CEMETERY OPERATIONS. NO EXTRAS SHALL BE GIVEN FOR ISSUES RELATED TO SITE ACCESS.
9. SPECIFICALLY FOR SECTION X, PROTECT EXISTING GRAVESITES PRIOR TO, DURING AND AFTER ANY WORK. DEFINE THE CONSTRUCTION AREA WITH THE COR. DRIVING OF CONSTRUCTION VEHICLES OVER EXISTING GRAVES IS STRICTLY FORBIDDEN; CONTRACTOR SHALL NOT PLACE ANY MATERIALS, TOOLS OR EQUIPMENT WITHIN THE BURIAL PLOT AREAS

NOTE: The proposed roadway and the proposed surface of the Maintenance Yard are to receive 8" of subbase. The finished surface and elevation of the Maintenance Yard is to be the top of the compacted subbase (graveled Yard). This shall match the finished elevation of the proposed asphalt roadway and the finished elevation of the 50' x 40' concrete pavement all at a 2% slope draining due north towards the main creek.


Clean construction area. Taper and grade to drain to match all adjacent areas taking care to prevent future erosion.

GENERAL NOTES
SHEET 4


EXPANSION JOINT NOTE:
 USE 1/2" WIDE PREMOLDED BITUMINOUS MATERIAL FOR FULL DEPTH OF JOINT. ROUND JOINT EDGES. TRIM MATERIAL AT TOP TO PROVIDE ROOM FOR SEALANT. FORM JOINT AROUND ALL APPURTENANCES EXTENDING INTO OR THROUGH CONCRETE AND BETWEEN CONCRETE AND ANY FIXED STRUCTURE. JOINTS SHALL BE SPACED AT 20' IN BOTH DIRECTIONS.

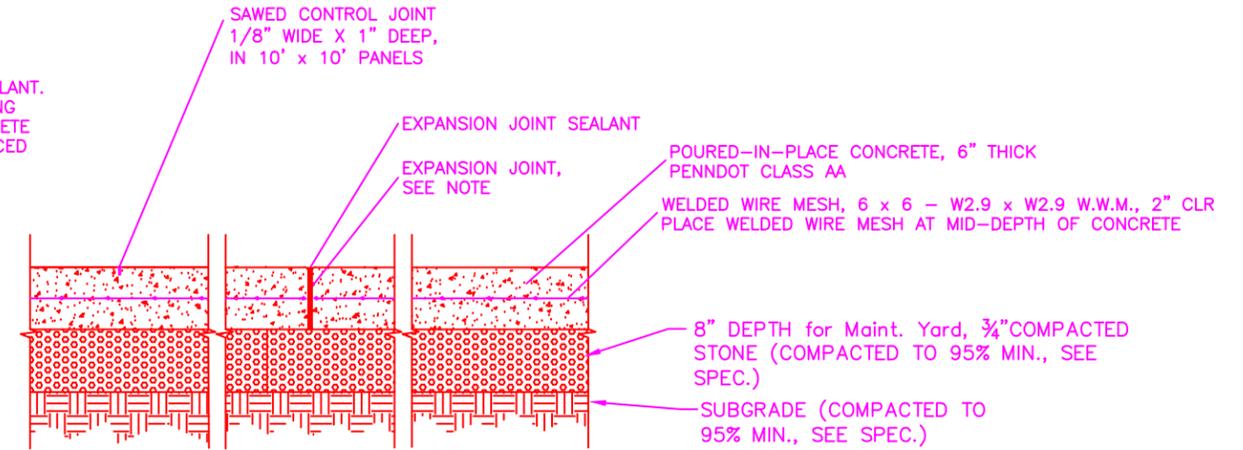


3 CONCRETE PAVEMENT Maintenance Yard

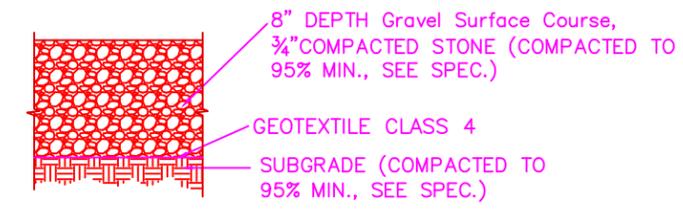

2 GRAVEL SURFACE COURSE Maintenance Yard

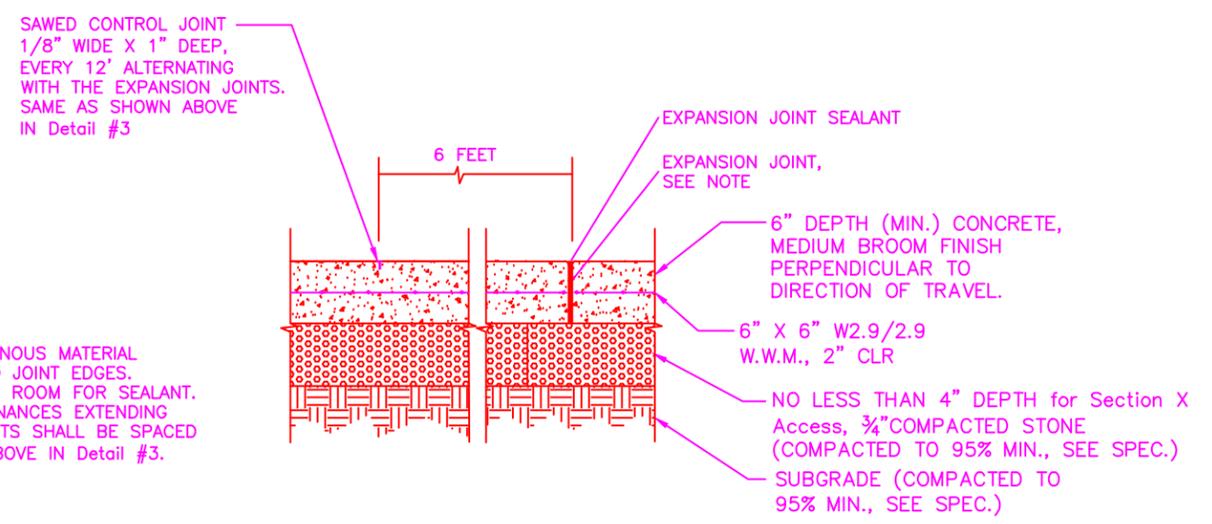


1 CONCRETE PAVEMENT Section X Access

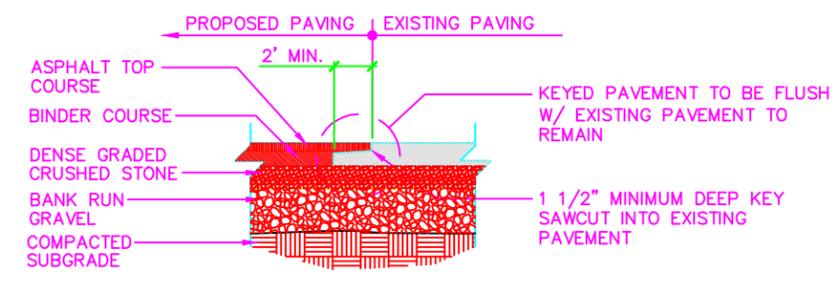

4 PAVEMENT KEY

NOT TO SCALE

EXPANSION JOINT WITH SEALANT - NOTE:
 USE 1/2" WIDE PREMOLDED BITUMINOUS MATERIAL FOR FULL DEPTH OF JOINT. ROUND JOINT EDGES. TRIM MATERIAL AT TOP TO PROVIDE ROOM FOR SEALANT. FORM JOINT AROUND ALL APPURTENANCES EXTENDING INTO OR THROUGH CONCRETE. JOINTS SHALL BE SPACED AT EVERY 12'. SAME AS SHOWN ABOVE IN Detail #3.

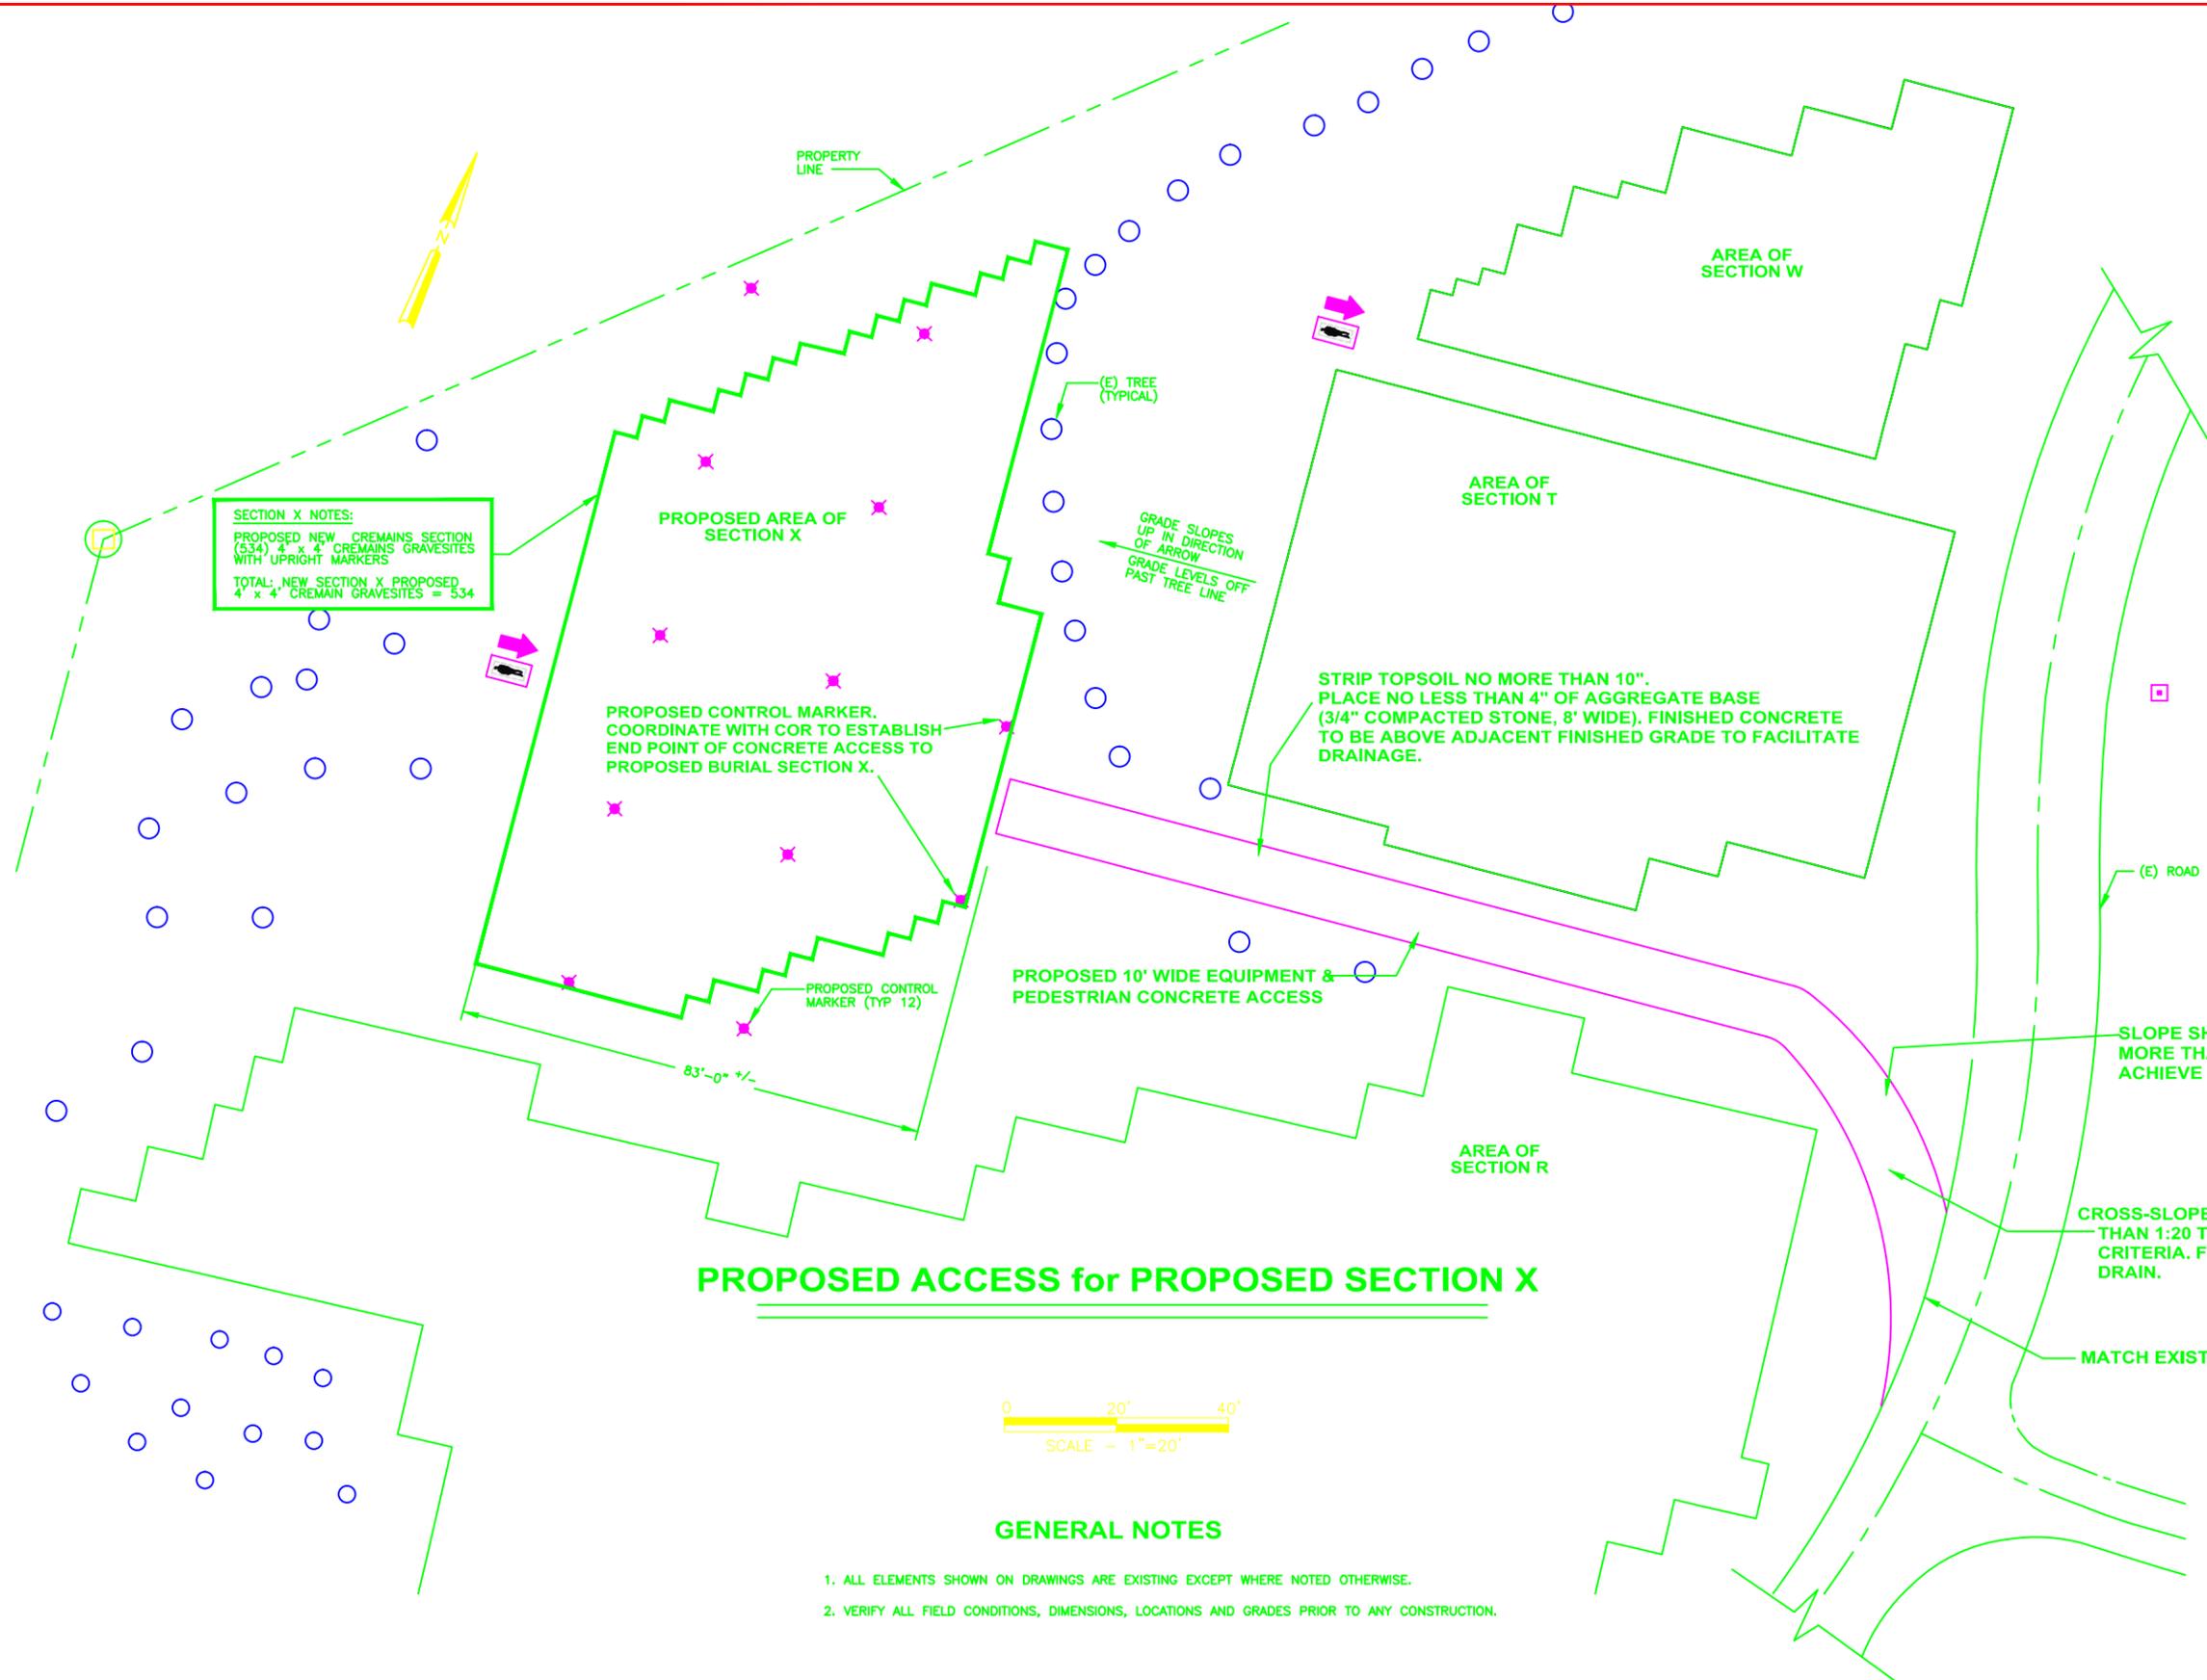

SECTION X NOTES:
 PROPOSED NEW CREMAINS SECTION
 (534) 4' x 4' CREMAINS GRAVESITES
 WITH UPRIGHT MARKERS
 TOTAL NEW SECTION X PROPOSED
 4' x 4' CREMAINS GRAVESITES = 534

PROPOSED CONTROL MARKER.
 COORDINATE WITH COR TO ESTABLISH
 END POINT OF CONCRETE ACCESS TO
 PROPOSED BURIAL SECTION X.

STRIP TOPSOIL NO MORE THAN 10".
 PLACE NO LESS THAN 4" OF AGGREGATE BASE
 (3/4" COMPACTED STONE, 8' WIDE). FINISHED CONCRETE
 TO BE ABOVE ADJACENT FINISHED GRADE TO FACILITATE
 DRAINAGE.

PROPOSED ACCESS for PROPOSED SECTION X



GENERAL NOTES

1. ALL ELEMENTS SHOWN ON DRAWINGS ARE EXISTING EXCEPT WHERE NOTED OTHERWISE.
2. VERIFY ALL FIELD CONDITIONS, DIMENSIONS, LOCATIONS AND GRADES PRIOR TO ANY CONSTRUCTION.

SLOPE SHOULD BE NO MORE THAN 1:12 TO ACHIEVE ADA CRITERIA

CROSS-SLOPE TO BE NO MORE THAN 1:20 TO ACHIEVE ADA CRITERIA. FINISH GRADE TO DRAIN.

MATCH EXISTING PAVEMENT

Revisions	Date

SYMBOL KEY	
	CONTROL MARKER
	EXISTING STRUCTURE WITH CLASSIFICATION NUMBER
	HEADSTONES IN THE HIGHLIGHTED BURIAL SECTION FACE IN THE DIRECTION OF THE ARROW
	PAVED ROAD W/CURB & GUTTER (C & G SHOWN BOTH SIDES)
	EXISTING

	METAL PICKET FENCE
	CHAIN LINK FABRIC FENCE
	PROPERTY BOUNDARY LINE
	OVERHEAD ELECTRIC LINE AND POWER POLE
	UNDERGROUND ELECTRIC LINE
	SANITARY SEWER LINE
	STORM DRAIN LINE
	IRRIGATION LINE
	WATER LINE

DRAWING NOTES	
1.	
2.	
3.	

KEYMAP	

Drawing Title	
Approved:	
Approved:	

Project Title			Date
Proposed Section X Access			
Building No.	Checked	Drawn	Project No.
Location			DRAWING NO.
			6

Veterans Administration	
-------------------------	--