
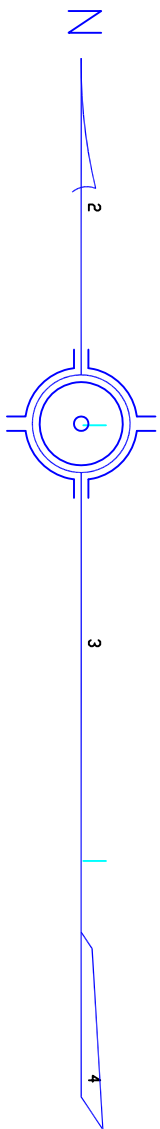


GENERAL NOTES:

1. Contractor to install 4" PVC conduit with three innerducts through the conduit at a minimum 36" depth.
2. Conduit must have a radius sweep of approximately a 10 to 1 ratio (e.g. 24 fiber cable has a diameter of approximately 1" so the minimum bend radius would be 10 inches).
3. Install a pull string and a #12 solid copper wire for tracing in the conduit.
4. Install new sod to replace any turf that is removed or damaged.
5. Sprinkler lines are approximate. Contractor is responsible for locating lines and repairing lines that are damaged during the project.
6. Storm sewer lines are approximate. Contractor is responsible for locating lines and repairing lines that are damaged during the project.
7. Fire hydrant lines are approximate. Contractor is responsible for locating lines and repairing lines that are damaged during the project.

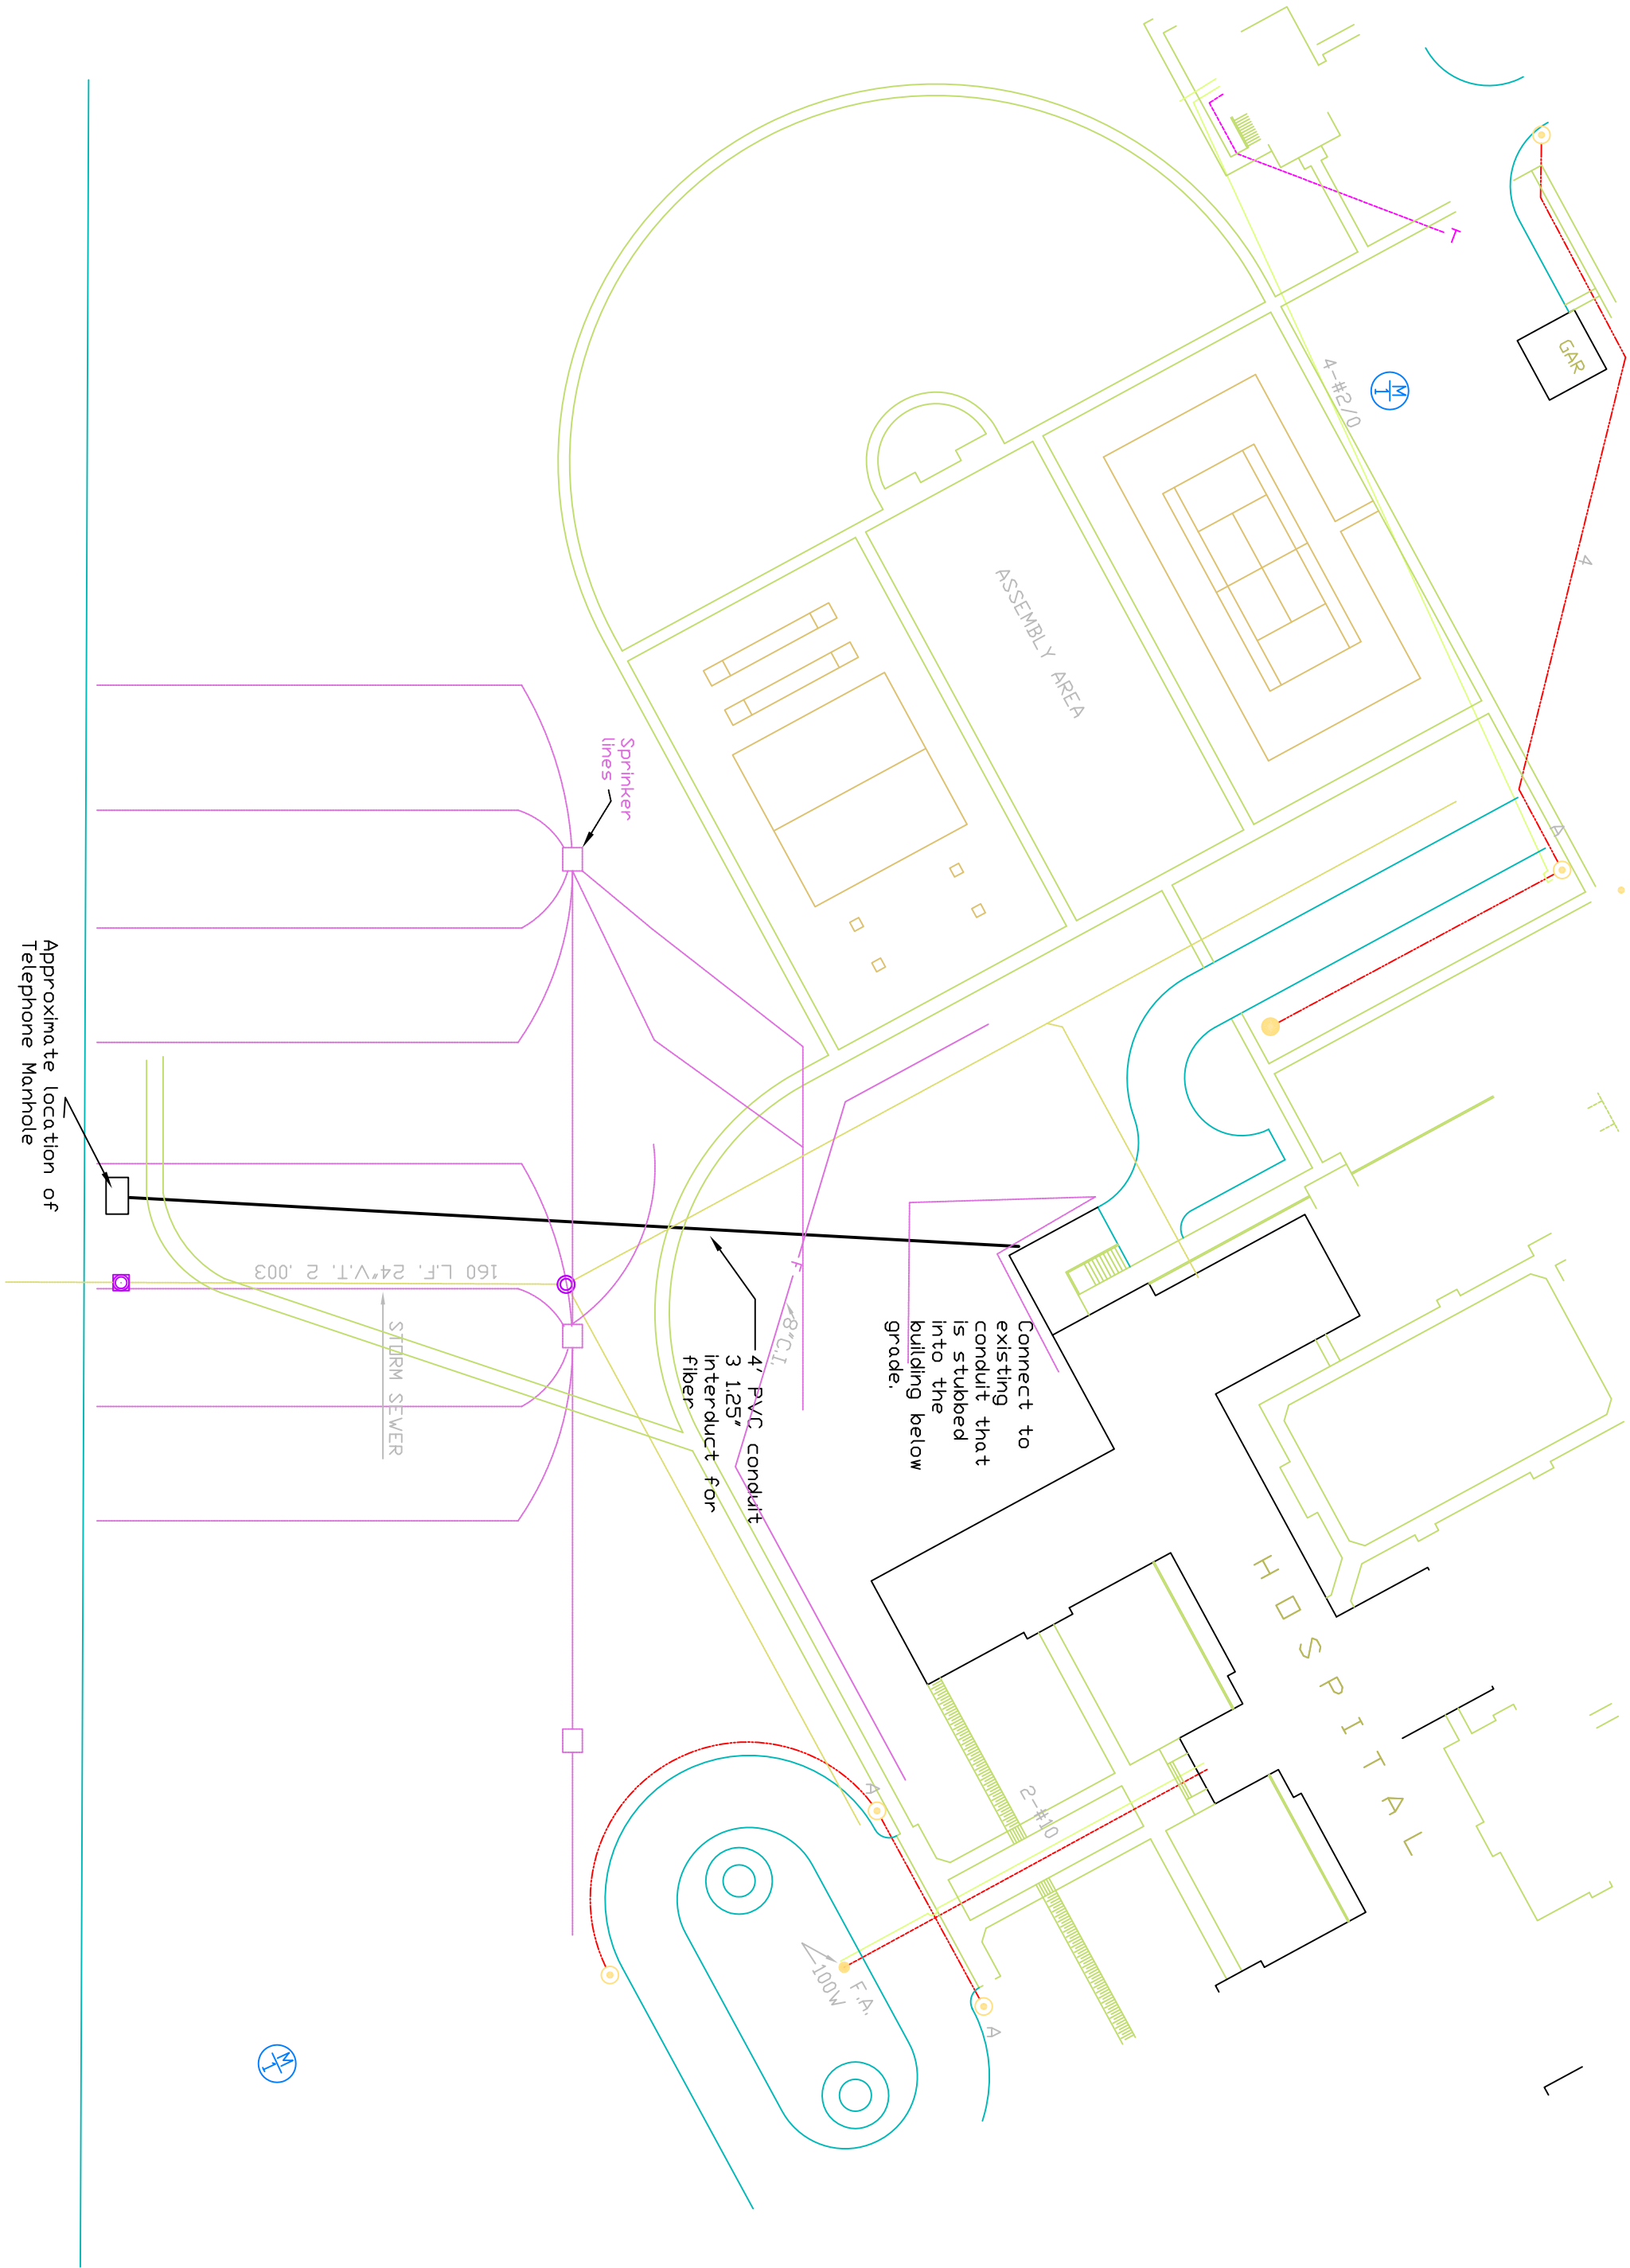

Revisions		Date
1		

Drawing Title		Project Title		CAD Reference File	
Fiber Optic Site Prep		Fiber Optic Site Prep		Date	
Approved: Division Chief, ENGINEERING SERVICE		Building Number		Project No.	
Approved: Service Director MEDICAL CENTER DIRECTOR		Site		Drawing NO.	
		Location		Dwg 1 of 1	

Department of Veterans Affairs	
--------------------------------	--