


three inches = one foot
one and one half inch = one foot
one inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot
one sixteenth inch = one foot

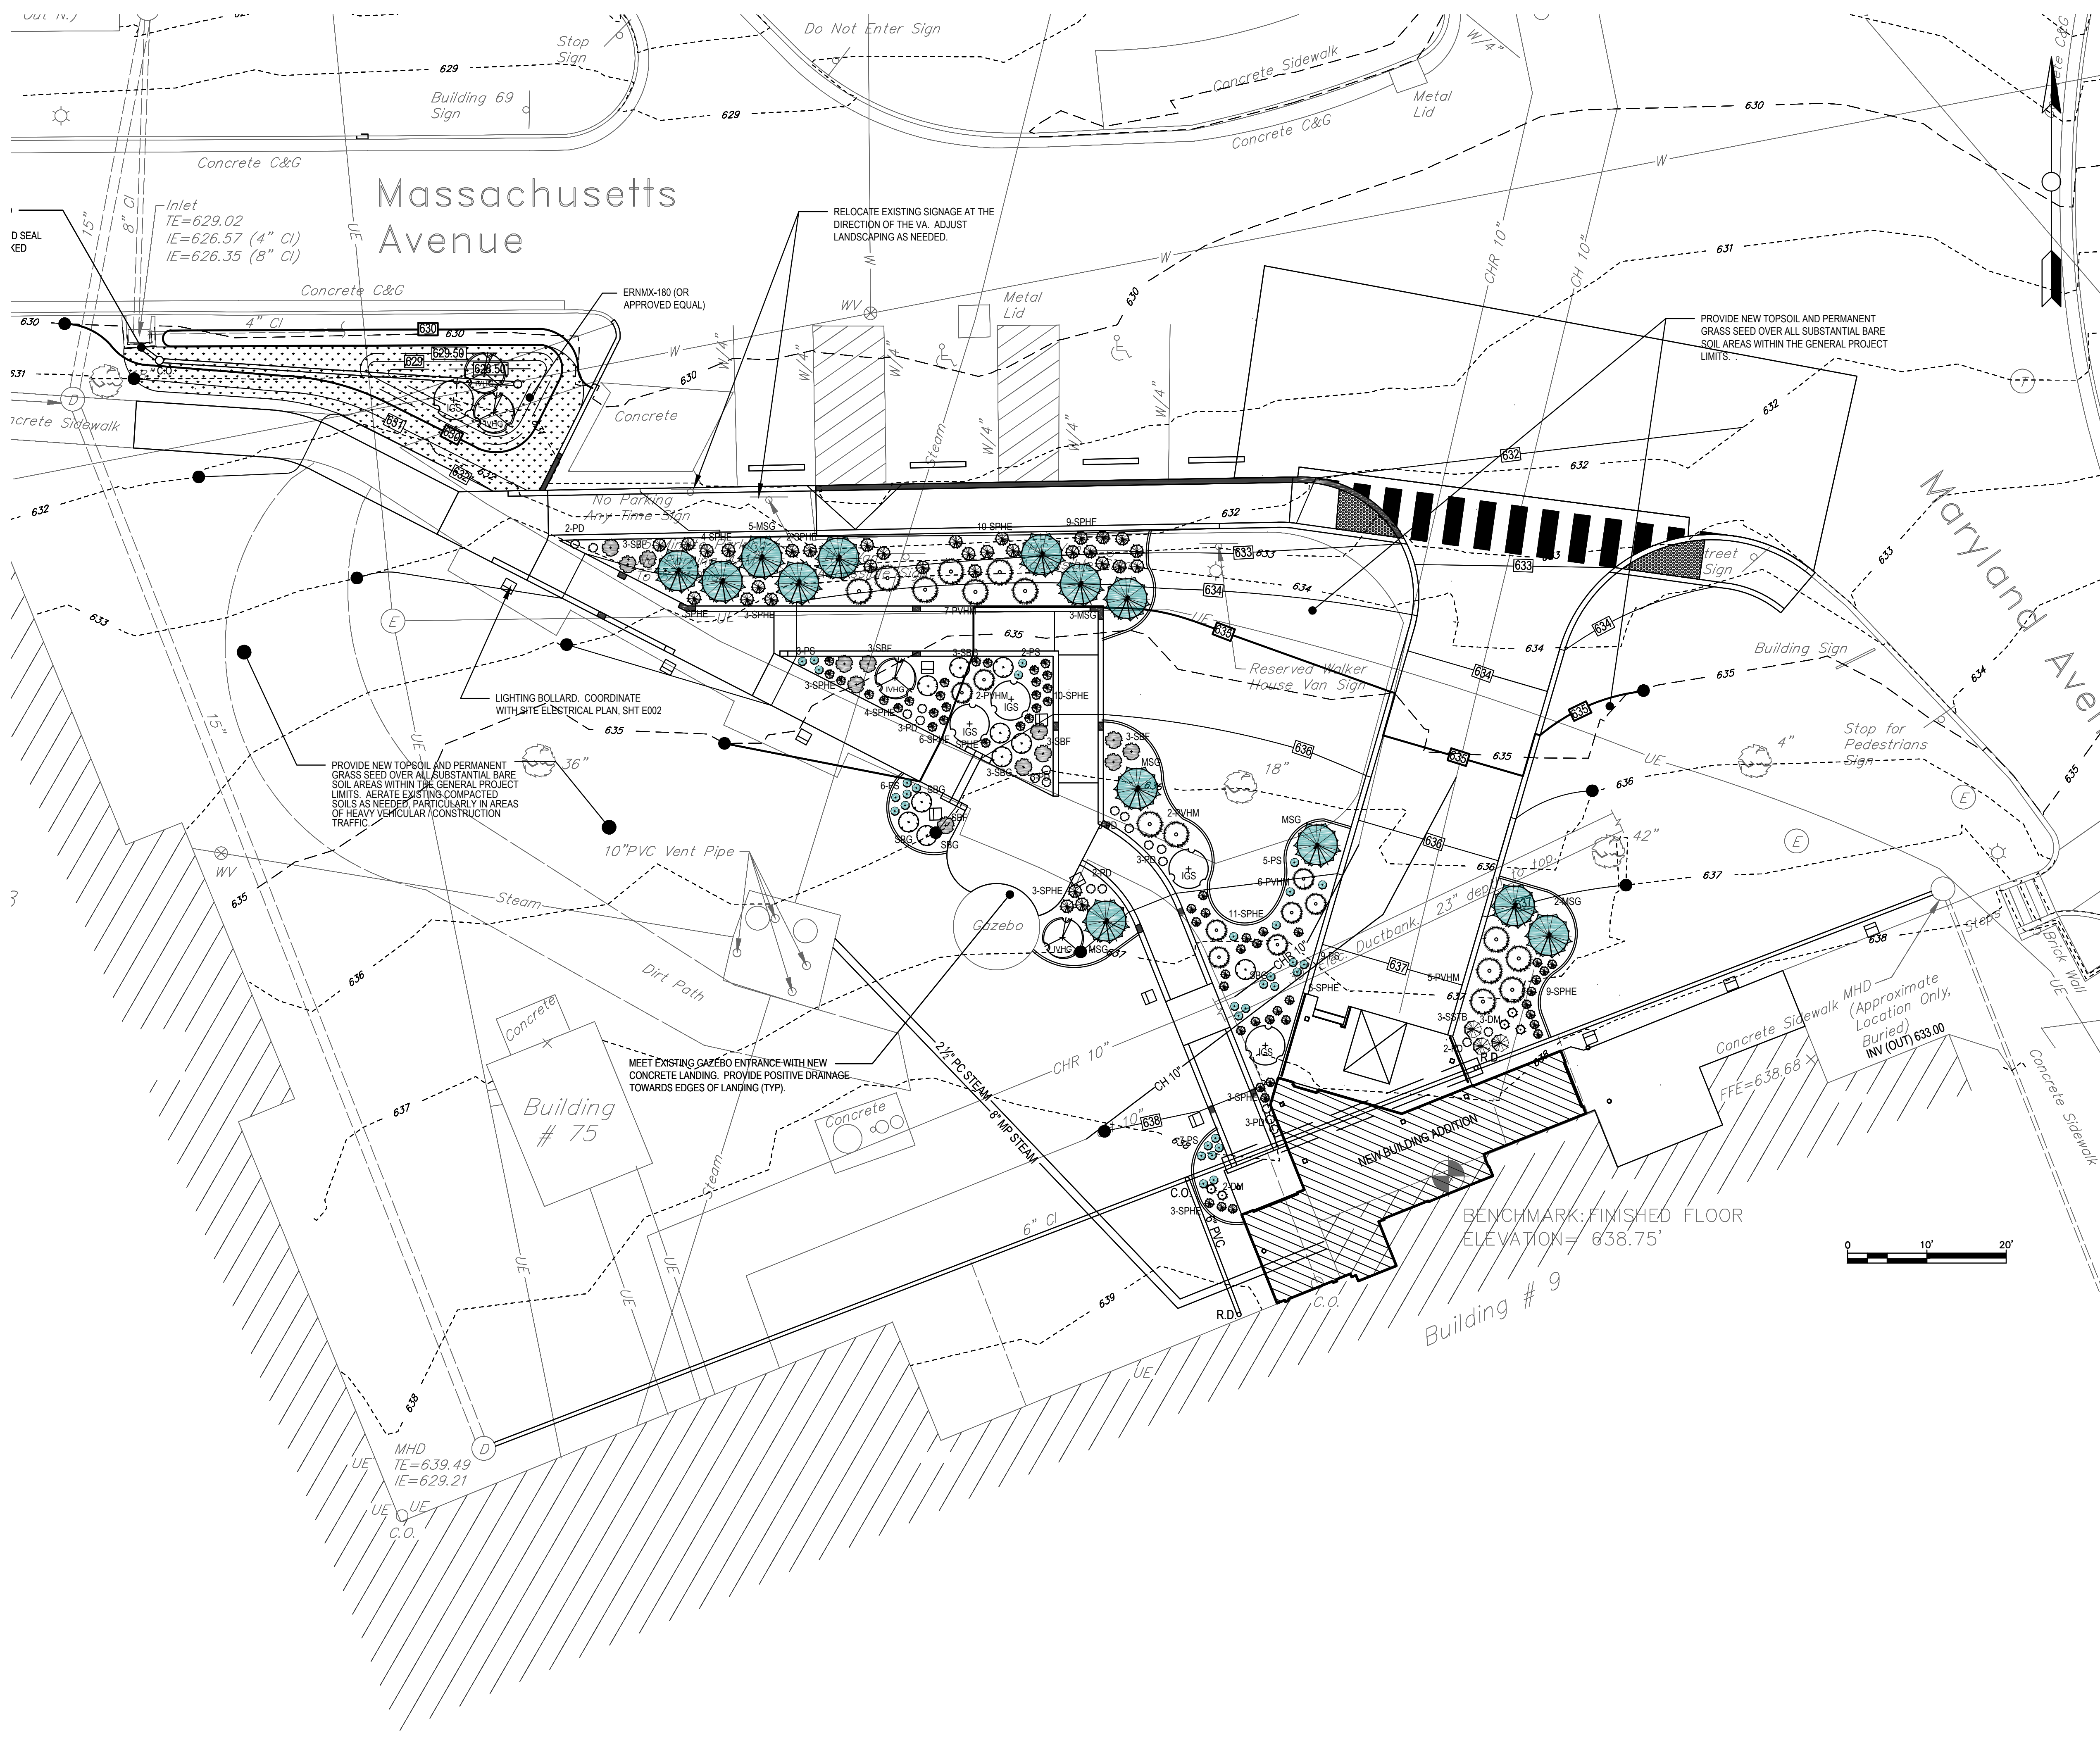

LANDSCAPE PLAN LEGEND

NOTE: REFER TO THE EXISTING FEATURES PLAN FOR THE EXISTING FEATURES LEGEND

X
XXXX
DETAIL NUMBER
DRAWING NUMBER WHERE DRAWN

X
XXXX
SECTION LETTER
DRAWING NUMBER WHERE DRAWN

PROPOSED TREES
SEE PLAN FOR SPECIES AND QUANTITIES

PROPOSED SHRUBS AND GROUNDCOVER
SEE PLAN FOR SPECIES AND QUANTITIES

- LANDSCAPE PLAN NOTES**
- ALL TREE LOCATIONS SHALL BE STAKED IN THE FIELD AND LOCATIONS APPROVED BY OWNERS REPRESENTATIVE PRIOR TO PLANTING.
 - TOPSOIL WITH QUALITY ORGANIC SOIL AMENDMENT SHALL BE USED FOR ALL PLANTING AND SEEDING OPERATIONS.
 - NOTIFY ALL UTILITY COMPANIES AND LOCATE ALL UTILITIES PRIOR TO EXCAVATING PLANT PITS. PLANT LOCATIONS MAY BE ADJUSTED IN THE FIELD TO AVOID INTERFERENCE WITH UNDERGROUND UTILITIES.
 - SHOULD ANY DISCREPANCY ARISE BETWEEN THE PLANTING PLAN AND THE PLANTING SCHEDULE, THE PLAN SHALL GOVERN AS TO THE QUANTITY OF PLANT MATERIAL.
 - ALL PLANT MATERIAL SHALL BE OF NURSERY STOCK QUALITY AS DEFINED BY THE AMERICAN NURSERY AND LANDSCAPE ASSOCIATION. ALL PLANT MATERIAL SHALL BE GUARANTEED TO LIVE AT LEAST 18 MONTHS FOLLOWING INSTALLATION.
 - ALL NON-BIODEGRADABLE ROOT WRAPPING TO BE REMOVED COMPLETELY BEFORE PLANTING.
 - PROVIDE 3" DOUBLE GROUND HARDWOOD MULCH AT ALL PLANTING AREAS.
 - ALL PLANT MATERIAL SHALL BE APPROVED UPON ARRIVAL TO THE SITE, UNLESS OTHERWISE NOTIFIED.
 - SEED ALL AREAS DISTURBED BY CONSTRUCTION NOT OTHERWISE CONTAINING PLANTING BEDS, SIDEWALKS, BUILDINGS, ETC.
 - ALL DISTURBED AREAS NOT SCHEDULED TO RECEIVE PAVING OR LANDSCAPING TO RECEIVE 4" MIN. DEPTH TOPSOIL AND LAWN SEEDING.
 - ALL TREES IN LAWN AREA TO HAVE A 5' DIA. MULCH RING.
 - SEE EROSION AND SEDIMENTATION CONTROL PLANS FOR TEMPORARY AND PERMANENT SEEDING SCHEDULE.
 - CONTRACTOR MAY MAKE MINOR ADJUSTMENTS TO THE PLANT AND SHRUB LOCATIONS IN ORDER TO ACCOMMODATE PROPOSED LIGHTING BOLLARDS, RAILINGS AND OTHER EXISTING AND PROPOSED SITE IMPROVEMENTS, OR TO GENERALLY ACHIEVE A BALANCED, AESTHETIC ARRANGEMENT, GIVEN SITE CONSTRAINTS.

QUANTITY	KEY	BOTANICAL NAME COMMON NAME	SPACING (SPACE PLANTS EVENLY IN AREAS INDICATED)	SIZE (HT.)	CONDITION
DECIDUOUS TREES					
-	-	-	-	-	-
EVERGREEN TREES					
-	-	-	-	-	-
SHRUBS					
4	IGS	ILEX GLABRA 'SHAMROCK' SHAMROCK INK BERRY	5'-0" O.C.	24"	B&B
13	SBF	SPIRAEA X BUMALDA 'FROEBELI' FROEBEL'S SPIREA	3'-0" O.C.	18"	#3 CONTAINER
10	SBG	SPIRAEA X BUMALDA X GOLDFLAME GOLDFLAME SPIREA	4'-0" O.C.	18"	#3 CONTAINER
5	IVHG	ITEA VIRGINICA 'HENRY'S GARNET' VIRGINIA SWEETSPICE	4'-0" O.C.	24"	B&B
ORNAMENTAL GRASSES					
13	MSG	MISCANTHUS SINENSIS 'GRACILLIMUS' MAIDEN GRASS	EVENLY SPACED	-	#3 CONTAINER
90	SPHE	SPOROBOLUS HETEROLEPIS (A. GRAY) A. GRAY PRAIRIE DROPS EED	EVENLY SPACED	-	#3 CONTAINER
22	PVHM	PANICUM VIGATUM 'HEAVY METAL' HEAVY METAL RED SWITCH GRASS	EVENLY SPACED	-	#2 CONTAINER
3	SSTB	SCHIZACHYRIUM SCOPARIUM 'THE BLUES' THE BLUES LITTLE BLUESTEM	EVENLY SPACED	-	#2 CONTAINER
GROUNDCOVER					
18	PD	PHLOX DIVARICATA WILD BLUE PHLOX	EVENLY SPACED	-	#1 CONTAINER
29	PS	PHLOX SUBULATA L. CREEPING PHLOX	EVENLY SPACED, PROVIDE VARYING COLORS	-	#1 CONTAINER
5	DM	DRYOPTERIS MARGINALIS MARGINAL SHIELD FERN	EVENLY SPACED	-	#1 CONTAINER

1 LANDSCAPE PLAN

CONSULTANTS:		ARCHITECTS/ENGINEERS:		Drawing Title SITE LANDSCAPING PLAN		Project Title BUILDING 9 - SECOND FLOOR RENOVATION		Project Number 542-13-105		Office of Construction and Facilities Management		
				Approved: Project Director		Location 1400 Blackhorse Hill Road Coatesville, PA 19320		Building Number 9		Drawing Number LP111		
Revisions:						Date 05/12/14	Checked RB	Drawn CMP	Dwg. 19 of 125		Department of Veterans Affairs	