




three inches = one foot
one and one half inch = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot

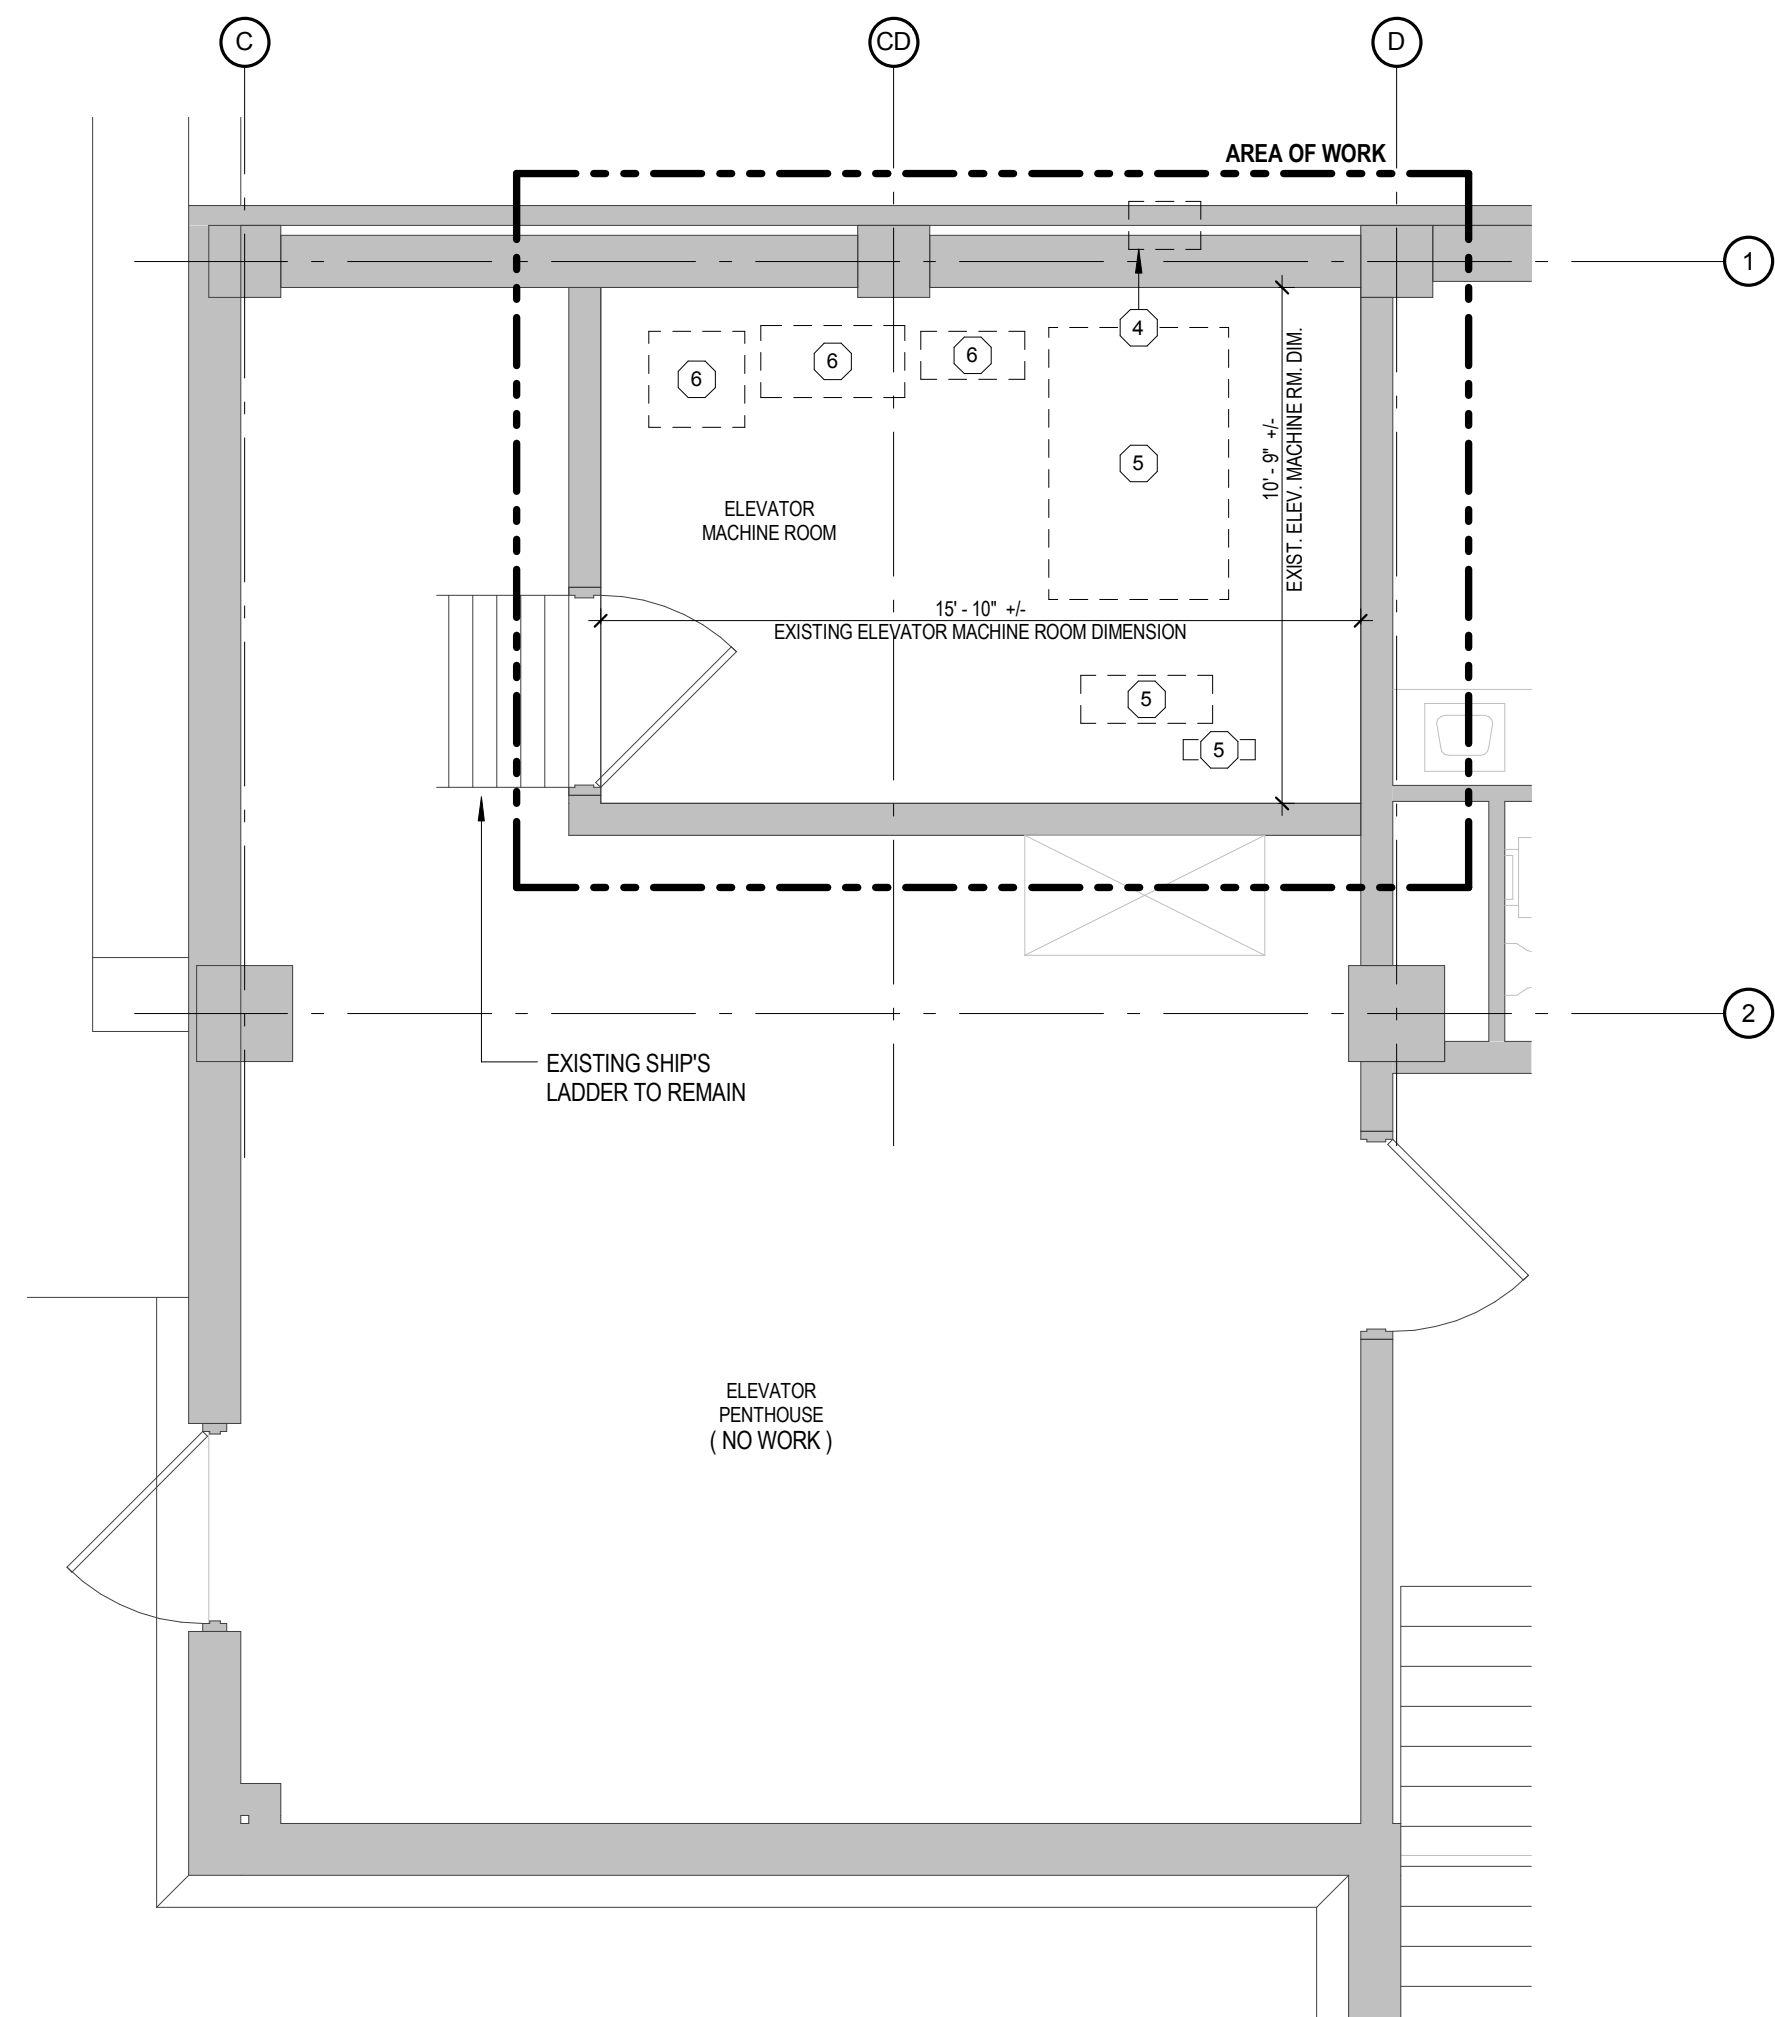


DEMOLITION PLAN:
SERVICE ELEVATOR @ THIRD FLOOR (PH)
1/4" = 1'-0"

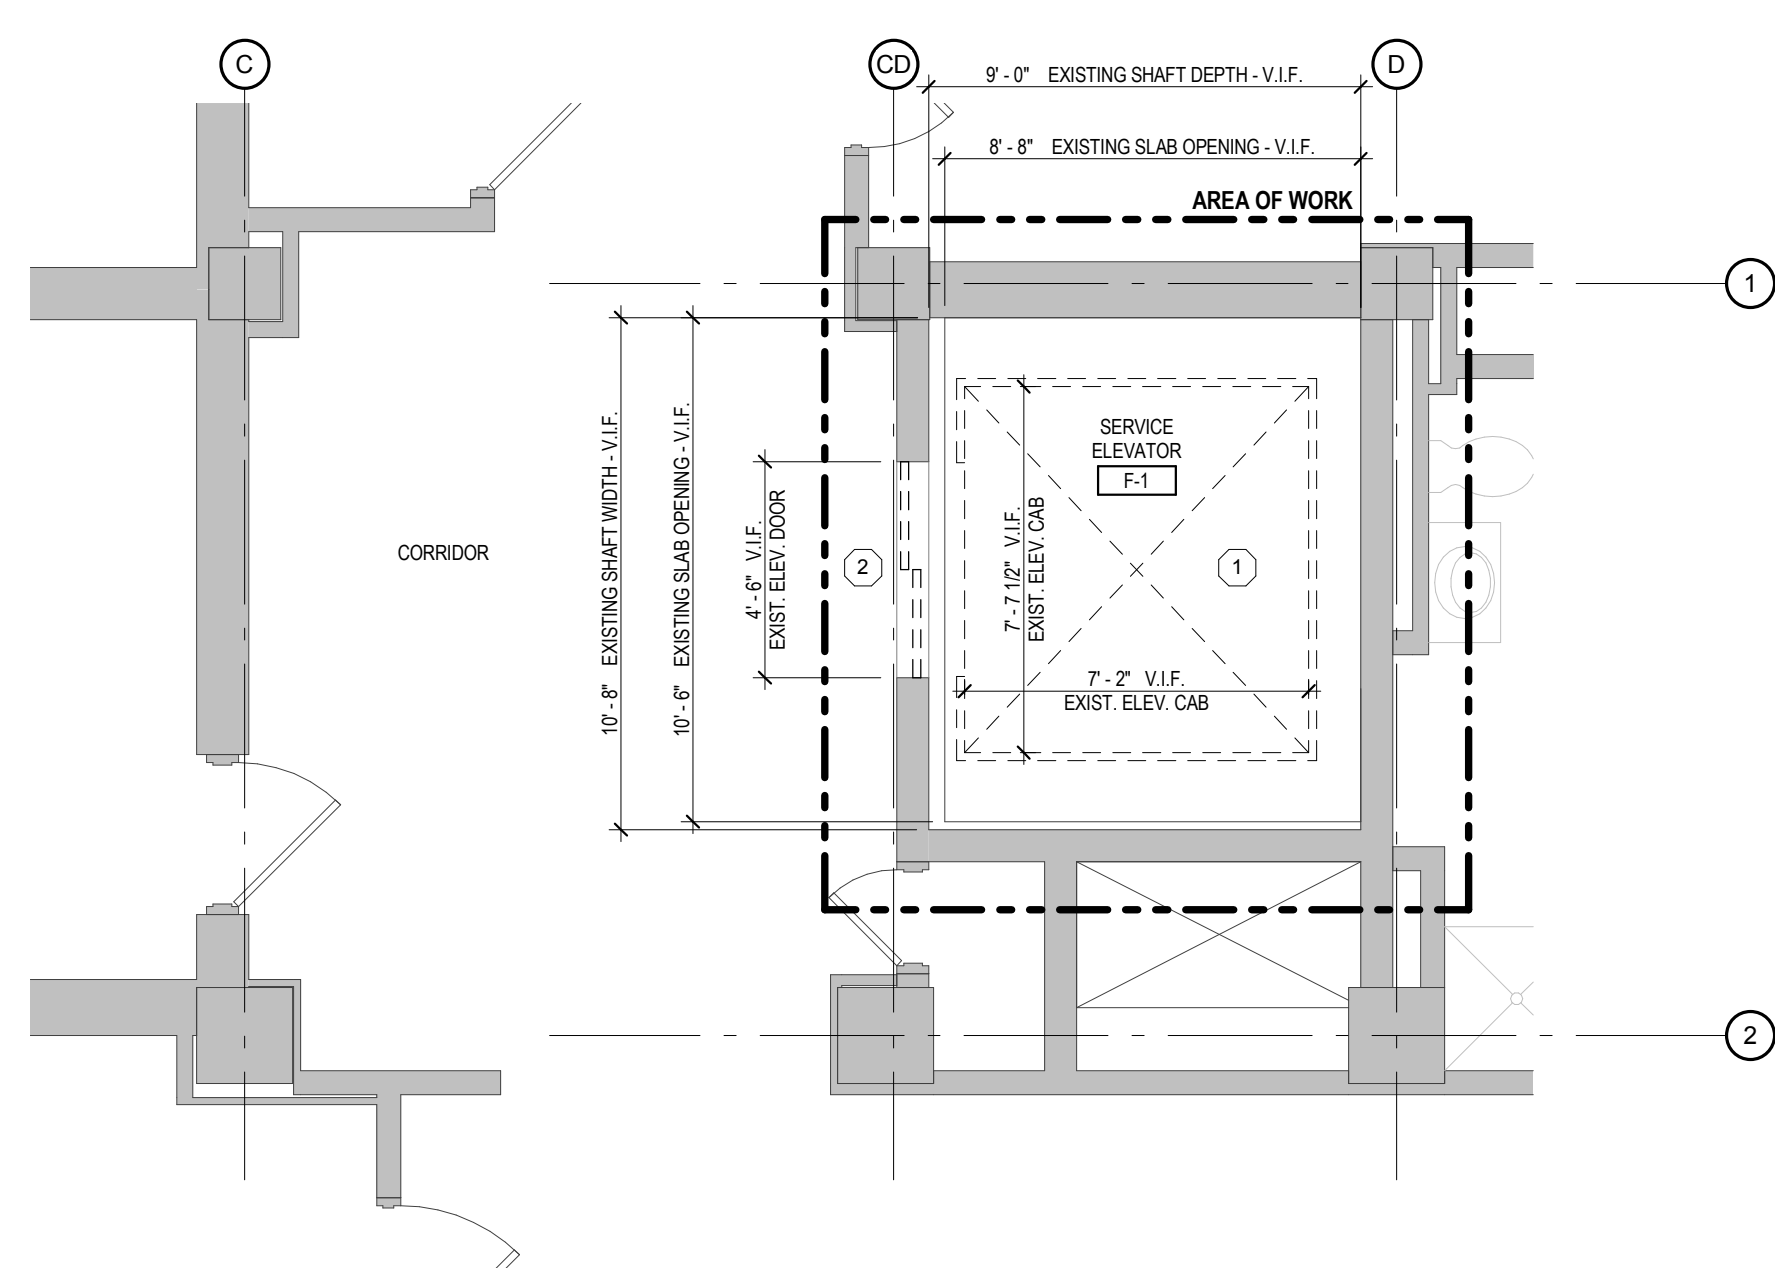

DEMOLITION PLAN:
SERVICE ELEVATOR @ FIRST FLOOR
1/4" = 1'-0"
1ST FLOOR SHOWN: BASEMENT AND 2ND FLOOR SIMILAR

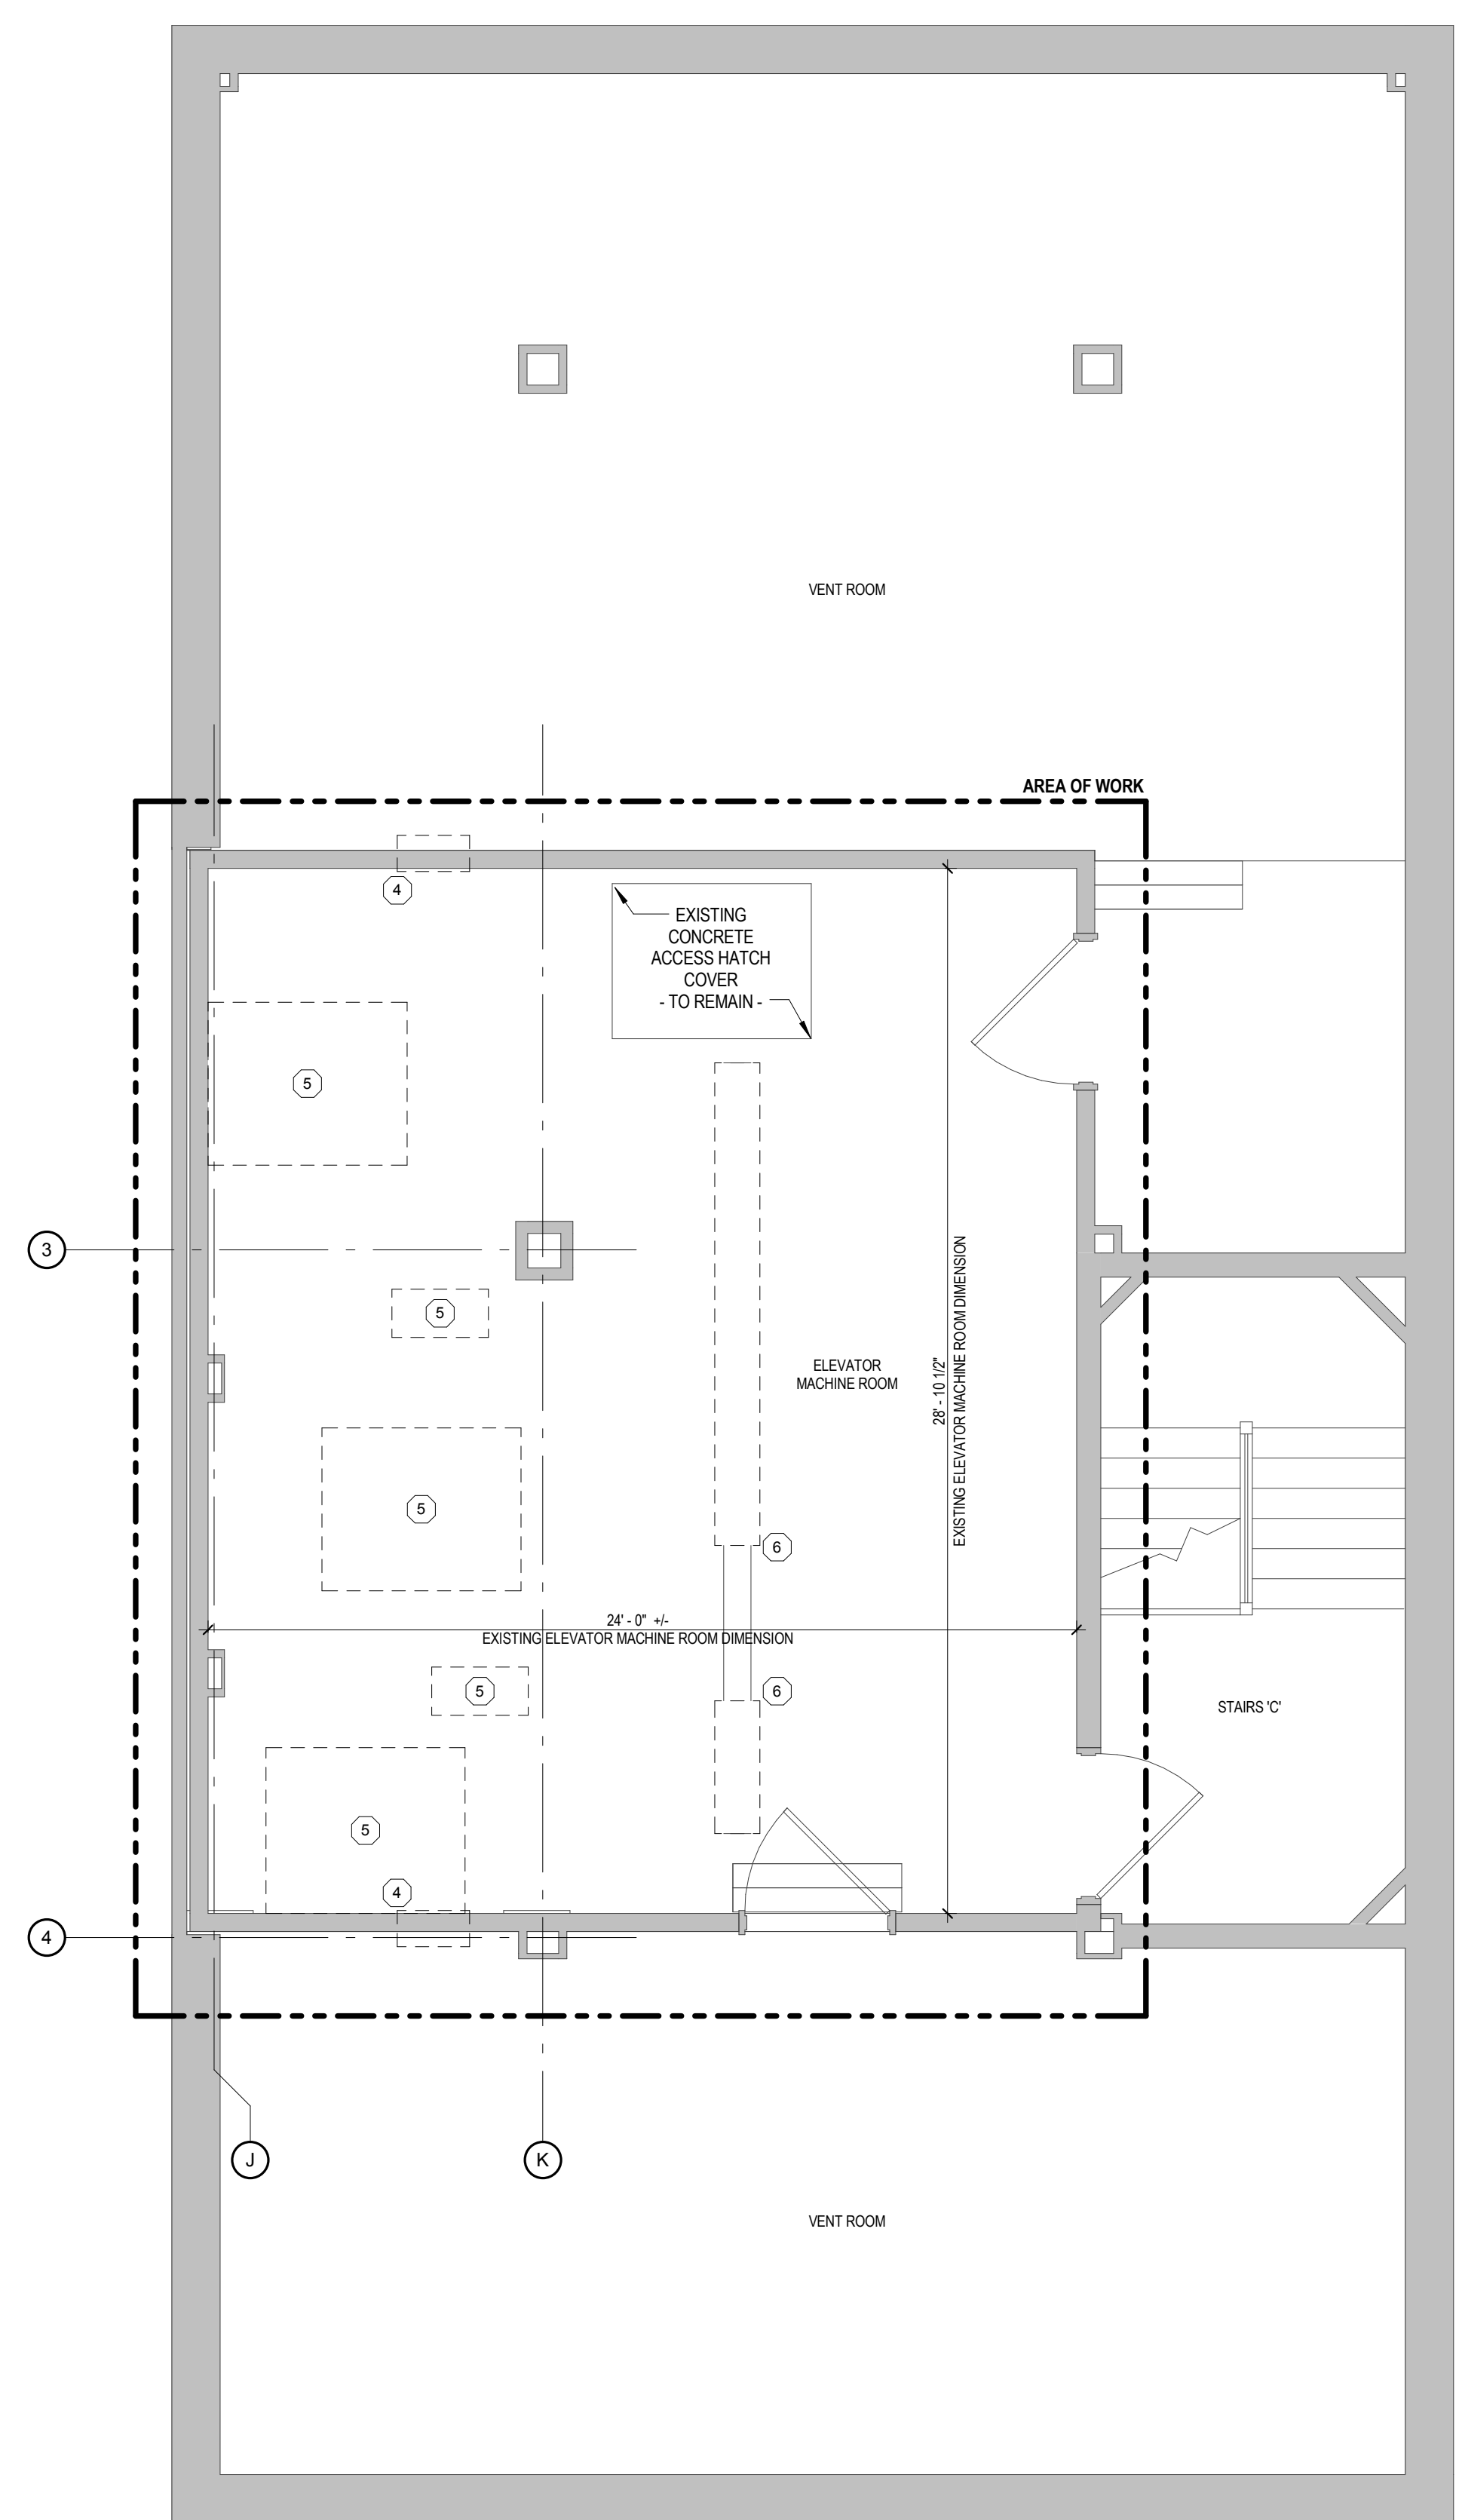

DEMOLITION PLAN:
PASSENGER AND SERVICE ELEVATORS @ PENTHOUSE LEVEL
1/4" = 1'-0"

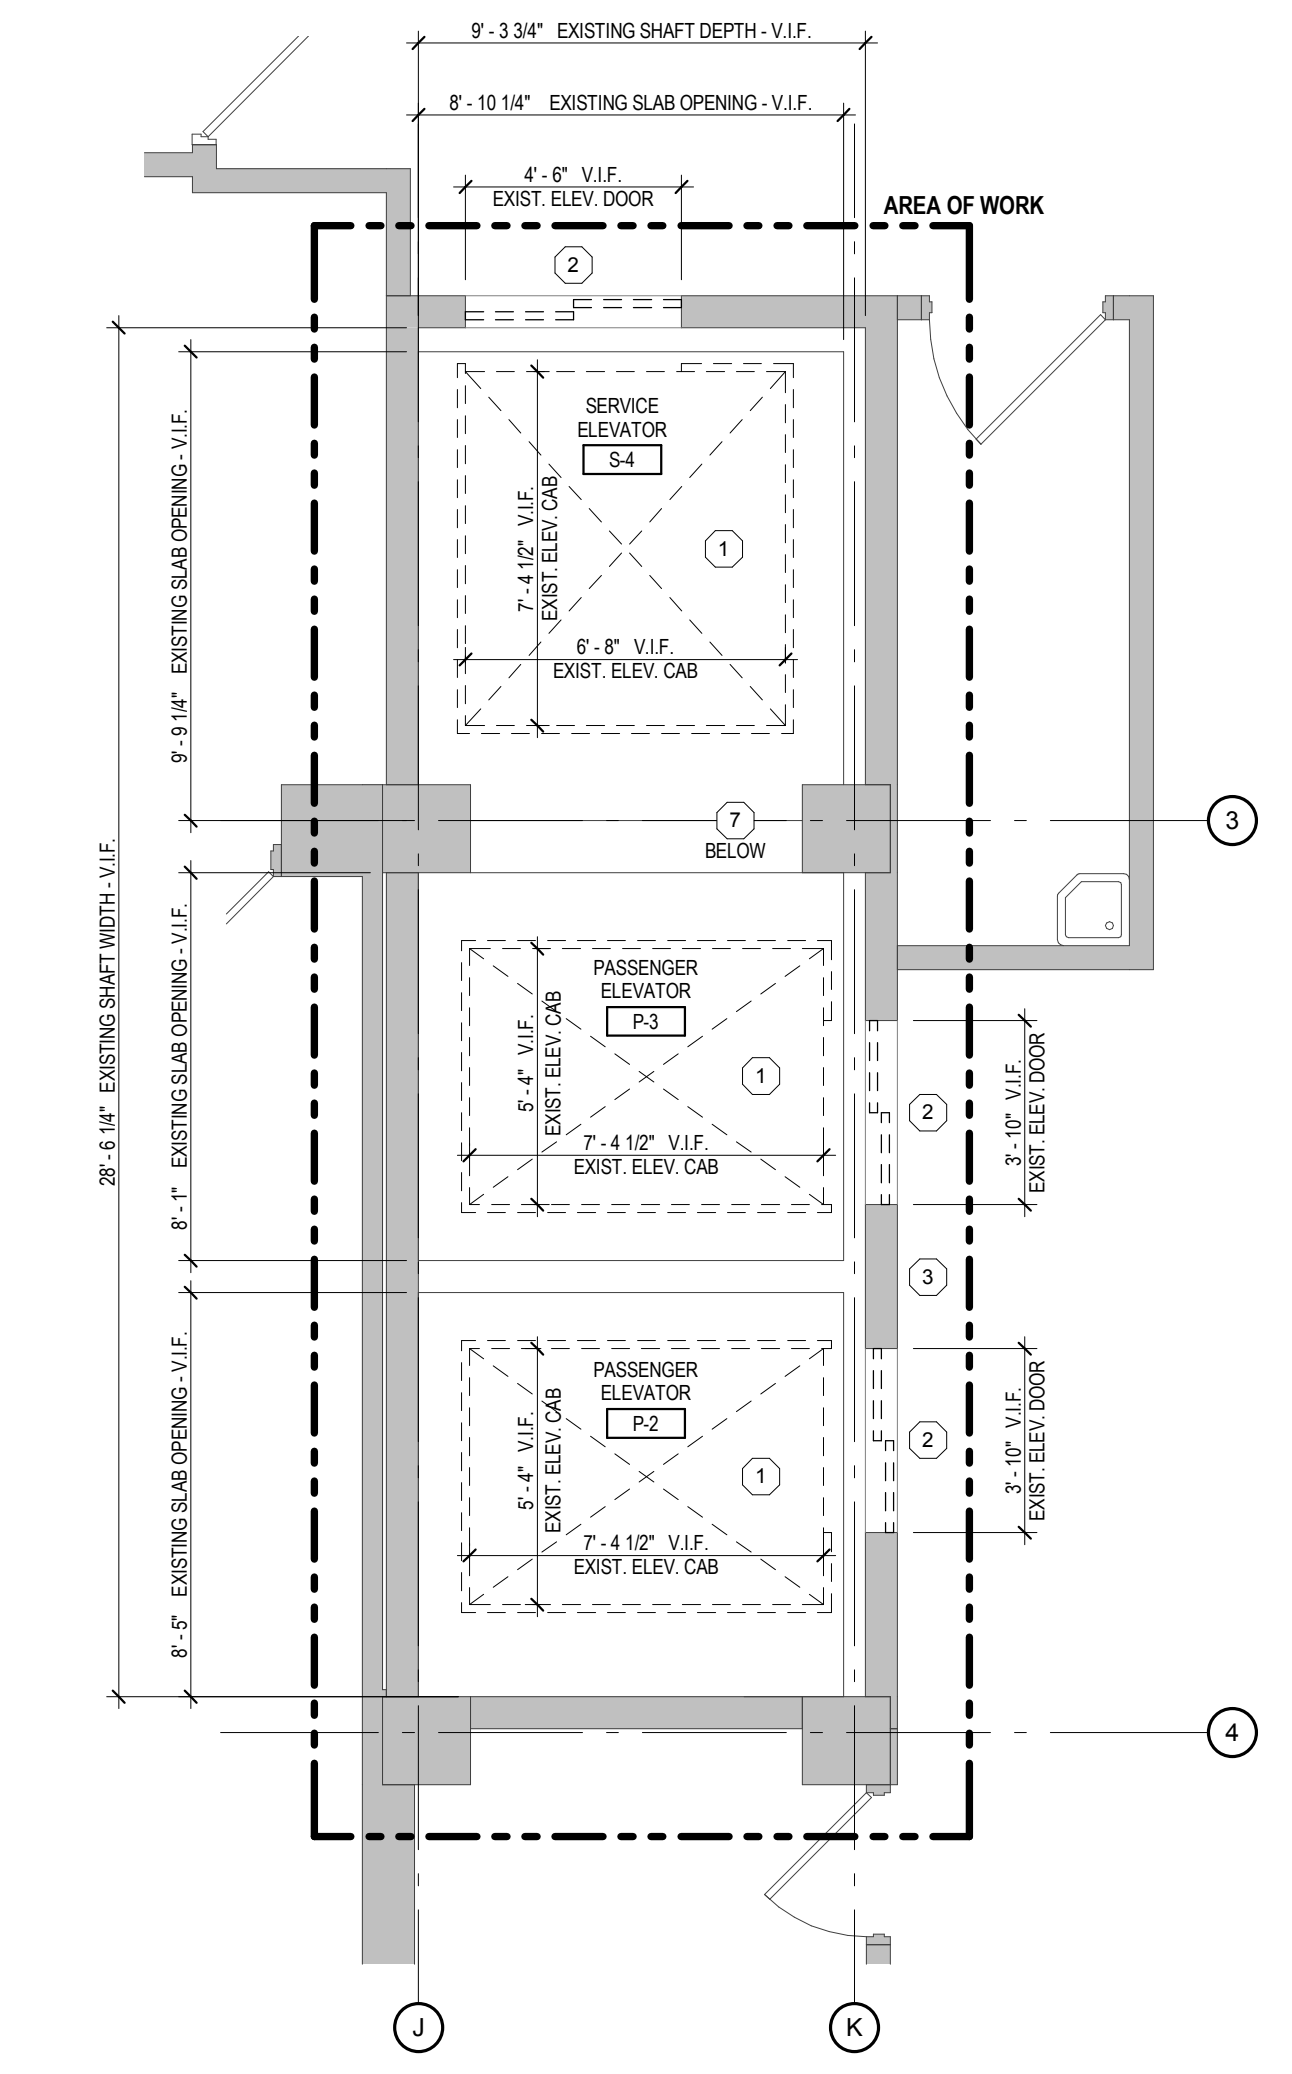

DEMOLITION PLAN:
PASSENGER AND SERVICE ELEVATORS
@ TYPICAL FLOOR PLAN
1/4" = 1'-0"

ALL WORK SHALL BE PERFORMED IN PHASES:
NO MORE THAN ONE ELEVATOR SHALL BE OUT OF SERVICE AT ANY GIVEN TIME. ORDER AND METHOD OF PHASING SHALL BE COORDINATED WITH FACILITY STAFF AND PROJECT MANAGEMENT (CONTRACTING OFFICER'S REPRESENTATIVE (COR) PRIOR TO START OF WORK.

- GENERAL DEMOLITION NOTES:
- CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS AND COORDINATE ALL DEMOLITION ACTIVITIES WITH ANY NEW CONSTRUCTION AS INDICATED WITHIN THE CONSTRUCTION DOCUMENTS. DO NOT SCALE DRAWINGS.
 - CONTRACTOR SHALL PERFORM ALL NECESSARY DEMOLITION ACTIVITIES AS REQUIRED FOR INSTALLATION OF NEW CONSTRUCTION AS INDICATED WITHIN THE CONSTRUCTION DOCUMENTS. COORDINATE WITH THOSE DOCUMENTS FOR EXACT DIMENSIONS AND LOCATIONS OF FINISHED WORK.
 - ALL DEMOLITION NOT SPECIFICALLY INDICATED, BUT NECESSARY TO COMPLETE THE PROJECT AS INDICATED ON THE CONSTRUCTION DOCUMENTS, SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.
 - THE CONTRACTOR SHALL INSPECT AND ACCESS EACH SPACE AND FULFILL THE INTENT OF THE WORK REQUIRED BY THE CONTRACT DOCUMENTS. DEVIATIONS REQUIRED BY EXISTING FIELD CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF THE CONTRACTING OFFICER'S REPRESENTATIVE (COR) PRIOR TO PROCEEDING WITH THE WORK.
 - ANY CUTTING AND REMOVAL INDICATED ON THE CONSTRUCTION DOCUMENTS ARE GENERAL INDICATIONS ONLY AND MAY NOT NECESSARILY SHOW THE FULL EXTENT OF CUTTING AND REMOVAL NECESSARY.
 - THROUGHOUT THE COURSE OF DEMOLITION ACTIVITIES, PROPERLY PROTECT ANY EXISTING CONSTRUCTION INDICATED TO REMAIN. EXERCISE CARE WHEN REMOVING ADJACENT CONSTRUCTION AND PROPERLY REPAIR (TO ORIGINAL CONDITION) ANY AREAS SCHEDULED TO REMAIN THAT SUSTAIN DAMAGE AS A RESULT OF DEMOLITION ACTIVITIES.
 - CONTRACTOR SHALL CONSTRUCT DUST PROOF PROTECTIVE BARRIERS AS NECESSARY AT AREAS OF INTERIOR DEMOLITION TO PROTECT EXISTING CONSTRUCTION AND EQUIPMENT SCHEDULED TO REMAIN.
 - PERFORM ALL WORK REQUIRED TO PROTECT BUILDING OCCUPANTS AND EXISTING BUILDING UTILITIES. THE BUILDING WILL REMAIN IN OPERATION THROUGHOUT THE COURSE OF DEMOLITION AND CONSTRUCTION ACTIVITIES.
 - THE CONTRACTOR SHALL BE RESPONSIBLE TO PROVIDE ALL NECESSARY TEMPORARY BRACING AND SHORING AS REQUIRED TO MAINTAIN THE INTEGRITY AND STRUCTURAL STABILITY OF THE BUILDING AND ITS INDIVIDUAL ELEMENTS.
 - EXCEPT AS NOTED OTHERWISE, REMOVE ALL DEMOLISHED MATERIALS FROM THE SITE AND DISPOSE OF IN ACCORDANCE WITH ALL LOCAL, STATE AND FEDERAL LAWS REGULATIONS. DO NOT BURN, BURY, OR SELL MATERIALS ON THE PROJECT SITE. AT THE COMPLETION OF EACH WORK DAY, CLEAN THE ENTIRE WORK AREA AND LEAVE IN A NEAT CONDITION FREE OF DEBRIS AND RUBBISH.
 - STRUCTURAL, MECHANICAL, PLUMBING, ELECTRICAL, TELECOMMUNICATION, AND CIVIL DOCUMENTS PROVIDE ADDITIONAL DEMOLITION REQUIREMENTS FOR EACH PRIME CONTRACT. ALL PRIME CONTRACTORS ARE RESPONSIBLE FOR FAMILIARIZING THEMSELVES WITH THOSE DOCUMENTS THAT MAY PROVIDE ADDITIONAL DEMOLITION REQUIREMENTS BEYOND THOSE SPECIFICALLY INDICATED ON THE ARCHITECTURAL DEMOLITION PLANS.
 - THROUGHOUT THE COURSE OF DEMOLITION ACTIVITIES, THE CONTRACTOR SHALL PATCH, REPAIR AND PREPARE EXISTING EXPOSED SURFACES AND/OR ADJACENT MATERIAL AS REQUIRED TO RECEIVE NEW FINISHES.
 - CAREFULLY REMOVE AND DELIVER TO THE OWNER ANY EXISTING FIRE EXTINGUISHERS FOUND WITHIN THE LIMIT OF DEMOLITION ACTIVITIES.
 - THE OWNER RESERVES THE RIGHT TO REMOVE ANY ITEMS SCHEDULED FOR DEMOLITION PRIOR TO THE START OF DEMOLITION ACTIVITIES AND CLAIM ANY ITEMS REMOVED BY THE CONTRACTOR THROUGHOUT THE COURSE OF DEMOLITION.


DEMOLITION KEYNOTE LEGEND

KEYNOTE	DESCRIPTION
1	REMOVE EXISTING ELEVATOR EQUIPMENT AND COMPONENTS WITHIN SHAFT IN PREPARATION FOR ELEVATOR MODERNIZATION. REFER TO SPECIFICATIONS FOR SCOPE OF NEW / EXISTING TO REMAIN / EXISTING-REFURBISHED WORK.
2	EXISTING ELEVATOR HOISTWAY DOORS TO REMAIN @ EACH LEVEL. REMOVE DOOR SKIN/FINISH IN PREPARATION FOR NEW SKIN/FINISH. EXISTING SILL, JAMBS, AND HEAD TO REMAIN @ EACH FLOOR LEVEL. REPAIR/CLEAN SILL AS REQUIRED. REPAIR JAMBS AS REQUIRED FOR NEW JAMB PANELS TO COVER EXISTING.
3	REMOVE EXISTING ELEVATOR CALL BUTTONS AND INDICATOR LIGHTS @ EACH FLOOR LEVEL. PATCH/REPAIR DAMAGE TO EXISTING LOBBY FINISH WHERE NEW BUTTONS/LIGHTS ARE NOT SCHEDULED. MATCH ADJACENT EXISTING MATERIALS AND FINISHES.
4	REMOVE EXISTING DAMPER AND EXHAUST FAN - REFER TO MECHANICAL DRAWINGS FOR EXTENT OF DEMOLITION.
5	REMOVE EXISTING ELEVATOR MOTOR, SHEAVE, AND ASSOCIATED EQUIPMENT / ACCESSORIES.
6	REMOVE EXISTING ELEVATOR CONTROL EQUIPMENT - REFER TO ELECTRICAL DRAWINGS FOR EXTENT OF ELECTRICAL DEMOLITION. EXISTING FLOOR-MOUNTED WIREWAY TO REMAIN.
7	REMOVE EXISTING ELEVATOR PIT LADDERS (2) AT BOTTOM OF ELEVATOR SHAFT.

ELEVATOR MODERNIZATION NOTES:
CONTRACTOR SHALL VERIFY ALL EXISTING ELEVATOR COMPONENTS WITH THE PROJECT SPECIFICATIONS PRIOR TO SUBMISSION OF A BID. ALL EXISTING ITEMS SHALL BE VERIFIED, INCLUDING ITEMS NOTED AS "REUSE EXISTING". "REUSE OF EXISTING" COMPONENTS SHALL NOT EXCLUDE THE ITEMS FROM MODERNIZATION. THE SCOPE OF ELEVATOR MODERNIZATION SHOULD INCLUDE, BUT NOT BE LIMITED TO: (CONTRACTOR SHALL VERIFY ALL STATEMENTS BELOW)

	ELEVATOR F-1	ELEVATORS P-2, P-3, & S-4
MACHINE	NEW	NEW
HOIST MOTOR	NEW	NEW
DEFLECTOR SHEAVE	REUSE EXISTING	REUSE EXISTING
CONTROL SYSTEM	NEW	NEW
DESTINATION DISPATCH	-	-
SELECTOR SYSTEM	NEW	NEW
DRIVE SYSTEM	NEW	NEW
GOVERNOR	NEW	NEW
HOIST & GOVERNOR CABLES	NEW	NEW
TRAVELING CABLES & WIRING	NEW	NEW
CAR FRAME	REUSE EXISTING	REUSE EXISTING
CAR PLATFORM	REUSE EXISTING	REUSE EXISTING
CAR GUIDE SHOES	REUSE EXISTING	REUSE EXISTING
GUIDE RAILS	REUSE EXISTING	REUSE EXISTING
BUFFERS	REUSE EXISTING	REUSE EXISTING
ENTRANCE FRAMES	NEW	NEW
ENTRANCE DOOR PANELS	NEW	NEW
HOISTWAY SILLS	REUSE EXISTING	REUSE EXISTING
DOOR OPERATOR	NEW	NEW
CAR DOOR PANEL	NEW	NEW
CAR SILL	REUSE EXISTING	REUSE EXISTING
DOOR DETECTORS	NEW	NEW
CAR ENCLOSURE	NEW	NEW
FLOORING	NEW	NEW
SIGNALS	NEW	NEW
ROOM ALERT CONTROLLER (PACS)	NEW	NEW

PCRA / ICRA:
REFER TO SHEET 01-A001 FOR PRE-CONSTRUCTION RISK ASSESSMENT (PCRA) AND INFECTION CONTROL RISK ASSESSMENT (ICRA) REQUIREMENTS FOR ALL PHASES OF CONSTRUCTION.



FULLY SPRINKLERED
CONSTRUCTION DOCUMENTS

Revisions:	Date	CONSULTANTS:	SEAL	ARCHITECTS/ENGINEERS:	Drawing Title DEMOLITION PLANS	Project Title: ERIE VAMC - REPLACE ELEVATORS	Project Number 562-14-113
					Approved: Project Director	Location: 135 EAST 38TH STREET, ERIE, PA 16504	Building Number 01
						Date: MAY 4, 2015	Checked: JRD
							Drawn: JDB
							Dwg. 3 of 16

Office of Construction and Facilities Management
Department of Veterans Affairs