


**FLOOR PLAN:**

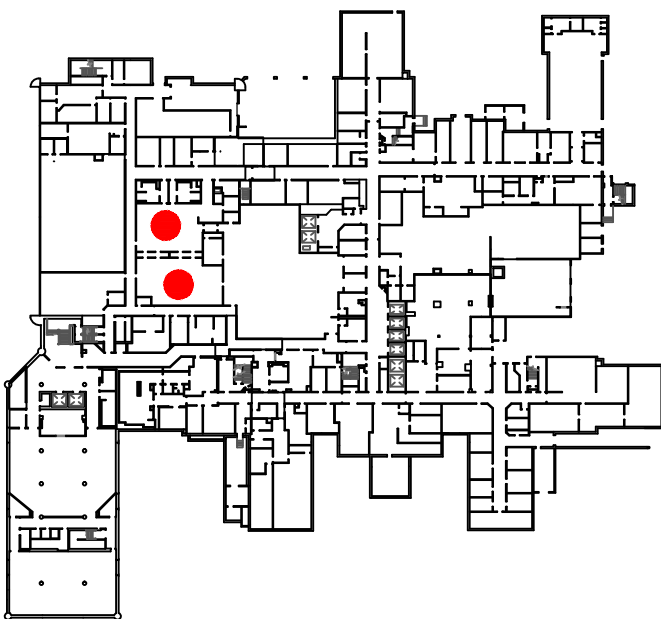

**INFECTION CONTROL RISK ASSESSMENT:**

**LOW/MEDIUM RISK (LEVEL II):**  
NO WORK SHALL COMMENCE WITHOUT PRIOR SCHEDULING AND APPROVAL FROM COTR. PROVIDE ACTIVE MEANS TO PREVENT AIRBORNE DUST FROM DISPERSING INTO THE ATMOSPHERE. WATER MIST WORK SURFACES TO CONTROL DUST WHILE CUTTING. WIPE WORK SURFACE WITH DISINFECTANT. CONTAIN CONSTRUCTION WASTE BEFORE TRANSPORT IN TIGHTLY COVERED CONTAINERS. ALL CEILING TILES REMOVED FOR CONDUIT INSTALLATION SHALL BE REPLACED AT THE END OF EVERY WORK SHIFT IN ORDER TO MAINTAIN THE SMOKE BARRIER. USE A HEPA VACUUM ON EVERY TILE BEFORE REINSTALLATION. ONLY ONE CEILING TILE CAN BE REMOVED AT A TIME FOR CABLE/CONDUIT INSTALLATION. WET MOP AND/OR VACUUM WITH HEPA FILTERED VACUUM AT THE END OF EVERY WORK SHIFT.

**SHEET NOTES:**

Room BA113A is currently used for storage of chemicals and as dress room to transition from clean sterile storage area into Dirty Side operations.

ROOM BA113A OPTIONS:

1. If Option A or B is selected - this room will be used as temporary relocation of Clean side operations for GI Lab. The room will need to be fitted for existing Sterile Processing Equipment.
2. If Option C is selected - this room will be the permanent location for the GI Lab Clean side operations. The room will be fitted for the new Sterile Processing Equipment.

GENERAL NOTES:  
1. SCALED DIMENSIONS & ARCHITECTURAL FEATURES MAY NOT BE CORRECT.  
2. CONTRACTORS & A/E's ARE RESPONSIBLE TO FIELD VERIFY ALL DIMENSIONS WITHIN THE PROJECT AREA.

DEPARTMENT OF VETERANS AFFAIRS  
MEDICAL CENTER  
1055 Clermont Street  
Denver, Colorado, 80220

Drawing Title <b>SPS BASEMENT LAYOUT BA113A LOCATION</b>		Project Title <b>GI HVAC &amp; EQUIPMENT SITE PREP</b>		Date 05/15/2014
Approved: Service Chief	Drawn CMG	Building Number 1	Title Block By ska	Project No. 554-14-821
Approved: Section Chief	Checked	Wing C	DRAWING No A-01	Dwg 2 Of 2

Department of  
Veterans Affairs