RENOVATE PUBLIC RESTROOMS

Dept of Veterans Affairs Salisbury, NC

GENERAL NOTES

I. ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH CONTRACT DOCUMENTS \$ REQUIREMENTS

2. THE CONTRACTOR SHALL CHECK ALL CONTRACT DOCUMENTS, FIELD CONDITIONS, AND DIMENSIONS FOR ACCURACY AS SHOWN BEFORE PROCEEDING WITH THE CONSTRUCTION. IF THERE ARE ANY QUESTIONS, THE CONTRACTOR SHALL OBTAIN A CLARIFICATION FROM THE GOVERNMENT BEFORE PROCEEDING WITH THE WORK IN QUESTION OR RELATED WORK.

3. DRAWINGS SHALL NOT BE SCALED. WRITTEN DIMENSIONS SHALL ALWAYS GOVERN. CONTRACTOR REQUIRING DIMENSIONS NOT NOTED, SHALL CONTACT THE GOVERNMENT FOR SUCH INFORMATION PRIOR TO PROCEEDING WITH WORK RELATED TO THOSE DIMENSIONS.

4. CONTRACTOR SHALL NOTIFY GOVERNMENT OF CONFLICTS BETWEEN DRAWINGS DETAILS AND SPECIFICATION IN WRITING, PRIOR TO PROCEEDING WITH THE

5. "TYPICAL" OR "TYP." MEANS THAT THE CONDITION IS REPRESENTATIVE FOR ALL SIMILAR CONDITIONS, UNLESS OTHERWISE NOTED. "SIMILAR" OR "SIM" MEANS COMPARABLE CHARACTERISTICS FOR THE CONDITIONS NOTED. VERIFY DIMENSIONS AND ORIENTATION ON PLANS AND ELEVATIONS. "ALIGN" AS USED IN THESE DOCUMENTS MEANS TO ACCURATELY LOCATE FINISHES IN THE SAME PLACE.

REFERENCED STANDARDS, BY EXISTING CONDITIONS, BY GENERALLY ACCEPTED CONSTRUCTION PRACTICE OR BY THE CONTRACT DOCUMENTS.

6. "AS REQUIRED" MEANS AS REQUIRED BY REGULATORY REQUIREMENTS, BY

7. CONTRACTOR SHALL PROVIDE ALL NECESSARY BLOCKING, BACKING, FRAMING HANGERS OR OTHER SUPPORTS OF ALL FIXTURES, EQUIPMENT, FURNISHINGS, AND ALL OTHER ITEMS REQUIRING SAME.

8. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL CUTTING AND PATCHING FOR PROPER INSTALLATION OF MATERIAL AND EQUIPMENT.

9. ALL PENETRATIONS THROUGH MASONRY AND CONCRETE STRUCTURES SHALL BE SEALED TO PROTECT AGAINST FIRE WITH ENVIRONMENTAL CONDITIONS THAT EXIST.

10 CONTRACTOR TO SUBMIT MOBILIZATION PLAN TO GOVERNMENT FOR APPROVAL BEFORE MOBILIZATION OF THE JOB CAN TAKE PLACE.

I I CONTRACTOR NOT TO PARK IN PATIENT PARKING LOTS OR EMPLOYEE PARKING ONLY ON DESIGNATED BY COTR. CONTRACTOR TO COORDINATE WITH COTR FOR PARKING AREAS AND PROPER ACCESS TO CONSTRUCTION AREA.

12 BEFORE STARTING WORK IN A NEW AREA OR MOVEMENT OF EQUIPMENT ONE AREA TO ANOTHER, COORDINATION WITH THE FACILITY AND GOVERNMENT IS REQUIRED TO ENSURE PATIENT SAFETY.

13 IT IS THE CONTRACTOR'S RESPONSIBILITY TO MAKE THE PROPER COORDINATION IN ADVANCE FOR MAJOR INTERRUPTIONS (15 CALENDAR DAYS) AND ANY DELAY OF WORK DUE TO IMPROPER NOTICE WILL BE RESPONSIBILITY OF THE CONTRACTOR NOT THE GOVERNMENT.

14 AT ANY TIME IMPROPER PROCEDURES ARE OBSERVED THAT PUT PATIENT SAFETY, STAFF, OR CONTRACTOR WORKERS SAFETY AT RISK, THE WORK WILL BE STOPPED UNTIL CORRECTIONS ARE MADE AND AND APPROVED BY THE GOVERNMENT AND THE CONTRACTOR WILL BE HELD RESPONSIBLE FOR ANY DELAY DUE TO IMPROPER ADHERENCE TO THE CONTRACT/DOCUMENTS AND/OR SAFETY REGULATIONS.

15 BEFORE ANY NEW ELECTRICAL, MECHANICAL, AND/OR SITE MODIFICATIONS THE CONTRACTOR MUST NOTIFY THE GOVERNMENT 72 HOURS IN ADVANCE FOR PROPER COORDINATION TO ENSURE PATIENT, STAFF, AND CONTRACTOR WORKERS SAFETY.

I 6 CONTRACTOR TO REMOVE ALL DEBRIS FROM CONSTRUCTION AREA THAT MIGHT EFFECT GOVERNMENT OPERATIONS AND EACH DAY PERFORM HOUSE KEEPING OPERATIONS TO ENSURE CLEAN WORK AREA.

SPECIAL CONCERNS

. DUE TO WORK BEING DONE IN AN ACTIVE HOSPITAL SPECIAL PRECAUTIONS AND COORDINATION MUST BE TAKEN BEFORE ANY WORK CAN BE DONE. 2. MOBILIZATION PLAN MUST BE SUBMITTED TO THE GOVERNMENT AND APPROVED. MOBILIZATION PLAN MUST ADDRESS DUST CONTROL MEASURE, MOVEMENT OF MATERIALS, CONTROL METHODS DURING CONSTRUCTION, TRAFFIC CONTROL, AND DEMOBILIZATION OUTLINE.

3. ALL WORK SHALL BE DONE IN A PROFESSIONAL MANNER AND AT ALL TIMES WORKERS WILL CONDUCT THEMSELVES IN A WAY AS NOT TO DISTURB NORMAL HOSPITAL OPERATIONS.

4. THE GOVERNMENT RESERVED THE RIGHT TO REMOVE ANY PERSONNEL FROM THE JOB SITE FOR ANY FAILURE TO ADHERE TO THE CONTRACT/DOCUMENTS AND/OR SAFETY REGULATIONS AND WILL BE AT THE COST OF THE CONTRACTOR DUE TO FAILURE TO ADHERE TO CONTRACT/DOCUMENTS AND/OR SAFETY REGULATIONS. 5. AT ALL TIMES CONTRACTORS SHALL WEAR ID BADGES AND PROPER PPE. 6. CONTRACTOR WORKERS MUST COMPLETE 2 DVD INFECTION CONTROL

INFORMATION SESSION BEFORE ANY WORK CAN BEGIN.

DRAWING INDEX

<u>GENERAL</u>

G - 001G-002 TYPICAL ELEVATIONS, SCHEDULES, AND DETAILS

<u>ARCHITECTURE</u>

B3-A100 BUILDING 3 - LEVELS 1 AND 2 DEMO AND FLOOR PLANS

B3-A101 BUILDING 3 - LEVEL 3 DEMO AND FLOOR PLANS

B6-A100 BUILDING 6 - DEMO AND FLOOR PLANS

LOCATION MAP

BUILDINGS I I 1. ADMINISTRATION BUILDING G. M. & S BUILDING OUTPATIENT CLINICS . PATIENT TREATMENT(MENTAL HEALTH) MAIN KITCHEN RECREATION BUILDING R.M.S & CORE CLINIC BUILDING 8. PATIENT TREATMENT(MENTAL HEALTH) 10. N.C. VETERANS HOME 11. MENTAL HEALTH OFFICES 11A. MENTAL HEALTH OFFICE: 11B. MENTAL HEALTH OFFICES 11C. MENTAL HEALTH OFFICES 12. POLICE HEADQUARTERS 13. STUDENT LODGING 14. E&W DUPLEX QUARTERS 16. LAUNDRY 17. WAREHOUSE 17A. WAREHOUSE 17B. EM WAREHOUSE 17C. GSA VEHICLES 18. BOILER PLANT 19. CHAPEL 21. ENDOSCOPE, PODIATRY, ONCOLOGY, SLEEP CLINIC 21B. ENGINEERING 22. FLAG POLE 23. GARAGES 24. R.M.&S STORAGE 25. R.M.&S. STORAGE 28. ENGINEERING PAINT SHOP 29. R.M.&S. STORAGE O. GREENHOUSE 31. CHILLER PLANT 32. GENERATOR BUILDING 3. SWITCHGEAR BUILDING 34. GENERATOR BUILDING 35. GENERATOR BUILDING 36. GENERATOR BUILDING 37. GENERATOR BUILDING 38. GENERATOR BUILDING 39. PICNIC SHELTER 40. GROUNDS STORAGE SHELTER 42. GERO-PSYCHIATRIC BUILDING 43. HOSPICES BUILDING W.G.(Bill) HEFNER MEDICAL CENTER SALISBURY, NORTH CAROLINA

PROJECT DESCRIPTION

STATEMENT OF WORK

PERFORM DEMOLITION AND REWORK OF RESTROOMS AS INDICATED IN DRAWINGS. SCOPE INCLUDES: BUILDING I


BUILDING 2 BUILDING 3 BUILDING 6

PROVIDE ALL LABOR, MATERIALS, TOOLS, EQUIPMENT, TRANSPORTATION, QUALIFIED SUPERVISION, AND ALL ASPECT OF CONSTRUCTION DESCRIBED HERE IN OTHER SPECIFIC TASK AS FURTHER DEFINED. WORK INCLUDES, BUT NOT LIMITED TO DEMOLITION OF EXISTING CERAMIC TILE, ACT, LIGHT FIXTURES, PLUMBING FIXTURES, PLUMBING LINES AND THE INSTALLATION OF NEW PLUMBING FIXTURES, ACT, LED LIGHTS, PAINTING, TOILET PARTITIONS AND CERAMIC TILE WORK.

J	LINA								
RECOMMEND APPROVAL Drav					Drawing Title	Project Title	Date 12.02.2014		
	REQUESTER	Date			TITLE SHEET	CAMPUS RESTROOM RENOVATION	12.02.2014		
	CHIEF OF SERVICE	Date	CHIEF OF STAFF	Date			Project No. 659-14-006		
	ASSOC. DIR. PATIENT CARE SVC.	Date	ASSOC. DIR. for OPERATIONS	Date	Approved: Safety Manager/M&O Supervisor	Building Number Checked Drawn N/A GAW GLM	DRAWING NO.		
MEDICAL CENTER DIRECTOR				Date	Approved:Chief of Facilities Management Svr.	Location W.G.(Bill) Hefner Medical Center 1601 Brenner Ave. Salisbury NC 28144	G-001 DWG. 1 OF 7		



Revision	Date

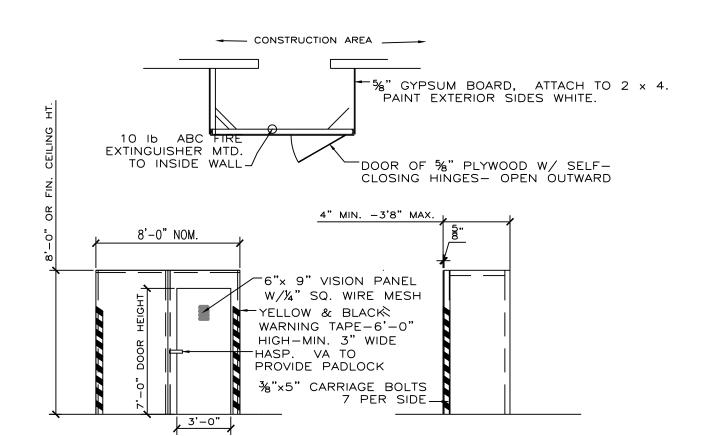

DUST PARTITIONS SHALL BE CONSTRUCTED OF 2x4 STUDS AND $\frac{5}{8}$ "GYPSUM BOARD. PAINT ALL EXPOSED SIDE OF THE PARTITION WHITE. THE PARTITION SHALL BE SECURED TO AND SEALED TO ADJACENT SURFACES WITH POLYETHYLENE AND TAPE AS REQUIRED FOR A COMPLETE SEAL. PROVIDE EACH DUST PARTITION WITH A 3'-0" x 7'-0" DOOR THAT IS EQUIPPED WITH SELF CLOSING HINGES AND A HASP. THE DOOR SHALL BE SECURED WITH A VA PROVIDED PADLOCK. EACH DUST PARTITION SHALL BE EQUIPPED WITH A CONTRACTOR FURNISHED FIRE EXTINGUISHER. THE SIZE OF EACH DUST PARTITION SHALL VARY AS REQUIRED TO MEET THE NEEDS OF EACH PROJECT. CONTRACTOR SHALL COORDINATE THE CONSTRUCTION OF ALL DUST PARTITIONS WITH THE COR PRIOR TO INSTALLING PARTITION.

** STYPSUM BOARD, ATTACH TO 2 x 4.

PAINT EXTERIOR SIDES WHITE.

2(TWO) 3'0" DOORS TO BE CONSTRUCTED OF SOPEN OUTWARD

OPEN OUTWARD

8'-0"± OR EQUAL

10 WIDTH OF OPENING

6"x 9" VISION PANEL

W/4" SQ. WIRE MESH


YELLOW & BLACK
WARNING TAPE-6'-0"
HIGH-MIN. 3" WIDE

HASP. VA TO
PROVIDE PADLOCK

** 5" CARRIGE BOLTS
7 PER SIDE

CONSTRUCTION AREA

DUST PARTITIONS SHALL BE CONSTRUCTED OF 2x4 METAL STUDS AND $\frac{5}{8}$ "GYPSUM BOARD. PAINT ALL EXPOSED SIDE OF THE PARTITION WHITE. THE PARTITION SHALL BE SECURED TO AND SEALED TO ADJACENT SURFACES WITH POLYETHYLENE AND TAPE AS REQUIRED FOR A COMPLETE SEAL. PROVIDE EACH DUST PARTITION WITH A 3'-0" x 7'-0" DOOR THAT IS EQUIPPED WITH SELF CLOSING HINGES AND A HASP. THE DOOR SHALL BE SECURED WITH A VA PROVIDED PADLOCK. EACH DUST PARTITION SHALL BE EQUIPPED WITH A CONTRACTOR FURNISHED FIRE EXTINGUISHER. THE SIZE OF EACH DUST PARTITION SHALL VARY AS REQUIRED TO MEET THE NEEDS OF EACH PROJECT. CONTRACTOR SHALL COORDINATE THE CONSTRUCTION OF ALL DUST PARTITIONS WITH THE COR PRIOR TO INSTALLING

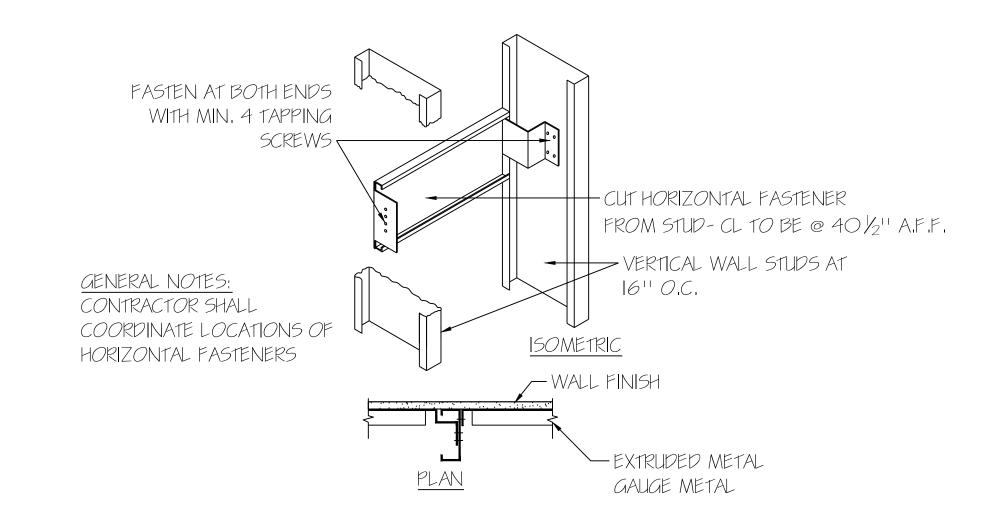


MOUNTING BRACE DETAIL

SINGLE DUST PARTITION


DOUBLE DOOR DUST PARTITION

PARTITION.

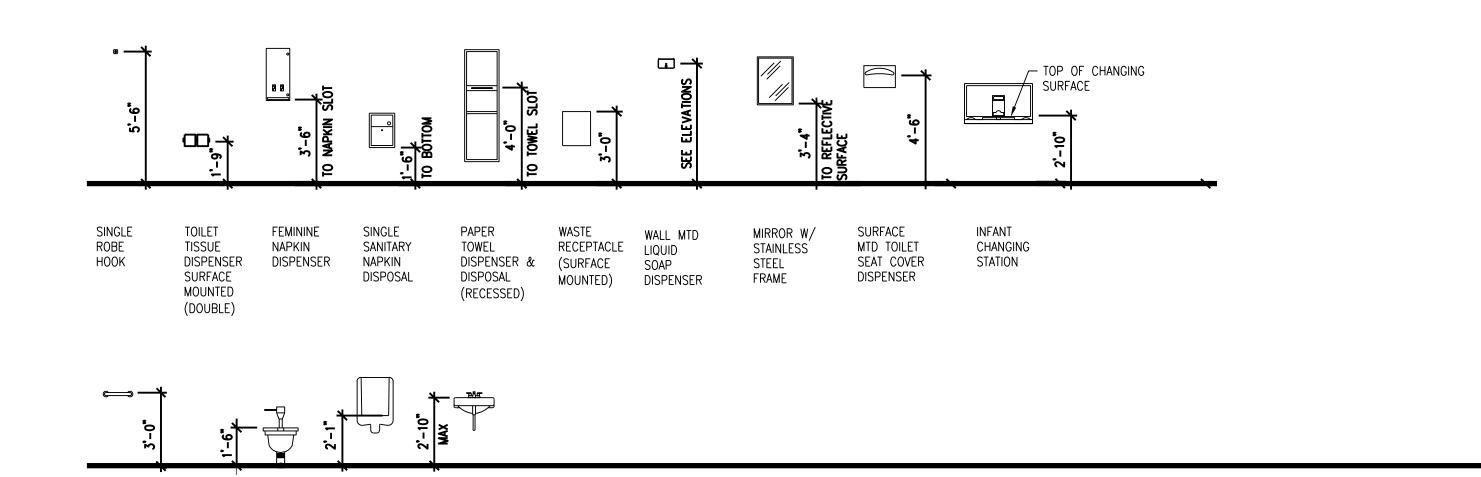


TOILET ACCESSORY MOUNTING HEIGHTS
NTS


WATER CLOSET

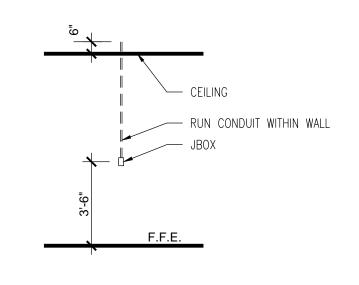

NURSE CALL ROUGH-IN

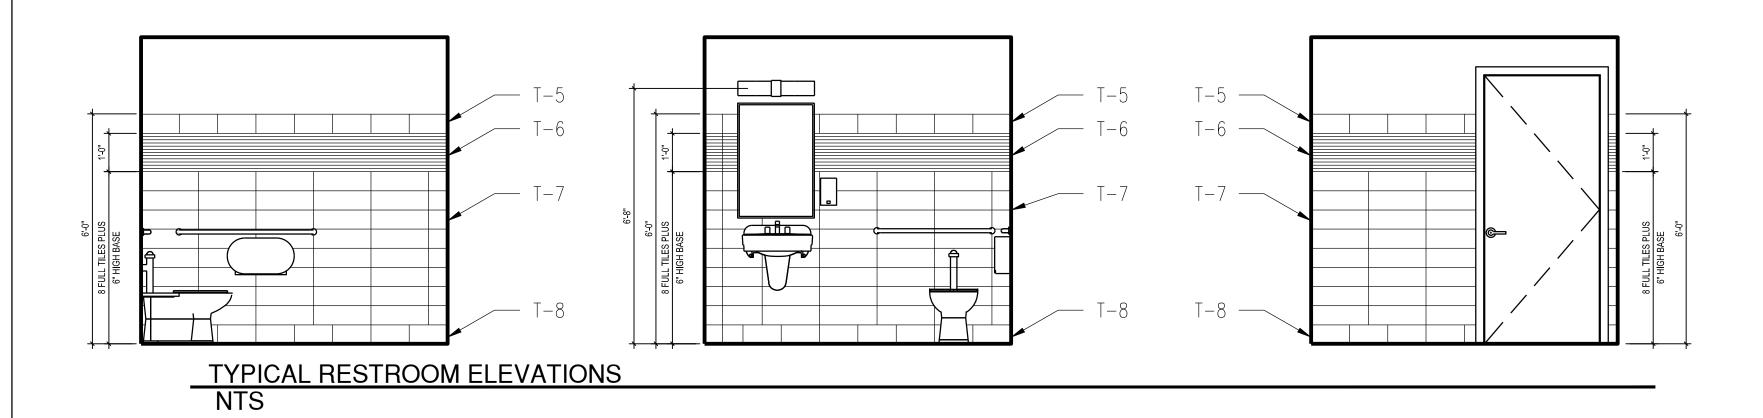

NOTE
TYPICAL RESTROOM ELEVATIONS SHOWN HERE ARE
FOR FINISHES ON ALL WALLS IN BUILDINGS 2, 3, 4, 6, 21,
AND 42. REFER TO PLANS FOR FIXTURE, AND
SPECIALTIES LOCATIONS
FOR BUILDING 1 FINISHES, SEE B1-A100

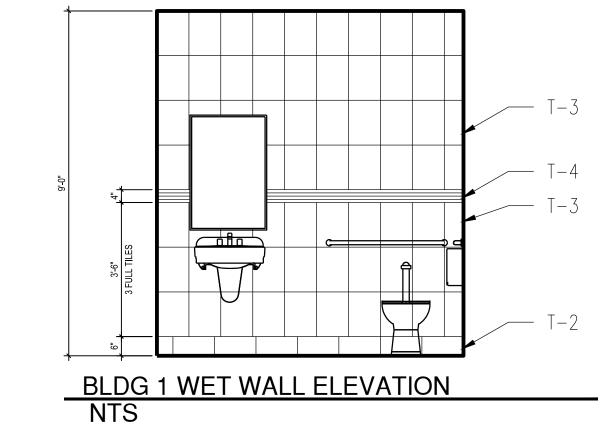


FII	NISH LEGEND		PLUMBING SCHEDULE
ACO	USTIC CEILING TILE	GROUT	TOILET: FLOOR MOUNTED, REAR DISCHARGE, FLUSH VALVE,
ACT-	CertainTeed Fine Fissured Reveal Edge HHF-154 Grid: 15/16" Armstrong Prelude ML	GT-1 Custom Building Products #145 Light Smoke GT-2 Custom Building Products Non-Sanded	ELONGATED BOWL, ADA, 1.28 GAL / FLUSH URINAL: WALL HUNG UNDER MOUNT SINK: STAINLESS STEEL UNDER MOUNT SINK
PAIN	24" x 24" x 5/8" T	#382 Bone GT-3	WALL MOUNT SINK: WALL HUNG WITH IN WALL CARRIER
P-1	ICI / Gliddin Water Chestnut 62/127	Custom Building Products #122 Linen GT-4 Custom Building Products	FAUCET: CHICAGO FAUCETS NO. 116.203.AB.1 WITH BASE PLATE AND VULCAN LFUSG-B MIXING VALVE
P-2	Glidden	#59 Saddle Brown SOLID SURFACE MATERIAL	
POR(Spa Blue #A1950 CELAIN TILE	Avonite Aztec Brown	LIGHTING SCHEDULE
T-1	SELAIN TILE	K3-7700	2X4 TROFFER LIGHTS: CREE CR24-40LHE, 40K LED
	Daltile Concrete Connections Eastside Brown CN94 13" x 13" Field Tile GT-1	TOILET PARTITIONS Ampco Solid Plastic Color: Khaki Overhead Braced	WALL SCONCES: VANITY WALL SCONCE - HORIZONTAL INSTALL SCOTT S3720-24" BA - BRUSHED ALUMINUM FINISH
T-2	Daltile Concrete Connections Eastside Brown CN94 6" x 13" Cove Base	WALL TRANSITION Schluter -RONDEC-D8 Finish: AE - Satin Anodized Aluminum	SPECIALTIES SCHEDULE
	GT-1	THRESHOLD	GRAB BARS, 36"
T-3	American Olean Mirasol Crema Laila ML71 10" x 14" Wall Tile GT-2	Daltile Durango T714 Travertine Honed SOLID SURFACE MATERIAL	36" SATIN FINISH STAINLESS STEEL GRAB BAR, FLANG AND COVER GRAB BARS, 42" 36" SATIN FINISH STAINLESS STEEL GRAB BAR, FLANG AND COVER
T-4	American Olean Designer Elegance Dali 4" x 12" Illusions Accent 5/8" x Random AC61	Avonite Aztec Brown K3-7700 LAMINATE	MIRRORS 24" X 36" CHANNEL FRAME MIRROR TOILET PAPER DISPENSER FURNISHED BY OWNER, INSTALLED BY CONTRACTOR SOAP DISPENSER
T-5	Crossville Manior Camton UPS AV253 4" x 12" Single Bullnose GT-3	Formica Oiled Legno 8846-58	FURNISHED BY OWNER, INSTALLED BY CONTRACTOR PAPER TOWEL DISPENSER GEORGIA PACIFIC ENMOTION RECESSED AUTOMATED TOUCHLESS TOWEL DISPENSER 59466 OR EQUAL
T-6	DalTile Stone Radiance Whisper Green SA51 GT-3		
T-7	Crossville Manior Camton UPS AV253 6" x 12" Horizontal Installation GT-3		
T-8	DalTile Franciscan Slate Coastal Azul FS97 Cove Base S-36C9TB GT-4		
T-9	DalTile Franciscan Slate Coastal Azul FS97 18" x 18" GT-4		


- 1		
	Revision	Date


RECOMMEND APPROVAL							
REQUESTER	Date			TYPICA DETAIL			
CHIEF OF SERVICE	Date	CHIEF OF STAFF	Date				
ASSOC. DIR. PATIENT CARE SVC.	Date	ASSOC. DIR. for OPERATIONS	Date	Approv			
APPROVAL BY: MEDICAL CENTER DIRECTO	R		Date	Approv			

wing Title	Project Title			Date 12.02.2014		
ICAL ELEVATIONS, SCHEDULES, AND AILS	CAMPUS RESTROOM RENOVATION			Project No. 659-14-006		
roved: Safety Manager/M&O Supervisor	Building Number N/A	Checked GAW	Drawn GLM	DRAWING NO.		
roved:Chief of Facilities Management Svr.	1601 E	l) Hefner Medic Brenner Ave. ry NC 28144	cal Center	G-002 DWG. 2 OF 7		



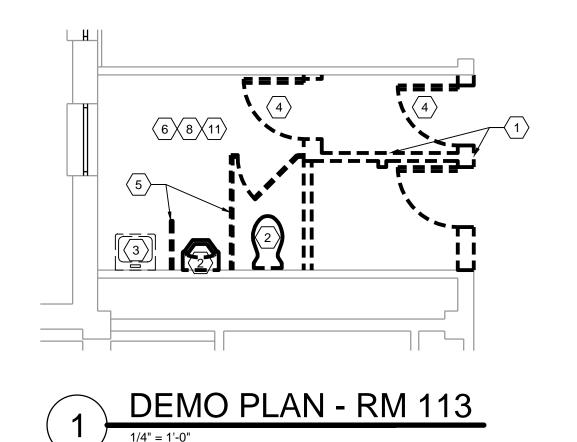


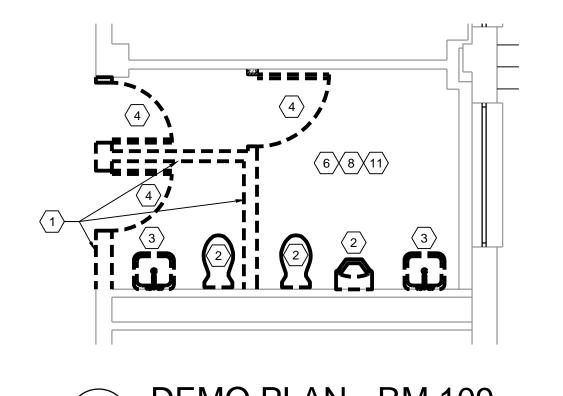

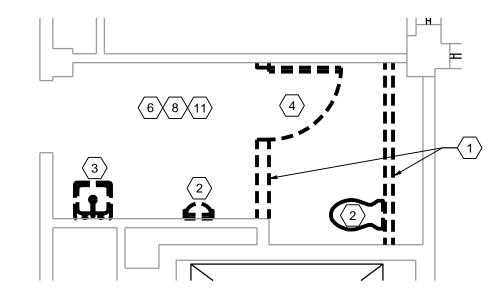



DEMO PLAN - RM 218

1/4" = 1'-0"

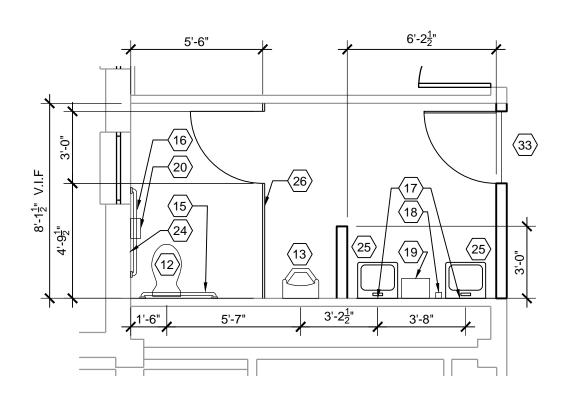

FLOOR PLAN - RM 113

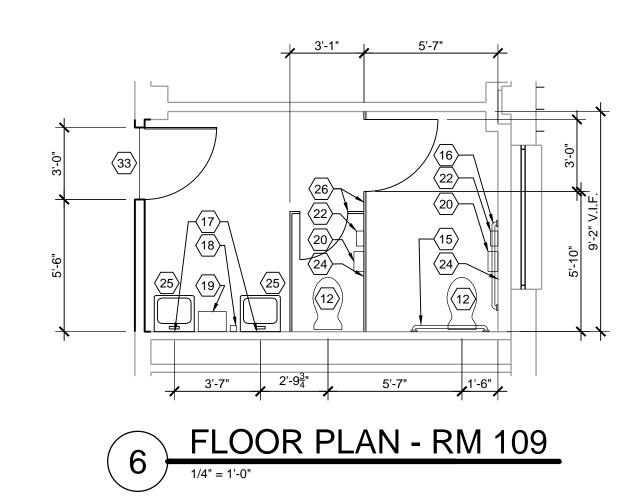


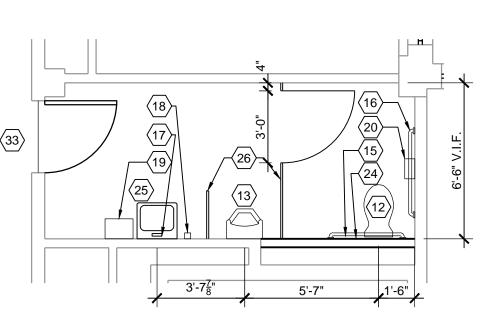



10 FLOOR PLAN - RM 218


REPLACE AND RELOCATE EXISTING

SPRINKLER HEADS TO COMPLY WITH NFPA 13

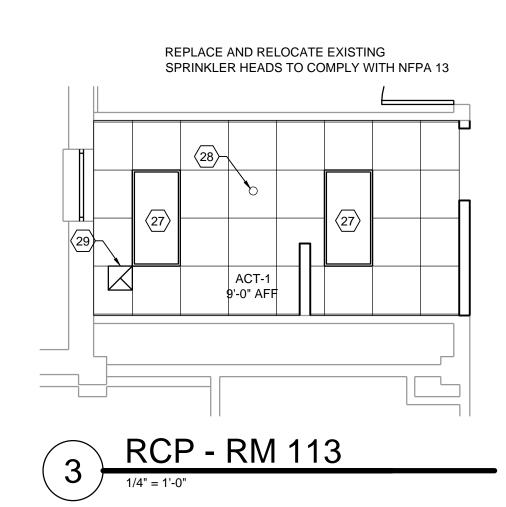


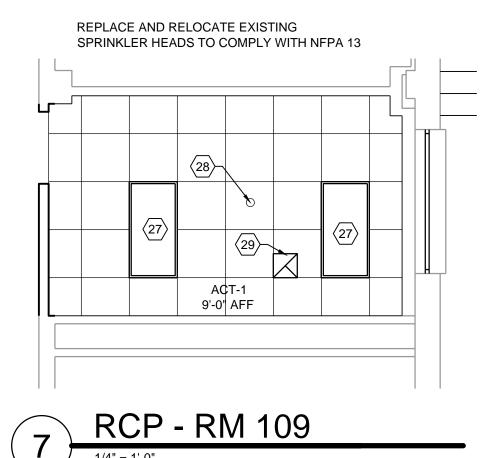


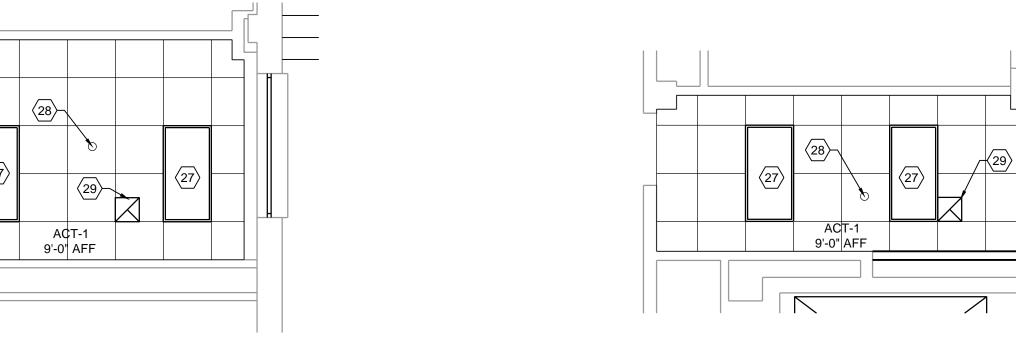

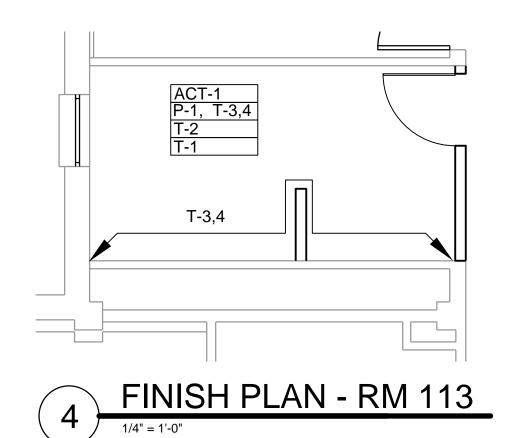

Date

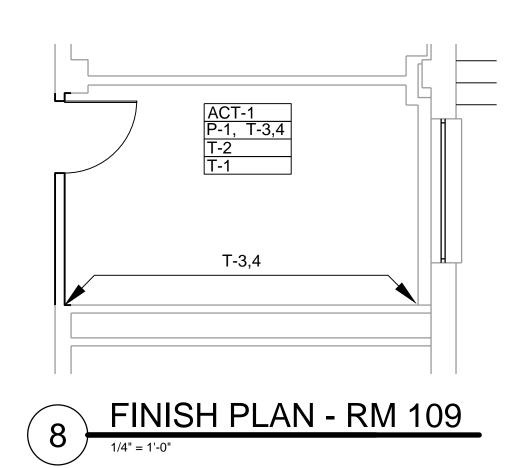

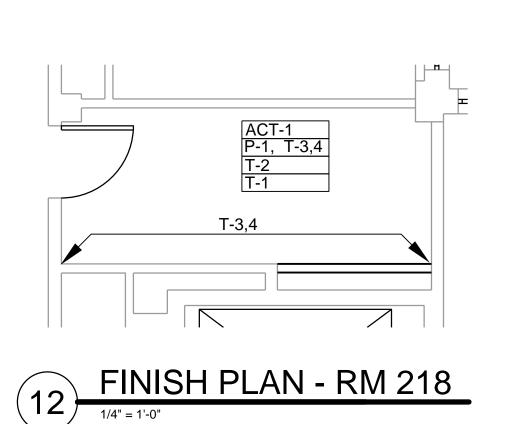

KEYNOTES

- (1.) DEMO EXISTING WALL
- 2. DEMO EXISTING TOILET / URINAL
- DEMO EXISTING LAVATORY
- 4. DEMO EXISTING DOOR AND FRAME DEMO EXISTING TOILET PARTITIONS
- 6. DEMO EXISTING TILE FLOOR, GRIND AND LEVEL
- FLOOR TO PREP FOR NEW FINISHES
- DEMO EXISTING GWB CEILING

8. DEMO EXISTING ACT CEILING

- 9. DEMO EXISTING FLOOR SINK
- 10. DEMO EXISTING MOP SINK AND FAUCET
- 11. DEMO EXISTING WALL AND BASE TILE, PREP FOR NEW FINISHES
- 12. FLOOR MOUNTED REAR DISCHARGE TOILET-TIE INTO
- EXISTING WASTE LINE
- 13. URNINAL-TIE INTO EXISTING WASTE LINE
- 14. UNDER-MOUNT SINK(S) AND COUNTER TOP
- 15. 42" GRAB BAR
- 16. 36" GRAB BAR 17. MIRROR 24" X 48"
- 18. SOAP DISPENSER
- 19. PAPER TOWEL DISPENSER
- 20. TOILET PAPER DISPENSER
- 21. SANITARY NAPKIN DISPOSAL
- 22. SANITARY NAPKIN DISPENSER

LOCATION WITH COR. SEE DETAIL

- 23. RECESSED WALL MOUNTED RETRACTABLE BARRICADE BELT
- 24. PROVIDE CONDUIT FOR NURSE CALL. COORDINATE
- 25. WALL MOUNTED SINK
- 26. TOILET PARTITIONS
- 27. LAY-IN CEILING LIGHT FIXTURE 28. CEILING OCCUPANCY SENSOR
- 29. EXHAUST, TIE INTO EXISTING
- 30. RELOCATE (E) POWER / DATA TO NEW WALL
- 31. WALL SCONCE, SEE LIGHT FIXTURE SCHEDULE
- 32. BABY CHANGING STATION
- 33. SCHLUTER TRANSITION STRIP


DEMOLITION NOTES


- 1. REMOVAL AS DESCRIBED HEREIN SHALL BE ACCOMPLISHED WITHOUT STORING ON THE FLOOR EXCESSIVE QUANTITIES OF ANY MATERIALS, RUBBISH, DIRT, DEBRIS, OR WASTE OF ANY SORT RESULTING FROM THE REMOVAL OPERATIONS ON THE FLOOR.
- 2. ALL DEBRIS SHALL BE REMOVED FROM THE CONSTRUCTION SITE DAILY.
- 3. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONS TO MAINTAIN FREE PROTECTED ACCESS OF ALL TENANTS, SERVICE PERSONNEL AND THE PUBLIC THROUGH THE AREAS
- 4. ALL DEMOLITION WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS.
- 5. THE CONTRACTOR SHALL REMOVE ALL PIPE SLEEVES PROJECTING THROUGH SLAB, PATCH ALL PENETRATIONS, HOLES, ETC. THAT ARE PART OF THE SCOPE
- 6. ALL PIPES AND CONDUITS IN WALLS THAT ARE TO BE DEMOLISHED ARE TO BE REMOVED AND/OR RELOCATED AS REQUIRED.
- 7. CONTRACTOR SHALL REVIEW WITH VA ANY AND ALL ITEMS OF DEMOLITION NOT IMPLIED OR SPECIFIED ON DRAWINGS OR SPECIFICATIONS AND TO INCLUDE SUCH COSTS IN BID UNLESS OTHERWISE ADVISED.
- 8. REFER TO ALL OTHER PLANS INCLUDING, BUT NOT LIMITED TO ENGINEERING, COMMUNICATION, ETC., FOR SCOPE OF WORK TO BE INCLUDED IN BID AND PRIOR TO COMMENCEMENT OF DEMOLITION.
- 9. PROVIDE ALL LABOR, MATERIAL, EQUIPMENT AND SERVICES AND PERFORM ALL OPERATIONS REQUIRED FOR COMPLETE INTERIOR DEMOLITION AND RELATED WORK AS DESCRIBED AND SPECIFIED HEREIN, AND AS MAY BE REASONABLY IMPLIED AS
- 10. WORK SHALL CONFORM TO THE LATEST EDITION OF ALL APPLICABLE REFERENCE SPECIFICATIONS AND TO GOVERNING BUILDING CODES AND REQUIREMENTS OF AUTHORITIES HAVING JURISDICTION.

NECESSARY TO COMPLETE THE WORK IN ALL RESPECTS.

CONTRACTORS EXPENSE.

- 11. JOBSITE INSPECTION MUST BE CONDUCTED BY CONTRACTOR TO EXAMINE EXISTING CONDITIONS, TO DETERMINE NATURE AND SCOPE OF WORK OR ANY DIFFICULTIES THAT MIGHT ARISE AT TIME OF WORK. IN ADDITION, CONTRACTOR TO EXAMINE ALL WORK THAT IS INTENDED TO REMAIN AS PART OF THE COMPLETED PROJECT AND REPORT ALL UNSATISFACTORY CONDITIONS TO VA PRIOR TO COMMENCEMENT OF WORK. EXERCISE EXTREME CARE DURING DEMOLITION SO AS NOT TO DAMAGE CONSTRUCTION AND OTHER STRUCTURES THAT ARE INTENDED TO REMAIN. ANYTHING DAMAGED AT TIME OF WORK IS TO BE REPAIRED AND/OR REPLACED TO MATCH EXISTING CONSTRUCTION AT
- 12. REFER TO ENGINEERING, AND/OR COMMUNICATIONS DRAWINGS FOR EXISTING ITEMS/SYSTEMS TO REMAIN (DUCTWORK, SPRINKLERS, PLUMBING RISERS, TELE./ELEC. FEEDS AND PANELS, ETC.). ALL ITEMS NOT SCHEDULED FOR REUSE SHALL BE DEMOLISHED.
- 13. CONTRACTOR TO PROVIDE DUST BARRIER FOR PROTECTION OF EXISTING AREAS TO REMAIN AS REQUIRED.
- 14. WHEN DEMOLITION TAKES PLACE, SHOULD ANY WORK AFFECT THE INTEGRITY OF THE STRUCTURE, WORK MUST STOP IMMEDIATELY, AND VA NOTIFIED. UNDER NO CIRCUMSTANCES SHALL REINFORCING OF ANY KIND BE DAMAGED, CUT OR BROKEN.
- REMOVE ALL WALL CONDUITS LEFT AFTER WALL DEMOLITION INCLUDING SWITCH BOXES, PLATES, BRIDGES, PLUMBING LINES, OR ANY OTHER TELEPHONE OR ELECTRICAL WIRING AND EQUIPMENT. DEMOLISHED LINES ARE TO BE BROUGHT BACK TO PANELS, RISERS, ETC. AND DISCONNECTED OR CAPPED.
- 16. CONTRACTOR TO REVIEW WITH VA REGARDING ALL ITEMS SCHEDULED FOR RELOCATION. SAID ITEMS TO BE REMOVED CAREFULLY, PROTECTED AND STORED.
- 17. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DEMOLITION OF EXISTING PARTITIONS, MOLDINGS, BASES (RUBBER, VINYL, METAL, CONCRETE, ETC.), SUSPENDED CEILINGS, LIGHT FIXTURES, SWITCHES, DOORS AND BUCKS, HARDWARE, ETC., AND ALL OTHER ITEMS REQUIRED TO BE DEMOLISHED TO ACCOMMODATE THE SCOPE OF WORK FOR NEW

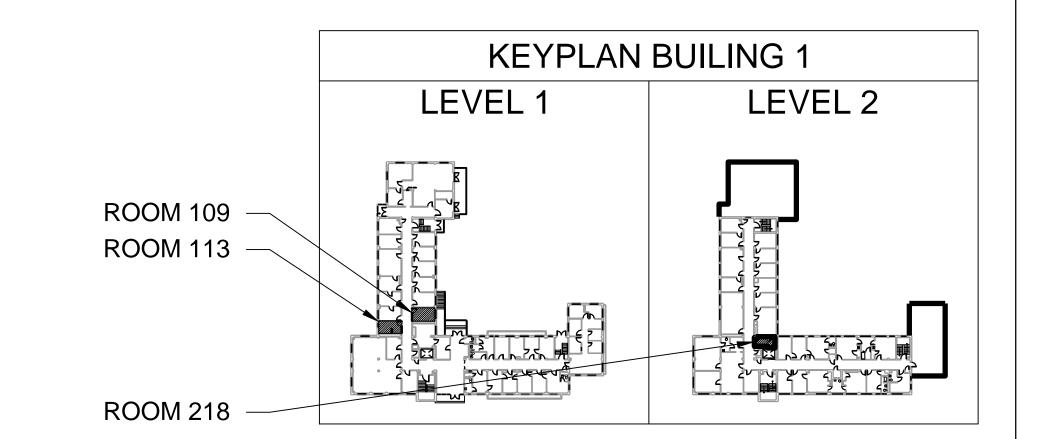

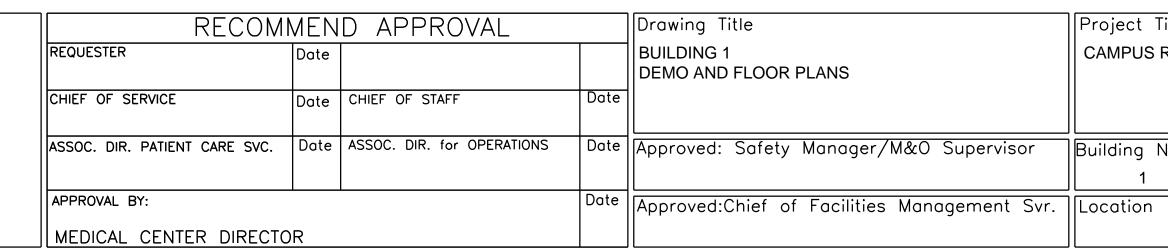


ng Title	Project Title
ING 1 AND FLOOR PLANS	CAMPUS RESTROOM RENOVATION


Building Number ||Checked

RESTROC	M RENOVAT	ION	12.02.2014	
		Project No. 659-14-006		
Number	Checked	Drawn	DRAWING NO.	\
	GAW	GLM	B1-A100	
) Hefner Medic			
	renner Ave. y NC 28144		DWG. 3 OF 7	



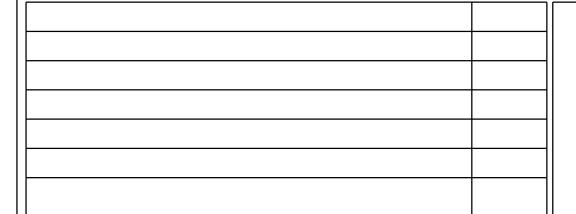


Revision

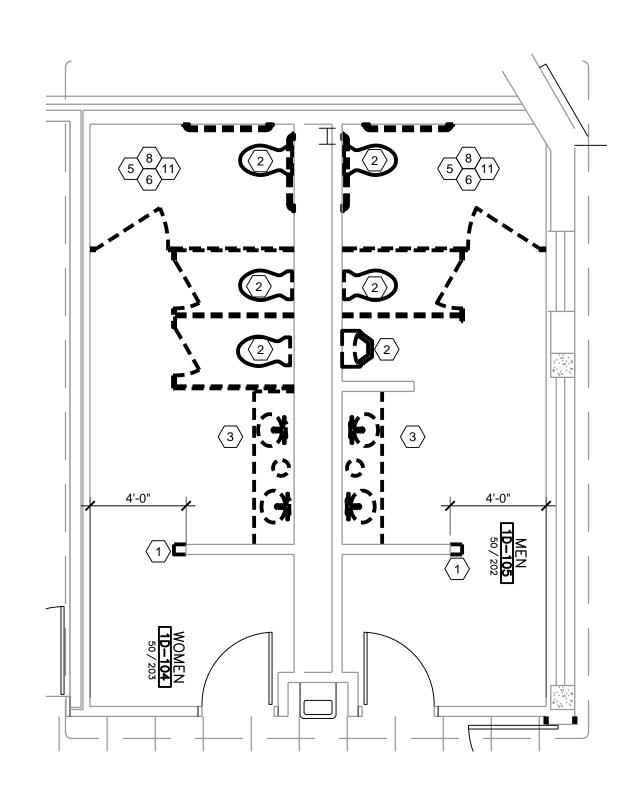


DEMO PLAN - RM 1D104

1/4" = 1'-0"

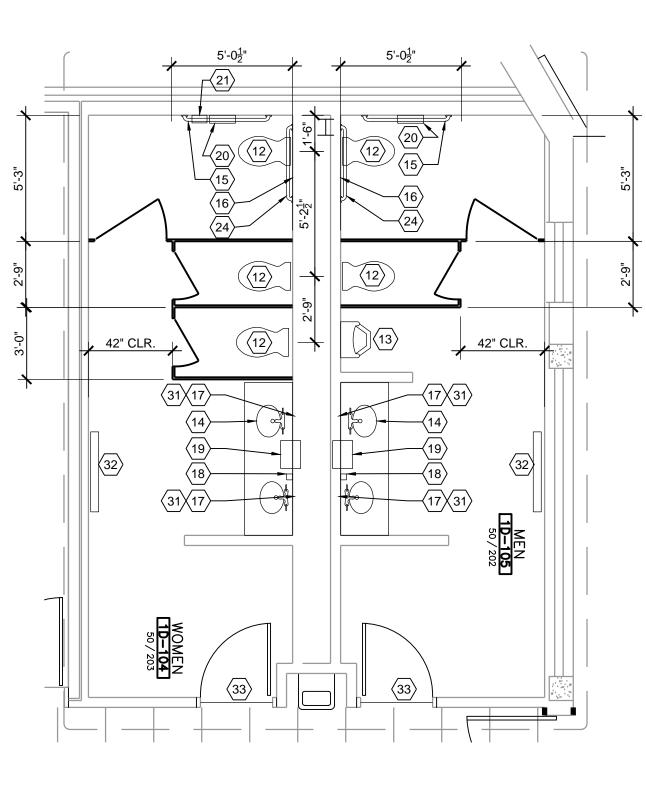


FLOOR PLAN - RM 1D104

1/4" = 1'-0"

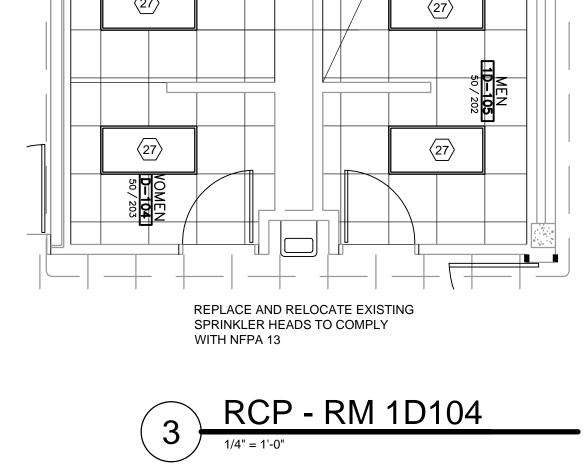

8'-0" AFF

8'-0" AFF

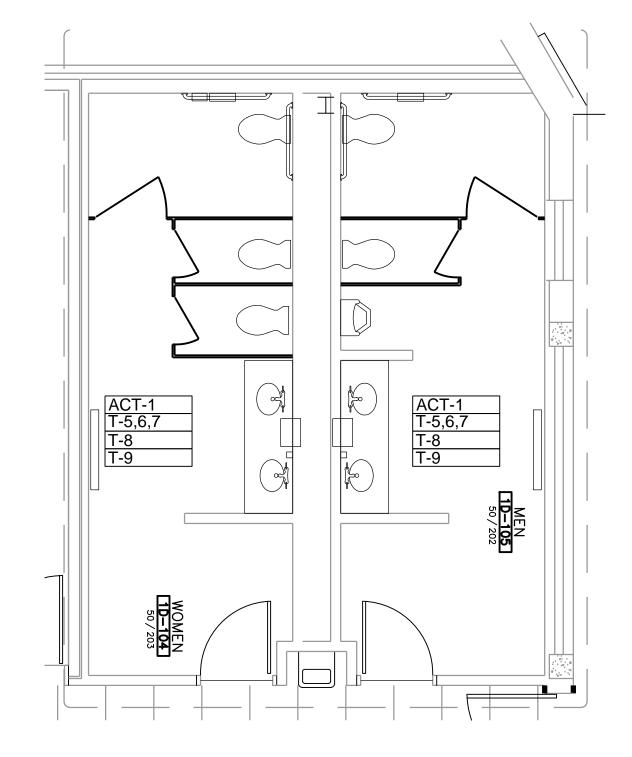



KEYNOTES

- (1.) DEMO EXISTING WALL
- 2. DEMO EXISTING TOILET / URINAL
- DEMO EXISTING LAVATORY
- 4. DEMO EXISTING DOOR AND FRAME

DEMO EXISTING TOILET PARTITIONS

- 6. DEMO EXISTING TILE FLOOR, GRIND AND LEVEL FLOOR TO PREP FOR NEW FINISHES
- DEMO EXISTING GWB CEILING

8. DEMO EXISTING ACT CEILING

- 9. DEMO EXISTING FLOOR SINK
- 10. DEMO EXISTING MOP SINK AND FAUCET
- 11. DEMO EXISTING WALL AND BASE TILE, PREP FOR NEW FINISHES
- 12. FLOOR MOUNTED REAR DISCHARGE TOILET-TIE INTO EXISTING WASTE LINE
- 13. URNINAL-TIE INTO EXISTING WASTE LINE
- 14. UNDER-MOUNT SINK(S) AND COUNTER TOP
- 15. 42" GRAB BAR
- 16. 36" GRAB BAR
- 17. MIRROR 24" X 48" 18. SOAP DISPENSER
- 19. PAPER TOWEL DISPENSER
- 20. TOILET PAPER DISPENSER
- 21. SANITARY NAPKIN DISPOSAL
- 22. SANITARY NAPKIN DISPENSER
- 23. RECESSED WALL MOUNTED RETRACTABLE BARRICADE BELT
- 24. PROVIDE CONDUIT FOR NURSE CALL. COORDINATE LOCATION WITH COR. SEE DETAIL
- 25. WALL MOUNTED SINK
- 26. TOILET PARTITIONS
- 27. LAY-IN CEILING LIGHT FIXTURE
- 28. CEILING OCCUPANCY SENSOR

29. EXHAUST, TIE INTO EXISTING

- 30. RELOCATE (E) POWER / DATA TO NEW WALL
- 31. WALL SCONCE, SEE LIGHT FIXTURE SCHEDULE
- 32. BABY CHANGING STATION
- 33. SCHLUTER TRANSITION STRIP

DEMOLITION NOTES


- 1. REMOVAL AS DESCRIBED HEREIN SHALL BE ACCOMPLISHED WITHOUT STORING ON THE FLOOR EXCESSIVE QUANTITIES OF ANY MATERIALS, RUBBISH, DIRT, DEBRIS, OR WASTE OF ANY SORT RESULTING FROM THE REMOVAL OPERATIONS ON THE FLOOR.
- 2. ALL DEBRIS SHALL BE REMOVED FROM THE CONSTRUCTION SITE DAILY.
- 3. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONS TO MAINTAIN FREE PROTECTED ACCESS OF ALL TENANTS, SERVICE PERSONNEL AND THE PUBLIC THROUGH THE AREAS
- 4. ALL DEMOLITION WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS.
- 5. THE CONTRACTOR SHALL REMOVE ALL PIPE SLEEVES PROJECTING THROUGH SLAB, PATCH ALL PENETRATIONS, HOLES, ETC. THAT ARE PART OF THE SCOPE
- 6. ALL PIPES AND CONDUITS IN WALLS THAT ARE TO BE DEMOLISHED ARE TO BE REMOVED AND/OR RELOCATED AS REQUIRED.
- 7. CONTRACTOR SHALL REVIEW WITH VA ANY AND ALL ITEMS OF DEMOLITION NOT IMPLIED OR SPECIFIED ON DRAWINGS OR SPECIFICATIONS AND TO INCLUDE SUCH COSTS IN BID UNLESS OTHERWISE ADVISED.
- 8. REFER TO ALL OTHER PLANS INCLUDING, BUT NOT LIMITED TO ENGINEERING, COMMUNICATION, ETC., FOR SCOPE OF WORK TO BE INCLUDED IN BID AND PRIOR TO COMMENCEMENT OF DEMOLITION.
- 9. PROVIDE ALL LABOR, MATERIAL, EQUIPMENT AND SERVICES AND PERFORM ALL OPERATIONS REQUIRED FOR COMPLETE INTERIOR DEMOLITION AND RELATED WORK AS DESCRIBED AND SPECIFIED HEREIN, AND AS MAY BE REASONABLY IMPLIED AS
- 10. WORK SHALL CONFORM TO THE LATEST EDITION OF ALL APPLICABLE REFERENCE SPECIFICATIONS AND TO GOVERNING BUILDING CODES AND REQUIREMENTS OF AUTHORITIES HAVING JURISDICTION.

NECESSARY TO COMPLETE THE WORK IN ALL RESPECTS.


CONTRACTORS EXPENSE.


ETC. AND DISCONNECTED OR CAPPED.

- 11. JOBSITE INSPECTION MUST BE CONDUCTED BY CONTRACTOR TO EXAMINE EXISTING CONDITIONS, TO DETERMINE NATURE AND SCOPE OF WORK OR ANY DIFFICULTIES THAT MIGHT ARISE AT TIME OF WORK. IN ADDITION, CONTRACTOR TO EXAMINE ALL WORK THAT IS INTENDED TO REMAIN AS PART OF THE COMPLETED PROJECT AND REPORT ALL UNSATISFACTORY CONDITIONS TO VA PRIOR TO COMMENCEMENT OF WORK. EXERCISE EXTREME CARE DURING DEMOLITION SO AS NOT TO DAMAGE CONSTRUCTION AND OTHER STRUCTURES THAT ARE INTENDED TO REMAIN. ANYTHING DAMAGED AT TIME OF WORK IS TO BE REPAIRED AND/OR REPLACED TO MATCH EXISTING CONSTRUCTION AT
- 12. REFER TO ENGINEERING, AND/OR COMMUNICATIONS DRAWINGS FOR EXISTING ITEMS/SYSTEMS TO REMAIN (DUCTWORK, SPRINKLERS, PLUMBING RISERS, TELE./ELEC. FEEDS AND PANELS, ETC.). ALL ITEMS NOT SCHEDULED FOR REUSE SHALL BE
- 13. CONTRACTOR TO PROVIDE DUST BARRIER FOR PROTECTION OF EXISTING AREAS TO REMAIN AS REQUIRED.
- 14. WHEN DEMOLITION TAKES PLACE, SHOULD ANY WORK AFFECT THE INTEGRITY OF THE STRUCTURE, WORK MUST STOP IMMEDIATELY, AND VA NOTIFIED. UNDER NO CIRCUMSTANCES SHALL REINFORCING OF ANY KIND BE DAMAGED, CUT OR BROKEN.
- 15. REMOVE ALL WALL CONDUITS LEFT AFTER WALL DEMOLITION INCLUDING SWITCH BOXES, PLATES, BRIDGES, PLUMBING LINES, OR ANY OTHER TELEPHONE OR ELECTRICAL WIRING AND EQUIPMENT. DEMOLISHED LINES ARE TO BE BROUGHT BACK TO PANELS, RISERS,
- 16. CONTRACTOR TO REVIEW WITH VA REGARDING ALL ITEMS SCHEDULED FOR RELOCATION. SAID ITEMS TO BE REMOVED CAREFULLY, PROTECTED AND STORED.
- 17. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DEMOLITION OF EXISTING PARTITIONS, MOLDINGS, BASES (RUBBER, VINYL, METAL, CONCRETE, ETC.), SUSPENDED CEILINGS, LIGHT FIXTURES, SWITCHES, DOORS AND BUCKS, HARDWARE, ETC., AND ALL OTHER ITEMS REQUIRED TO BE DEMOLISHED TO ACCOMMODATE THE SCOPE OF WORK FOR NEW

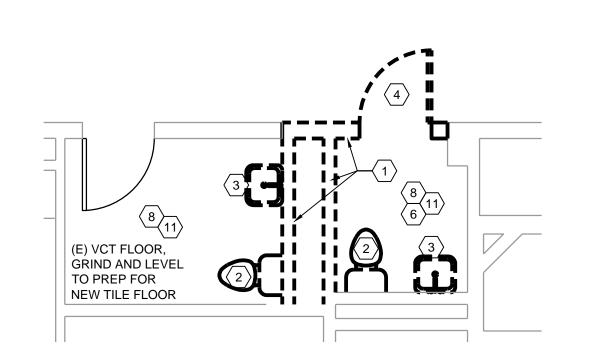



Date

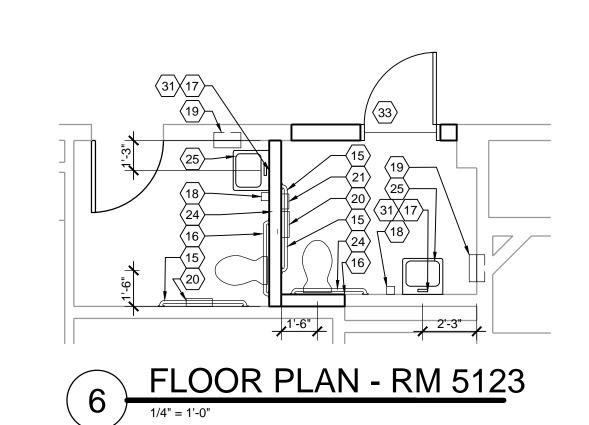

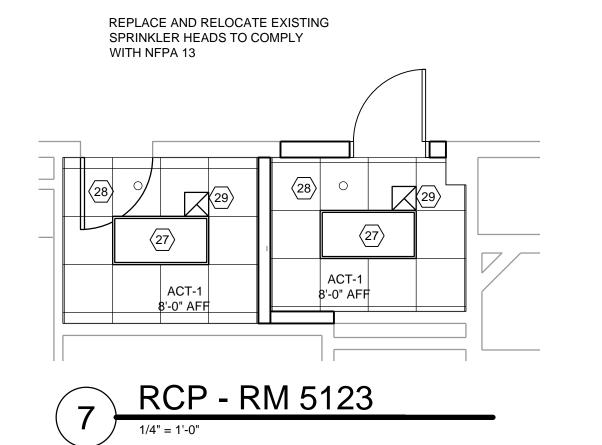

MEDICAL CENTER DIRECTOR

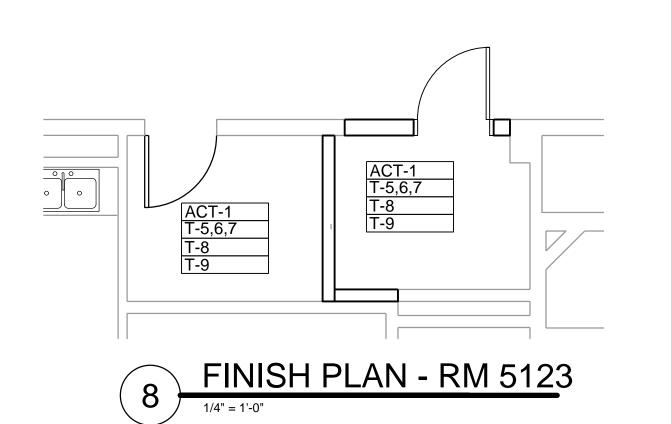

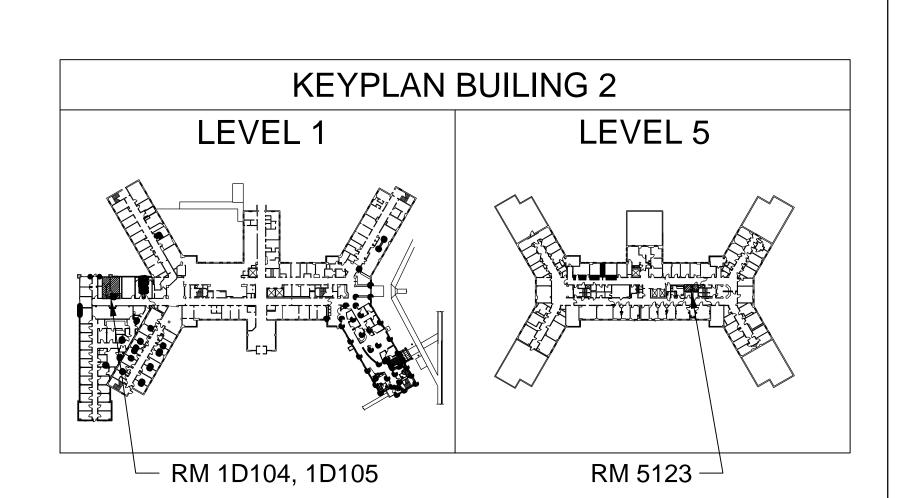

02.22.2014

Project No. **659-14-006**

DRAWING NO.


B2-A100

DWG. 4 OF 7


RECOMMEND APPROVAL Drawing Title Project Title REQUESTER BUILDING 2 DEMO AND FLOOR PLANS CAMPUS RESTROOM RENOVATION Date CHIEF OF STAFF CHIEF OF SERVICE ASSOC. DIR. PATIENT CARE SVC. Date ASSOC. DIR. for OPERATIONS Date Approved: Safety Manager/M&O Supervisor Building Number Checked Drawn GLM GAW APPROVAL BY: Date Approved:Chief of Facilities Management Svr. Location W.G.(Bill) Hefner Medical Center 1601 Brenner Ave. Salisbury NC 28144







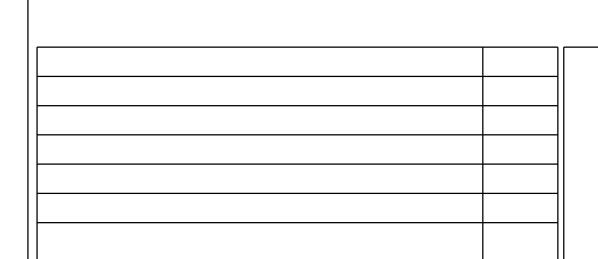

Revision

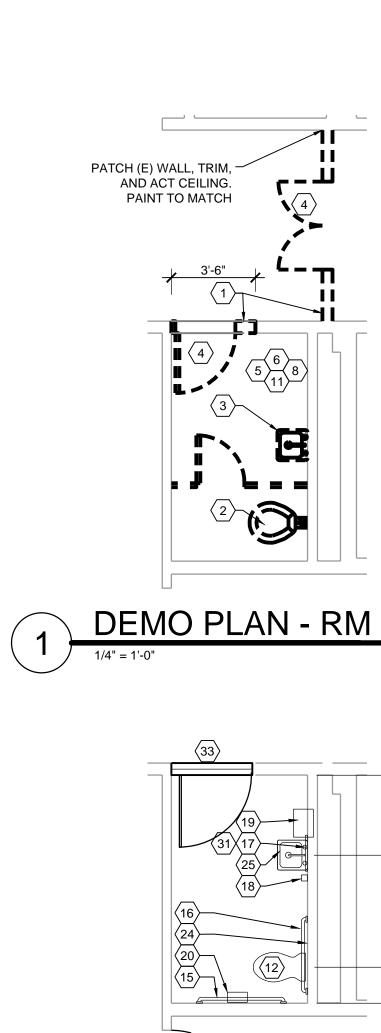

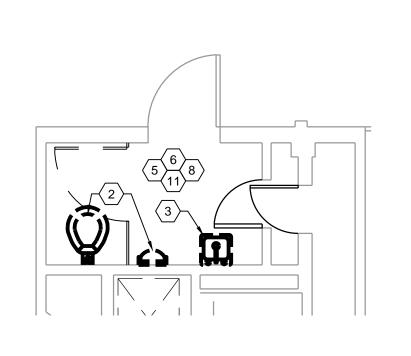

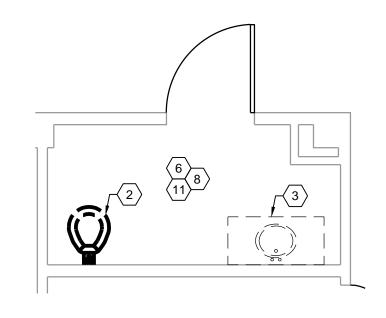










REPLACE AND RELOCATE EXISTING

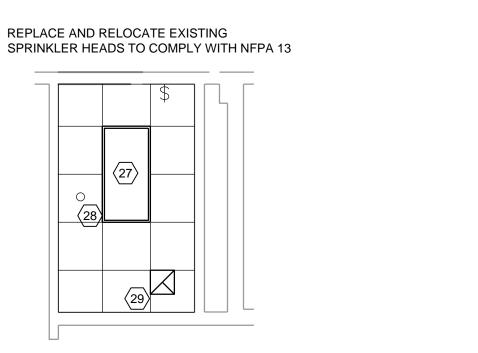

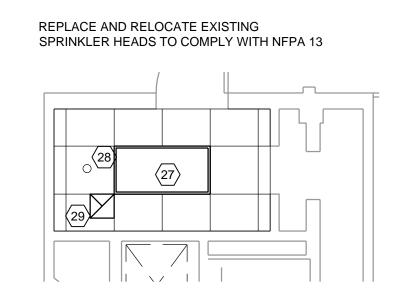


RCP - RM 1051

6 FLOOR PLAN - RM 1051

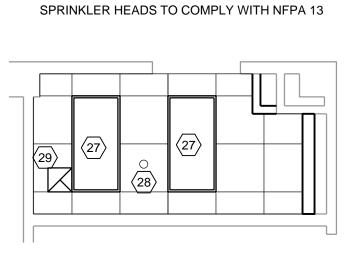



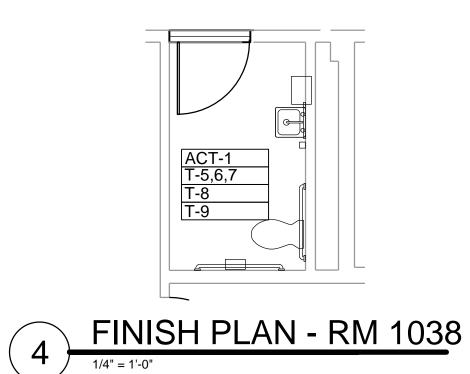



Date

Revision

3 RCP - RM 1038

FLOOR PLAN - RM 1038

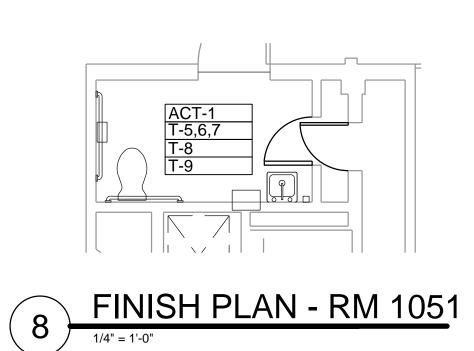

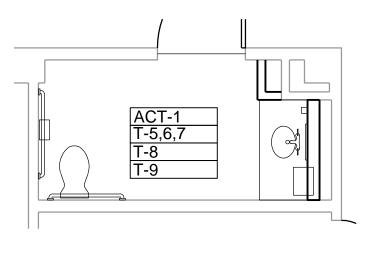

12 DEMO PLAN - RM 2002

KEYNOTES

- 1. DEMO EXISTING WALL
- 2. DEMO EXISTING TOILET / URINAL
- DEMO EXISTING LAVATORY
- 4. DEMO EXISTING DOOR AND FRAME DEMO EXISTING TOILET PARTITIONS
- 6. DEMO EXISTING TILE FLOOR, GRIND AND LEVEL FLOOR TO PREP FOR NEW FINISHES
- DEMO EXISTING GWB CEILING

8. DEMO EXISTING ACT CEILING

- 9. DEMO EXISTING FLOOR SINK
- 10. DEMO EXISTING MOP SINK AND FAUCET
- 11. DEMO EXISTING WALL AND BASE TILE, PREP FOR
- 12. FLOOR MOUNTED REAR DISCHARGE TOILET-TIE INTO
- EXISTING WASTE LINE
- 13. URNINAL-TIE INTO EXISTING WASTE LINE
- 14. UNDER-MOUNT SINK(S) AND COUNTER TOP

NEW FINISHES

- 15. 42" GRAB BAR 16. 36" GRAB BAR
- 17. MIRROR 24" X 48"
- 18. SOAP DISPENSER
- 19. PAPER TOWEL DISPENSER
- 20. TOILET PAPER DISPENSER
- 21. SANITARY NAPKIN DISPOSAL
- 22. SANITARY NAPKIN DISPENSER
- 23. RECESSED WALL MOUNTED RETRACTABLE BARRICADE BELT
- 24. PROVIDE CONDUIT FOR NURSE CALL. COORDINATE LOCATION WITH COR. SEE DETAIL
- 25. WALL MOUNTED SINK
- 26. TOILET PARTITIONS
- 27. LAY-IN CEILING LIGHT FIXTURE
- 28. CEILING OCCUPANCY SENSOR
- 29. EXHAUST, TIE INTO EXISTING
- 30. RELOCATE (E) POWER / DATA TO NEW WALL
- 31. WALL SCONCE, SEE LIGHT FIXTURE SCHEDULE
- 32. BABY CHANGING STATION
- 33. SCHLUTER TRANSITION STRIP


DEMOLITION NOTES

UNLESS OTHERWISE ADVISED.

- 1. REMOVAL AS DESCRIBED HEREIN SHALL BE ACCOMPLISHED WITHOUT STORING ON THE FLOOR EXCESSIVE QUANTITIES OF ANY MATERIALS, RUBBISH, DIRT, DEBRIS, OR WASTE OF ANY SORT RESULTING FROM THE REMOVAL OPERATIONS ON THE FLOOR.
- 2. ALL DEBRIS SHALL BE REMOVED FROM THE CONSTRUCTION SITE DAILY.
- 3. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONS TO MAINTAIN FREE PROTECTED ACCESS OF ALL TENANTS, SERVICE PERSONNEL AND THE PUBLIC THROUGH THE AREAS
- 4. ALL DEMOLITION WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS.
- 5. THE CONTRACTOR SHALL REMOVE ALL PIPE SLEEVES PROJECTING THROUGH SLAB, PATCH ALL PENETRATIONS, HOLES, ETC. THAT ARE PART OF THE SCOPE
- 6. ALL PIPES AND CONDUITS IN WALLS THAT ARE TO BE DEMOLISHED ARE TO BE REMOVED AND/OR RELOCATED AS REQUIRED.
- 7. CONTRACTOR SHALL REVIEW WITH VA ANY AND ALL ITEMS OF DEMOLITION NOT IMPLIED OR SPECIFIED ON DRAWINGS OR SPECIFICATIONS AND TO INCLUDE SUCH COSTS IN BID
- 8. REFER TO ALL OTHER PLANS INCLUDING, BUT NOT LIMITED TO ENGINEERING, COMMUNICATION, ETC., FOR SCOPE OF WORK TO BE INCLUDED IN BID AND PRIOR TO COMMENCEMENT OF DEMOLITION.
- 9. PROVIDE ALL LABOR, MATERIAL, EQUIPMENT AND SERVICES AND PERFORM ALL OPERATIONS REQUIRED FOR COMPLETE INTERIOR DEMOLITION AND RELATED WORK AS DESCRIBED AND SPECIFIED HEREIN, AND AS MAY BE REASONABLY IMPLIED AS
- 10. WORK SHALL CONFORM TO THE LATEST EDITION OF ALL APPLICABLE REFERENCE SPECIFICATIONS AND TO GOVERNING BUILDING CODES AND REQUIREMENTS OF AUTHORITIES HAVING JURISDICTION.

NECESSARY TO COMPLETE THE WORK IN ALL RESPECTS.

- 11. JOBSITE INSPECTION MUST BE CONDUCTED BY CONTRACTOR TO EXAMINE EXISTING CONDITIONS, TO DETERMINE NATURE AND SCOPE OF WORK OR ANY DIFFICULTIES THAT MIGHT ARISE AT TIME OF WORK. IN ADDITION, CONTRACTOR TO EXAMINE ALL WORK THAT IS INTENDED TO REMAIN AS PART OF THE COMPLETED PROJECT AND REPORT ALL UNSATISFACTORY CONDITIONS TO VA PRIOR TO COMMENCEMENT OF WORK. EXERCISE EXTREME CARE DURING DEMOLITION SO AS NOT TO DAMAGE CONSTRUCTION AND OTHER STRUCTURES THAT ARE INTENDED TO REMAIN. ANYTHING DAMAGED AT TIME OF WORK IS TO BE REPAIRED AND/OR REPLACED TO MATCH EXISTING CONSTRUCTION AT CONTRACTORS EXPENSE.
- 12. REFER TO ENGINEERING, AND/OR COMMUNICATIONS DRAWINGS FOR EXISTING ITEMS/SYSTEMS TO REMAIN (DUCTWORK, SPRINKLERS, PLUMBING RISERS, TELE./ELEC. FEEDS AND PANELS, ETC.). ALL ITEMS NOT SCHEDULED FOR REUSE SHALL BE DEMOLISHED.
- 13. CONTRACTOR TO PROVIDE DUST BARRIER FOR PROTECTION OF EXISTING AREAS TO REMAIN AS REQUIRED.
- 14. WHEN DEMOLITION TAKES PLACE, SHOULD ANY WORK AFFECT THE INTEGRITY OF THE STRUCTURE, WORK MUST STOP IMMEDIATELY, AND VA NOTIFIED. UNDER NO CIRCUMSTANCES SHALL REINFORCING OF ANY KIND BE DAMAGED, CUT OR BROKEN.
- 15. REMOVE ALL WALL CONDUITS LEFT AFTER WALL DEMOLITION INCLUDING SWITCH BOXES, PLATES, BRIDGES, PLUMBING LINES, OR ANY OTHER TELEPHONE OR ELECTRICAL WIRING AND EQUIPMENT. DEMOLISHED LINES ARE TO BE BROUGHT BACK TO PANELS, RISERS, ETC. AND DISCONNECTED OR CAPPED.
- 16. CONTRACTOR TO REVIEW WITH VA REGARDING ALL ITEMS SCHEDULED FOR RELOCATION. SAID ITEMS TO BE REMOVED CAREFULLY, PROTECTED AND STORED.
- 17. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DEMOLITION OF EXISTING PARTITIONS, MOLDINGS, BASES (RUBBER, VINYL, METAL, CONCRETE, ETC.), SUSPENDED CEILINGS, LIGHT FIXTURES, SWITCHES, DOORS AND BUCKS, HARDWARE, ETC., AND ALL OTHER ITEMS REQUIRED TO BE DEMOLISHED TO ACCOMMODATE THE SCOPE OF WORK FOR NEW

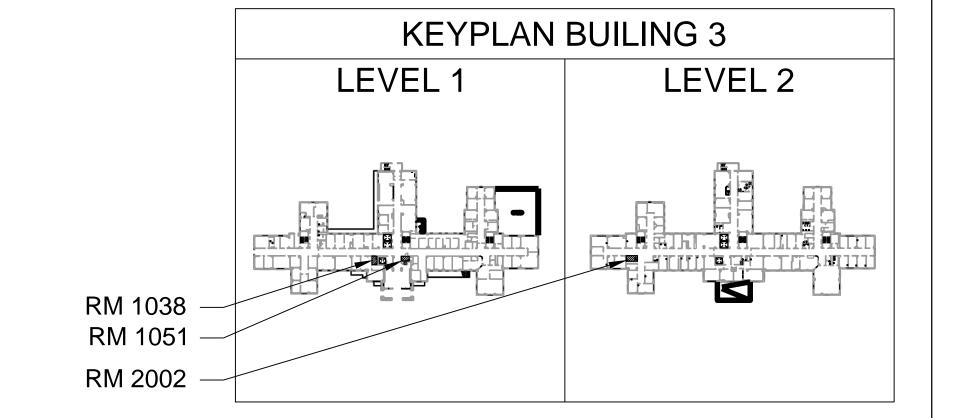

DWG. 5 OF 7


RECOMI	MEN	ID APPROVAL		Drawing Title	Project	Title		
REQUESTER	Date			BUILDING 3 - LEVEL 1 AND 2 DEMO AND FLOOR PLANS	CAMPUS	RESTROC	M RENOVATION	ON
CHIEF OF SERVICE	Date	CHIEF OF STAFF	Date					
ASSOC. DIR. PATIENT CARE SVC.	Date	ASSOC. DIR. for OPERATIONS	Date	Approved: Safety Manager/M&O Supervisor	Building	Number	Checked	Drawn
					3		GAW	GLM
APPROVAL BY:			Date	Approved:Chief of Facilities Management Svr.	Location		l) Hefner Medico Brenner Ave.	ıl Center
MEDICAL CENTER DIRECTOR						Salisbur	y NC 28144	


wing Title	Project Title
LDING 3 - LEVEL 1 AND 2 10 AND FLOOR PLANS	CAMPUS RESTROOM RENOVATION

12.02.2014 Project No. **659-14-006** ved: Safety Manager/M&O Supervisor | Building Number || Checked || Drawn









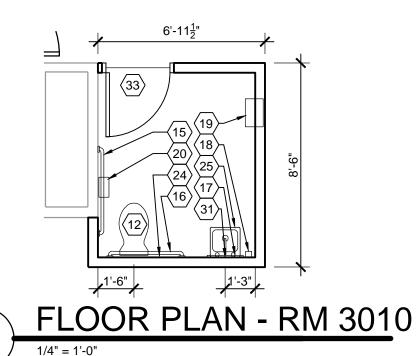

REPLACE AND RELOCATE EXISTING SPRINKLER HEADS TO COMPLY WITH NFPA 13



3 RCP - RM 3010



FINISH PLAN - RM 3010

Date

Revision

KEYNOTES

- $\langle 1. \rangle$ DEMO EXISTING WALL
- 2. DEMO EXISTING TOILET / URINAL
- DEMO EXISTING LAVATORY
- 4. DEMO EXISTING DOOR AND FRAME

DEMO EXISTING TOILET PARTITIONS

- 6. DEMO EXISTING TILE FLOOR, GRIND AND LEVEL
- FLOOR TO PREP FOR NEW FINISHES
- 7. DEMO EXISTING GWB CEILING
- 8. DEMO EXISTING ACT CEILING DEMO EXISTING FLOOR SINK
- 10. DEMO EXISTING MOP SINK AND FAUCET
- 11. DEMO EXISTING WALL AND BASE TILE, PREP FOR NEW FINISHES
- 12. FLOOR MOUNTED REAR DISCHARGE TOILET-TIE INTO EXISTING WASTE LINE
- 13. URNINAL-TIE INTO EXISTING WASTE LINE
- 14. UNDER-MOUNT SINK(S) AND COUNTER TOP
- 15. 42" GRAB BAR 16. 36" GRAB BAR
- 17. MIRROR 24" X 48"
- 18. SOAP DISPENSER
- 19. PAPER TOWEL DISPENSER
- 20. TOILET PAPER DISPENSER
- 21. SANITARY NAPKIN DISPOSAL
- 22. SANITARY NAPKIN DISPENSER
- 23. RECESSED WALL MOUNTED RETRACTABLE BARRICADE BELT

LOCATION WITH COR. SEE DETAIL

- 24. PROVIDE CONDUIT FOR NURSE CALL. COORDINATE
- 25. WALL MOUNTED SINK
- 26. TOILET PARTITIONS
- 27. LAY-IN CEILING LIGHT FIXTURE
- 28. CEILING OCCUPANCY SENSOR
- 29. EXHAUST, TIE INTO EXISTING
- 30. RELOCATE (E) POWER / DATA TO NEW WALL
- 31. WALL SCONCE, SEE LIGHT FIXTURE SCHEDULE
- 32. BABY CHANGING STATION
- 33. SCHLUTER TRANSITION STRIP

DEMOLITION NOTES

UNLESS OTHERWISE ADVISED.

CONTRACTORS EXPENSE.

DEMOLISHED.


- 1. REMOVAL AS DESCRIBED HEREIN SHALL BE ACCOMPLISHED WITHOUT STORING ON THE FLOOR EXCESSIVE QUANTITIES OF ANY MATERIALS, RUBBISH, DIRT, DEBRIS, OR WASTE OF ANY SORT RESULTING FROM THE REMOVAL OPERATIONS ON THE FLOOR.
- 2. ALL DEBRIS SHALL BE REMOVED FROM THE CONSTRUCTION SITE DAILY.
- 3. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONS TO MAINTAIN FREE PROTECTED ACCESS OF ALL TENANTS, SERVICE PERSONNEL AND THE PUBLIC THROUGH THE AREAS
- 4. ALL DEMOLITION WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS.
- 5. THE CONTRACTOR SHALL REMOVE ALL PIPE SLEEVES PROJECTING THROUGH SLAB, PATCH ALL PENETRATIONS, HOLES, ETC. THAT ARE PART OF THE SCOPE
- 6. ALL PIPES AND CONDUITS IN WALLS THAT ARE TO BE DEMOLISHED ARE TO BE REMOVED AND/OR RELOCATED AS REQUIRED.
- 7. CONTRACTOR SHALL REVIEW WITH VA ANY AND ALL ITEMS OF DEMOLITION NOT IMPLIED OR SPECIFIED ON DRAWINGS OR SPECIFICATIONS AND TO INCLUDE SUCH COSTS IN BID
- 8. REFER TO ALL OTHER PLANS INCLUDING, BUT NOT LIMITED TO ENGINEERING, COMMUNICATION, ETC., FOR SCOPE OF WORK TO BE INCLUDED IN BID AND PRIOR TO
- COMMENCEMENT OF DEMOLITION. 9. PROVIDE ALL LABOR, MATERIAL, EQUIPMENT AND SERVICES AND PERFORM ALL OPERATIONS REQUIRED FOR COMPLETE INTERIOR DEMOLITION AND RELATED WORK AS
- DESCRIBED AND SPECIFIED HEREIN, AND AS MAY BE REASONABLY IMPLIED AS NECESSARY TO COMPLETE THE WORK IN ALL RESPECTS. 10. WORK SHALL CONFORM TO THE LATEST EDITION OF ALL APPLICABLE REFERENCE

SPECIFICATIONS AND TO GOVERNING BUILDING CODES AND REQUIREMENTS OF

- AUTHORITIES HAVING JURISDICTION. 11. JOBSITE INSPECTION MUST BE CONDUCTED BY CONTRACTOR TO EXAMINE EXISTING CONDITIONS, TO DETERMINE NATURE AND SCOPE OF WORK OR ANY DIFFICULTIES THAT MIGHT ARISE AT TIME OF WORK. IN ADDITION, CONTRACTOR TO EXAMINE ALL WORK THAT IS INTENDED TO REMAIN AS PART OF THE COMPLETED PROJECT AND REPORT ALL UNSATISFACTORY CONDITIONS TO VA PRIOR TO COMMENCEMENT OF WORK. EXERCISE EXTREME CARE DURING DEMOLITION SO AS NOT TO DAMAGE CONSTRUCTION AND OTHER STRUCTURES THAT ARE INTENDED TO REMAIN. ANYTHING DAMAGED AT TIME OF WORK IS
- 12. REFER TO ENGINEERING, AND/OR COMMUNICATIONS DRAWINGS FOR EXISTING ITEMS/SYSTEMS TO REMAIN (DUCTWORK, SPRINKLERS, PLUMBING RISERS, TELE./ELEC. FEEDS AND PANELS, ETC.). ALL ITEMS NOT SCHEDULED FOR REUSE SHALL BE

TO BE REPAIRED AND/OR REPLACED TO MATCH EXISTING CONSTRUCTION AT

- 13. CONTRACTOR TO PROVIDE DUST BARRIER FOR PROTECTION OF EXISTING AREAS TO REMAIN AS REQUIRED.
- 14. WHEN DEMOLITION TAKES PLACE, SHOULD ANY WORK AFFECT THE INTEGRITY OF THE STRUCTURE, WORK MUST STOP IMMEDIATELY, AND VA NOTIFIED. UNDER NO CIRCUMSTANCES SHALL REINFORCING OF ANY KIND BE DAMAGED, CUT OR BROKEN.
- 15. REMOVE ALL WALL CONDUITS LEFT AFTER WALL DEMOLITION INCLUDING SWITCH BOXES, PLATES, BRIDGES, PLUMBING LINES, OR ANY OTHER TELEPHONE OR ELECTRICAL WIRING AND EQUIPMENT. DEMOLISHED LINES ARE TO BE BROUGHT BACK TO PANELS, RISERS, ETC. AND DISCONNECTED OR CAPPED.
- 16. CONTRACTOR TO REVIEW WITH VA REGARDING ALL ITEMS SCHEDULED FOR RELOCATION. SAID ITEMS TO BE REMOVED CAREFULLY, PROTECTED AND STORED.
- 17. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DEMOLITION OF EXISTING PARTITIONS, MOLDINGS, BASES (RUBBER, VINYL, METAL, CONCRETE, ETC.), SUSPENDED CEILINGS, LIGHT FIXTURES, SWITCHES, DOORS AND BUCKS, HARDWARE, ETC., AND ALL OTHER ITEMS REQUIRED TO BE DEMOLISHED TO ACCOMMODATE THE SCOPE OF WORK FOR NEW

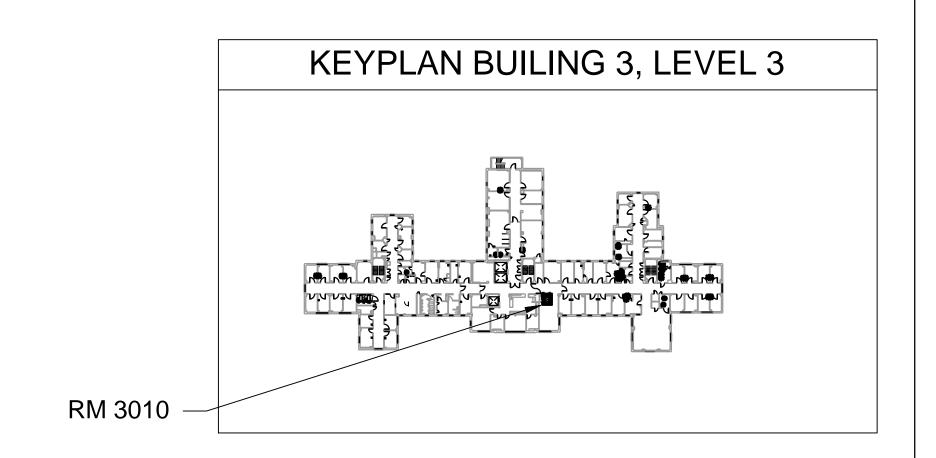

	RECOMI	MEN	D APPROVAL		Drawing Title	Project Title		
	REQUESTER	Date			BUILDING 3 - LEVEL 3 DEMO AND FLOOR PLANS	CAMPUS RES	TROOM RENOVAT	ION
	CHIEF OF SERVICE	Date	CHIEF OF STAFF	Date				
	ASSOC. DIR. PATIENT CARE SVC.	Date	ASSOC. DIR. for OPERATIONS	Date	Approved: Safety Manager/M&O Supervisor	Building Num	nber Checked	Drawn
						3	GAW	GLM
	APPROVAL BY:			Date	Approved:Chief of Facilities Management Svr.		V.G.(Bill) Hefner Medic	cal Center
JL	MEDICAL CENTER DIRECTO	R					601 Brenner Ave. Salisbury NC 28144	

12.02.2014 Project No. **659-14-006**

B3-A101

DWG. 6 OF 7





Date

Revision

CHIEF OF SERVICE

MEDICAL CENTER DIRECTOR

KEYNOTES

- 1. DEMO EXISTING WALL
- 2. DEMO EXISTING TOILET / URINAL
- DEMO EXISTING LAVATORY
- 4. DEMO EXISTING DOOR AND FRAME DEMO EXISTING TOILET PARTITIONS
- 6. DEMO EXISTING TILE FLOOR, GRIND AND LEVEL FLOOR TO PREP FOR NEW FINISHES
- DEMO EXISTING GWB CEILING
- 8. DEMO EXISTING ACT CEILING
- 9. DEMO EXISTING FLOOR SINK
- 10. DEMO EXISTING MOP SINK AND FAUCET
- 11. DEMO EXISTING WALL AND BASE TILE, PREP FOR
- NEW FINISHES 12. FLOOR MOUNTED REAR DISCHARGE TOILET-TIE INTO
- EXISTING WASTE LINE
- 13. URNINAL-TIE INTO EXISTING WASTE LINE
- 14. UNDER-MOUNT SINK(S) AND COUNTER TOP
- 15. 42" GRAB BAR
- 16. 36" GRAB BAR
- 18. SOAP DISPENSER
- 19. PAPER TOWEL DISPENSER
- 20. TOILET PAPER DISPENSER
- 21. SANITARY NAPKIN DISPOSAL
- 22. SANITARY NAPKIN DISPENSER
- 23. RECESSED WALL MOUNTED RETRACTABLE
- BARRICADE BELT
- LOCATION WITH COR. SEE DETAIL
- 25. WALL MOUNTED SINK
- 27. LAY-IN CEILING LIGHT FIXTURE
- 28. CEILING OCCUPANCY SENSOR
- 29. EXHAUST, TIE INTO EXISTING
- 30. RELOCATE (E) POWER / DATA TO NEW WALL
- 32. BABY CHANGING STATION
- 33. SCHLUTER TRANSITION STRIP

DEMOLITION NOTES

UNLESS OTHERWISE ADVISED.


CONTRACTORS EXPENSE.

ETC. AND DISCONNECTED OR CAPPED.

- 1. REMOVAL AS DESCRIBED HEREIN SHALL BE ACCOMPLISHED WITHOUT STORING ON THE FLOOR EXCESSIVE QUANTITIES OF ANY MATERIALS, RUBBISH, DIRT, DEBRIS, OR WASTE OF ANY SORT RESULTING FROM THE REMOVAL OPERATIONS ON THE FLOOR.
- 2. ALL DEBRIS SHALL BE REMOVED FROM THE CONSTRUCTION SITE DAILY.
- 3. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONS TO MAINTAIN FREE PROTECTED ACCESS OF ALL TENANTS, SERVICE PERSONNEL AND THE PUBLIC THROUGH THE AREAS
- 4. ALL DEMOLITION WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS.
- 5. THE CONTRACTOR SHALL REMOVE ALL PIPE SLEEVES PROJECTING THROUGH SLAB, PATCH ALL PENETRATIONS, HOLES, ETC. THAT ARE PART OF THE SCOPE
- 6. ALL PIPES AND CONDUITS IN WALLS THAT ARE TO BE DEMOLISHED ARE TO BE REMOVED AND/OR RELOCATED AS REQUIRED.
- 7. CONTRACTOR SHALL REVIEW WITH VA ANY AND ALL ITEMS OF DEMOLITION NOT IMPLIED OR SPECIFIED ON DRAWINGS OR SPECIFICATIONS AND TO INCLUDE SUCH COSTS IN BID
- 8. REFER TO ALL OTHER PLANS INCLUDING, BUT NOT LIMITED TO ENGINEERING, COMMUNICATION, ETC., FOR SCOPE OF WORK TO BE INCLUDED IN BID AND PRIOR TO COMMENCEMENT OF DEMOLITION.
- 9. PROVIDE ALL LABOR, MATERIAL, EQUIPMENT AND SERVICES AND PERFORM ALL OPERATIONS REQUIRED FOR COMPLETE INTERIOR DEMOLITION AND RELATED WORK AS DESCRIBED AND SPECIFIED HEREIN, AND AS MAY BE REASONABLY IMPLIED AS
- 10. WORK SHALL CONFORM TO THE LATEST EDITION OF ALL APPLICABLE REFERENCE SPECIFICATIONS AND TO GOVERNING BUILDING CODES AND REQUIREMENTS OF AUTHORITIES HAVING JURISDICTION.

NECESSARY TO COMPLETE THE WORK IN ALL RESPECTS.

- 11. JOBSITE INSPECTION MUST BE CONDUCTED BY CONTRACTOR TO EXAMINE EXISTING CONDITIONS, TO DETERMINE NATURE AND SCOPE OF WORK OR ANY DIFFICULTIES THAT MIGHT ARISE AT TIME OF WORK. IN ADDITION, CONTRACTOR TO EXAMINE ALL WORK THAT IS INTENDED TO REMAIN AS PART OF THE COMPLETED PROJECT AND REPORT ALL UNSATISFACTORY CONDITIONS TO VA PRIOR TO COMMENCEMENT OF WORK. EXERCISE EXTREME CARE DURING DEMOLITION SO AS NOT TO DAMAGE CONSTRUCTION AND OTHER STRUCTURES THAT ARE INTENDED TO REMAIN. ANYTHING DAMAGED AT TIME OF WORK IS TO BE REPAIRED AND/OR REPLACED TO MATCH EXISTING CONSTRUCTION AT
- 12. REFER TO ENGINEERING, AND/OR COMMUNICATIONS DRAWINGS FOR EXISTING ITEMS/SYSTEMS TO REMAIN (DUCTWORK, SPRINKLERS, PLUMBING RISERS, TELE./ELEC. FEEDS AND PANELS, ETC.). ALL ITEMS NOT SCHEDULED FOR REUSE SHALL BE DEMOLISHED.
- 13. CONTRACTOR TO PROVIDE DUST BARRIER FOR PROTECTION OF EXISTING AREAS TO REMAIN AS REQUIRED.
- 14. WHEN DEMOLITION TAKES PLACE, SHOULD ANY WORK AFFECT THE INTEGRITY OF THE STRUCTURE, WORK MUST STOP IMMEDIATELY, AND VA NOTIFIED. UNDER NO CIRCUMSTANCES SHALL REINFORCING OF ANY KIND BE DAMAGED, CUT OR BROKEN.
- 15. REMOVE ALL WALL CONDUITS LEFT AFTER WALL DEMOLITION INCLUDING SWITCH BOXES, PLATES, BRIDGES, PLUMBING LINES, OR ANY OTHER TELEPHONE OR ELECTRICAL WIRING AND EQUIPMENT. DEMOLISHED LINES ARE TO BE BROUGHT BACK TO PANELS, RISERS,
- 16. CONTRACTOR TO REVIEW WITH VA REGARDING ALL ITEMS SCHEDULED FOR RELOCATION. SAID ITEMS TO BE REMOVED CAREFULLY, PROTECTED AND STORED.
- 17. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DEMOLITION OF EXISTING PARTITIONS, MOLDINGS, BASES (RUBBER, VINYL, METAL, CONCRETE, ETC.), SUSPENDED CEILINGS, LIGHT FIXTURES, SWITCHES, DOORS AND BUCKS, HARDWARE, ETC., AND ALL OTHER ITEMS REQUIRED TO BE DEMOLISHED TO ACCOMMODATE THE SCOPE OF WORK FOR NEW

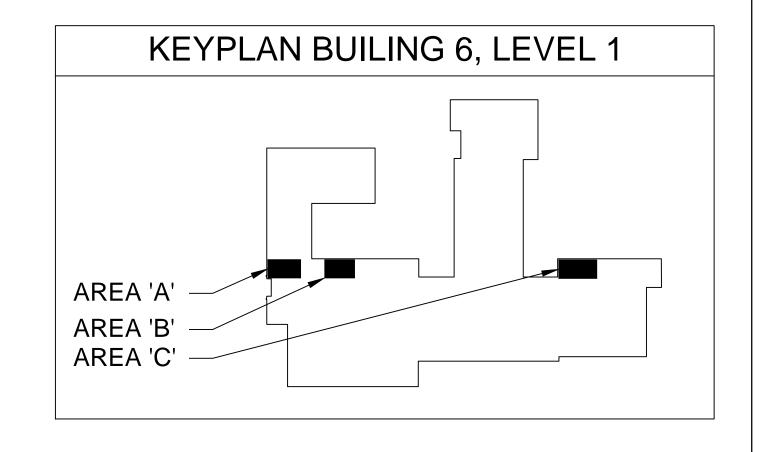

DWG. 7 OF 7

