

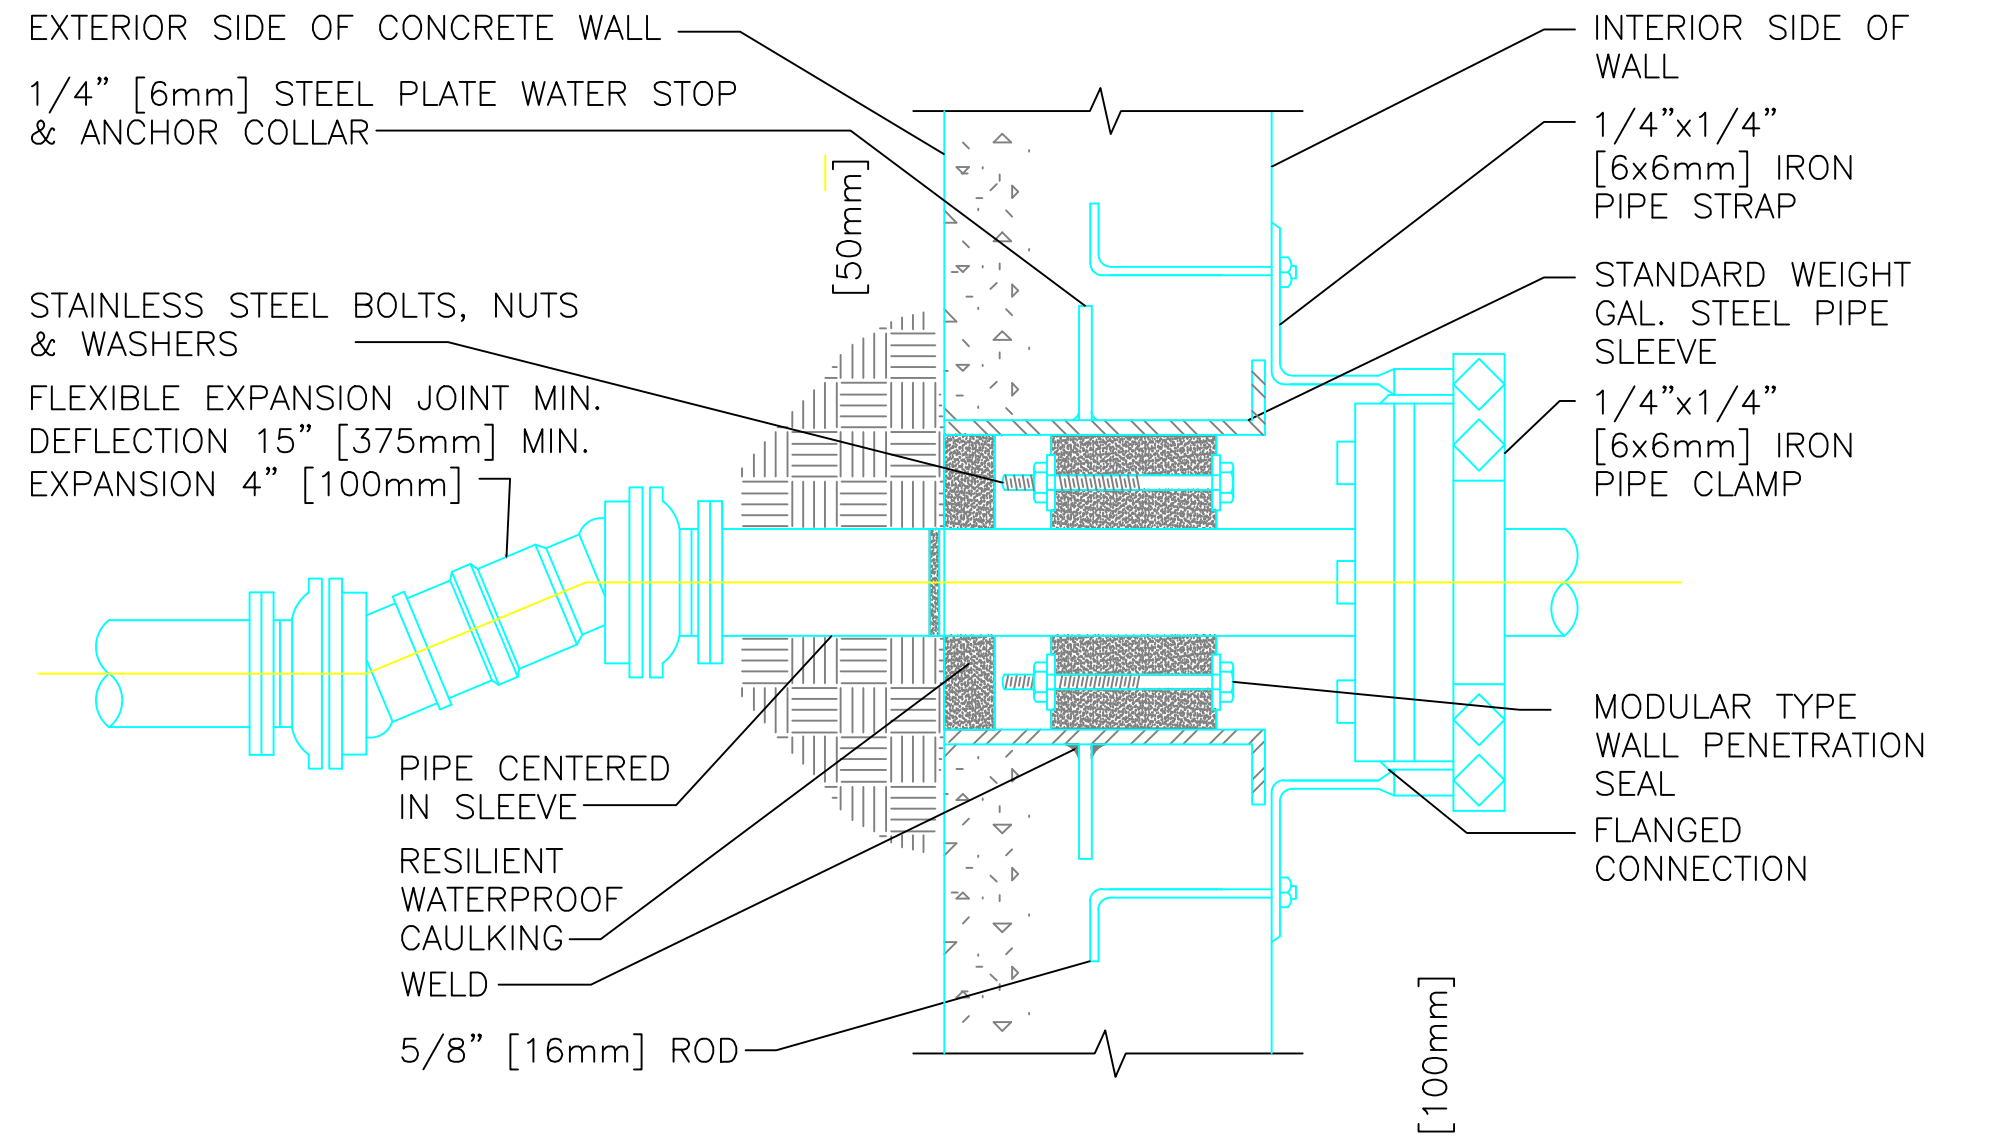
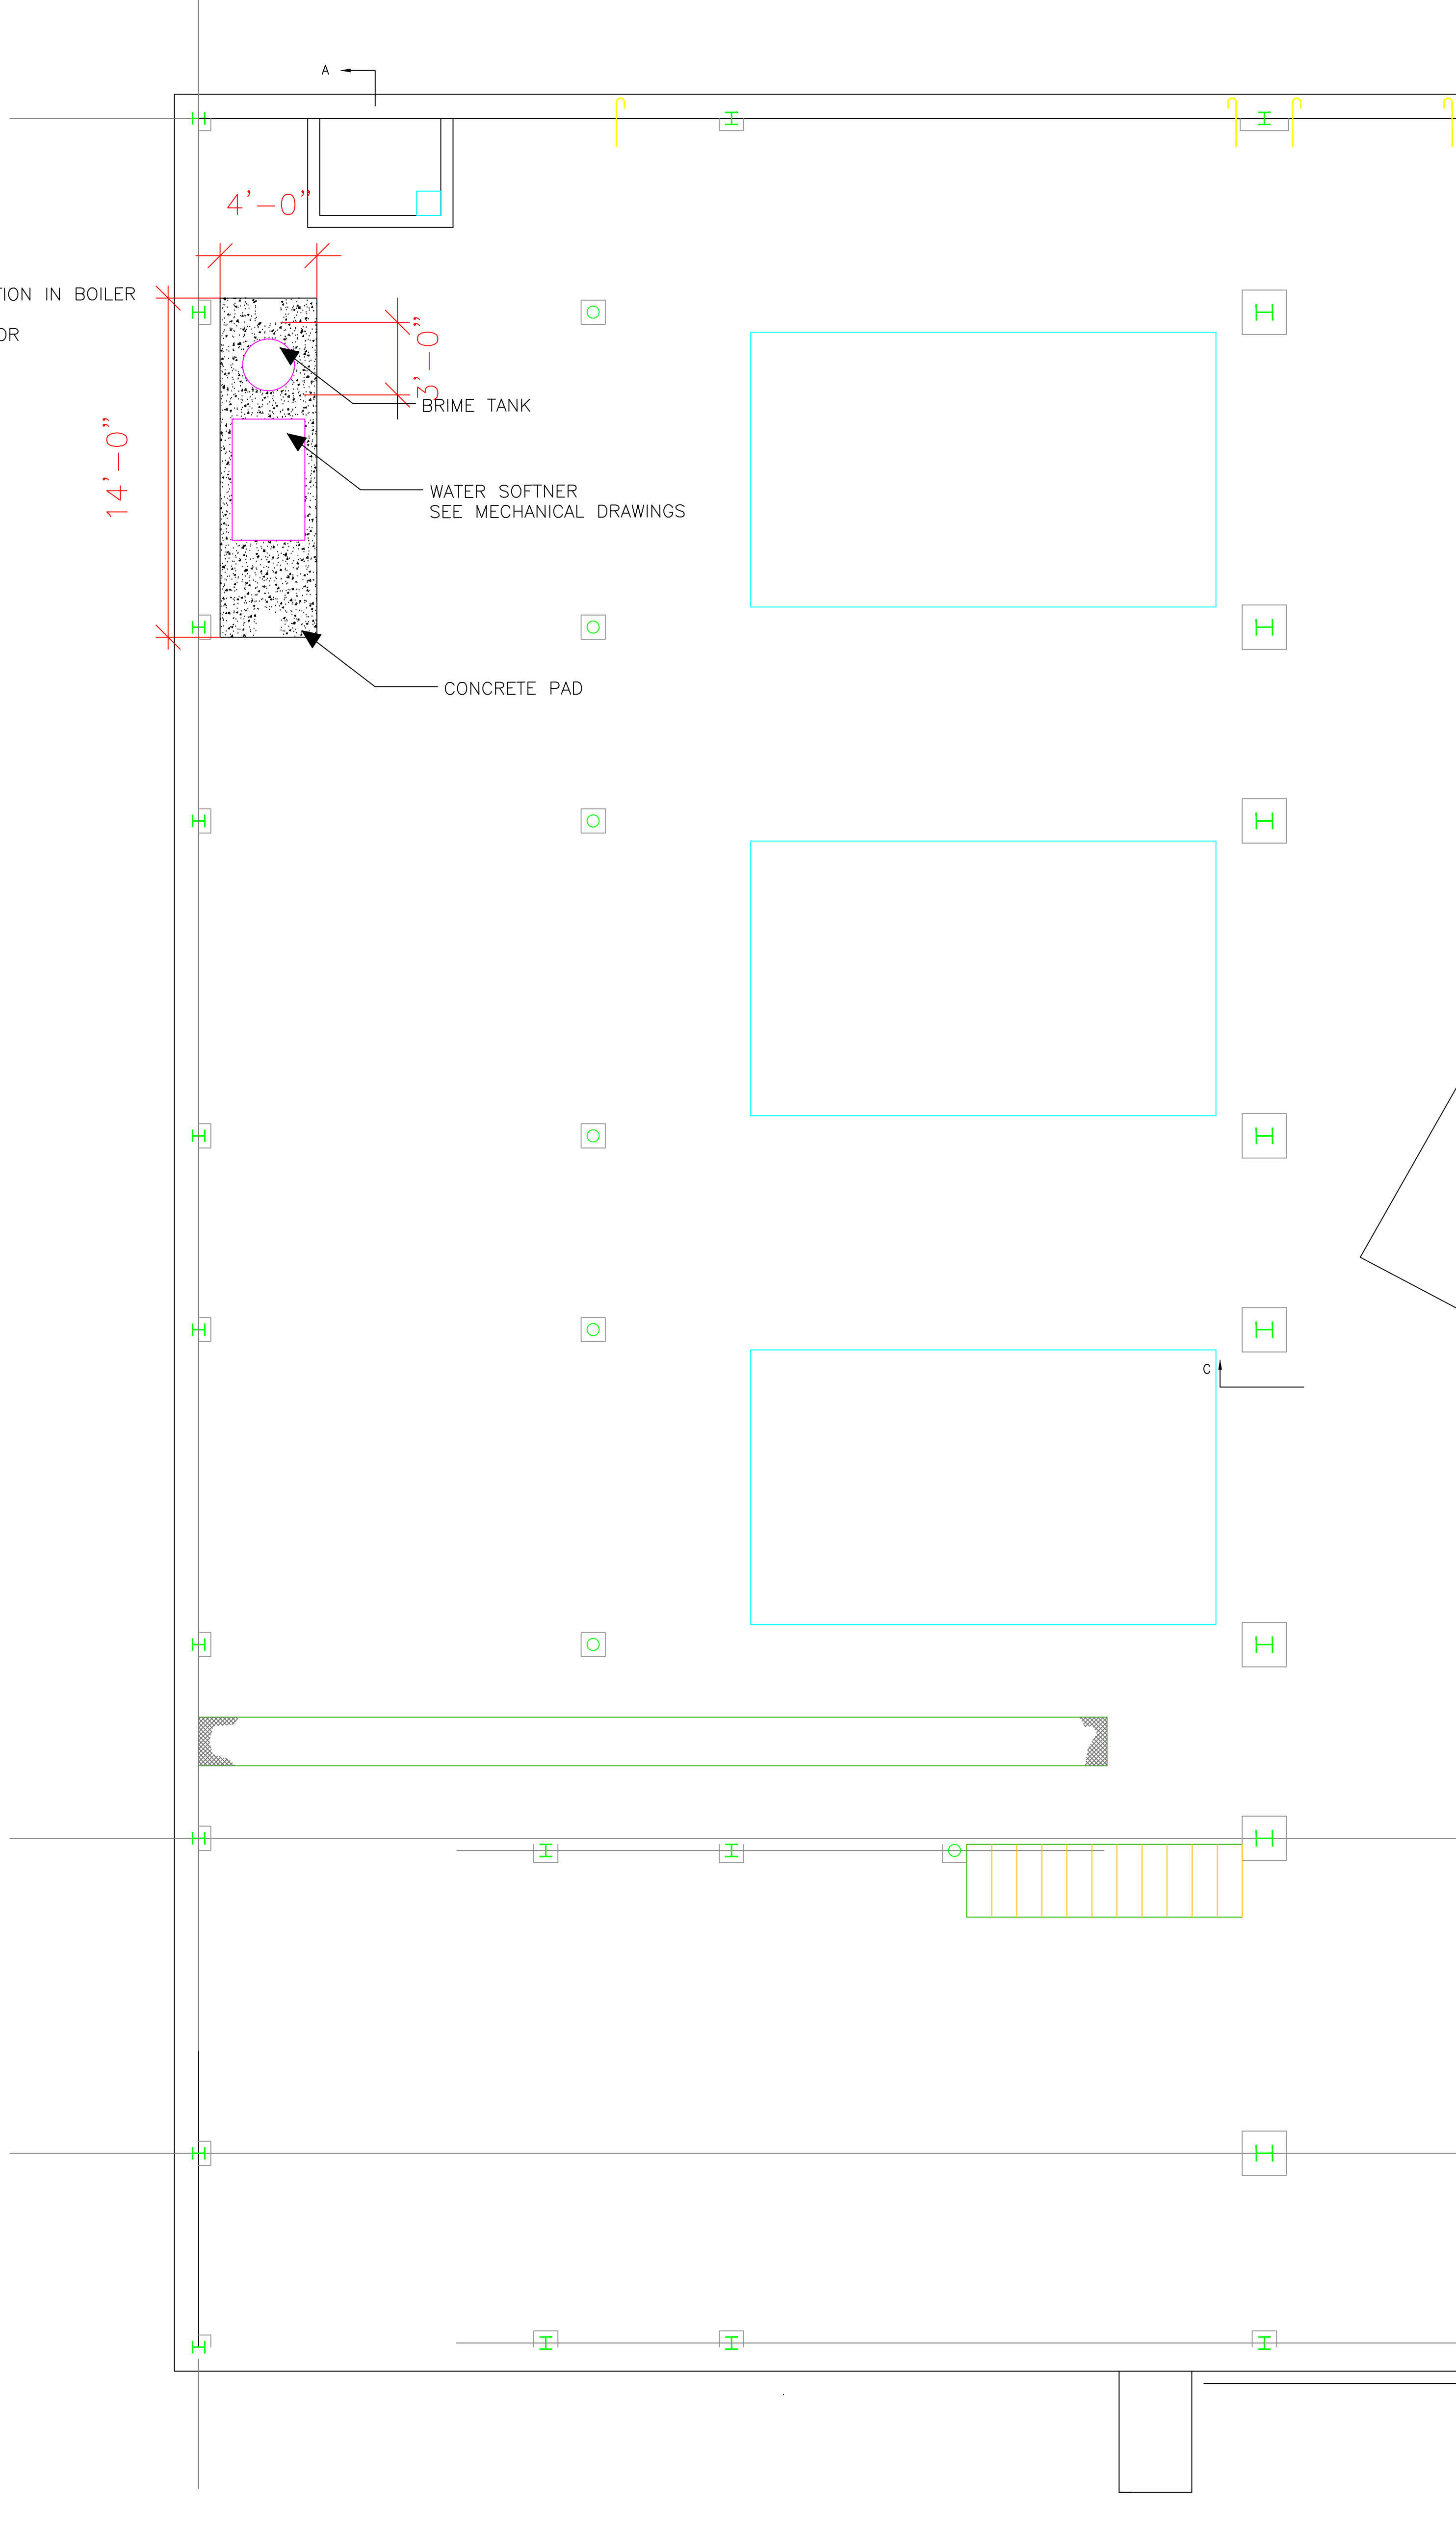
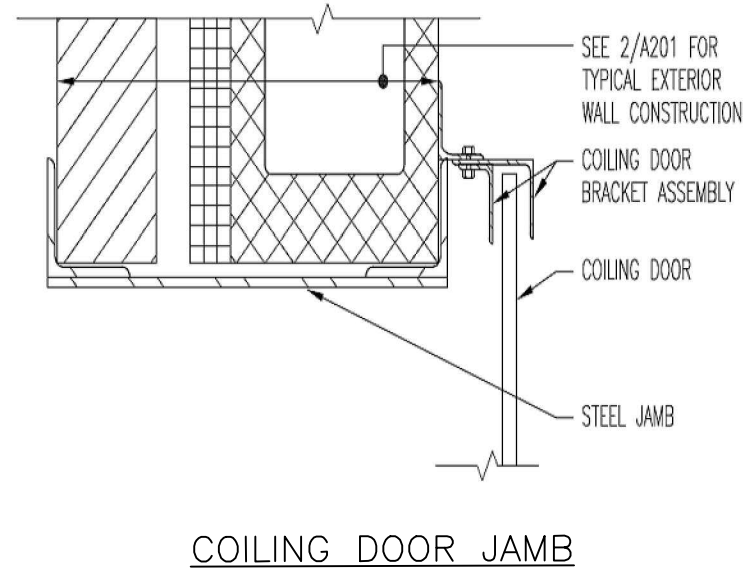
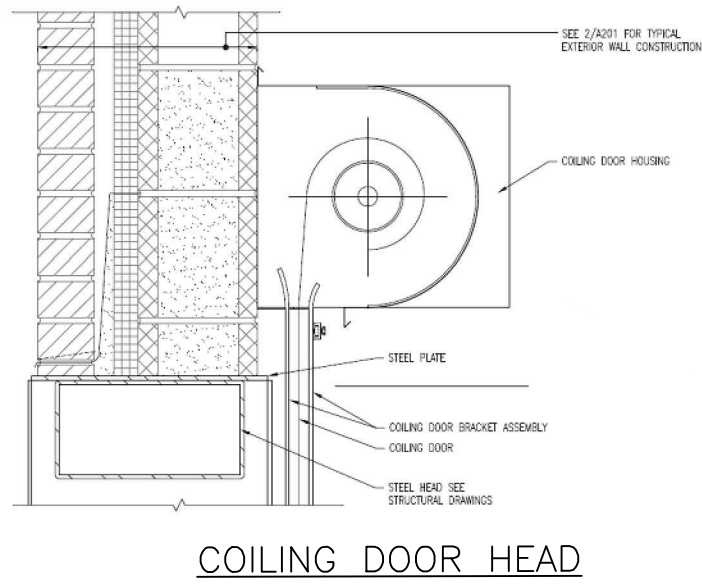
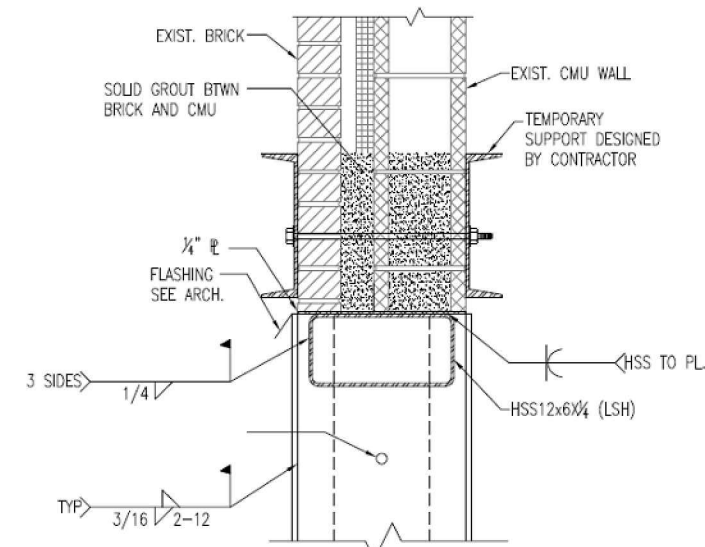
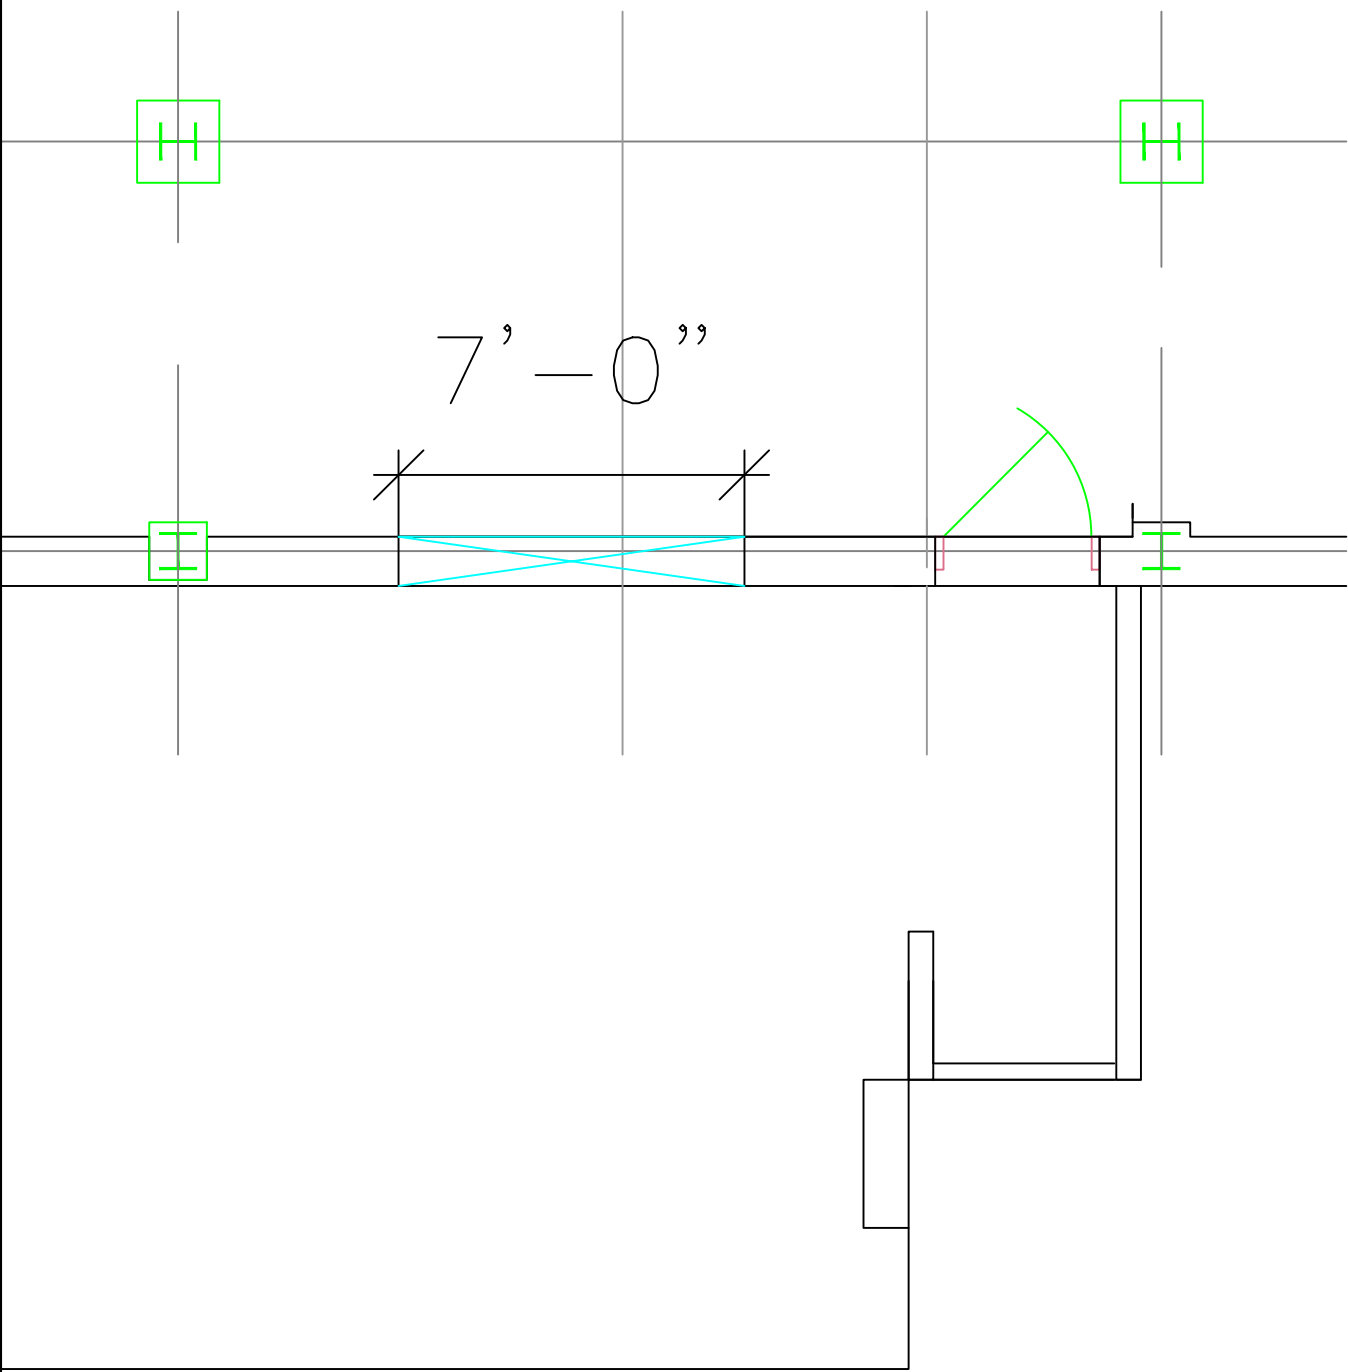
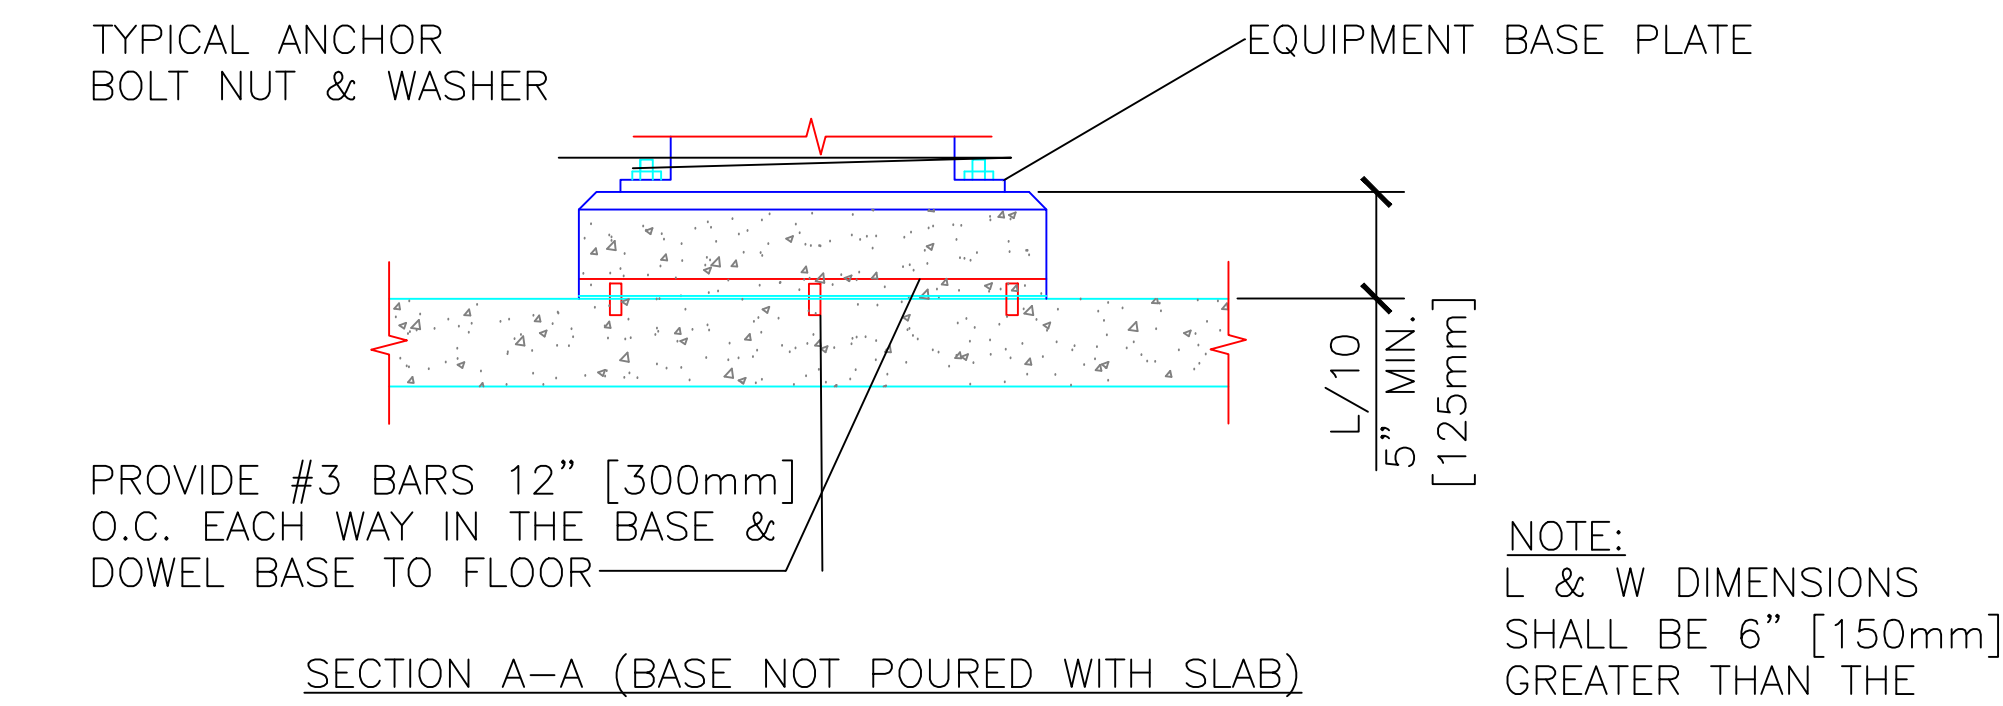


NOTE:
SEE DRAWING G-102 NOTE 10.
A. RELOCATED BY OTHER.
B. REMOVE/DEMOLITION OF EXISTING BRICK
C. CUT/REMOVE EXISTING CONCRETE WALL
D. REMOVE AND REPLACE EXISTING CONDUIT
E. SLOPE NEW RAMP TO FINISH FLOOR ELEVATION IN BOILER
PLANT.
F. RELOCATE ELECTRICAL. COORDINATE WITH COR

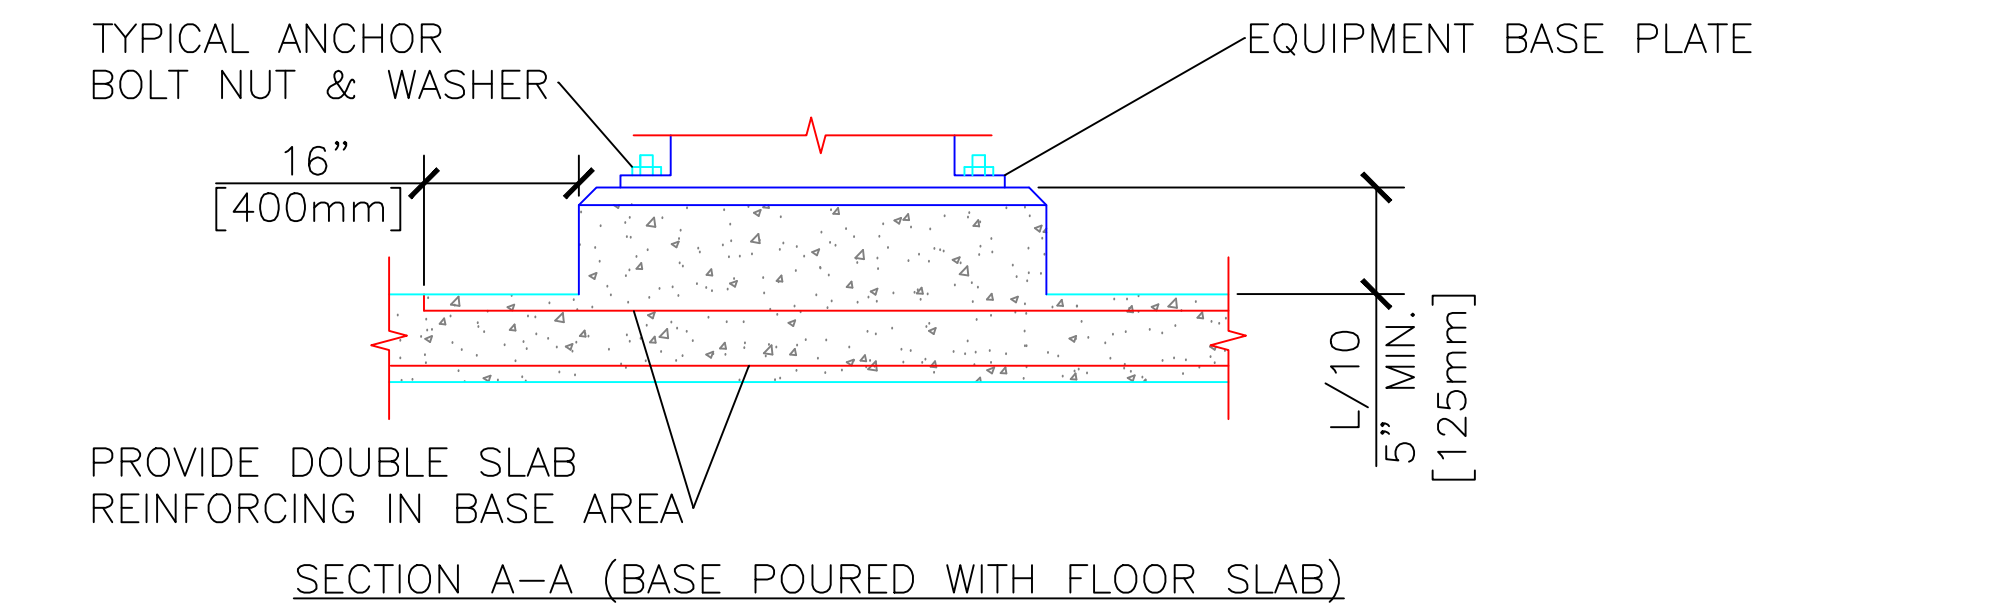

1 PIPE PENETRATION THROUGH WALLS BELOW GRADE

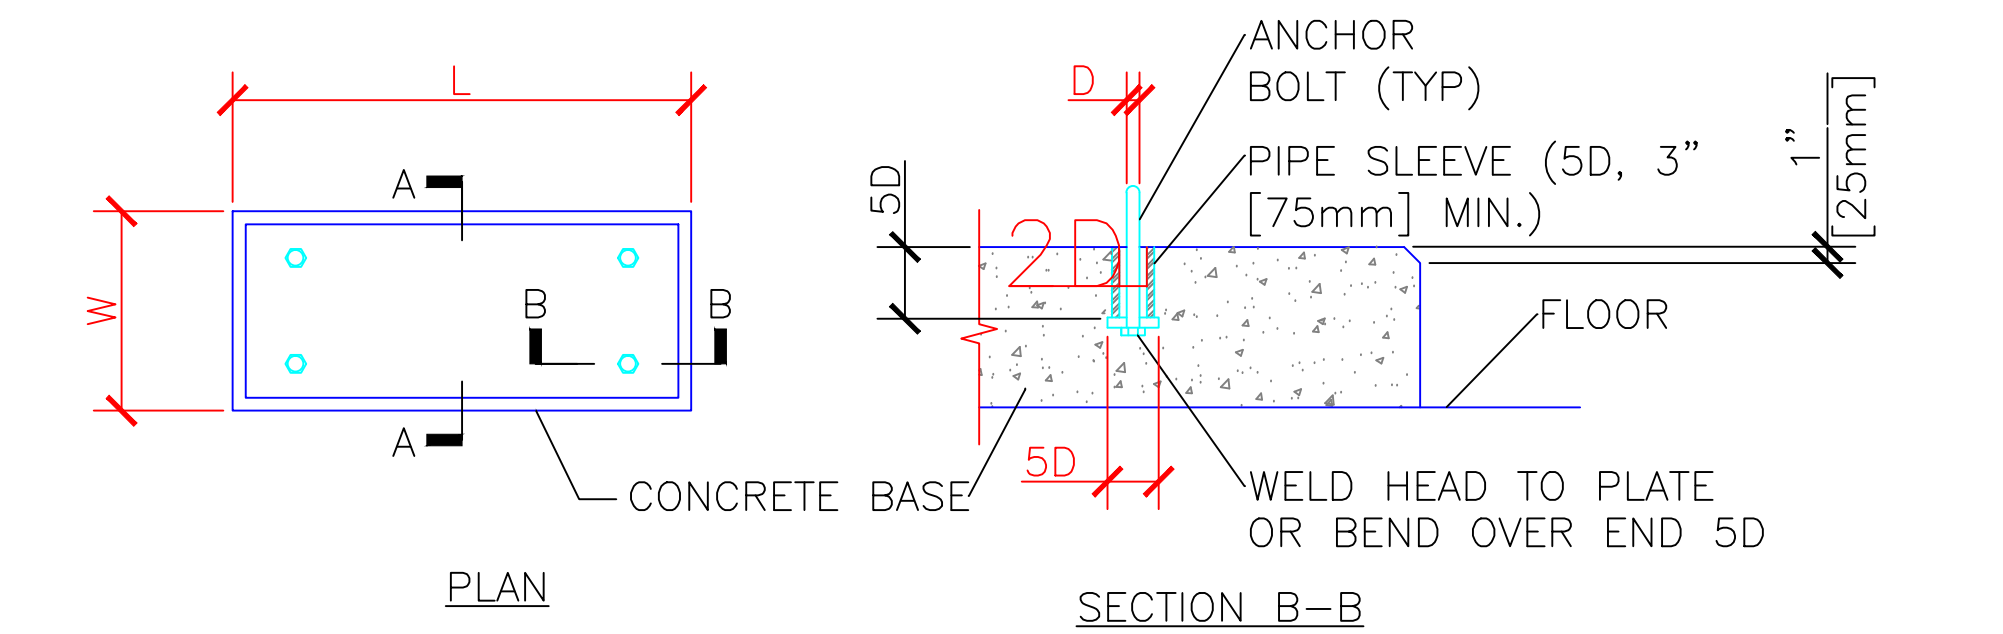

2 CONCRETE EQUIPMENT BASES

NOTE:
CONTRACTOR TO CORE DRILL MIN 6" CORE THROUGH CONCRETE SLAB.
CONTRACTOR REQUIRED TO RUN 115VOLTS FOR WATER SOFTNER
SOFTNER SHALL HAVE WATER SUPPLY, DISCHARGE FROM SOFTNER
WITH BLOCKING ISOLATION VALVE BETWEEN SUPPLY AND DISCHARGE
CONCRETE PAD SHALL BE MIN 5" THICK.
CURRENT CONDITION IS THERE IS EPOXY FLOOR WHICH THE CONTRACTOR
WILL HAVE TO MANAGE WITH CASTING THE CONCRETE PAD.
A PRE-FAB CONCRETE PAD CAN BE USED, BUT MUST BE APPROVE THROUGH
SUBMITTAL PROCESS.
BOTH SOLUTION THE EPOXY FLOOR MUST BE PROTECTED.

MISSING IMAGE-PICTURE/ROLL-UP DOOR-FIRST FLOOR	22 JAN 2015
Revision	Date

RECOMMEND APPROVAL			
REQUESTER	Date		
CHIEF OF SERVICE	Date	CHIEF OF STAFF	Date
ASSOC. DIR. PATIENT CARE SVC.	Date	ASSOC. DIR. for OPERATIONS	Date
APPROVAL BY:	Date		
MEDICAL CENTER DIRECTOR			

Drawing Title	STRUCTURE DETAILS
Approved: Safety Manager/M&O Supervisor	
Approved:Chief of Facilities Management Svr.	

Project Title	REPLACE REFRACTORY ON BOILER #3
Building Number	BUILDING # 18
Location	W.G.(Bill) Hefner Medical Center 1601 Brenner Ave. Salisbury NC 28144

Date	29 JUNE 2014
Project No.	659-15-101
DRAWING NO.	S-101
DWG.	9 OF 9

