


- DEMOLITION PLAN GENERAL NOTES:** \*NOT ALL NOTES ARE RELEVANT FOR ALL SHEETS
- A. DASHED LINES INDICATE ITEMS TO BE REMOVED UNLESS OTHERWISE NOTED. INCLUDES BUT IS NOT LIMITED TO FLOOR MOUNTED EQUIPMENT, FURNITURE, PLUMBING FIXTURES, SOFFITS AND INTERIOR WALLS. COORDINATE WITH MECHANICAL AND ELECTRICAL DRAWINGS FOR CEILING MOUNTED PIPING, DUCTWORK AND ELECTRICAL DEVICE REMOVAL.
  - B. ANY DISCREPANCIES BETWEEN THESE DRAWINGS AND FIELD CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF THE PROJECT MANAGER.
  - C. CONTRACTOR SHALL AT ALL TIMES MAINTAIN THE BUILDING IN A WEATHER TIGHT CONDITION.
  - D. OWNER WILL OCCUPY ADJACENT SPACES AND FLOORS FOR THEIR NORMAL BUSINESS ACTIVITIES. TAKE CARE TO MINIMIZE DISRUPTIONS AND PREVENT DAMAGE TO ADJACENT SPACES AND FLOORS.
  - E. CONTRACTOR SHALL REMOVE FROM THE PREMISES ALL CONSTRUCTION DEBRIS AND ITEMS NOT REUSED OR RETAINED BY THE OWNER. SEE SPECIFICATIONS SECTION 01 74 19 CONSTRUCTION WASTE MANAGEMENT.
  - F. MAINTAIN FIRE AND EGRESS REQUIREMENTS FOR THE BUILDING. COORDINATE WITH THE OWNER.
  - G. PROVIDE TEMPORARY ENCLOSURES, DUST PROTECTION, AND BARRICADES AS REQUIRED TO PREVENT POSSIBLE INJURY TO PERSONS IN AND AROUND THE CONSTRUCTION AREA IN ACCORDANCE WITH OSHA REQUIREMENTS AND THE HOSPITALS INFECTION CONTROL PROGRAM. COORDINATE WITH THE OWNER.
  - H. UPON REMOVAL OF ALL TEMPORARY PARTITIONS AND BARRIERS, PATCH ALL DAMAGED SURFACES TO MATCH ADJACENT FINISHES.
  - I. UTILITIES ARE TO BE KEPT OPERATIONAL FOR ALL AREAS OUTSIDE THE DEMOLITION AREA. PRIOR TO ANY UTILITY DISRUPTION, COORDINATE WITH OWNER AND OBTAIN PERMISSION.
  - J. WHERE EXISTING SURFACES ARE TO REMAIN EXPOSED AND REFINISHED, PATCH AND OTHERWISE REPAIR THE SURFACES AS REQUIRED TO RECEIVE NEW FINISHES.
  - K. REMOVE ALL CEILING TILES AND GRIDS TO THE EXTENTS INDICATED. COORDINATE WITH MECHANICAL AND ELECTRICAL FOR DEMOLITION OF CEILING MOUNTED EQUIPMENT.
  - L. CONTRACTOR IS RESPONSIBLE FOR TEMPORARILY SUPPORTING ALL DEVICES CONTAINED WITHIN EXISTING CEILING GRIDS AND TILES TO BE REINSTALLED. PROTECT ALL REMAINING MECHANICAL AND ELECTRICAL EQUIPMENT DURING ALL CONSTRUCTION ACTIVITY.
  - M. UTILIZE DUST PARTITIONS AT EACH PHASE TO PROTECT ADJACENT OCCUPIED SPACES. COORDINATE WITH PHASING, DEMOLITION AND CONSTRUCTION PLANS FOR TIMING AND PLACEMENT.
  - N. FOLLOWING DEMOLITION ALL REMAINING WALLS, COLUMNS, CEILINGS AND FLOORS MUST BE CLEARED OF EXCESS PLASTER, MORTAR AND OTHER DEBRIS AND CLEANED. GRIND DOWN, PATCH AND CLEAN AS NECESSARY TO ENSURE A LEVEL SURFACE.
  - O. INFILL AND PATCH AS NECESSARY ANY SCARS AS A RESULT OF DEMOLITION, INCLUDING, BUT NOT LIMITED TO WALLS, FLOORS, CEILINGS, WINDOWS AND FRAMES. INFILL AND FIRE STOP ANY PENETRATIONS THROUGH THE SLAB. RATINGS MUST BE MAINTAINED.
  - P. MAINTAIN ELECTRICAL PANELS DURING ALL CONSTRUCTION ACTIVITY. SEE ELECTRICAL DRAWINGS FOR NEW LOCATIONS. COORDINATE WITH PHASING PLAN AND ELECTRICAL.
  - Q. PROVIDE FLOORING PROTECTION DURING ALL CONSTRUCTION ACTIVITIES IN CONSTRUCTION AREAS AND CONSTRUCTION PATHS.
  - R. WHEN WALLS ARE REMOVED THE FLOORS MAY NOT BE THE SAME ELEVATION AS ADJACENT SPACES. CONTRACTOR IS RESPONSIBLE FOR MAKING NECESSARY ADJUSTMENTS TO MATCH FLOORING HEIGHTS.

- DEMOLITION PLAN KEYNOTES:**
- 1. REMOVE DOOR AND FRAME IN ITS ENTIRETY. INFILL WITH SIMILAR MATERIAL.
  - 2. SAWCUT PORTION OF MASONRY WALL FROM TOP OF SLAB TO BOTTOM OF STRUCTURE. PREPARE FOR INSTALLATION OF NEW DOOR AND FRAME. SEE DOOR AND FRAME SCHEDULE.
  - 3. REMOVE PORTION OF EXISTING BUILDING AS SHOWN. SEE MECHANICAL, ELECTRICAL, STRUCTURAL AND CIVIL DRAWINGS FOR ADDITIONAL DEMOLITION ITEMS. INFILL AND PATCH AS NECESSARY ANY SCARS AS A RESULT OF DEMOLITION.
  - 4. REMOVE CONCRETE BLOCK AND MASONRY INFILL FROM TOP OF SLAB TO BOTTOM OF STRUCTURE.
  - 5. INFILL AND PATCH SCARS AS A RESULT OF DEMOLITION.
  - 6. REMOVE STAIR AND PLATFORM IN ITS ENTIRETY. REPAIR ANY DAMAGE TO BRICK AND ROOFING MATERIAL WITH SIMILAR MATERIALS. INFILL AND PATCH AS NECESSARY ANY SCARS AS A RESULT OF DEMOLITION.

- LEGEND:**
- EXISTING STRUCTURE TO REMAIN
  - LIMITS OF CONSTRUCTION
  - REMOVE

**EXISTING BUILDING 2, 15 AND 38 - DEMOLITION PLAN LEVEL 1**  
1/8" = 1'-0"

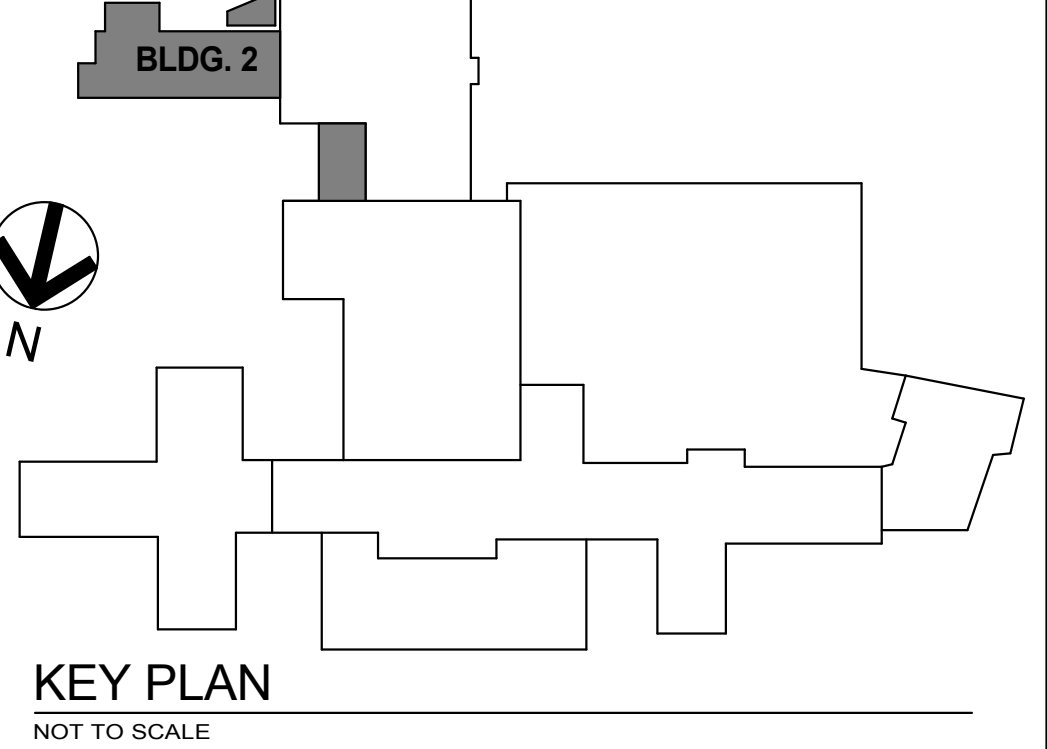

2E

<div>Revisions</div> <div>Date</div>		<div>SHIVEHATTERY</div> <div>ARCHITECTURE+ENGINEERING</div> <div>2834 Northgate Drive   Iowa City, Iowa 52245 319.354.5040   fax 319.354.6921   shive-hattery.com Iowa   Illinois   Missouri</div>		<div>Drawing Title</div> <div>BUILDINGS 2, 15, 38 FIRST FLOOR DEMOLITION PLAN</div> <div>Approved: Division Chief</div> <div>Approved: Service Director</div>	<div>Project Title</div> <div>RENOVATE AND EXPAND SPACE FOR PATIENT SUPPORT AREAS</div> <div>Building Number</div> <div>2E</div> <div>Location</div> <div>VETERANS AFFAIRS Enter address under Management tab - Project Settings - Project Information - Project Address</div>	<div>Date</div> <div>12-05-2014</div> <div>CONSTRUCTION DOCUMENTS</div> <div>Project No.</div> <div>DVA# 636-311</div> <div>S-H # 110240-0</div> <div>DRAWING No.</div> <div>2E-AD1</div> <div>Dwg. of</div>	<div>Veterans Administration</div>
--------------------------------------	--	--	--	---	--	--	------------------------------------