

A. DASHED LINES INDICATE ITEMS TO BE REMOVED UNLESS OTHERWISE NOTED. INCLUDES BUT IS NOT LIMITED TO FLOORED MOUNTED EQUIPMENT, FURNITURE, PLUMBING FIXTURES, SOFFITS AND INTERIOR PARTITIONS. SEE ELECTRICAL DRAWINGS FOR CEILING MOUNTED PIPING, DUCTWORK AND ELECTRICAL DEVICE REMOVAL.

B. ANY DISCREPANCIES BETWEEN THESE DRAWINGS AND FIELD CONDITIONS MUST BE BROUGHT TO THE ATTENTION OF THE ARCHITECT IMMEDIATELY.

C. CONTRACTOR SHALL, AT ALL TIMES MAINTAIN THE BUILDING IN A WEATHER TIGHT CONDITION.

D. OWNER WILL OCCUPY ADJACENT SPACES AND FLOORS FOR THEIR NORMAL BUSINESS ACTIVITIES. TAKE CARE TO PROTECT ADJACENT SPACES AND FLOORS FROM DAMAGE.

E. CONTRACTOR SHALL REMOVE FROM THE PREMISES ALL CONSTRUCTION DEBRIS AND ITEMS NOT SPECIFICALLY REQUIRED BY THE OWNER. SEE SPECIFICATIONS SECTION 01 74 19 CONSTRUCTION WASTE MANAGEMENT.

F. MAINTAIN FIRE AND EGRESS REQUIREMENTS FOR THE BUILDING. COORDINATE WITH THE OWNER TO PROTECT ADJACENT SPACES AND FLOORS FROM DAMAGE. PROVIDE ACCESS TO REMAIN TO PROVIDE POSSIBLE ENTRY TO PERSONS IN AND AROUND THE CONSTRUCTION AREA IN ACCORDANCE WITH OSHA REGULATIONS.

H. UPON REMOVAL OF ALL TEMPORARY PARTITIONS AND BARRIERS, PATCH ALL DAMAGED SURFACES TO MATCH ADJACENT FINISHES.

I. PRIOR TO ANY OPERATIONAL WORK FOR ALL AREAS OUTSIDE THE DEMOLITION AREA, PRIOR TO ANY UTILITY DISRUPTION, COORDINATE WITH OWNER AND OBTAIN PERMISSION.

J. WHERE EXISTING SURFACES ARE TO BE REMOVED EXPOSED AND REFINISHED, PATCH AND OTHERWISE REFINISH SURFACES AS REQUIRED TO MATCH ADJACENT FINISHES.

K. REMOVE ALL CEILING TILES AND GRIDS TO THE EXTENTS INDICATED. COORDINATE WITH MECHANICAL CONTRACTOR FOR REMOVAL OF ALL MECHANICAL DEVICES CONTAINED WITHIN.

L. CONTRACTOR IS RESPONSIBLE FOR TEMPORARILY SUPPORTING ALL DEVICES CONTAINED WITHIN EXISTING CEILING GRIDS AND TILES TO BE REINSTALLED. PROTECT ALL REMAINING MECHANICAL AND ELECTRICAL DEVICES AND ALL ADJACENT AREAS FROM DAMAGE.

M. UTILIZE DUST PARTITIONS AT EACH PHASE TO PROTECT ADJACENT OCCUPIED SPACES. COORDINATE WITH FRASING, DEMOLITION AND CONSTRUCTION PLANS FOR TIMING AND PLACEMENT.

N. REMOVE ALL EXCESS PLASTER, MORTAR AND OTHER DEBRIS AND CLEANED. GRIND DOWN, PATCH AND CLEAN AS NECESSARY TO MATCH ADJACENT FINISHES.




O. INFILL AND PATCH AS NECESSARY ANY SCARS AS A RESULT OF DEMOLITION. INCLUDING, BUT NOT LIMITED TO WALLS, FLOORS, CEILINGS, WINDOWS AND FRAMES. INFILL AND FLOOR STOP ANY CRACKS AND REPAIR THE SLAB, REPAIR AND PATCH AS NECESSARY TO MATCH ADJACENT FINISHES.



P. MAINTAIN ELECTRICAL PANELS DURING ALL CONSTRUCTION ACTIVITY. SEE ELECTRICAL DRAWINGS FOR LOCATION OF ALL ELECTRICAL PANELS.

Q. PROVIDE FLOORING PROTECTION DURING ALL CONSTRUCTION ACTIVITIES IN CONSTRUCTION AREAS AND CONSTRUCTION PATHS.

R. FLOORS ARE GRABED THE FLOORS MAY NOT BE THE SAME ELEVATION AS ADJACENT SPACES. CONTRACTOR IS RESPONSIBLE FOR MAKING NECESSARY ADJUSTMENTS TO MATCH FLOORING HEIGHTS.

1. REMOVE DOOR AND FRAME IN ITS ENTIRETY. INFILL WITH SIMILAR MATERIAL.
2. SAWCUT PORTION OF MASONRY WALL FROM TOP OF SLAB TO BOTTOM OF STRUCTURE. PREPARE FOR INSTALLATION OF NEW DOOR AND FRAME. SEE DOOR AND FRAME SCHEDULE.
3. REMOVE PORTION OF EXISTING BUILDINGS AS SHOWN. SEE MECHANICAL, ELECTRICAL, STRUCTURAL AND CIVIL DRAWINGS FOR ADDITIONAL DEMOLITION ITEMS. INFILL AND PATCH AS NECESSARY ANY SCARS AS A RESULT OF DEMOLITION.
4. REMOVE CONCRETE BLOCK AND MASONRY INFILL FROM TOP OF SLAB TO BOTTOM OF STRUCTURE.
5. INFILL AND PATCH SCARS AS A RESULT OF DEMOLITION.
6. REMOVE STAIR AND PLATFORM IN ITS ENTIRETY. REPAIR ANY DAMAGE TO BRICK AND ROOFING MATERIAL WITH SIMILAR MATERIALS. INFILL AND PATCH AS NECESSARY ANY SCARS AS A RESULT OF DEMOLITION.

 EXISTING STRUCTURE TO REMAIN  
 LIMITS OF CONSTRUCTION  
 REMOVE

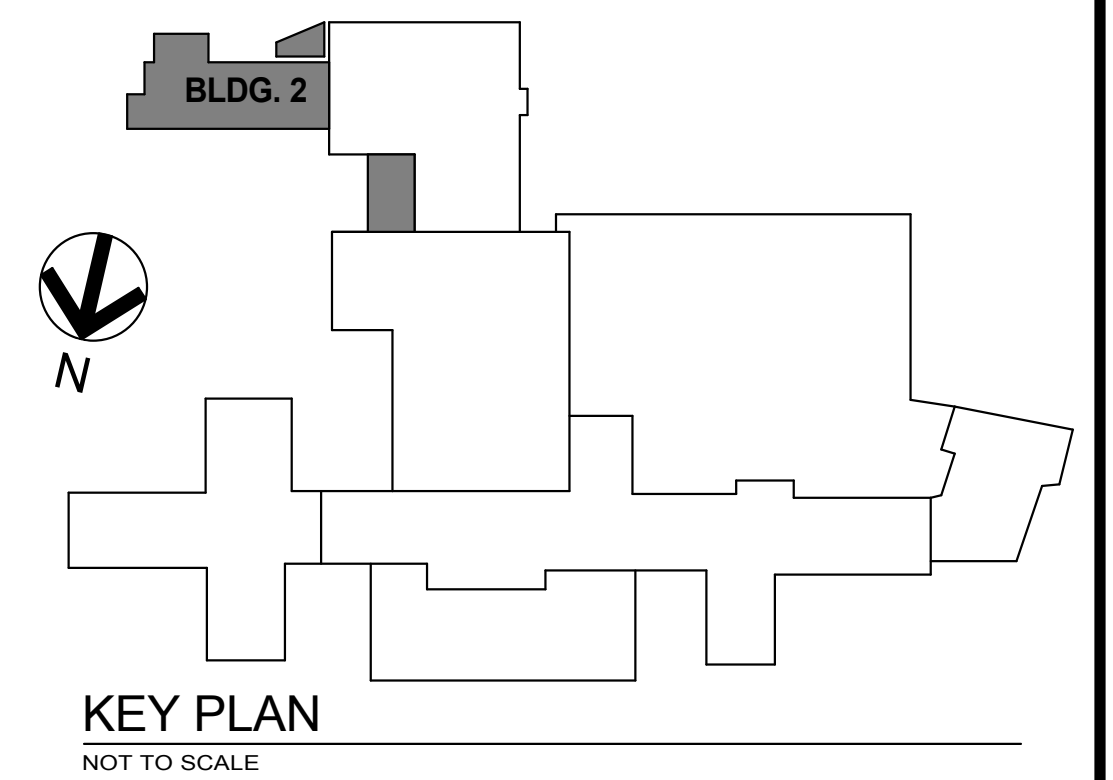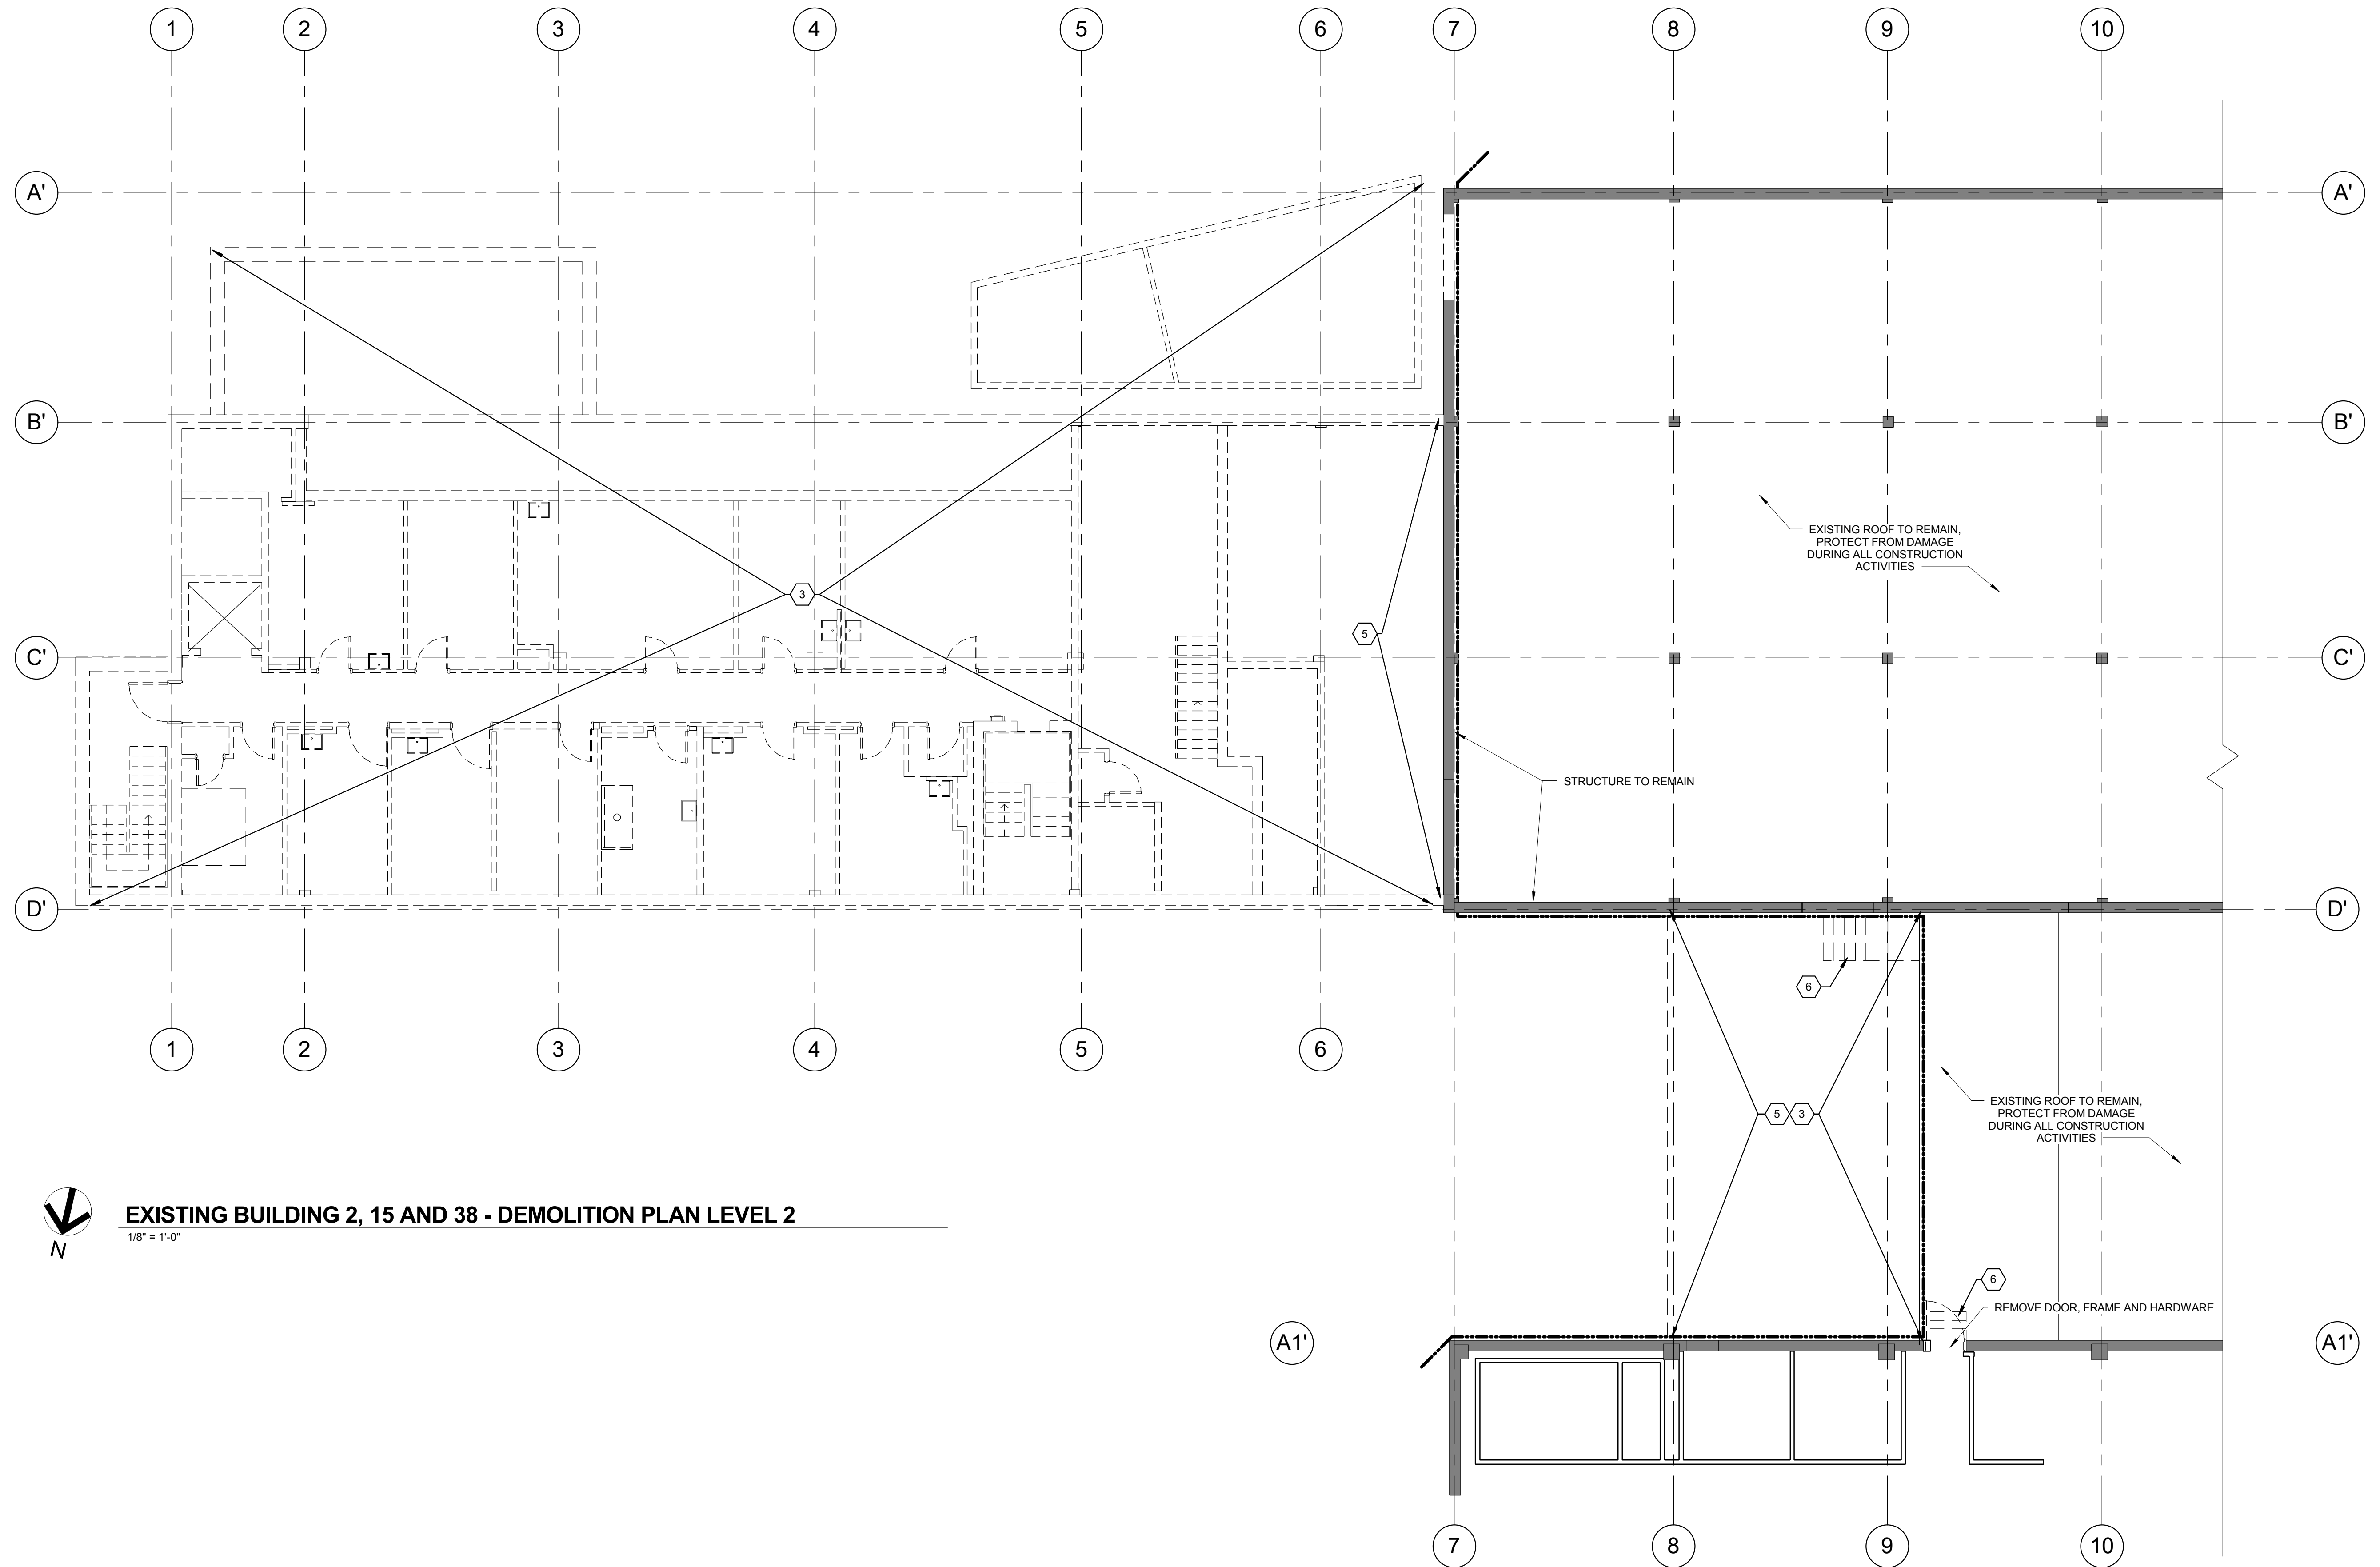

# 2E

**SHIVEHATTERY**  
ARCHITECTURE+ENGINEERING

2834 Northgate Drive | Iowa City, Iowa 52245  
319.354.3040 | fax 319.354.6921 | [shive-hattery.com](http://shive-hattery.com)  
Iowa | Illinois | Missouri

Drawing Title

BUILDINGS 2, 15, 38 SECOND  
FLOOR DEMOLITION PLAN

Approved: Division Chief

Approved: Service Director

Project Title

**RENOVATE AND  
EXPAND SPACE FOR  
PATIENT SUPPORT  
AREAS**

Building Number

Location  
VETERANS AFFAIRS  
Enter address under Management tab - Project Settings - Project Information - Project Address

Date 12-05-2014  
CONSTRUCTION  
DOCUMENTS

Project No.  
DVA # 636-111  
G-H # 110240-0

DRAWING No.

2E-AD2  
Dwg. of

Dwg. of

## Veterinarians Administration