



1. THE ELECTRICAL DEMOLITION DRAWINGS INDICATE EXISTING ELECTRICAL ITEMS. THE DRAWINGS ARE INTENDED TO INDICATE THE LOCATION OF WIRING RUNS, PANELS, AND DEVICES. THE ELECTRICAL CONTRACTOR SHALL VERIFY THE LOCATION OF EACH DEVICE, BOX, CONDUIT, OR WIRE THAT MAY EXIST. THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR IDENTIFYING AND VERIFYING EXISTING CONDITIONS.

2. ELECTRICAL ITEMS (i.e., LIGHTING FIXTURES, RECEPTACLES, SWITCHES, ETC.) REMOVED BY THE ELECTRICAL CONTRACTOR SHALL BE THE PROPERTY OF THE OWNER. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DISPOSAL OF MATERIAL THE OWNER DOES NOT WANT TO REUSE OR TO RELY ON THE CONTRACTOR TO REMOVE.

3. THE CONTRACTOR SHALL OBTAIN APPROVAL FROM THE OWNER 72 HOURS IN ADVANCE BEFORE TURNING OFF POWER TO CIRCUITS, FEEDERS, PANELS, ETC. COORDINATE ALL OUTAGES WITH OWNER. REMOVE ALL SWITCHES AND DEVICES. REMOVE ALL DEVICES, PANELS, AND ASSOCIATED CONDUIT AND WIRE BACK TO THE PANELBOARD OR FEEDER JUNCTION BOX SERVING THE DEVICE. REMOVE ALL CONDUIT REMOVED BY THE CONTRACTOR. ALL DEVICES BEING REMOVED, ALL ASSOCIATED CONDUIT AND WIRE BACK TO THE PANELBOARD OR FEEDER JUNCTION BOX SERVING THE DEVICE.

4. ALL CONDUIT SHALL BE REMOVED WHERE WALLS ARE BEING REMOVED, WHERE CONDUIT IS IN THE CONCRETE SLAB, CUT OFF FLUSH, PULL OUT WIRE, AND PLUG, WHERE CONDUIT RUNS OUT OF WALL. ALL ASSOCIATED CLAMPS, STRAPS, HANGERS, ETC., SHALL ALSO BE REMOVED.

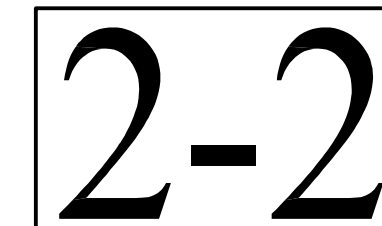
5. ELECTRICAL CONTRACTOR SHALL COORDINATE ALL ELECTRICAL WORK WITH ALL OTHER TRADES. REMOVE ALL EXISTING ELECTRICAL REMOVING EXISTING ELECTRICAL AND INSTALLING NEW ITEMS.

6. REMOVE FOR ARCHITECTURAL PHASING PLANS FOR PHASING OF THE PROJECT. REMOVE THE ELECTRICAL SERVICES WHERE REQUIRED TO FACILITATE THE PHASING PLAN.

7. EQUIPMENT REMOVAL IN CERTAIN LOCATIONS MAY REQUIRE THE INSTALLATION OF A JUNCTION BOX TO RECONNECT CIRCUITS. THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE INSTALLATION OF OPERATING PANELS AND EQUIPMENT WHERE REQUIRED TO MAINTAIN POWER TO REMAINING EQUIPMENT.

8. WHERE DEVICES ARE TO BE REMOVED FROM EXISTING TO REMAIN WALLS, ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR PATCHING WALLS.

- D1 REMOVE LIGHT FIXTURES, ASSOCIATED LIGHT SWITCH, SPEAKERS, FIRE ALARM DEVICES, COMMUNICATIONS DEVICES AND BACKBOXES FROM THE INDICATED ROOM/CORRIDOR OR BOUNDED AREA CEILING(S) UNLESS NOTED OTHERWISE.
- D2 REMOVE ALL RECEPTACLES, PLUGSTRIPS, POWER POLES, MECHANICAL UNIT POWER CONNECTIONS, POWER OUTLETS, COMMUNICATION DEVICES, BACKBOXES AND JUNCTION BOXES FROM THE INDICATED ROOM/CORRIDOR OR BOUNDED AREA UNLESS NOTED OTHERWISE.
- D3 REMOVE COMMUNICATION CABLES FROM EXISTING CLOSET 214A TO EXISTING COMMUNICATIONS ROOM 1W100.

Veterans Administration