


EXISTING OXYGEN SERVICE SHALL REMAIN ACTIVE UNTIL NEW PIPING HAS BEEN INSTALLED, TESTED AND CERTIFIED AT WHICH POINT THE EXISTING OXYGEN SERVICE SHALL BE SHUT DOWN TO ALLOW FOR CONNECTING NEW TO EXISTING AT THE BULK STORAGE TANK AND WITHIN THE BUILDING (REFER TO SITE PLANS AND PLUMBING PLANS).

SHUTDOWN SHALL BE LIMITED TO 12 HOURS AND SHALL INCLUDE THE CONNECTIONS TO EXISTING AS NOTED ABOVE AND RECERTIFICATION OF EXISTING OXYGEN SYSTEM THROUGHOUT THE HOSPITAL. MEDICAL GAS CERTIFIER SHALL PROPERLY STAFF THE PROJECT TO MEET SHUTDOWN REQUIREMENTS.

QUANTITY AND LOCATION OF OXYGEN OUTLETS SHOWN ON THE SHEET ARE FOR BIDDING PURPOSES, MEDICAL GAS CERTIFIER SHALL VERIFY EXACT LOCATION OF OUTLETS WITH THE OWNER PRIOR TO THE SHUTDOWN.

OWNER SHALL PROVIDE BOTTLED OXYGEN DURING THE SHUTDOWN.

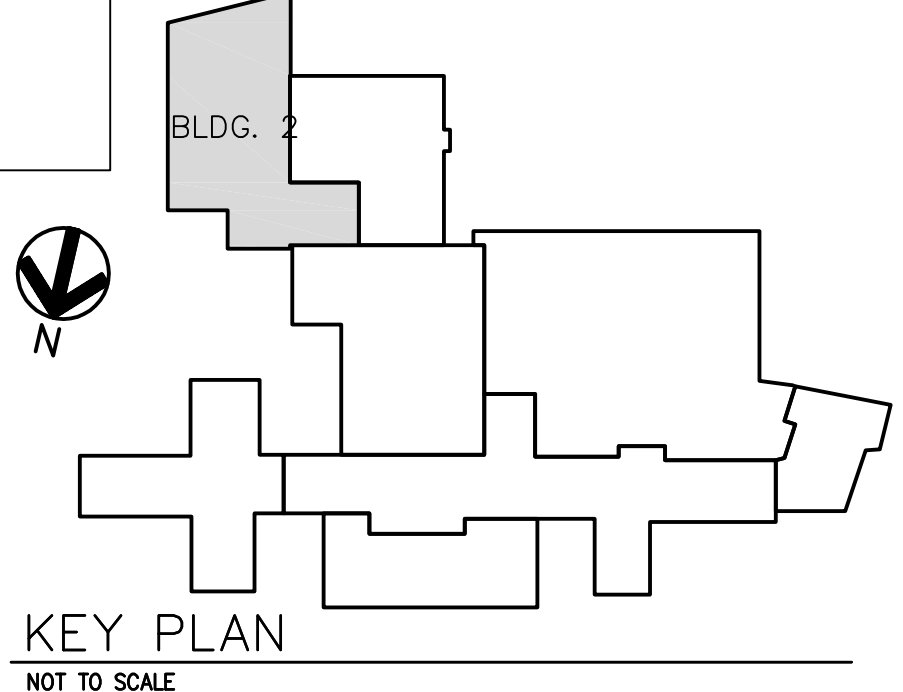

2-1

12-05-2014
CONSTRUCTION
DOCUMENTS

Project No.
DVA#636-311
S-H#110240-0

DRAWING NO.
2-P3

Dwg. 7 Of 24

Veterans
Administration

Revisions

Date

SHIVEHATTERY
ARCHITECTURE+ENGINEERING

2834 Northgate Drive | Iowa City, Iowa 52245
319.354.3040 | fax: 319.354.6921 | shive-hattery.com
Iowa | Illinois | Missouri

Drawing Title
OXYGEN
RECERTIFICATION PLANS

Approved: Division Chief

Approved: Service Director

Project Title
RENOVATE AND EXPAND
SPACE FOR PATIENT
SUPPORT AREAS

Building Number
2

Location
IOWA CITY VA HEALTH CARE SYSTEM
IOWA CITY, IOWA

Checked
TRF

Drawn
MSJ