

GENERAL PLUMBING DEMOLITION NOTES:

1. DISCONNECT AND REMOVE ALL PREVIOUSLY ABANDONED PIPING. REMOVE EXISTING/ABANDONED HANGERS AND SUPPORTS IF DEEMED NOT REUSABLE.
2. ALL PIPING SHOWN IS BASED ON ORIGINAL DRAWINGS AND FIELD VERIFICATION OF MAINS. THE CONTRACTOR SHALL BE RESPONSIBLE TO DETERMINE ROUTE AND TO VERIFY ALL EXISTING CONDITIONS OF BRANCH PIPING TO INDIVIDUAL AND GANG-FIXTURE LOCATIONS. ALL DEMOLISHED PIPING SHALL BE REMOVED AND DISPOSED OF BY THE CONTRACTOR.
3. ALL PIPING ASSOCIATED WITH EXISTING SYSTEMS TO BE REMOVED SHALL BE DEMOLISHED. NO PIPING SHALL BE ABANDONED.
4. CONTRACTOR SHALL BE RESPONSIBLE FOR DRAINING PIPING SYSTEMS TO BE CUT, CAPPED, OR REMOVED. DISCHARGE FROM SUCH SYSTEMS SHALL BE APPROPRIATELY DISPOSED PER FEDERAL, STATE AND LOCAL REQUIREMENTS.
5. THE CONTRACTOR SHALL COORDINATE WITH AN OWNER PROVIDED LIST OF ANY EQUIPMENT THE MAINTENANCE DEPARTMENT MAY WISH TO RETAIN AFTER REMOVAL. THE CONTRACTOR SHALL BE RESPONSIBLE TO DISPOSE OF ALL REMOVED AND/OR DEMOLISHED EQUIPMENT THE OWNER CHOOSES NOT TO RETAIN.
6. ALL PLUMBING FIXTURES AND/OR ARCHITECTURAL FEATURES TEMPORARILY REMOVED DURING DEMOLITION FOR ACCESS TO DEMO AND/OR NEW WORK AND FUTURE RECONNECTION/REINSTALLATION, SHALL BE REINSTALLED UNDER WORK REQUIRED ON THESE DRAWINGS. ALL COMPONENTS SHALL BE REINSTALLED AND FINISHED TO ORIGINAL CONDITION OR REPLACED WITH NEW UNDER THIS CONTRACT.
7. COORDINATE WITH GENERAL CONTRACTOR FOR FLOOR, WALL AND ROOF PATCHING REQUIRED DUE TO PENETRATIONS RESULTING FROM DEMOLITION OF EXISTING AND INSTALLATION OF NEW MECHANICAL EQUIPMENT AND COMPONENTS.
8. REFER TO SPECIFICATIONS FOR UTILITY TIE-IN AND DISRUPTION REQUIREMENTS.
9. (48) FORTY-EIGHT HOUR WRITTEN NOTICE SHALL BE GIVEN TO THE OWNER PRIOR TO DISRUPTION OF UTILITIES OR SERVICES TO OR WITHIN THE BUILDING, SUBJECT TO THE OWNER'S APPROVAL. SEE SPECIFICATION SECTION 01 00 00 GENERAL REQUIREMENTS.
10. CONTRACTOR SHALL BE RESPONSIBLE FOR THE DEMOLITION ALL OTHER PLUMBING FIXTURES AND ASSOCIATED PIPING NOT SHOWN ON THIS PLAN BUT IS LOCATED WITHIN THE PROJECT BOUNDARY.


PLUMBING DEMOLITION KEYED NOTES:

- 1 REMOVE EXISTING OXYGEN MAIN.
- 2 REMOVE EXISTING SHOWER AND ASSOCIATED PIPING.
- 3 REMOVE EXISTING LAVATORY AND ASSOCIATED PIPING.
- 4 REMOVE EXISTING WATER CLOSET AND ASSOCIATED PIPING.
- 5 REMOVE EXISTING SINK AND ASSOCIATED PIPING.
- 6 REMOVE EXISTING CW AND HW TO CAGE WASHER.
- 7 REMOVE EXISTING STORM PIPING.
- 8 REMOVE EXISTING HYDRAULIC FLUID AND PIPING LOCATED WITHIN ELEVATOR SHAFT AND ELEVATOR EQUIPMENT ROOM.
- 9 REMOVE EXISTING TRENCH DRAIN.
- 10 REMOVE EXISTING AIR COMPRESSOR.
- 11 REMOVE EXISTING ABANDONED FUEL OIL LINES, REFER TO SHEET 2-PD0 FOR REMOVAL OF PIPING UNDER THE BUILDING.
- 12 REMOVE EXISTING EMERGENCY SHOWER/EYE WASH AND PIPING.

EXISTING OXYGEN SERVICE SHALL REMAIN ACTIVE UNTIL NEW PIPING HAS BEEN INSTALLED, TESTED AND CERTIFIED AT WHICH POINT THE EXISTING OXYGEN SERVICE SHALL BE SHUT DOWN TO ALLOW FOR CONNECTING NEW TO EXISTING AT THE BULK STORAGE TANK AND WITHIN THE BUILDING (REFER TO SITE PLANS AND PLUMBING PLANS).

SHUTDOWN SHALL BE LIMITED TO 12 HOURS AND SHALL INCLUDE THE CONNECTIONS TO EXISTING NOTED ABOVE AND RECERTIFICATION OF EXISTING OXYGEN SYSTEM THROUGHOUT THE HOSPITAL. REFER TO SHEET 2-P3 FOR PROPOSED LOCATION AND NUMBER OF OUTLETS TO BE RECERTIFIED. MEDICAL GAS CERTIFIER SHALL PROPERLY MAN THE PROJECT TO MEET SHUTDOWN REQUIREMENTS.

OWNER SHALL PROVIDE BOTTLED OXYGEN DURING THE SHUTDOWN.

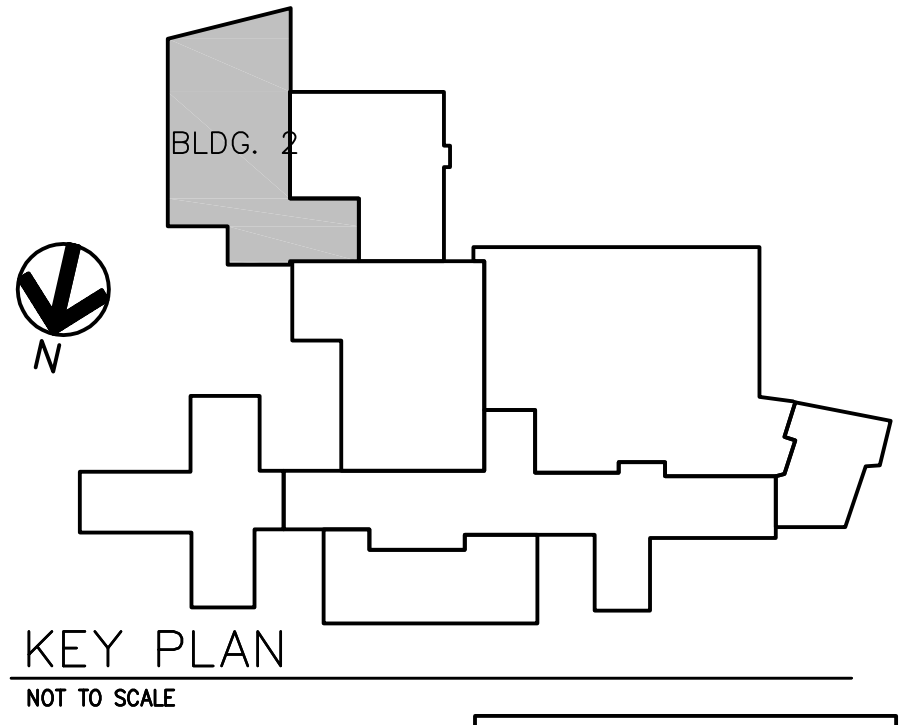

2-1

<div>Revisions</div> <div>Date</div>		<div>SHIVEHATTERY</div> <div>ARCHITECTURE+ENGINEERING</div> <div>2834 Northgate Drive   Iowa City, Iowa 52245 319.354.3040   fax: 319.354.6921   shive-hattery.com Iowa   Illinois   Missouri</div>		<div>Drawing Title</div> <div>FIRST FLOOR PLUMBING DEMOLITION PLAN</div> <div>Approved: Division Chief</div> <div>Approved: Service Director</div>	<div>Project Title</div> <div>RENOVATE AND EXPAND SPACE FOR PATIENT SUPPORT AREAS</div> <div>Building Number</div> <div>2</div> <div>Location</div> <div>IOWA CITY VA HEALTH CARE SYSTEM IOWA CITY, IOWA</div>	<div>Date</div> <div>12-05-2014 CONSTRUCTION DOCUMENTS</div> <div>Project No.</div> <div>DVA#636-311 S-H#110240-0</div> <div>DRAWING NO.</div> <div>2-PD1</div> <div>Dwg. 2 Of 24</div>
--------------------------------------	--	---	--	--	--	---

Veterans  
Administration