


GENERAL PLUMBING DEMOLITION NOTES:

1. DISCONNECT AND REMOVE ALL PREVIOUSLY ABANDONED PIPING, REMOVABLE EXISTING/ABANDONED HANGERS AND SUPPORTS IF DEEMED NOT REUSABLE.
2. ALL PIPING SHOWN IS BASED ON ORIGINAL DRAWINGS AND FIELD VERIFICATION OF MAINS. THE CONTRACTOR SHALL BE RESPONSIBLE TO RETURN LOCALS AND TO VERIFY ALL EXISTING CONDITIONS OF BRANCH PIPING TO INDIVIDUAL AND GANG-FIXTURE LOCATIONS. ALL DEMOLISHED PIPING SHALL BE REMOVED AND DISPOSED OF BY THE CONTRACTOR.
3. ALL PIPING ASSOCIATED WITH EXISTING SYSTEMS TO BE REMOVED SHALL BE DEMOLISHED. NO PIPING SHALL BE ABANDONED.
4. CONTRACTOR SHALL BE RESPONSIBLE FOR DRAINING PIPING SYSTEMS TO BE CUT, CAPPED, OR ABANDONED. DISPOSITION OF PIPING SYSTEMS SHALL BE APPROPRIATELY DISPOSED PER FEDERAL, STATE AND LOCAL REQUIREMENTS.
5. THE CONTRACTOR SHALL COORDINATE WITH AN OWNER PROVIDED LIST OF ANY EQUIPMENT THE MAINTENANCE DEPARTMENT MAY WISH TO RETAIN AFTER REMOVAL. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVAL OF REMOVED AND/OR DEMOLISHED EQUIPMENT THE OWNER CHOOSES NOT TO RETAIN.
6. ALL PLUMBING FIXTURES AND/OR ARCHITECTURAL FEATURES TEMPORARILY REMOVED DURING DEMOLITION FOR ACCESS TO DEMO AND/OR NEW WORK AND FUTURE RECONSTRUCTION/REPAIRATION OF EXISTING ARE TO BE REMOVED UNDER WORK REQUIRED ON THESE DRAWINGS. ALL COMPONENTS SHALL BE REINSTATEMENT AND REFINISHED TO ORIGINAL CONDITION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DEMOLISHED EQUIPMENT THE OWNER CHOOSES NOT TO RETAIN.
7. COORDINATE WITH GENERAL CONTRACTOR FOR FLOOR, WALL AND ROOF PATCHING REQUIRED DUE TO PENETRATIONS RESULTING FROM DEMOLITION OF EXISTING AND INSTALLATION OF NEW MECHANICAL EQUIPMENT AND COMPONENTS.
8. REFER TO SPECIFICATIONS FOR UTILITY TIE-IN AND DISRUPTION REQUIREMENTS.
9. (48) FORTY-EIGHT HOUR WRITTEN NOTICE SHALL BE GIVEN TO THE OWNER PRIOR TO DISRUPTION OF UTILITIES OR SERVICES TO OR WITHIN THE BUILDING. SUBJECT TO THE OWNER'S APPROVAL, THE CONTRACTOR SHALL BE RESPONSIBLE TO ALL GENERAL REQUIREMENTS.
10. CONTRACTOR SHALL BE RESPONSIBLE FOR THE DEMOLITION ALL OTHER PLUMBING FIXTURES AND ASSOCIATED PIPING NOT SHOWN ON THIS PLAN BUT IS LOCATED WITHIN THE PROJECT BOUNDARY.

PLUMBING DEMOLITION KEYED NOTES:

1. REMOVE EXISTING VENT PIPING.
2. REMOVE ROOF DRAINS.
3. REMOVE VENT THRU ROOF.
4. REMOVE EXISTING STORM PIPING UP TO ROOF DRAIN.
5. REMOVE EXISTING HYDRAULIC FLUID AND PIPING LOCATED WITHIN ELEVATOR SHAFT AND ELEVATOR EQUIPMENT ROOM.

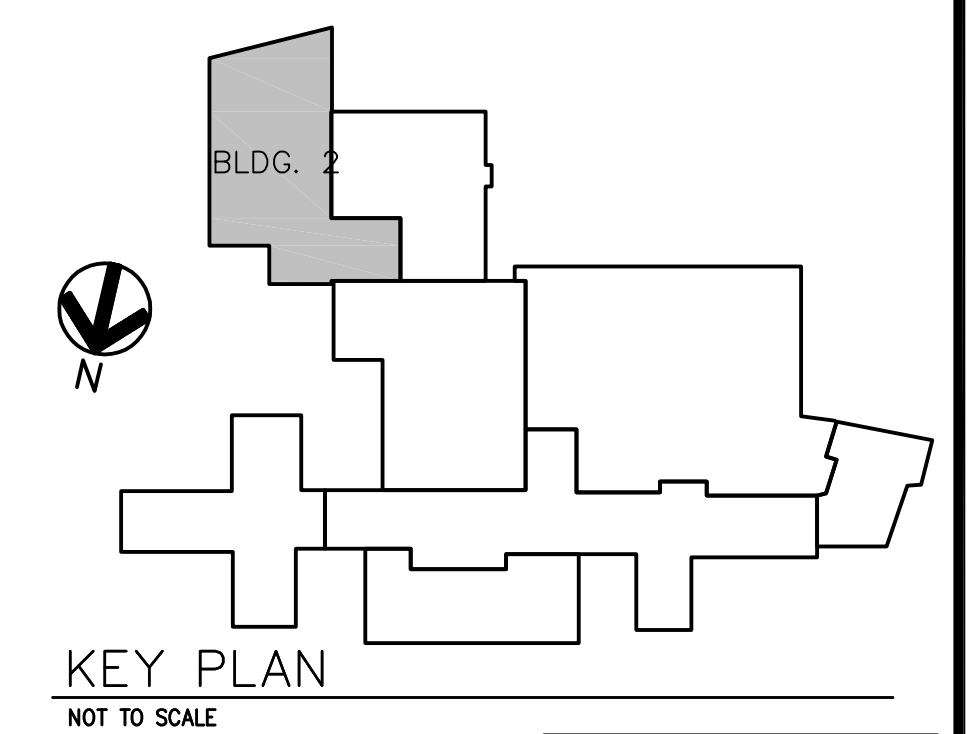

2-2

Date 12-05-2014
CONSTRUCTION
DOCUMENTS

Project No.
DVA#636-311
S-H#110240-0

DRAWING NO.

2-PD2

Veterinarians
Administrators

SECOND FLOOR — PLUMBING DEMOLITION PLAN
1/8" = 1'-0"

SHIVEHATTERY
ARCHITECTURE+ENGINEERING

2834 Northgate Drive | Iowa City, Iowa 52245
319.354.3040 | fax: 319.354.6921 | shive-hattery.com
Iowa | Illinois | Missouri

	Drawing Title
--	---------------

SECOND FLOOR
PLUMBING DEMOLITION PLAN

Approved: Division Chief

Approved: Service Director

	Project Title
--	---------------

RENOVATE AND EXPAND
SPACE FOR PATIENT
SUPPORT AREAS

	Building Number

	Location		

Revisions	Date
-----------	------