



three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot

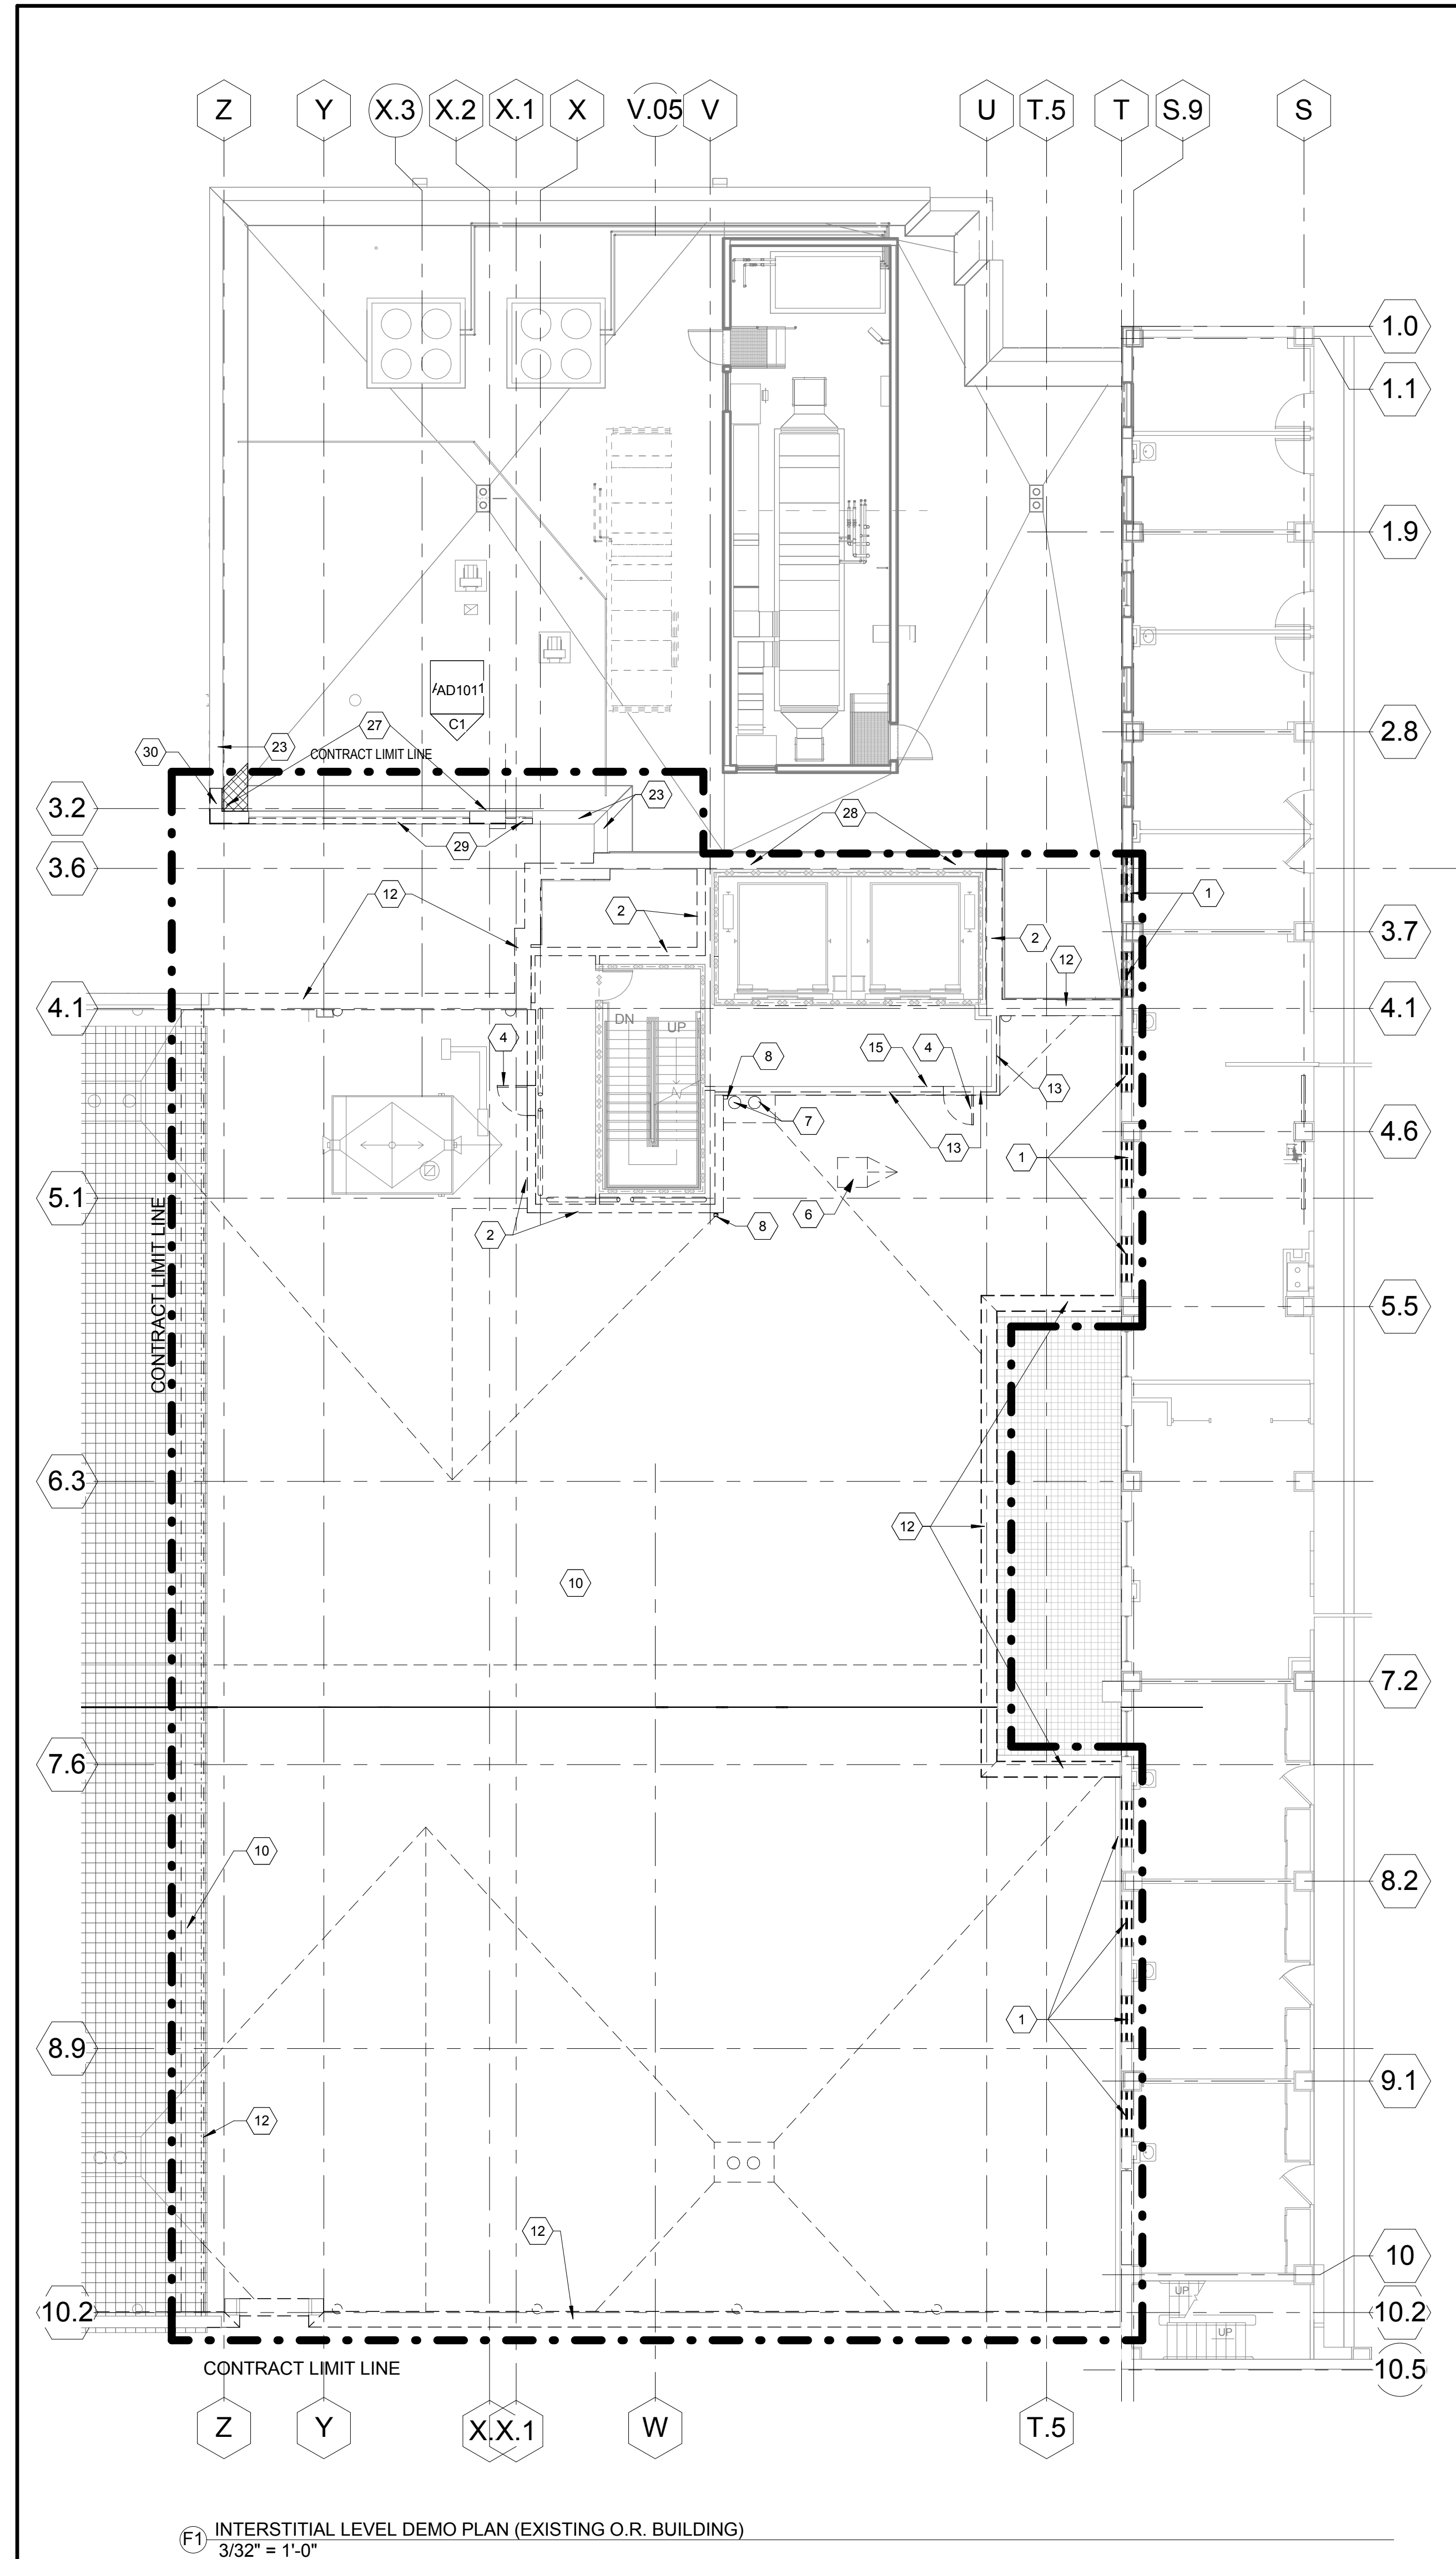


F1 INTERSTITIAL LEVEL DEMO PLAN (EXISTING O.R. BUILDING)
3/32" = 1'-0"

CONSULTANTS:		
STRUCTURAL ENGINEER: KPF CONSULTING ENGINEERS - ST. LOUIS 1630 DES PERES RD, SUITE 100 SAINT LOUIS, MO 63131	PLUMBING: 303RD ENGINEERING GROUP, LLC 1935 ARSENAL STREET ST. LOUIS, MO 63118	LIFE SAFETY/FIRE PROTECTION: CODE CONSULTANTS, INC. 2043 WOODLAND PARKWAY, SUITE 300 CHESTERFIELD, MO 63017
MECHANICAL/ELECTRICAL: KJWW ENGINEERING CONSULTANTS - ST. LOUIS 115 SUNNEN DRIVE, SUITE 104 ST. LOUIS, MO 63141	ESTIMATING: KJWW ENGINEERING CONSULTANTS - ST. LOUIS 1204 WASHINGTON AVE., SUITE 200 ST. LOUIS, MO 63103	ACOUSTICAL ENGINEERS: ACOUSTICCONTROL, LLC 1709 WASHINGTON AVENUE, LOFT 300 ST. LOUIS, MO 63103
COMMISSIONING: ZODIAC INTERNATIONAL 16100 CHESTERFIELD PARKWAY, SUITE 365 CHESTERFIELD, MO 63017	ENVIRONMENTAL: ENVIRONMENTAL CONSULTANTS, LLC #6 MEADOW HEIGHTS PROFESSIONAL PARK DR. COLLINSVILLE, IL 62234	ARCHITECT/ENGINEERS: CHRISTNER 168 N MERAMEC, SUITE 400 ST. LOUIS, MISSOURI 63105 TEL 314 725 2027 FAX 314 725 2028 CHRISTNERENGINEERING.COM
1	2/9/15	Amendment #6
No.	Date	Revisions

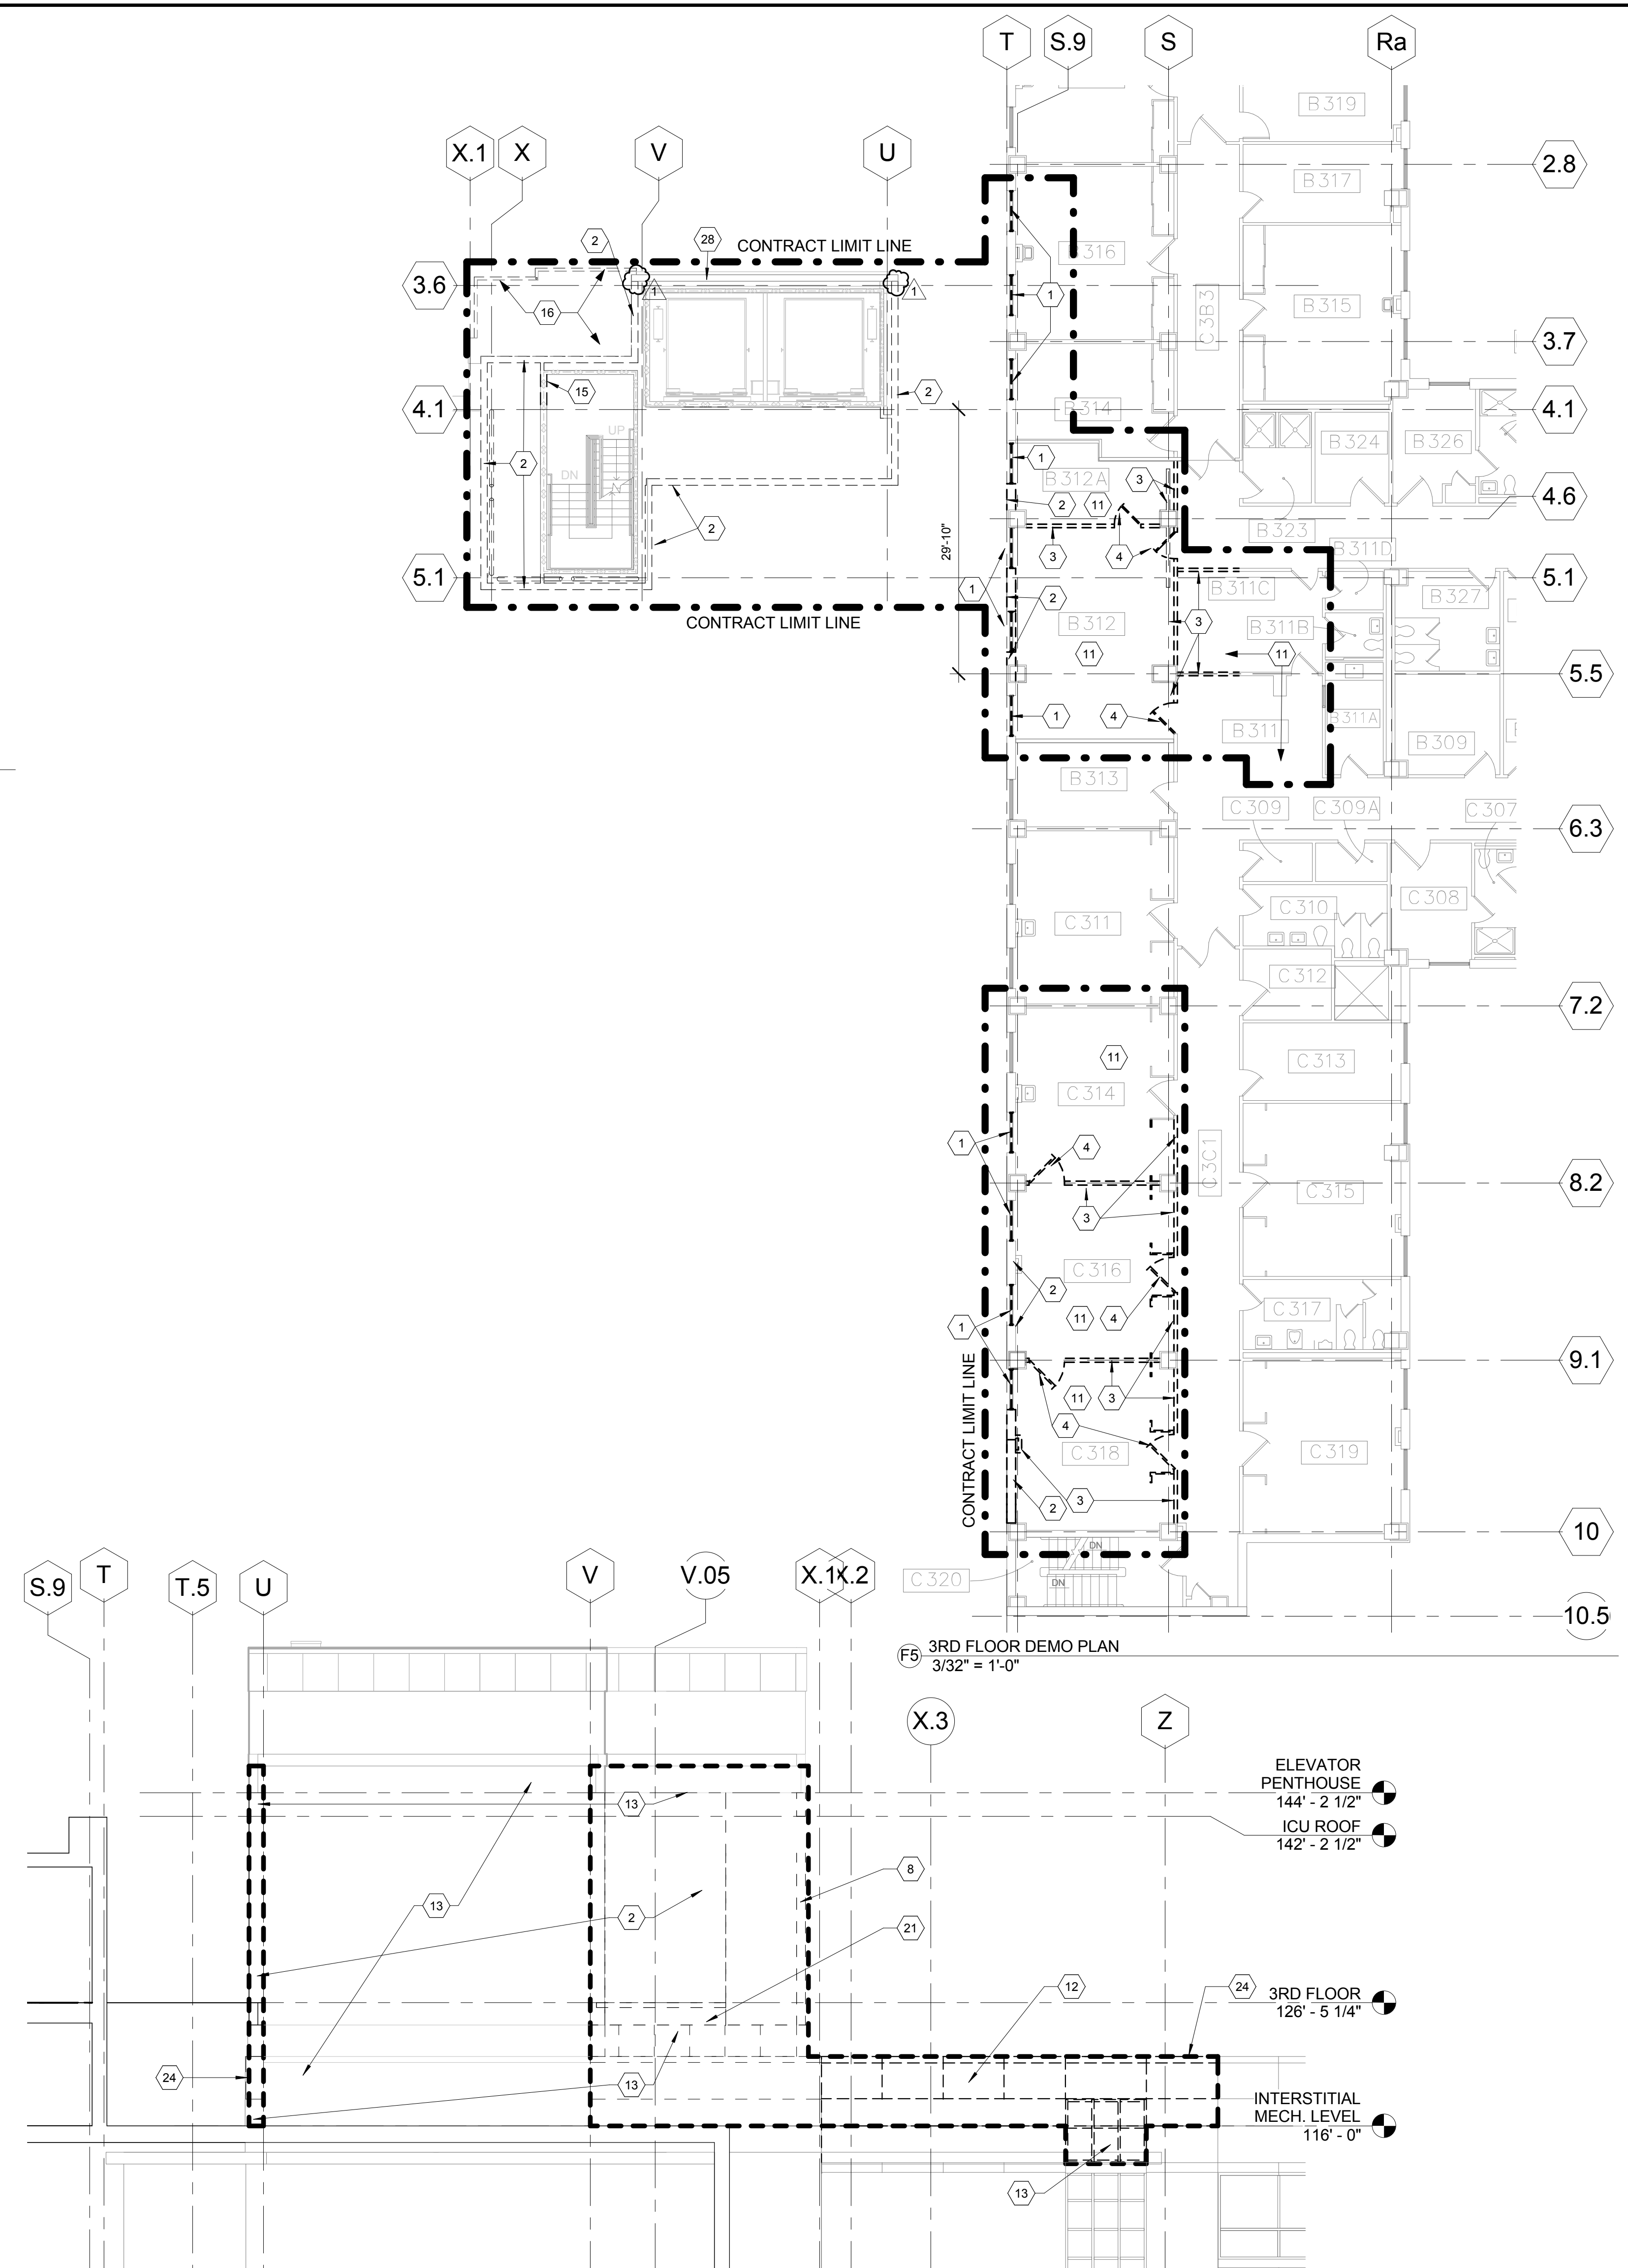


F5 3RD FLOOR DEMO PLAN
3/32" = 1'-0"

ARCHITECT/ENGINEERS:		
ARCHITECTS DESIGNERS PLANNERS LANDSCAPE ARCHITECTS	THE SEAL (S) AND SIGNATURE(S) APPLY ONLY TO THE DOCUMENT TO WHICH THEY ARE AFFIXED, AND WE EXPRESSLY DISCLAIM ANY RESPONSIBILITY FOR ALL OTHER PLANS, SPECIFICATIONS, ESTIMATES, REPORTS, OR OTHER DOCUMENTS OR INSTRUMENTS RELATING TO OR INTENDED TO BE USED FOR ANY PART OF PARTS OF THE PROJECT.	© COPYRIGHT 2012 CHRISTNER INC.
168 N MERAMEC, SUITE 400 ST. LOUIS, MISSOURI 63105 TEL 314 725 2027 FAX 314 725 2028 CHRISTNERENGINEERING.COM	DIRECTOR OF SPECIALTY CARE	ARCHITECT/ENGINEER
168 N MERAMEC, SUITE 400 ST. LOUIS, MISSOURI 63105 TEL 314 725 2027 FAX 314 725 2028 CHRISTNERENGINEERING.COM	CHIEF ENGINEER	ASSOCIATE DIRECTOR OF PATIENT SERVICES
168 N MERAMEC, SUITE 400 ST. LOUIS, MISSOURI 63105 TEL 314 725 2027 FAX 314 725 2028 CHRISTNERENGINEERING.COM	CHIEF OF STAFF	ASSOCIATE DIRECTOR
168 N MERAMEC, SUITE 400 ST. LOUIS, MISSOURI 63105 TEL 314 725 2027 FAX 314 725 2028 CHRISTNERENGINEERING.COM	MEDICAL CENTER DIRECTOR	MEDICAL CENTER DIRECTOR

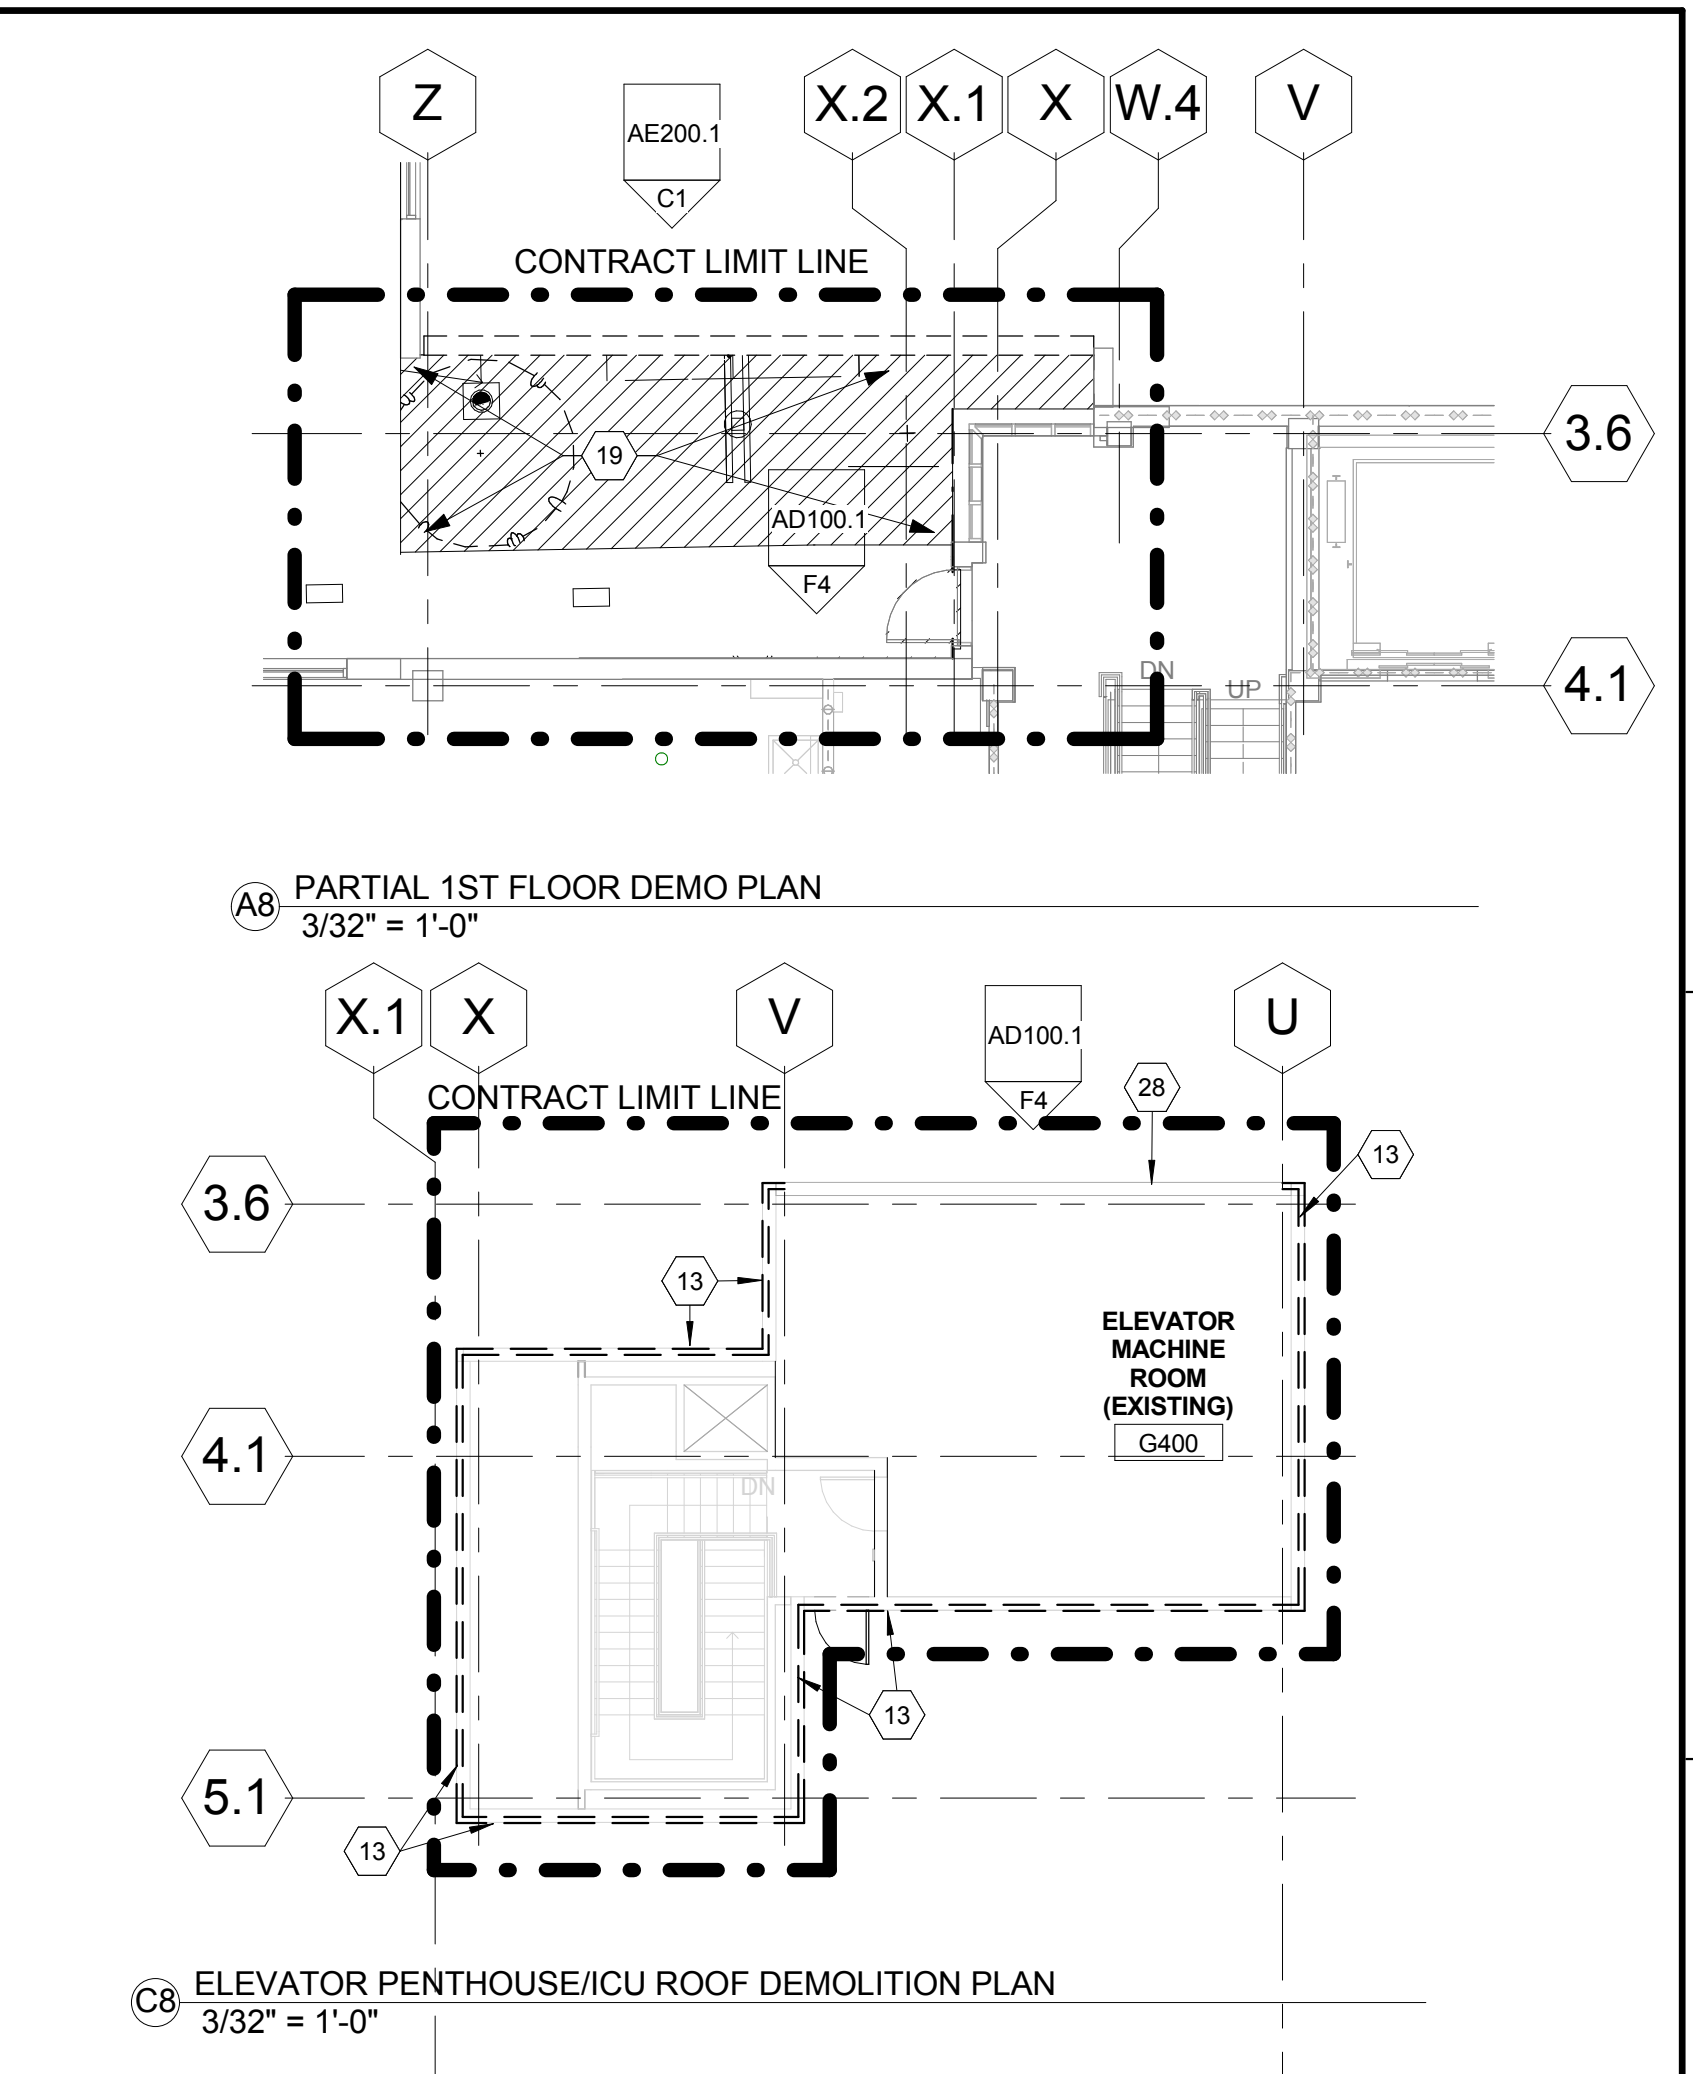

- DEMOLITION GENERAL NOTES**
- NOT ALL KEYED NOTES USED ON EACH SHEET.
 - OWNER HAS FIRST RIGHT OF REFUSAL FOR ALL ITEMS TO BE DEMOLISHED, INCLUDING BUT NOT LIMITED TO LIGHT FIXTURES, DOORS, DOOR HARDWARE, CASEWORK, ETC.
 - REFER TO PHASING PLAN FOR ADDITIONAL CONSIDERATIONS
 - REFER TO WALL SECTIONS FOR SELECTIVE DEMOLITION WHERE OCCURS

- KEYED NOTES - DEMOLITION**
- REMOVE WINDOW - NOTE CONTRACTOR WILL ONLY BE ALLOWED TO WORK IN ONE ROOM AT A TIME IN THIS AREA.
 - REMOVE EXTERIOR WALL FROM FINISH FLOOR TO UNDERSIDE OF STRUCTURAL DECK ABOVE
 - REMOVE PARTITION
 - REMOVE DOOR, FRAME AND HARDWARE.
 - EXISTING ROOF ACCESS HATCH TO BE REMOVED
 - ABANDON EXISTING ROOF DRAINS.
 - REMOVE EXISTING GUTTER AND DOWNSPOUT TO 6" ABOVE NEW ROOF
 - REMOVE EXISTING ROOFING AND ROOF INSULATION DOWN TO EXISTING CONCRETE ROOF SLAB. TYP WITHIN EXTENTS OF WORK ON THIS FLOOR. PREPARE ROOF SLAB FOR NEW FLOOR FINISH. MAINTAIN WEATHER TIGHT UNTIL AREA IS ENCLOSED (DRIED-IN)
 - REMOVE EXISTING FLOOR FINISH, PREPARE SUBSTRATE FOR NEW FLOOR FINISH. REMOVE CEILING.
 - REMOVE EXISTING PARAPET DOWN TO EXISTING ROOF SLAB. COORDINATE WITH DETAIL F1/AE302.4
 - REMOVE EXTERIOR CLADDING. SEE F1 & D3 / AE301.4
 - REMOVE PORTION OF WALL FOR FUTURE DOOR
 - REMOVE ROOF FRAMING, ROOFING AND RELATED COPING AND FLASHING
 - REMOVE LANDSCAPING
 - REMOVE PARAPET WITHIN NEW MECHANICAL ROOM
 - PROTECT EXISTING PARAPET TO REMAIN
 - EXTENT OF DEMOLITION
 - DEMOLISH WALL AS NECESSARY FOR PLUMBING WORK. COORDINATE WITH PLUMBING DRAWINGS. PATCH AND REPAIR AFTER WORK IS COMPLETED
 - PATCH/REPAIR PARTITION ABOVE CEILING TO MAINTAIN SMOKE BARRIER.
 - REMOVE ROOFING, ROOF INSULATION AND KICKERS FOR STRUCTURAL COLUMN TIE-IN AND FOR NEW EXTERIOR WALL.
 - PORTION OF EXTERIOR WALL AND PARAPET TO REMAIN
 - REMOVE EXISTING FACE BRICK. SEE DETAILF6/ AE303.4
 - REMOVE EXISTING FACE BRICK AND LESTONE BAND AS NEEDED FOR STRUCTURAL COLUMN TIE IN. REMOVE IN FULL MASONRY UNITS SO PATCH CAN BE TOOTHED IN TO EXISTING. LESTONE BAND MAY BE CUT, SALVAGED AND PROTECTED FOR REINSTALLATION

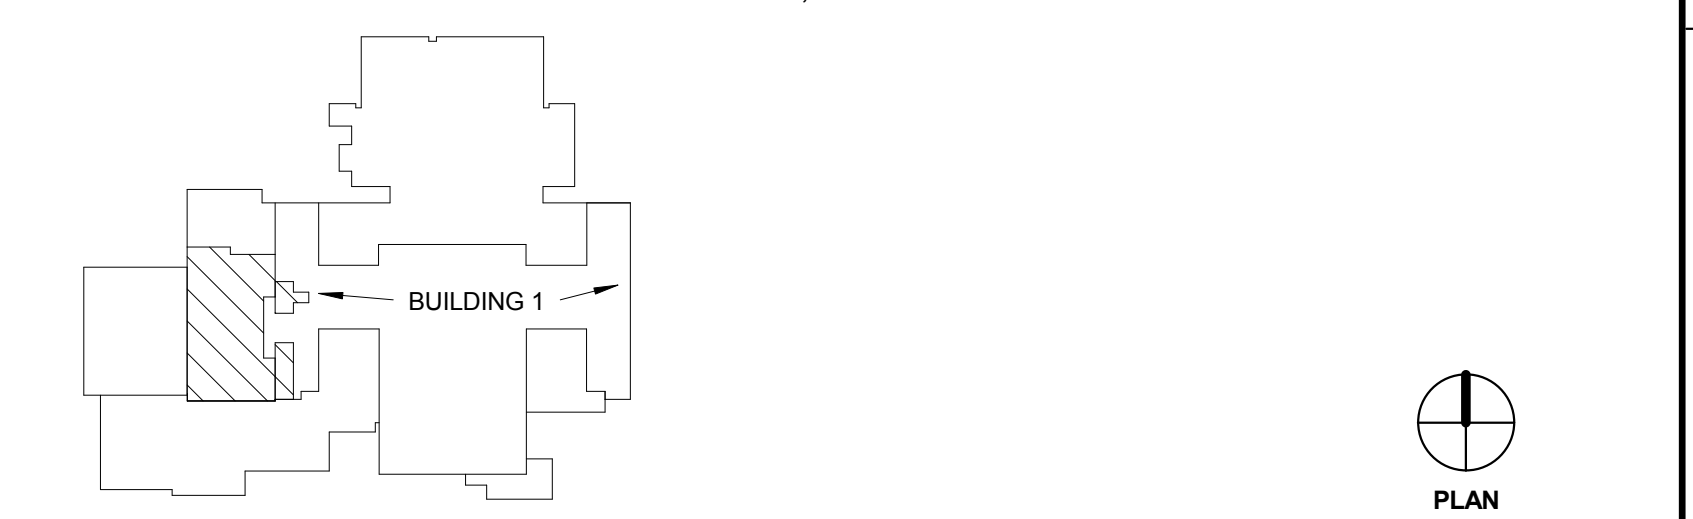

KEY PLAN - NOT TO SCALE
FULLY SPRINKLERED
CONSTRUCTION DOCUMENTS

Project Title INTENSIVE CARE UNIT		Project Number 589-330	
Building Number 1		Drawing Number AD100.1	
Location HARRY S. TRUMAN VAMC		Dwg. 14 of 201	
Date 9/4/14	Checked JW	Drawn EW	Approved Approver

**Office of
Construction
and Facilities
Management**

**Department of
Veterans Affairs**