

three inches = one foot

one and one-half inches = one foot

one inch = one foot

three-quarter inch = one foot

one-half inch = one foot


three-eighths inch = one foot

one-quarter inch = one foot

one-eighth inch = one foot

file path

9/25/2014 10:50:24 AM

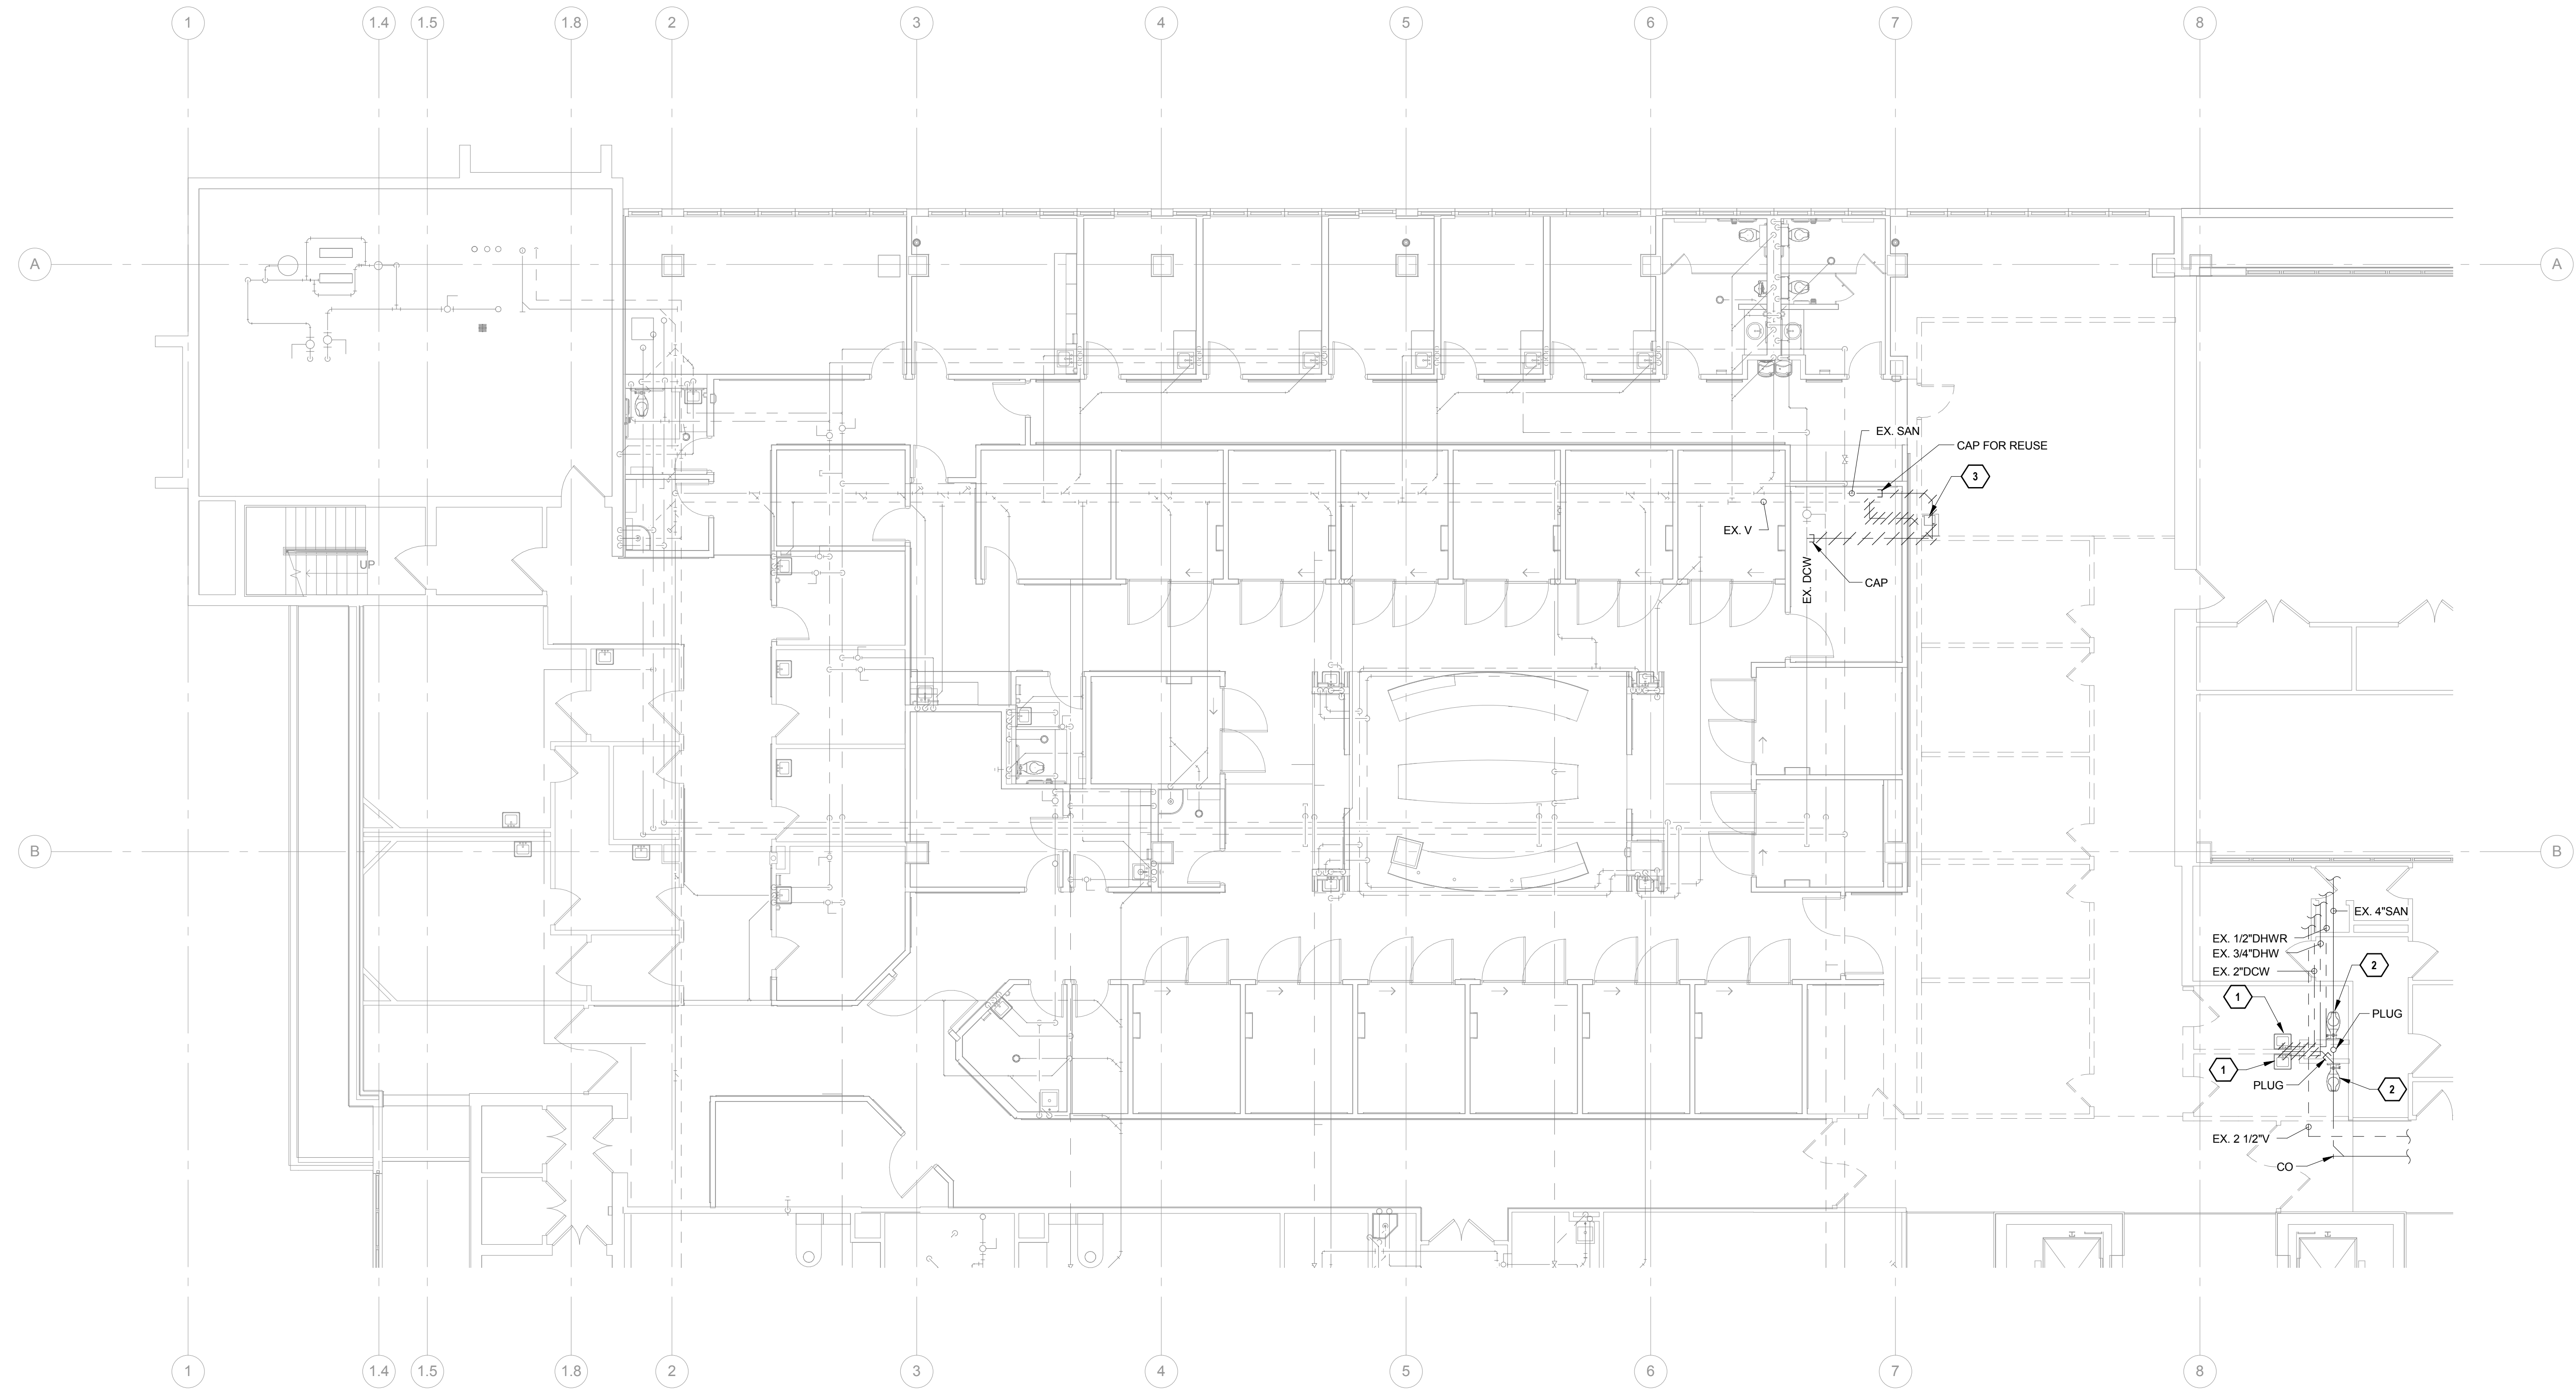

GENERAL NOTES


- A. CONTRACTOR TO COORDINATE ALL SHUTDOWNS AND OUTAGES WITH COR 2 WEEKS PRIOR TO COMMENCEMENT OF WORK.
- B. REFER TO DRAWING P001 FOR PLUMBING GENERAL NOTES AND DEMOLITION NOTES.
- C. REFER TO DRAWING PL104 FOR NEW WORK.
- D. FIELD VERIFY ALL PIPING TO BE DEMOLISHED PRIOR TO DEMOLITION.
- E. DOMESTIC HOT WATER MAINS, CROSS MAINS AND DOMESTIC HOT WATER RETURN SYSTEM TO REMAIN ACTIVE. DEMO BRANCH PIPE TO THESE MAINS AND CAP.
- F. PATCH TO MATCH EXISTING HOLES IN WALLS, FLOORS AND CEILINGS AS A RESULT OF DEMOLITION WORK.
- G. PATCH DISTURBED PORTIONS OF STRUCTURAL STEEL AND FIRE PROOFING AS A RESULT OF DEMOLITION WORK. RETURN TO ORIGINAL STATUS.
- H. SANITARY, WASTE AND ROOF DRAIN PIPING LOCATED IN 1ST FLOOR INTERSTITIAL SPACE. WATER, VENT AND MEDICAL GAS PIPING LOCATED IN 3RD FLOOR INTERSTITIAL SPACE.

KEYED NOTES

- 1. REMOVE LAVATORY. REMOVE WASTE, VENT AND SUPPLIES TO MAINS AND CAP.
- 2. REMOVE WATER CLOSET. REMOVE WASTE, VENT AND SUPPLIES TO MAINS AND CAP.
- 3. REMOVE ELECTRIC WATER COOLER. REMOVE WASTE, VENT AND SUPPLY TO MAIN AND CAP.

A1 PLUMBING - QUAD D - PACU PHASE 2 DEMOLITION PLAN  
1/8" = 1'-0"

KEY PLAN - 3RD FLOOR

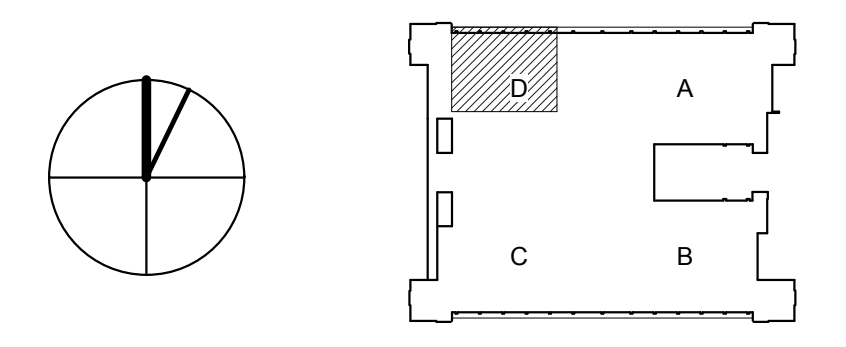

COMPLETION ITEM NO. \_\_\_\_\_  
FULLY SPRINKLERED

<div>Revisions</div> <table><thead><tr><th>#</th><th>Revisions</th><th>Date</th></tr></thead><tbody><tr><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td></tr></tbody></table>	#	Revisions	Date										<b>CONSULTANTS:</b>	<div>ARCHITECT/ENGINEERS</div> <div>THE HARTMAN + MAJEWSKI <b>DESIGN GROUP</b> Architects Engineers Interior Design Planners Urban Designers LEED® 120 Vassar Dr SE Suite 100 Albuquerque New Mexico 87106 Tel 505 242 6880 Fax 505 242 6881</div> <div>MICHAEL E. DENT STATE OF NEW MEXICO 7170 REGISTERED PROFESSIONAL ARCHITECT Date: 2/14/2014 16:55:34 45007</div> <div>Engineer</div> <div><b>BRIDGERS &amp; PAXTON</b> CONSULTING ENGINEERS, INC. 4800 G. MONTGOMERY BLVD. NE ALBUQUERQUE, NEW MEXICO 87110 (505) 341-1111 FAX: (505) 341-1432</div>	<div>Drawing Title</div> <div>PLUMBING - QUAD D - PACU PHASE 2 DEMOLITION PLAN</div> <div>Approved: Project Director</div>	<div>Project Title</div> <div>MICU-SICU CONSOLIDATION &amp; PACU BUILDING 41</div> <div>Location</div> <div>NMVAHCS RAYMOND G. MURPHY VAMC</div> <div>Date</div> <div>SEPTEMBER 26, 2014</div> <div>Checked</div> <div>FAS</div> <div>Drawn</div> <div>SNB</div>	<div>Project Number</div> <div>501-324</div> <div>Building Number</div> <div>BUILDING 41</div> <div>Drawing Number</div> <div><b>PD102</b></div> <div>Dwg. Of</div>	<div>Office of Construction and Facilities Management</div> <div>Department of Veterans Affairs</div>
	#	Revisions	Date															