


three inches = one foot
one and one-half inches = one foot
one inch = one foot
three-quarter inch = one foot
one-half inch = one foot
three-eighths inch = one foot
one-eighth inch = one foot
file path
9/25/2014 10:50:44 AM

GENERAL NOTES

- A. CONTRACTOR TO COORDINATE ALL SHUTDOWNS AND OUTAGES WITH COR 2 WEEKS PRIOR TO COMMENCEMENT OF WORK.
- B. COORDINATE WORK WITH OTHER TRADES TO MINIMIZE CONFLICTS.
- C. COORDINATE MEDICAL GAS SYSTEMS TO BE DEMOLISHED WITH MEDICAL GAS SYSTEMS TO REMAIN ACTIVE DURING EACH PHASE OF CONSTRUCTION. IF DISCREPANCIES ARISE, CONTACT THE COR PRIOR TO SHUTDOWN OF SERVICES.
- D. MEDICAL GAS EQUIPMENT REMOVED SHALL BE RETURNED TO OWNERS STOCK, OR IF REFUSED SHALL BE DISPOSED OF PROPERLY.
- E. EXISTING MEDICAL GAS SYSTEMS REMAINING IN SERVICE SHALL BE PROTECTED FROM DAMAGE.
- F. REFER TO DRAWING PG102 FOR NEW WORK.
- G. PATCH DISTURBED PORTIONS OF STRUCTURAL STEEL FIRE PROOFING AS A RESULT OF DEMOLITION WORK. RETURN TO ORIGINAL STATUS.
- H. REFER TO DRAWING P001 FOR PLUMBING MEDICAL GAS GENERAL NOTES AND DEMOLITION NOTES.



KEYED NOTES

1. REMOVE MEDICAL GASES: OXYGEN (O), MEDICAL AIR (MA), AND MEDICAL VACUUM SYSTEMS COMPLETE TO MAINS AND CAP.
2. EXISTING 2" MEDICAL VACUUM, 3/4" MEDICAL AIR AND 1 1/2" OXYGEN RISERS.
3. CAP MEDICAL GASES TO APPROXIMATE LOCATION FOR REUSE.
4. REMOVE EXISTING MEDICAL GAS ALARM PANEL.
5. EXISTING PAIN TREATMENT MEDICAL GASES TO REMAIN ACTIVE.
6. REMOVE EXISTING HEADWALL UNIT AND MEDICAL GAS PIPE SERVING UNIT. COORDINATE WITH COR FOR REUSE OR DISPOSAL.
7. CAP MEDICAL GASES TO APPROXIMATE LOCATION.

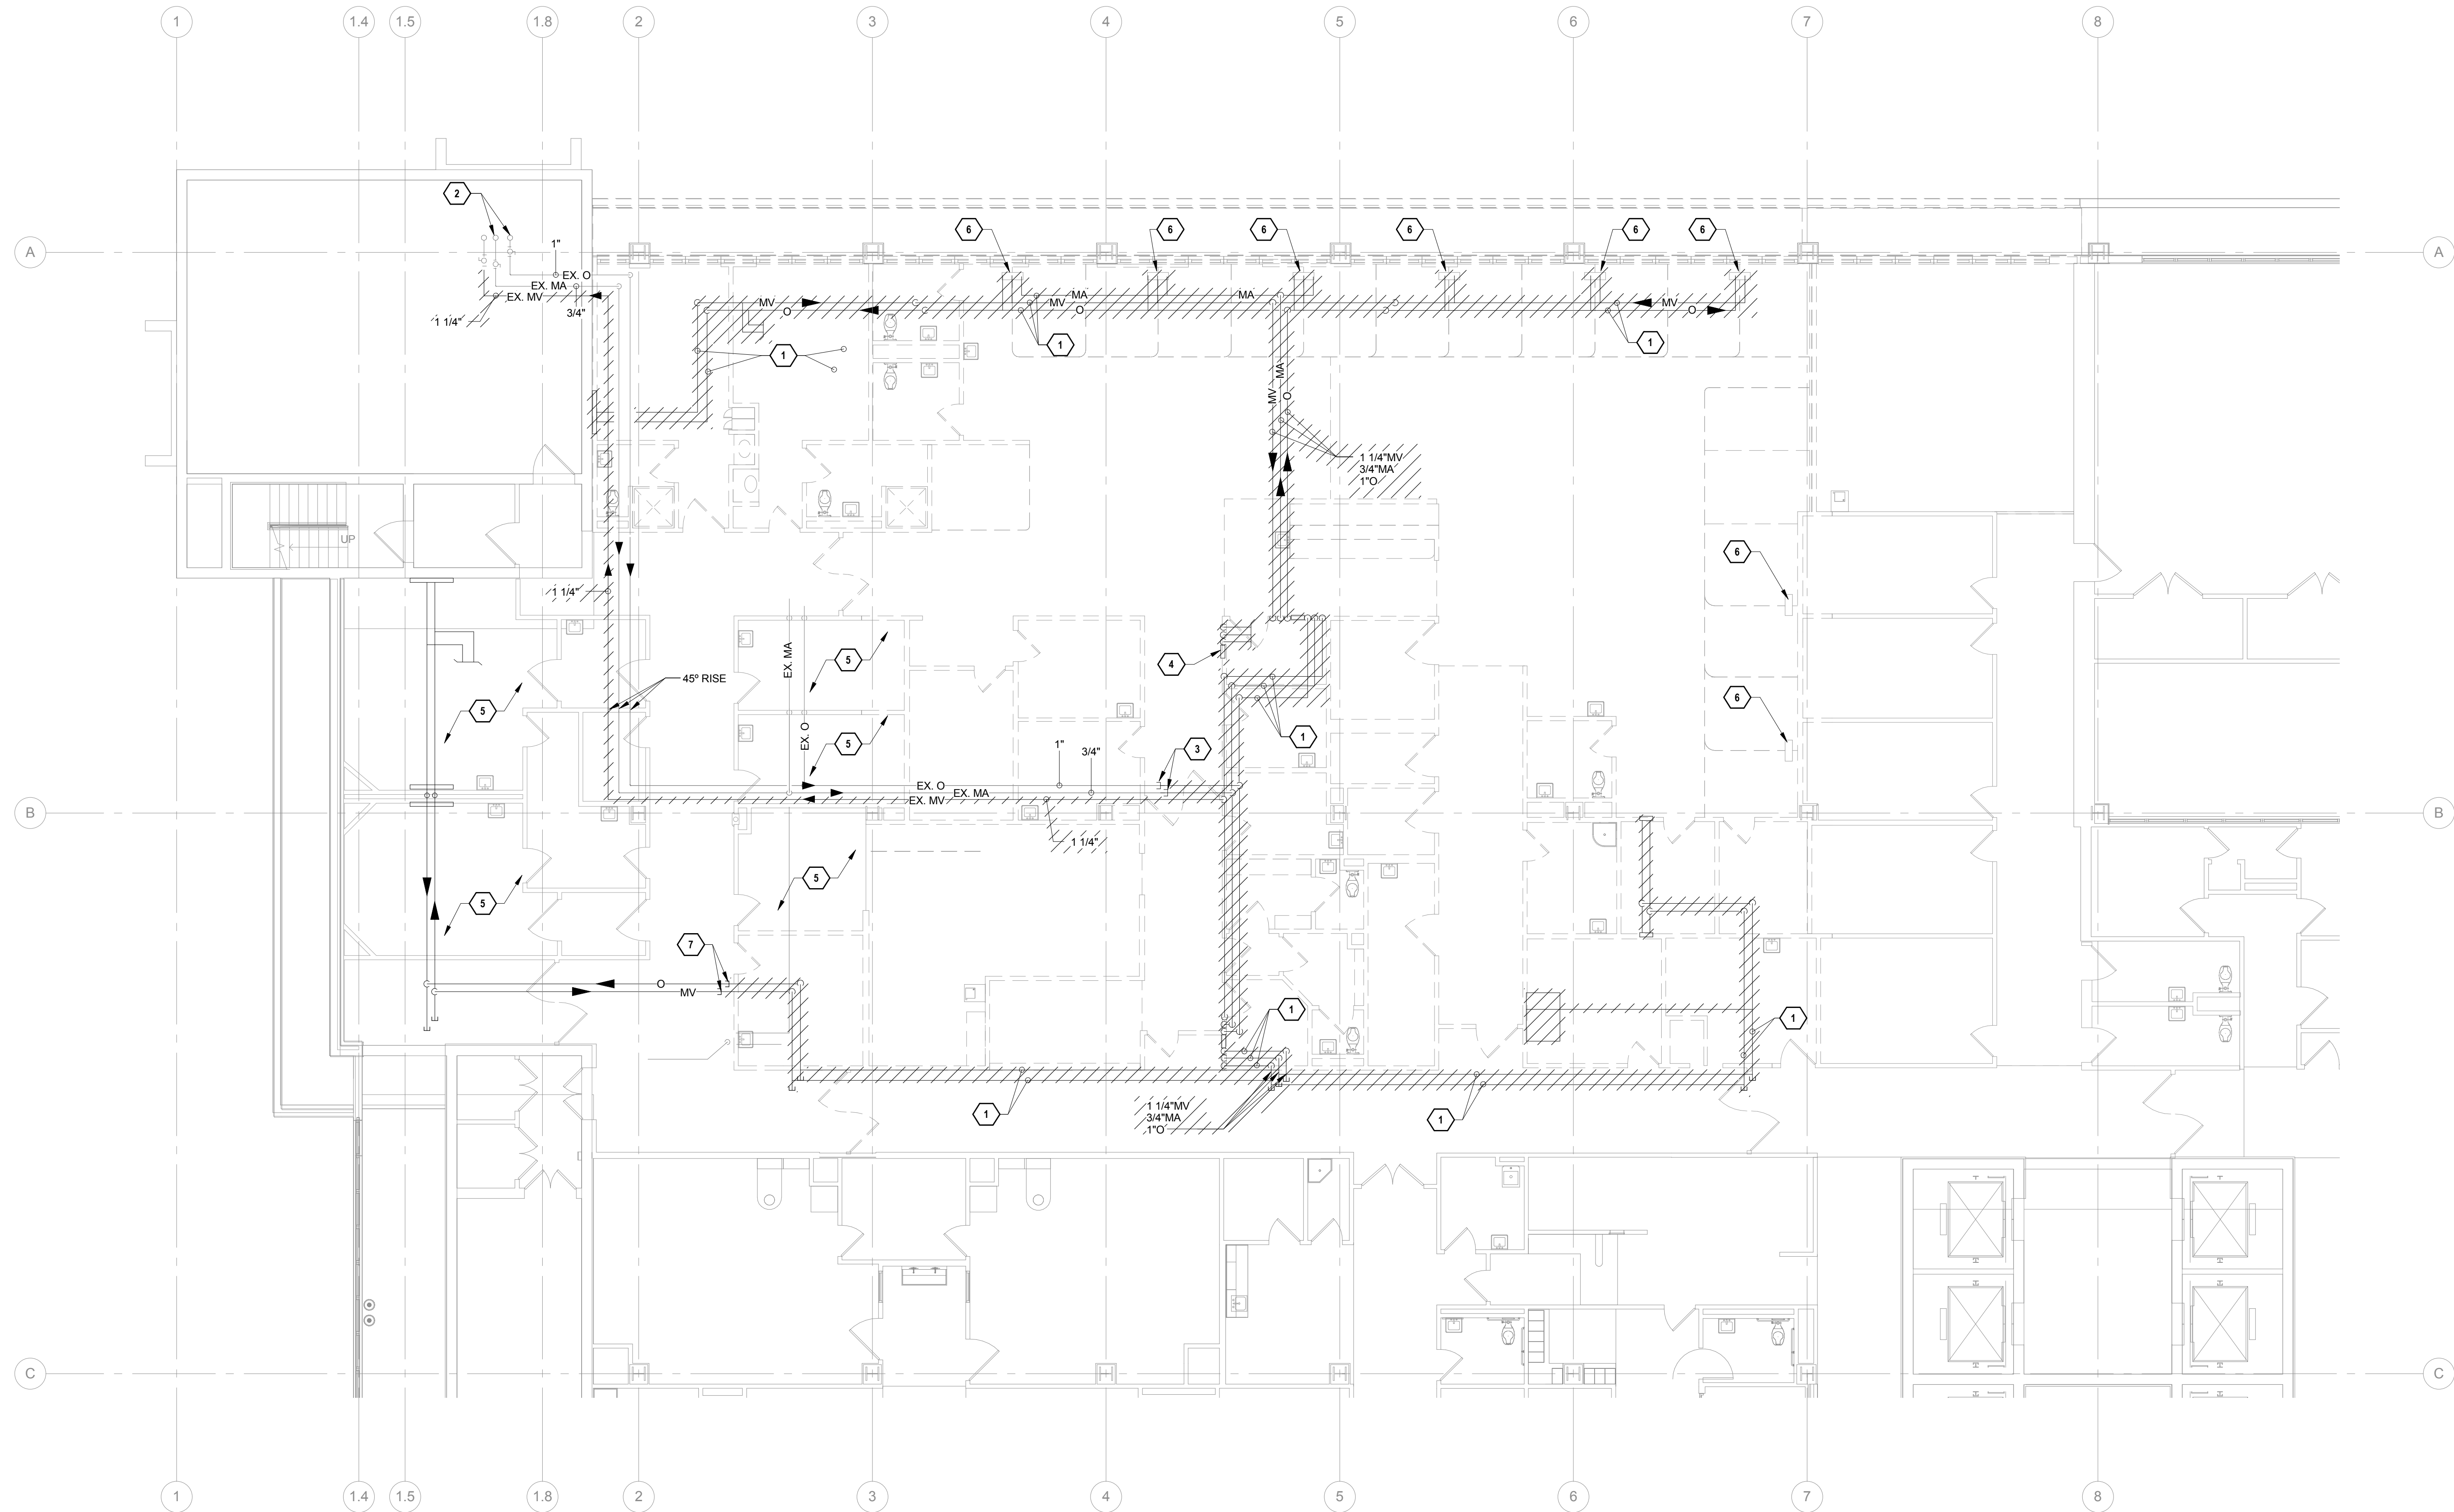

A1 PLUMBING MEDICAL GAS DEMOLITION PLAN - 3RD FLOOR - QUAD D - PACU PHASE 1
1/8" = 1'-0"

KEY PLAN - 3RD FLOOR

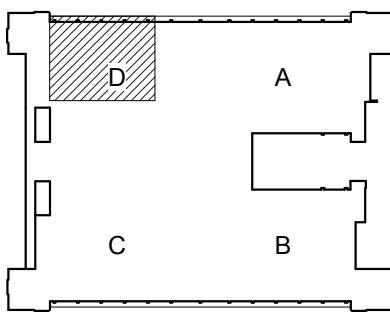

COMPLETION ITEM NO. _____
FULLY SPRINKLERED

CONSULTANTS:

ARCHITECT/ENGINEERS

THE HARTMAN + MAJEWSKI
DESIGN GROUP
Architects Engineers Interior Design
Planners Urban Designers LEED®
120 Vassar Dr SE Suite 100
Albuquerque New Mexico 87106
Tel 505 242 6880 Fax 505 242 6881



Drawing Title

PLUMBING MEDICAL GAS - QUAD D - PACU PHASE 1 DEMOLITION PLAN

Approved: Project Director

Project Title

MICU-SICU CONSOLIDATION & PACU BUILDING 41

Location

NMVAHCS RAYMOND G. MURPHY VAMC

Date

SEPTEMBER 26, 2014

Checked

FAS

Drawn

SNB

Project Number
501-324

Building Number
BUILDING 41

Drawing Number

PD105
Dwg. Of

Office of
Construction
and Facilities
Management

