


DECO™ WOOD  

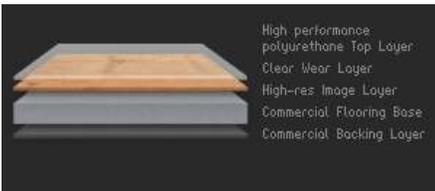

Product Specifications

REFERENCE SPECIFICATION

ASTM F 1700	Class III Printed Film Vinyl Tile Type A: Smooth Surface Type B: Embossed Surface
-------------	---

PHYSICAL DATA

ASTM F536 - Size	(Nominal 4"x36") 3.94 in. X 36.22 in. (100mm X 920mm)
ASTM F386 - Overall Thickness	Thickness 0.125 in. (3.0mm)
ASTM F410 - Wear Layer Thickness	Thickness 0.020 in. (0.5mm)
ASTM D2047 - Slip Resistance	Exceeds ADA and OSHA recommendations
ASTM F970 - Residual Indentation	Passes
ASTM F137 - Flexibility	Passes
ASTM F1514 - Resistance to Heat	Passes
ASTM F1515 - Resistance to Light	Passes
ASTM F925 - Resistance to Chemicals	Passes

FIRE TEST DATA

ASTM E648 Critical Radiant Flux	> 0.45 watts / cm ² , NFPA Class I
ASTM E662 Smoke Density	< 450 - Passes



©2011, LG Floors. All Rights Reserved