

Diagram illustrating the construction of a fireproofed column, showing the assembly of various materials and joints:

- 5 5/8" MTL. PLT. TOP PLATE TEMPORARILY ATTACHED TO STRUCTURE.
- UNDERSIDE OF FLOOR CONSTRUCTION ABOVE.
- FIRE TAPE JOINTS.
- 3 5/8" MTL. STUDS @ 24" O.C. MAX.
- 5/8" F.R. GYP. BOARD ATTACHED TO BOTH SIDES OF STUDS. FIRE TAPE JOINTS.
- FIRE TAPE JOINTS.
- FIN. CONC. FLOOR.
- 3 5/8" MTL. PLATE TEMPORARILY ATTACHED TO FLOOR.
- CONTRACTOR TO V.E.F.

D-1	ENTIRE AREA TO BE DEMO'D. REMOVE EXISTING WALL, FLOORING, CEILING, CASEWORK, DOORS, PLUMBING, AS WELL AS ALL FIXTURES FOR NEW CONSTRUCTION.
D-2	REMOVE EXISTING WALL. PATCH AND REPAIR EXISTING ADJACENT SURFACES AS REQUIRED.
D-3	COORDINATE EXTENT OF EXISTING CEILING, MECHANICAL, AND/OR ELECTRICAL TO BE REMOVED WITH NEW WORK.
D-4	REMOVE EXISTING DOOR, FRAME, AND HARDWARE. HARDWARE TO BE TURNED OVER TO THE VA IS TO BE REMOVED AND DISCARDED BY CONTRACTOR.
D-5	REMOVE EXISTING CASEWORK. PATCH AND REPAIR EXISTING ADJACENT SURFACES AS REQUIRED.
D-6	EXISTING WALL AND/FLOOR DOOR TO REMAIN.
D-7	REMOVE EXISTING FURRED OUT WALL CONSTRUCTION. PATCH AND REPAIR EXISTING ADJACENT SURFACES AS REQUIRED.
D-8	REMOVE EXISTING TOILET PARTITION. PATCH FLOOR, WALL AND CEILING TO CREATE SMOOTH SURFACE FOR NEW PARTITION.
D-9	REMOVE EXISTING BUILDING EXPANSION JOINT AND PREP SURFACES FOR NEW EXPANSION JOINT.
D-10	COORDINATE WITH ARCHITECTURAL DRAWINGS FOR THE LOCATION AND DIMENSIONS OF THE TOILETS AND BATHROOMS WITH SHOWERS. CUT OUT EXISTING CONCRETE TOPPING DOWN TO EXISTING CONCRETE DECK TO ALLOW FOR NEW C.T. FLOORS TO BE Laid ON NEW FLOORING.

PRIOR TO SUBMITTING PROPOSALS, BIDDERS SHALL EXAMINE DRAWINGS AND SPECIFICATIONS AND CONDUCT A PERSONAL EXAMINATION OF THE SITE AND BECOME AWARE OF ALL EXISTING CONDITIONS AND LIMITATIONS AFFECTING THE WORK AND THEIR PROPOSAL.

ALL DEMOLITION AND MATERIAL REMOVAL OPERATIONS SHALL BE CAREFULLY AND SAFELY CARRIED OUT TO ACCOMMODATE FUTURE NEW CONSTRUCTION. THE DEMOLITION CONTRACTOR SHALL BE TOTALLY RESPONSIBLE FOR SAFE PROCEDURES, PRACTICES AND OPERATION. THE CONTRACTOR SHALL PROVIDE AND LOCATE ALL BARRICADES, WARNING LIGHTS, DANGER SIGNS, OVERHEAD PROTECTION, AND ALL OTHER RELATED SAFETY PRECAUTIONS TO PROTECT ALL PERSONS AND PROPERTY EITHER DIRECTLY RELATED OR INCIDENTAL TO THE PROJECT FROM INJURY OR DAMAGE FROM ANY CAUSE. PROTECT ALL STRUCTURAL COMPONENTS AND IN-US BUILDING SERVICE FROM DAMAGE.

ALL WALLS, PARTITIONS, FRAMES AND OTHER MATERIALS SHOWN TO BE REMOVED SHALL HAVE NEATLY REMOVED CUT EDGES WHERE THEY WILL BE VISIBLE AFTER THE NEW CONSTRUCTION HAS BEEN COMPLETED.

ALL DEMOLISHED ITEMS SHALL BE THE PROPERTY OF THE C.O.R. ANY ITEMS NOT CLAIMED AND STORED BY THE C.O.R. SHALL BE DISCARDED BY THE CONTRACTOR.

CONTRACTOR SHALL PROVIDE SAFETY AND DUST PROOF BARRIERS FROM ALL PUBLIC OCCUPIED AREAS DURING THE ENTIRE CONSTRUCTION PERIOD.

CONTRACTOR SHALL PROPERLY DISPOSE OF ALL DEBRIS DAILY. ALL CONCRETE SLABS THAT ARE CUT OR REMOVED SHALL BE PROPERLY PATCHED TO MATCH EXISTING FINISH FLOOR.

ALL DEAD AND ABANDONED MECHANICAL AND ELECTRICAL
LINES SHALL BE DISCONNECTED AND REMOVED.

ALL ABANDONED PLUMBING LINES SHALL BE CAPPED OVER WITH CONCRETE AT FINISH FLOOR.

PATCH AND REPAIR EXISTING FLOOR AS REQUIRED AT REMOVED SANITARY LINES. REFER TO FLOOR SLAB DETAILS ON SHEET A-2.0.

PENETRATIONS THROUGH THE 13B FLOOR AND THE ATTIC FLOOR FOR NEW CONSTRUCTION ARE NOT SHOWN.
COORDINATE WITH MEP DRAWINGS.

MATERIAL TO BE REMOVED BY CHUTE AT WINDOW ON SOUTH SIDE. WINDOW(S) CAN BE REMOVED, AND MUST BE RE-INSTALLED AND SEALED PROPERLY WHEN CHUTE USE IS DONE.

CONTRACTOR TO COORDINATE ALL DEMOLITION WORK WITH COR. CONTRACTOR AND COR WILL WORK CLOSELY TOGETHER TO SCHEDULE DEMO. WORK. LARGE SCALE DEMO. WORK WILL BE DONE AFTER HOURS OR ON WEEKENDS.

AREA OF RENOVATION

 EXISTING WALL SHALL REMAIN.


 EXISTING DOOR, FRAME, AND HARDWARE SHALL REMAIN.

 EXISTING WALL SHALL BE REMOVED.

 EXISTING DOOR, FRAME, AND HARDWARE SHALL BE REMOVED.

 TEMPORARY DUST PROOF WALL AND DOOR.

 CUT OUT EXISTING CONCRETE TOPPING DOWN TO EXISTING CONCRETE DECK AT RESTROOMS WITH SHOWERS. COORD. WITH ARCH. DWGS.

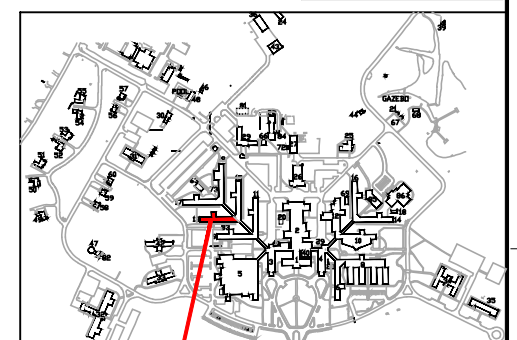

 REVIEW REVISIONS	02/25/15
Revisions:	Date:

718 Virginia Drive
Orlando, FL 32803
T: (407) 423-5355 F: (407) 422-5994

2209 NW 40th Ter. Ste. A
Gainesville, FL 32605
T: (352) 372-1911 F: (352) 372-1912

Approved: _____	
Engineering Asst. Chief	_____
Engineering Maint. And Oper.	_____
Engineering Equipment Manager	_____
Engineering Health & Safety	_____
Engineering Planning & Analysis	_____
C.O.R.	_____

Approved: Chief, Engineering Service

Approved: Chief, Engineering Service

Approved: Service Director

	Building Number
--	-----------------

12B

	Location
--	----------

1826 VETERANS BLVD. - DUBLIN, GA 31021

Date

JANUARY 30, 2015

Project No. _____


	DRAWING NO.

• • •

A-10

7.15

Dwg. 5 of 1



VA U.S. Department
of Veterans Affairs