


W. R. MEADOWS WESTERN REGION

Fort Worth, TX; Benicia, CA; Goodyear, AZ; Pomona, CA
www.wrmeadows.com • info@wrmeadows.com



TELEPHONE: 800-342-5976

A Family Company Since 1926

April 3, 2015

Robert Kenny
Veterans Admin Medical Center
777 E. Missouri Ave.
Suite 300
Phoenix, AZ 85014-2833

E-mail: Robert.kenny@va.gov

2015-2020 Health Care Bldgs
DR #201500402401
Phoenix, AZ 85012

Dear Robert Kenny,

As a manufacturer of quality construction products for 85 years and locally available to the above noted project, we respectfully request your approval of the following material as an equal in the specifications for this project:

<u>SPEC LOCATION</u>	<u>W. R. MEADOWS INC. PRODUCT EQUAL TO THOSE SPECIFIED</u>
033053-3	1. PERMINATOR® 10 MIL UNDERSLAB VAPOR BARRIER / RETARDER

Should the above material meet with your approval, please sign and fax back to our office at (623) 932-1547. Please feel free to visit our website www.wrmeadows.com for additional information. And if you need further product information, such as brochures, samples, project profiles, please let me know. Thank you for your consideration to this request.

Sincerely,

4/15/2015

Lauren Mazza
Architectural Services | W. R. Meadows of Arizona, Inc.
Office: 623-932-9383 | Toll Free: 800-825-5976
Email: LMazza@wrmeadows.com | Web: <http://www.wrmeadows.com>

Approved:

Robert Kenny - VA Contracting

Agreed upon by review from
GLHN

Architects and Prescott VA

Engineering as acceptable on
the 649-13-101
SCI Clinic
Project.



SUBSTITUTION REQUEST

(During the Bidding/Negotiating Stage)

Project: 2015-2020 HEALTH CARE BLDGS Substitution Request Number: _____
To: ROBERT KENNY From: GREG NEUNDORFER / LAUREN MAZZA
Date: April 3, 2015
RE: REQUEST FOR ALTERNATE PRODUCT A/E Project Number: 201500402401
Specification Title: VAPOR BARRIER Description: VAPOR RETARDER
Section 033053 Page: 3 Article /Paragraph: 2.2, G

PROPOSED SUBSTITUTION: PERMINATOR® 10 MIL UNDERSLAB VAPOR BARRIER / RETARDER

Manufacturer: W. R. MEADOWS, INC. Address: 300 Industrial Drive, Hampshire, IL 60140 Phone: 623-693-1132

Trade Name: SEALTIGHT Prod No.: _____

Attached data includes product description, specifications, drawings, photographs, and performance and test data adequate for evaluation of the request; applicable portions of the data are clearly identified.

Attached data also includes a description of changes to the Contract Documents that the proposed substitution will require for its proper installation.

The Undersigned certifies:

- Proposed substitution has been fully investigated and determined to be equal or superior in all respects to specified product
- Same warranty will be furnished for proposed substitution as for specified product.
- Same maintenance service and source of replacement parts, as applicable, is available.
- Proposed substitution will have no adverse effect on other trades and will not affect or delay progress schedule.
- Proposed substitution does not affect dimensions and functional clearances.
- Payment will be made for changes to building design, including A/E design, detailing, and construction costs caused by the substitution.

Submitted: GREG NEUNDORFER / LAUREN MAZZA
Signed by: *Lauren Mazza*
Firm: W. R. MEADOWS, INC.
Address: 300 INDUSTRIAL DRIVE, P.O. BOX 338
HAMPSHIRE, IL 60140
Telephone: 623-693-1132

- ☐ Substitution approved – Make submittals in accordance with Specification Section 01 25 00 Substitution Procedures.
☐ Substitution approved as noted – Make submittals in accordance with Specification Section 01 25 00 Substitution Procedures.
☐ Substitution rejected – Use specified materials.
☐ Substitution Request received too late – Use specified materials.

Signed by: _____ Date: _____

Supporting Data Attached: ☐ Drawings ☐ Product Data ☐ Samples ☐ Tests ☐ Reports

PRODUCT DATA

NO. 723

MasterFormat:

03 33 00

07 26 16

W. R. MEADOWS®

SEALTIGHT®

MAY 2014

(Supersedes May 2013)

PERMINATOR®

10 and 15 Mil Underslab Vapor Barrier

DESCRIPTION

PERMINATOR underslab vapor barrier is a new generation of polyolefin-based resin/chemical technology. PERMINATOR provides the vapor barrier industry with a highly effective, economical choice for helping to reduce the penetration of moisture and water vapor through the slab into the structure, thereby helping to reduce fungus, mildew, and mold growth. PERMINATOR also helps reduce radon gas from entering the structure.

New resin technology allows dramatically greater puncture resistance while maintaining one of the lowest perm ratings in the market.

PERMINATOR is tough enough to withstand normal construction jobsite conditions and traffic. It will not crack, puncture, snag, split, or tear easily.

PERMINATOR prevents uncontrolled moisture from entering the slab allowing the slab to maintain the maximum slab moisture emission rate and relative humidity level as allowed by flooring manufacturer's specifications.

PERMINATOR is available in 10 mil and 15 mil thicknesses. Both versions are furnished in 200' (61 m) long rolls.

PERMINATOR's 12' (3.66 m) wide (15 mil) and 15' (4.57 m) wide (10 mil) rolls require fewer seams in application. Installation is quick and easy. All joints/seams, both side and end, should be overlapped 6" (152.4 mm) and taped using 4" (101.6 mm) wide PERMINATOR TAPE from W. R. MEADOWS. PERMINATOR rolls fast and smoothly over level tamped soil or compacted fill.

USES

PERMINATOR underslab vapor barrier is primarily designed for underslab construction, where the soil has been tamped and leveled or compacted fill has been applied. The 200' (61 m) long sheets are unrolled as is or cut to size and installed using the overlapping method. Overlaps are 6" (152.4 mm) wide and these seams are sealed using 4" (101.6 mm) wide PERMINATOR TAPE.

PERMINATOR can also be used as a protection course for waterproofing membranes. The desired sheet lengths are cut to size and retained at the top of the waterproofing membranes by PERMINATOR TAPE or TERMINATION BAR from W. R. MEADOWS.

FEATURES/BENEFITS

- Available in 10 mil and 15 mil thicknesses, in 200' (61 m) long rolls.
- Helps reduce the penetration of moisture and water vapor through the slab into the structure.
- Helps reduce fungus, mildew, and mold.
- Helps reduce radon gas from entering a structure.
- Resistant to methane gas.
- Tough enough to withstand normal construction jobsite conditions and traffic ... will not crack, puncture, snag, split, or tear easily.
- Installs quickly and easily over tamped grade ... no gravel, fill, or sand needed.
- 12' (15 mil) and 15' (10 mil) wide rolls require fewer seams in application.
- PERMINATOR prevents uncontrolled moisture from entering the slab allowing the slab to maintain the maximum slab moisture emission rate and relative humidity level as allowed by flooring manufacturer's specifications.
- 10 or 15 mil thickness clearly marked on membrane for easy visual identification on jobsite.
- VOC content is 0 g/L.
- Made in America.

PACKAGING

10 mil: 15' wide (4.57 m), 200' long (60.96 m) or 54" wide (1.37 m), 400' long (121.92 m) by special order only.

15 mil: 12' wide (3.66 m), 200' long (60.96 m)

SPECIFICATIONS

- Meets or exceeds all requirements of ASTM E 1745-11 Class A, B & C.
- ACI 302.2R: Guide for Concrete Slabs that Receive Moisture Sensitive Flooring Materials makes a suggestion to use materials having 0.01 perms when flooring materials require protection lower than that determined by ASTM E1745. PERMINATOR 15 mil meets this requirement.

CONTINUED ON REVERSE SIDE...

W. R. MEADOWS, INC.


P.O. Box 338 • HAMPSHIRE, IL 60140-0338
Phone: 847/214-2100 • Fax: 847/683-4544

1-800-342-5976
www.wrmeadows.com

HAMPSHIRE, IL / CARTERSVILLE, GA / YORK, PA
FORT WORTH, TX / BENICIA, CA / POMONA, CA
GOODYEAR, AZ / MILTON, ON / ST. ALBERT, AB

TECHNICAL DATA

Properties	PERMINATOR (10 mil)	PERMINATOR (15 Mil)
Water Vapor Permeance ASTM E-96 Perms	0.0183	0.0063
Puncture Resistance ASTM D 1709 Method B Grams	>3500	>3200
Tensile Strength ASTM E 154 Section 9 Lb. Force/Inch (kN/m)	52 (9.12)	72 (12.61)
Water Vapor Permeance After Wetting Out Drying Out and After Long-Term Soaking ASTM E-154 Section 8 ASTM E-96 Procedure B Perms	0.0219	0.0052
Water Vapor Permeance Resistance to Plastic Flow and Elevated Temperature ASTM E-154 Section 11 ASTM E-96 Procedure B Perms	0.0197	0.0057
Water Vapor Permeance Effect Low Temperature and Flexibility ASTM E-154, Section 12 ASTM E-96, Procedure B Perms	0.0212	0.0052
Water Vapor Permeance Resistance to Deterioration From Organisms and Substances in Contacting Soil ASTM E-154, Section 13 ASTM E-96 Procedure B Perms	0.0198	0.0052

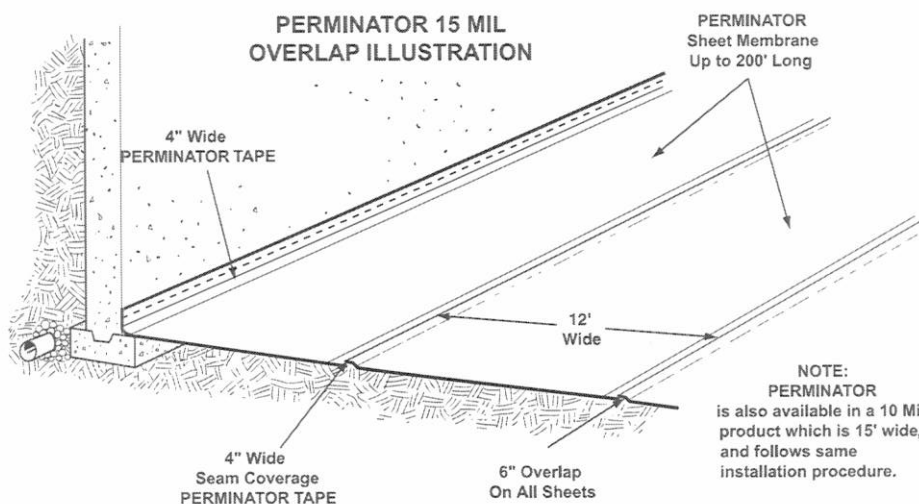

APPLICATION

Surface Preparation ... Level, tamp, or roll earth or granular material beneath the slab base as specified by supplied architectural drawings. Follow ASTM E-1643-10 (standard practice and procedure for installation of vapor retarder used in contact with earth or fill under concrete slabs). Reference American Concrete Institute (ACI) 302.1R-04: Chapter 4, Section 4.1.4 – Base Material for sub-grade preparation prior to placement of PERMINATOR.

Horizontal Application ... Unroll 200' (61 m) PERMINATOR over the area where the slab is to be poured. Cut to size if necessary. PERMINATOR should completely cover the pour area. All joints/seams, both side and end, should be overlapped 6" (152.4 mm) and taped using 4" (101.6 mm) wide PERMINATOR TAPE. (Note: The PERMINATOR TAPE area of adhesion should be free from dust, dirt, and moisture to allow maximum adhesion of the pressure-sensitive tape.)

The most efficient installation method includes placing PERMINATOR on top of the footing and against the vertical wall. This will sandwich PERMINATOR between the footing, vertical wall, and poured concrete floor. (See illustration on page 2.) This will help protect the concrete slab from external moisture sources once the slab has been placed.

Before placing concrete slab, make sure all penetrations, block outs, and damaged areas are repaired/addressed.

Numerous municipal building codes do not allow the placement of vapor barriers over the footing, due to breaking of the bond between the wall and footing. Although this is not an optimal application method, W. R. MEADOWS approves this alternate method when required by building code.

Seal All Protrusions ... Cut a slit around pipes, ductwork, rebar, and wire penetrations to place the initial layer of PERMINATOR. To further protect the concrete slab from external moisture sources, use a piece of PERMINATOR and place a collar around this as well.

1. Cut a piece of PERMINATOR a minimum width of 12" (304.8 mm). The length should be 1.5 times the pipe circumference. With a roofer's knife or scissors, cut "fingers" half the width of the film. See Figure 1.
2. Wrap around and tape the collar onto the pipe and completely tape fingers to the bottom layer of PERMINATOR, as shown in Figure 2.

In the event that PERMINATOR is damaged during or after installation, repairs must be made. Cut a piece of PERMINATOR large enough to cover any damage by a minimum overlap of 6" (152.4 mm) in all directions. Clean all adhesion areas of dust, dirt, and moisture. Tape down all edges using PERMINATOR TAPE.

NOTE: It is not necessary to overlay PERMINATOR with gravel or sand. PERMINATOR is tough enough to withstand normal construction abuse and traffic. Most flooring companies recommend the placement of the concrete slab directly on the vapor barrier. We agree, since this eliminates the potential for trapping moisture in a blotter-effect, causing it to resurface through the slab into the flooring systems. Consult local building codes and regulations, plus architectural and design firm guidelines, prior to application.

Figure 1 COLLAR


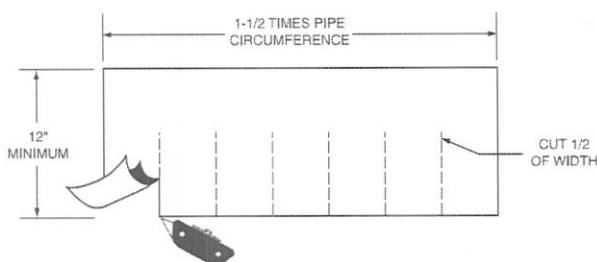


Figure 2: COLLAR INSTALLATION

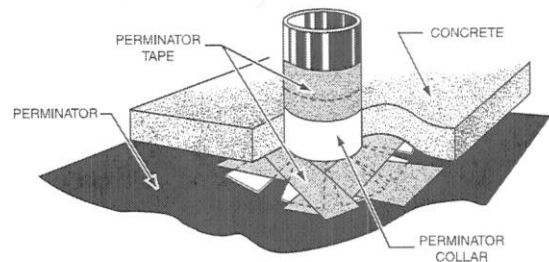

Vertical Wall Application ... Install MEL-ROL® waterproofing membrane or MEL-ROL LM liquid waterproofing membrane from W. R. MEADOWS according to installation instructions. While the membrane is still tacky, install PERMINATOR as a protective course over the applied waterproofing membrane. Using TERMINATION BAR with concrete nails or PERMINATOR TAPE at the termination of the waterproofing membrane is advisable in some applications. Supervised care must be taken during backfilling against the material so that it is not damaged or punctured. If damage occurs, patch using the techniques outlined previously. When applying PERMINATOR TAPE to foundation walls, MEL-PRIME™ adhesive from W. R. MEADOWS may be used to increase bond.

ACCESSORIES

MEL-DRAIN™ rolled matrix drainage system is designed to remove moisture from around footings and to relieve hydrostatic head pressures. Eight versions are available.

MEL-ROL LM or POINTING MASTIC may be used for stakes, small pipe, and rebar penetrations. Cut PERMINATOR just big enough for the penetration. Liberally apply MEL-ROL LM or POINTING MASTIC around the penetration to keep the integrity of the PERMINATOR membrane intact. MEL-ROL LM can be applied by brush, roller, or sprayer. POINTING MASTIC can be applied by caulking gun or trowel.

PERMINATOR TAPE is a self-adhesive tape for use in sealing vapor barrier seams and attachment to footings, protrusions, etc. It is offered in 4" (10 cm) widths and roll lengths of 180' (55 m)/roll. It is packaged twelve rolls per carton. Coverage: One box of tape will adhere approximately 10 rolls of PERMINATOR.

TERMINATION BAR is provided in 10' (3 m) lengths to attach PERMINATOR to walls as a protection course for vertical surface waterproofing applications.

PRECAUTIONS

PERMINATOR underslab vapor barrier does not negate the need for relief of hydrostatic heads. A complete drain tile system should be placed on the exterior of the footing and, in severe cases, on the interior of the footing as well. For maximum concrete performance and durability, the concrete floor slab design should provide for the lowest possible slump, yet assure complete hydration of the concrete. Refer to Safety Data Sheet for complete health and safety information.

LEED INFORMATION

May help contribute to LEED credits:

- EA Credit 1: Optimize Energy Performance
- IEQ Credit 3.1: Construction Indoor Air Quality Management Plan: During Construction
- IEQ Credit 7.1: Thermal Comfort - Design
- MR Credit 2: Construction Waste Management
- MR Credit 5: Regional Materials
- SS Credit 3: Brownfield Redevelopment



LIMITED WARRANTY

W. R. MEADOWS, INC. warrants at the time and place we make shipment, our material will be of good quality and will conform with our published specifications in force on the date of acceptance of the order. Read complete warranty. Copy furnished upon request.

Disclaimer

The information contained herein is included for illustrative purposes only, and to the best of our knowledge, is accurate and reliable. W. R. MEADOWS, INC. cannot however under any circumstances make any guarantee of results or assume any obligation or liability in connection with the use of this information. As W. R. MEADOWS, INC. has no control over the use to which others may put its product, it is recommended that the products be tested to determine if suitable for specific application and/or our information is valid in a particular circumstance. Responsibility remains with the architect or engineer, contractor and owner for the design, application and proper installation of each product. Specifier and user shall determine the suitability of products for specific application and assume all responsibilities in connection therewith.