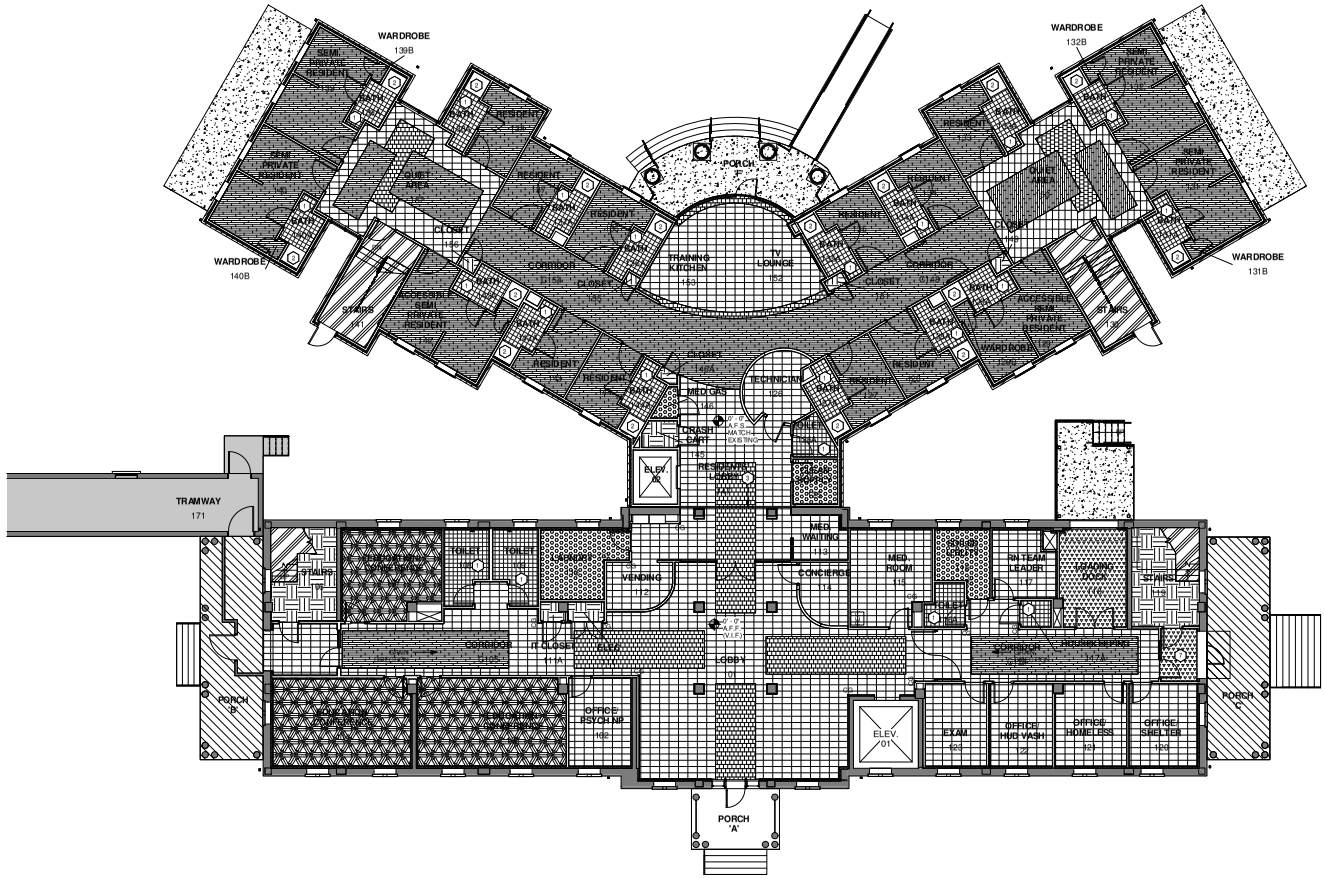

1 FIRST FLOOR - FINISH FLOOR PLAN
SCALE: 1/8" = 1'-0"

N

GENERAL SHEET NOTES

1. CONTRACTOR SHALL REMOVE EXISTING FLOORING MATERIALS ENTIRELY AND PREPARE CONCRETE FLOORS AS SPECIFIED FOR INSTALLATION OF NEW FLOORING MATERIALS AS SCHEDULED.
2. CONTRACTOR SHALL INSTALL NEW FLOORING IN PATTERNS INDICATED TO THE GREATEST EXTENT POSSIBLE. PATTERN DEVIATIONS SHALL BE APPROVED BY THE C.O.R. PRIOR TO INSTALLATION.
3. TERMINATE OR TRANSITION DISSIMILAR FLOORING MATERIALS AT THE CENTERLINE OF DOORS.
4. PROVIDE A FLUSH TRANSITION BETWEEN FLOORING MATERIALS OF VARYING HEIGHTS. PROVIDE TRANSITION STRIPS AS INDICATED ON MATERIAL SCHEDULE.
5. INSTALL NEW DOOR STOPS
6. FLOORING TO RUN CONTINUOUSLY BENEATH ALL CASEWORK.
7. DIFFERENT FLOOR MATERIALS ADJACENT TO EACH OTHER ARE TO BE FLUSH. FEATHER AND ALIGN AS REQUIRED.
8. PROVIDE SLOPE TO FLOOR DRAINS, TYPICAL AT ALL TOILET ROOMS.
9. TRANSITION STRIPS TO BE PROVIDED AT JOINT OF DIFFERING MATERIALS
10. LOCATE ALL FLOORING TRANSITIONS UNDER DOORS
11. PROVIDE 3/4" MIN. SLAB DEPRESSION AT SHOWERS. RE: STRUCTURAL
12. CONTRACTOR TO VERIFY FLOORS TO BE TRUE AND LEVEL WITH SPOT ELEVATIONS.

SHEET KEY NOTES

1. WATERPROOF MEMBRANE TO BE INSTALLED, INCLUDING SHOWER AREAS, REF SHEETS 1-AS-505 & 1-AS-506
2. 36" x 36" SOLID SURFACE SHOWER PAN
3. PROVIDE EXPANSION JOINT, RE: 21-AS-503
4. 48" x 48" ADA SOLID SURFACE SHOWER PAN
5. CRAWL SPACE
6. ELEVATOR PIT WITH SUMP PIT (SUMP PUMP N.I.C.)
7. FLRCTNG

GRAPHIC LEGEND

AREA IN CONTRACT

AREA NOT IN CONTRACT

NF — NO FINISH

FLOOR FINISH

LVT-1

LVT-2

LVT-3

VCT-1

CPT-1

PCT-1

RBRF

EXPOSED CONCRETE

SV-1

EXISTING TO REMAIN

0' - 0" FLOOR ELEVATION

FLRCTNG

BUILDING IS FULLY SPRINKLERED

Revisions:	Date

13 MAR. 2015

CONSULTANTS:

Terracon — Consulting Engineers & Scientists

Peaks to Plains Design

GreatWest engineering

H2B, INC. — Texas Firm Registration No. 8856 — 1225 N Loop W, Suite 900 HOUSTON, TX 77008 713.864.2900

SSR Smith Seckman Reid, Inc. — 7900 East Pinnacle Avenue, Suite 100-E Greenwood Village, CO 80111 (303) 770-1225 FAX: (303) 694-9144 www.ssr-inc.com

ARCHITECT/ENGINEERS:

COX DESIGN ASSOCIATES

ARCHITECTURE PLANNING INTERIORS

Austin
5121 Bee Caves Road, Suite 203
Austin, Texas 78746
T: 512 - 327 - 4149
F: 512 - 327 - 7679
coxdesign@austin.rr.com

Chicago
345 N. Canal St. Suite 701
Chicago, IL 60605
T: 312 - 698 - 3880
F: 312 - 454 - 9439
bcox@coxltd.com

Approved: Chief of MH	Approved: Chief of RMS
Date:	Date:
Approved: Director	Approved: Assoc. Director
Date:	Date:

Drawing Title: FIRST FLOOR - FLOOR FINISH PLAN

Project Name: EXPAND DOMICILIARY BUILDING 64

Project Number: 666-309

Date: 13 MAR. 2015

Location: VAMC SHERIDAN WY
1898 FORT ROAD
SHERIDAN, WY 82801

Building Number: 64 | Checked: RHC | Drawn: MAG

Drawing Number: 1-AS-121

Dwg. of

Office of Construction and Facilities Management

VA FORM 08-6231

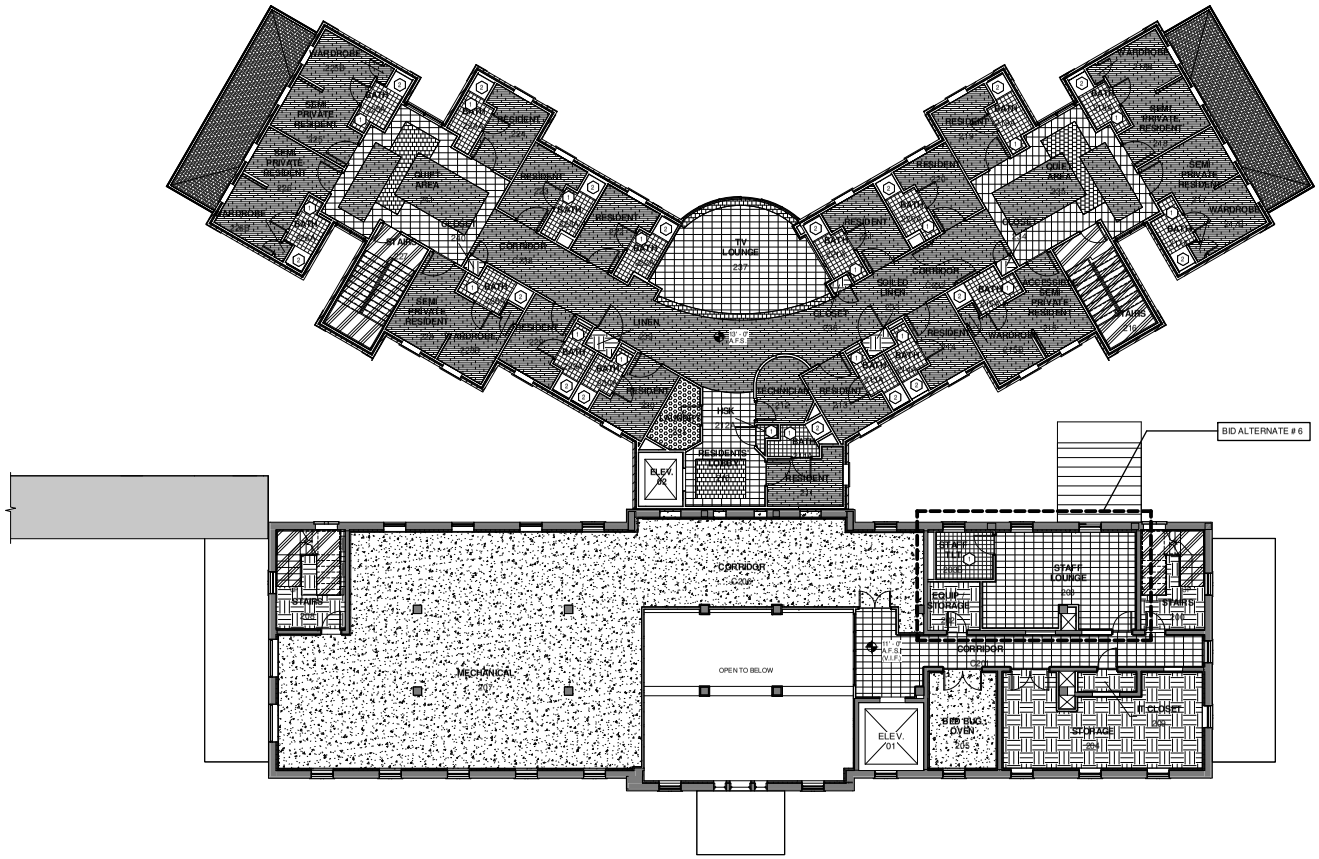

1 SECOND FLOOR - FINISH FLOOR PLAN
SCALE: 1/8" = 1'-0"

N

GENERAL SHEET NOTES

1. CONTRACTOR SHALL REMOVE EXISTING FLOORING MATERIALS ENTIRELY AND PREPARE CONCRETE FLOORS AS SPECIFIED FOR INSTALLATION OF NEW FLOORING MATERIALS AS SCHEDULED.
2. CONTRACTOR SHALL INSTALL NEW FLOORING IN PATTERNS INDICATED TO THE GREATEST EXTENT POSSIBLE. PATTERN DEVIATIONS SHALL BE APPROVED BY THE C.O.R. PRIOR TO INSTALLATION.
3. TERMINATE OR TRANSITION DISSIMILAR FLOORING MATERIALS AT THE CENTERLINE OF DOORS.
4. PROVIDE A FLUSH TRANSITION BETWEEN FLOORING MATERIALS OF VARYING HEIGHTS. PROVIDE TRANSITION STRIPS AS INDICATED ON MATERIAL SCHEDULE.
5. INSTALL NEW DOOR STOPS
6. FLOORING TO RUN CONTINUOUSLY BENEATH ALL CASEWORK.
7. DIFFERENT FLOOR MATERIALS ADJACENT TO EACH OTHER ARE TO BE FLUSH. FEATHER AND ALIGN AS REQUIRED.
8. PROVIDE SLOPE TO FLOOR DRAINS, TYPICAL AT ALL TOILET ROOMS.
9. TRANSITION STRIPS TO BE PROVIDED AT JOINT OF DIFFERING MATERIALS
10. LOCATE ALL FLOORING TRANSITIONS UNDER DOORS
11. PROVIDE 3/4" MIN. SLAB DEPRESSION AT SHOWERS, RE: STRUCTURAL
12. CONTRACTOR TO VERIFY FLOORS TO BE TRUE AND LEVEL WITH SPOT ELEVATIONS.

SHEET KEY NOTES

1. WATERPROOF MEMBRANE TO BE INSTALLED, INCLUDING SHOWER AREAS, REF SHEETS 1-AS-505 & 1-AS-506
2. 36" x 36" SOLID SURFACE SHOWER PAN
3. PROVIDE EXPANSION JOINT, RE: 2/1-AS-503
4. 48" x 48" ADA SOLID SURFACE SHOWER PAN
5. CRAWL SPACE
6. ELEVATOR PIT WITH SUMP PIT (SUMP PUMP N.I.C.)

GRAPHIC LEGEND

AREA IN CONTRACT
AREA NOT IN CONTRACT
NF NO FINISH

FLOOR FINISH

LVT-1
LVT-2
LVT-3
VCT-1
CPT-1
PCT-1
RB/RF
EXPOSED CONCRETE
SV-1
EXISTING TO REMAIN
0' - 0" FLOOR ELEVATION

BUILDING IS FULLY SPRINKLERED

Revisions:	Date

13 MAR. 2015

CONSULTANTS:

Terracon Consulting Engineers & Scientists
Peaks to Plains Design
GreatWest engineering
H2B, INC. Texas Firm Registration No. 8856 1225 N Loop W, Suite 900 HOUSTON, TX 77008 713.864.2900
SSR Smith Seckman Reid, Inc. 7900 East Pontiac Avenue, Suite 110-E Greenwood Village, CO 80111 (303) 779-1222 FAX: (303) 694-9144 www.ssr-inc.com

ARCHITECT/ENGINEERS:

COX DESIGN ASSOCIATES

ARCHITECTURE PLANNING INTERIORS

Austin
5121 Bee Caves Road, Suite 203
Austin, Texas 78746
T: 512 - 327 - 4149
F: 512 - 327 - 7679
coxdesign@austin.rr.com

Chicago
345 N. Canal St. Suite 701
Chicago, IL 60605
T: 312 - 698 - 3880
F: 312 - 454 - 9439
bcox@coxltd.com

Approved: Chief of MH	Approved: Chief of RMS
Date:	Date:
Approved: Director	Approved: Assoc. Director
Date:	Date:

Drawing Title: SECOND FLOOR - FINISH FLOOR PLAN

Project Name: EXPAND DOMICILIARY BUILDING 64

Location: VAMC SHERIDAN WY 1898 FORT ROAD SHERIDAN, WY 82801

Building Number	Checked	Drawn
64	RHC	MAG

Project Number: 666-309
Date: 13 MAR. 2015
Drawing Number: 1-AS-122
Dwg. of

Office of Construction and Facilities Management

VA FORM 08-6231

GENERAL SHEET NOTES

1. CONTRACTOR SHALL REMOVE EXISTING FLOORING MATERIALS ENTIRELY AND PREPARE CONCRETE FLOORS AS SPECIFIED FOR INSTALLATION OF NEW FLOORING MATERIALS AS SCHEDULED.
2. CONTRACTOR SHALL INSTALL NEW FLOORING IN PATTERNS INDICATED TO THE GREATEST EXTENT POSSIBLE. PATTERN DEVIATIONS SHALL BE APPROVED BY THE C.O.R. PRIOR TO INSTALLATION.
3. TERMINATE OR TRANSITION DISSIMILAR FLOORING MATERIALS AT THE CENTERLINE OF DOORS.
4. PROVIDE A FLUSH TRANSITION BETWEEN FLOORING MATERIALS OF VARYING HEIGHTS. PROVIDE TRANSITION STRIPS AS INDICATED ON MATERIAL SCHEDULE.
5. INSTALL NEW DOOR STOPS
6. FLOORING TO RUN CONTINUOUSLY BENEATH ALL CASEWORK.
7. DIFFERENT FLOOR MATERIALS ADJACENT TO EACH OTHER ARE TO BE FLUSH. FEATHER AND ALIGN AS REQUIRED.
8. PROVIDE SLOPE TO FLOOR DRAINS, TYPICAL AT ALL TOILET ROOMS.
9. TRANSITION STRIPS TO BE PROVIDED AT JOINT OF DIFFERING MATERIALS
10. LOCATE ALL FLOORING TRANSITIONS UNDER DOORS
11. PROVIDE 3/4" MIN. SLAB DEPRESSION AT SHOWERS. RE: STRUCTURAL
12. CONTRACTOR TO VERIFY FLOORS TO BE TRUE AND LEVEL WITH SPOT ELEVATIONS.

SHEET KEY NOTES

1. WATERPROOF MEMBRANE TO BE INSTALLED, INCLUDING SHOWER AREAS, REF SHEETS 1-AS-505 & 1-AS-506
2. 36" x 36" SOLID SURFACE SHOWER PAN
3. PROVIDE EXPANSION JOINT, RE: 2/1-AS-503
4. 48" x 48" ADA SOLID SURFACE SHOWER PAN
5. CRAWL SPACE
6. ELEVATOR PIT WITH SUMP PIT (SUMP PUMP N.I.C.)

GRAPHIC LEGEND

AREA IN CONTRACT

AREA NOT IN CONTRACT

NF NO FINISH

FLOOR FINISH

LVT-1

LVT-2

LVT-3

VCT-1

CPT-1

PCT-1

RBR/F

EXPOSED CONCRETE

SV-1

EXISTING TO REMAIN

0' - 0" FLOOR ELEVATION

BUILDING IS FULLY SPRINKLERED

BID ALTERNATE #4

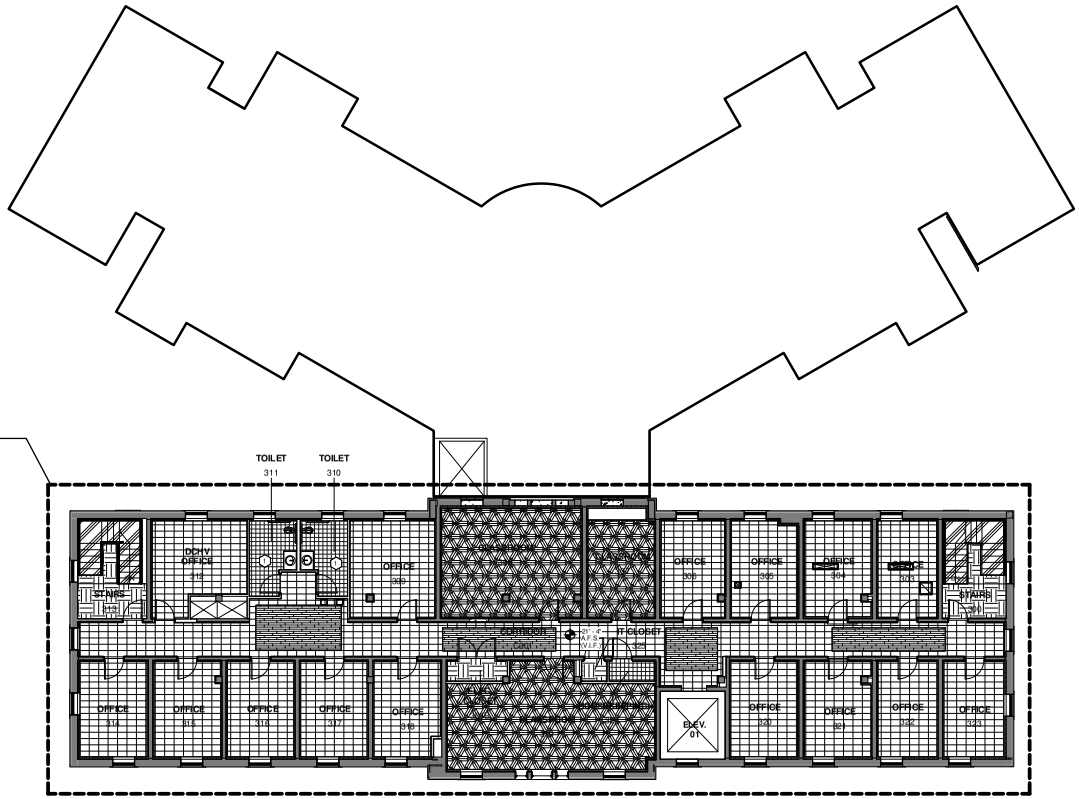

1 THIRD FLOOR - FINISH FLOOR PLAN
SCALE: 1/8" = 1'-0"

N

Revisions:	Date

13 MAR. 2015

CONSULTANTS:

Terracon Consulting Engineers & Scientists

Peaks to Plains Design

GreatWest engineering

H2B, INC. Texas Firm Registration No. 8856 1225 N Loop W, Suite 900 HOUSTON, TX 77008 713.864.2900

SSR Smith Seckman Reid, Inc. 7900 East Pontiac Avenue, Suite 110-C Greenwood Village, CO 80111 (303) 770-1222 FAX: (303) 694-9144 www.ssr-inc.com

ARCHITECT/ENGINEERS:

COX DESIGN ASSOCIATES

ARCHITECTURE PLANNING INTERIORS

Austin
5121 Bee Caves Road, Suite 203
Austin, Texas 78746
T: 512 - 327 - 4149
F: 512 - 327 - 7679
coxdesign@austin.rr.com

Chicago
345 N. Canal St. Suite 701
Chicago, IL 60605
T: 312 - 698 - 3880
F: 312 - 454 - 9439
bcox@coxltd.com

Approved: Chief of MH	Approved: Chief of RMS
Date:	Date:
Approved: Director	Approved: Assoc. Director
Date:	Date:

Drawing Title: THIRD FLOOR - FLOOR FINSH PLAN

Project Name: EXPAND DOMICILIARY BUILDING 64

Location: VAMC SHERIDAN WY 1898 FORT ROAD SHERIDAN, WY 82801

Building Number: 64 | Checked: RHC | Drawn: MAG

Project Number: 666-309

Date: 13 MAR. 2015

Drawing Number: 1-AS-123

Dwg. of

Office of Construction and Facilities Management

VA FORM 08-6231

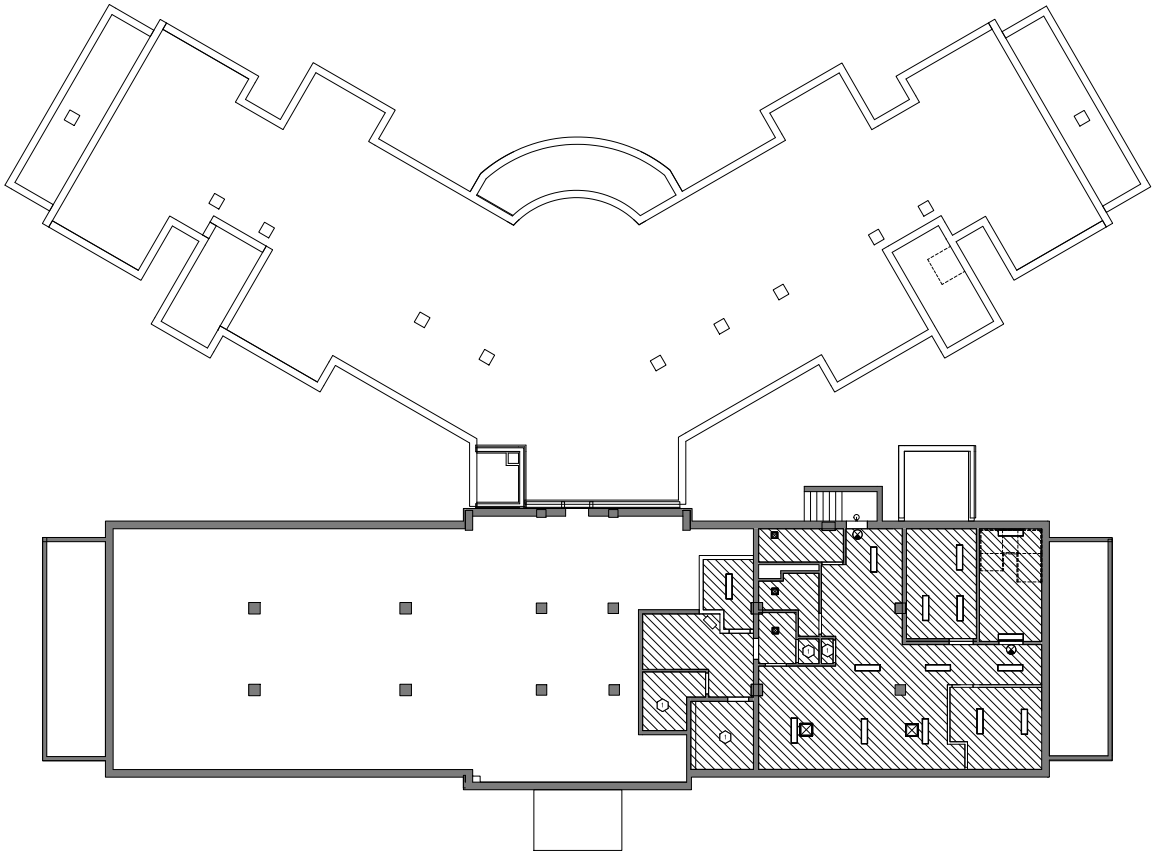

1 **BASEMENT REFLECTED CEILING PLAN**
SCALE: 1/8" = 1'-0"

N

GENERAL SHEET NOTES

1. PERIMETER CEILING TILES SHALL NOT BE LESS THAN 4".
2. LOCATE ALL SPRINKLER HEADS, SMOKE DETECTORS, AUDIO SPEAKERS, HEAT SENSORS, ETC IN THE CENTER OF CEILING TILE (OR IN THE CENTER OF THE RAISED/RECESSED FIELD OF A PATTERNED TILE.)
3. THE FOLLOWING IN DESCENDING ORDER IS THE PRECEDENCE ASSIGNED THE WORK ITEMS FOR SPACE PRIORITY. RECESSED LIGHT FIXTURES AND SPACE FOR THEIR INSTALLATION IS FIRST PRIORITY. HVAC DUCTWORK SECOND PRIORITY, ETC. AN EXCEPTION TO THE PRECEDENCE LISTING WOULD BE THE GRAVITY FLOOR REQUIREMENT FOR PLUMBING WASTE AND ROOF DRAINAGE. ALL ITEMS ARE TO BE INSTALLED TIGHT TO STRUCTURE OR THE WORK ITEMS ABOVE.
   - RECESSED LIGHT FIXTURES
   - DUCTWORK AND APPURTENANCES
   - MEDICAL GASES
   - PLUMBING WASTE AND ROOF DRAINAGE
   - HVAC PIPING
   - PLUMBING VENT AND SUPPLY PIPING
   - ELECTRICAL CONDUIT
   - FIRE PROTECTION SPRINKLER PIPING
4. ALL CEILINGS HEIGHTS AT 9' - 0" A.F.F. UNLESS NOTED OTHERWISE
5. SPRINKLER HEADS ARE TO BE LOCATED PER CERTIFIED INSTALLER, CENTERED IN CEILING TILE, AND RECESSED.
6. U.N.O., CEILINGS IN THE MECHANICAL AND ELECTRICAL ROOMS ARE EXPOSED TO THE FLOOR DECK ABOVE.
7. NOT ALL ACCESS PANELS ARE SHOWN, COORDINATE AND PROVIDE ADDITIONAL ACCESS PANELS AS REQUIRED BY EACH TRADE AT NO ADDITIONAL COST TO THE GOVERNMENT.
8. CONTRACTOR TO PROVIDE ALL REQUIRED CEILING ASSEMBLIES.
9. CONTRACTOR TO PROVIDE ACOUSTICAL PLASTER AT GYP BOARD CEILINGS.

SHEET KEY NOTES

1. EXISTING ROOM TO REMAIN AS IS
2. RELOCATED LIGHTING FIXTURE, R.E. ELEC.
3. HEATER, R.E. M.E.P.

GRAPHIC LEGEND

- 2' - 0" x 2' - 0" SUSPENDED WOOD PANEL SYSTEM
- 2' - 0" x 4' - 0" SUSPENDED EXPOSED GRID ACOUSTIC CEILING TILE
- 2' - 0" x 2' - 0" SUSPENDED EXPOSED GRID ACOUSTIC CEILING TILE
- 2' - 0" x 4' - 0" SUSPENDED WOOD PANEL SYSTEM
- EXPOSED TO STRUCTURE ABOVE
- EXISTING WOOD CEILING AT BLDG 64 PORTICOS
- PREFAB METAL SOFFIT
- NEW GWB CEILING OR BULKHEAD, SEE FINISH SCHEDULE FOR FINISH
- 2' X 4' LUMINAIRE
- 2' X 2' LUMINAIRE
- 6" X 12" LUMINAIRE
- 12" X 4' LUMINAIRE
- DOWNLIGHT
- DIRECTIONAL WALLWASH
- SUPPLY GRILLE
- RETURN GRILLE
- OCCUPANCY SENSOR
- CEILING ACCESS PANEL
- WALL MOUNTED LIGHT FIXTURE
- SURFACE MOUNTED LIGHT FIXTURE
- 48" X 4' LINEAR DIFFUSER
- EXHAUST GRILLE
- EXHAUST GRILLE
- SD SMOKE DETECTOR
- SP SPEAKER
- CEILING PLAN NOTE
- +8'-0" A.F.F CEILING HEIGHT, ABOVE FINISHED FLOOR
- COVE STRIP LIGHT
- PENDANT LIGHT FIXTURE
- DOUBLE SIDED EXIT SIGNAGE CEILING MOUNTED
- SINGLE SIDED EXIT SIGNAGE CEILING MOUNTED

BUILDING IS FULLY SPRINKLERED

Revisions:	Date

13 MAR. 2015

CONSULTANTS:

Terracon Consulting Engineers & Scientists | Peaks to Plains Design | GreatWest engineering | H2B, INC. Texas Firm Registration No. 8856, 1225 N Loop W, Suite 900, HOUSTON, TX 77008, 713.864.2900 | SSR Smith Seckman Reid, Inc. 7900 East Pontiac Avenue, Suite 110-E, Greenwood Village, CO 80111, (303) 770-1222, FAX: (303) 694-9144, www.ssr-inc.com

ARCHITECT/ENGINEERS:

COX DESIGN ASSOCIATES

ARCHITECTURE PLANNING INTERIORS

Austin
5121 Bee Caves Road, Suite 203
Austin, Texas 78746
T: 512 - 327 - 4149
F: 512 - 327 - 7679
coxdesign@austin.rr.com

Chicago
345 N. Canal St. Suite 701
Chicago, IL 60605
T: 312 - 698 - 3880
F: 312 - 454 - 9439
bcox@coxltd.com

Approved: Chief of MH	Approved: Chief of RMS
Date:	Date:
Approved: Director	Approved: Assoc. Director
Date:	Date:

Drawing Title: **BASEMENT FLOOR - REFLECTED CEILING PLAN**

Project Name: **EXPAND DOMICILIARY BUILDING 64**

Location: **VAMC SHERIDAN WY 1898 FORT ROAD SHERIDAN, WY 82801**

Building Number	Checked	Drawn
64	RHC	MAG

Project Number: **666-309**

Date: 13 MAR. 2015

Drawing Number: **1-AS-130**

Dwg. of

Office of Construction and Facilities Management

VA FORM 08-6231

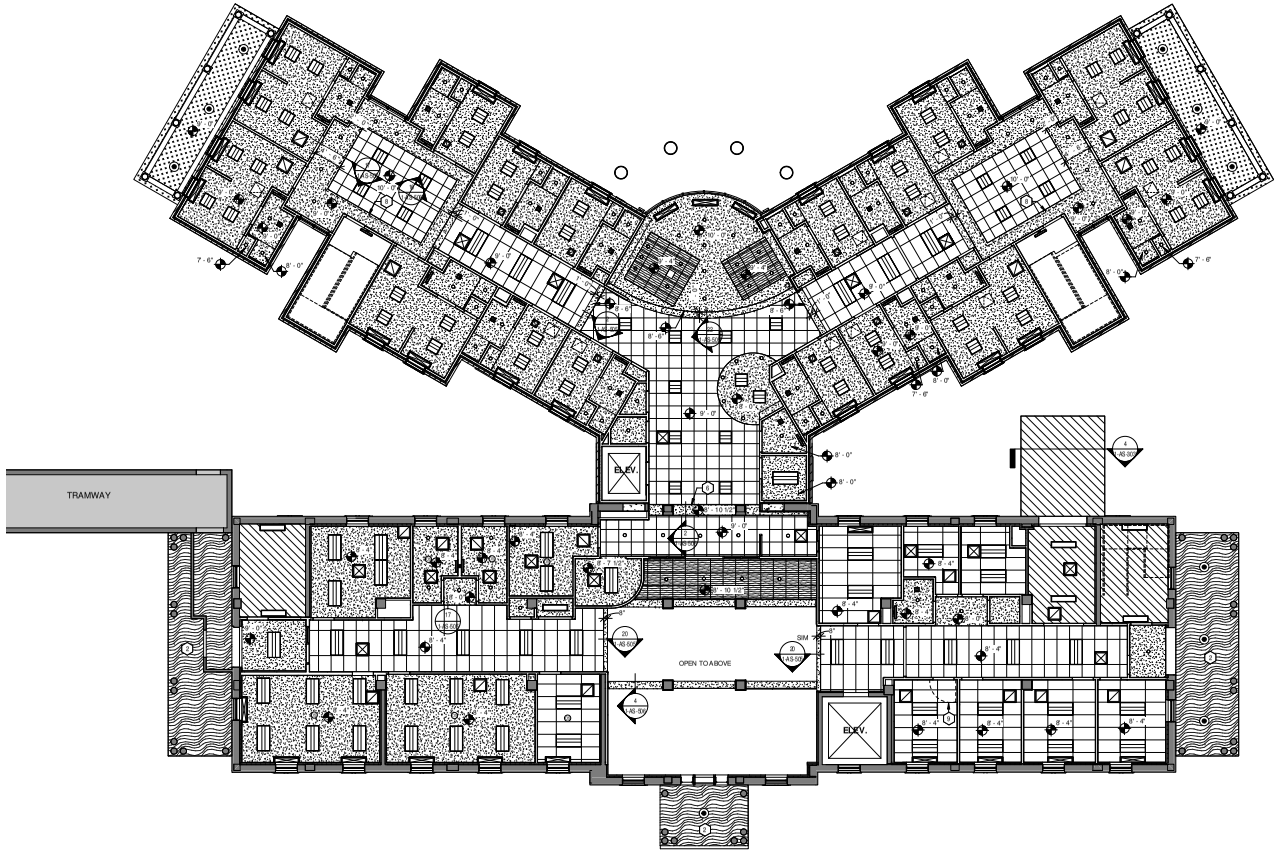

1 FIRST FLOOR REFLECTED CEILING PLAN
SCALE: 1/8" = 1'-0"

N

GENERAL SHEET NOTES

1. PERIMETER CEILING TILES SHALL NOT BE LESS THAN 4".
2. LOCATE ALL SPRINKLER HEADS, SMOKE DETECTORS, AUDIO SPEAKERS, HEAT SENSORS, ETC IN THE CENTER OF CEILING TILE (OR IN THE CENTER OF THE RAISED/RECESSED FIELD OF A PATTERNED TILE.)
3. THE FOLLOWING IN DESCENDING ORDER IS THE PRECEDENCE ASSIGNED THE WORK ITEMS FOR SPACE PRIORITY. RECESSED LIGHT FIXTURES AND SPACE FOR THEIR INSTALLATION IS FIRST PRIORITY. HVAC DUCTWORK SECOND PRIORITY, ETC. AN EXCEPTION TO THE PRECEDENCE LISTING WOULD BE THE GRAVITY FLOOR REQUIREMENT FOR PLUMBING WASTE AND ROOF DRAINAGE. ALL ITEMS ARE TO BE INSTALLED TIGHT TO STRUCTURE OR THE WORK ITEMS ABOVE.
   - RECESSED LIGHT FIXTURES
   - DUCTWORK AND APPURTENANCES
   - MEDICAL GASES
   - PLUMBING WASTE AND ROOF DRAINAGE
   - HVAC PIPING
   - PLUMBING VENT AND SUPPLY PIPING
   - ELECTRICAL CONDUIT
   - FIRE PROTECTION SPRINKLER PIPING
4. ALL CEILINGS HEIGHTS AT 9' - 0" A.F.F. UNLESS NOTED OTHERWISE
5. SPRINKLER HEADS ARE TO BE LOCATED PER CERTIFIED INSTALLER, CENTERED IN CEILING TILE, AND RECESSED.
6. U.N.O., CEILINGS IN THE MECHANICAL AND ELECTRICAL ROOMS ARE EXPOSED TO THE FLOOR DECK ABOVE.
7. NOT ALL ACCESS PANELS ARE SHOWN. COORDINATE AND PROVIDE ADDITIONAL ACCESS PANELS AS REQUIRED BY EACH TRADE AT NO ADDITIONAL COST TO THE GOVERNMENT.
8. CONTRACTOR TO PROVIDE ALL REQUIRED CEILING ASSEMBLIES.
9. CONTRACTOR TO PROVIDE ACOUSTICAL PLASTER AT GYP BOARD CEILINGS.

SHEET KEY NOTES

1. OPEN TO ABOVE
2. REPAIR AND PAINT EXISTING WOOD CEILING
3. ATTIC ACCESS ABOVE
4. CEILING ASSEMBLY TO MAINTAIN 1 HR SMOKE BARRIER
5. CEILING ASSEMBLY TO MAINTAIN 1 HR FIRE BARRIER AT STAIRS
6. CEILING EXPANSION JOINT
7. NEW ATTIC ACCESS HATCH. MAINTAIN CEILING ASSEMBLY RATING.
8. PERIMETER COVE LIGHTING, RE: ELECT DWGS
9. CEILING MOUNTED PRIVACY CURTAIN RAIL

GRAPHIC LEGEND

- 2'-0" x 2'-0" SUSPENDED WOOD PANEL SYSTEM
- 2'-0" x 4'-0" SUSPENDED EXPOSED GRID ACOUSTIC CEILING TILE
- 2'-0" x 2'-0" SUSPENDED EXPOSED GRID ACOUSTIC CEILING TILE
- 2'-0" x 4'-0" SUSPENDED WOOD PANEL SYSTEM
- EXPOSED TO STRUCTURE ABOVE
- EXISTING WOOD CEILING AT BLDG 64 PORTICOS
- PREFAB METAL SOFFIT
- NEW GWB CEILING OR BULKHEAD. SEE FINISH SCHEDULE FOR FINISH
- 2' X 4' LUMINAIRE
- 2' X 2' LUMINAIRE
- 6" X 12" LUMINAIRE
- 12" X 4' LUMINAIRE
- DOWNLIGHT
- DIRECTIONAL WALLWASH
- SUPPLY GRILLE
- RETURN GRILLE
- OCCUPANCY SENSOR
- CEILING ACCESS PANEL
- WALL MOUNTED LIGHT FIXTURE
- SURFACE MOUNTED LIGHT FIXTURE
- 48" X 4" LINEAR DIFFUSER
- EXHAUST GRILLE
- EXHAUST GRILLE
- SD SMOKE DETECTOR
- SP SPEAKER
- CEILING PLAN NOTE
- +8'-0" A.F.F CEILING HEIGHT, ABOVE FINISHED FLOOR
- COVE STRIP LIGHT
- PENDANT LIGHT FIXTURE
- DOUBLE SIDED EXIT SIGNAGE CEILING MOUNTED
- SINGLE SIDED EXIT SIGNAGE CEILING MOUNTED

BUILDING IS FULLY SPRINKLERED

Revisions:	Date

13 MAR. 2015

CONSULTANTS:

Terracon Consulting Engineers & Scientists
Peaks to Plains Design
GreatWest engineering
H2B, INC. Texas Firm Registration No. 8856 1225 N Loop W, Suite 900 HOUSTON, TX 77008 713.864.2900
SSR Smith Seckman Reid, Inc. 7900 East Pontiac Avenue, Suite 110-E Greenwood Village, CO 80111 (303) 770-1225 FAX: (303) 694-9144 www.ssr-inc.com

ARCHITECT/ENGINEERS:

COX DESIGN ASSOCIATES

ARCHITECTURE PLANNING INTERIORS

Austin
5121 Bee Caves Road, Suite 203
Austin, Texas 78746
T: 512 - 327 - 4149
F: 512 - 327 - 7679
coxdesign@austin.rr.com

Chicago
345 N. Canal St. Suite 701
Chicago, IL 60605
T: 312 - 698 - 3880
F: 312 - 454 - 9439
bcox@coxltd.com

Approved: Chief of MH	Approved: Chief of FMS
Date:	Date:
Approved: Director	Approved: Assoc. Director
Date:	Date:

Drawing Title: FIRST FLOOR - REFLECTED CEILING PLAN

Project Name: EXPAND DOMICILIARY BUILDING 64

Location: VAMC SHERIDAN WY 1898 FORT ROAD SHERIDAN, WY 82801

Building Number	Checked	Drawn
64	RHC	MAG

Project Number: 666-309

Date: 13 MAR. 2015

Drawing Number: 1-AS-131

Dwg. of

Office of Construction and Facilities Management

VA FORM 08-6231

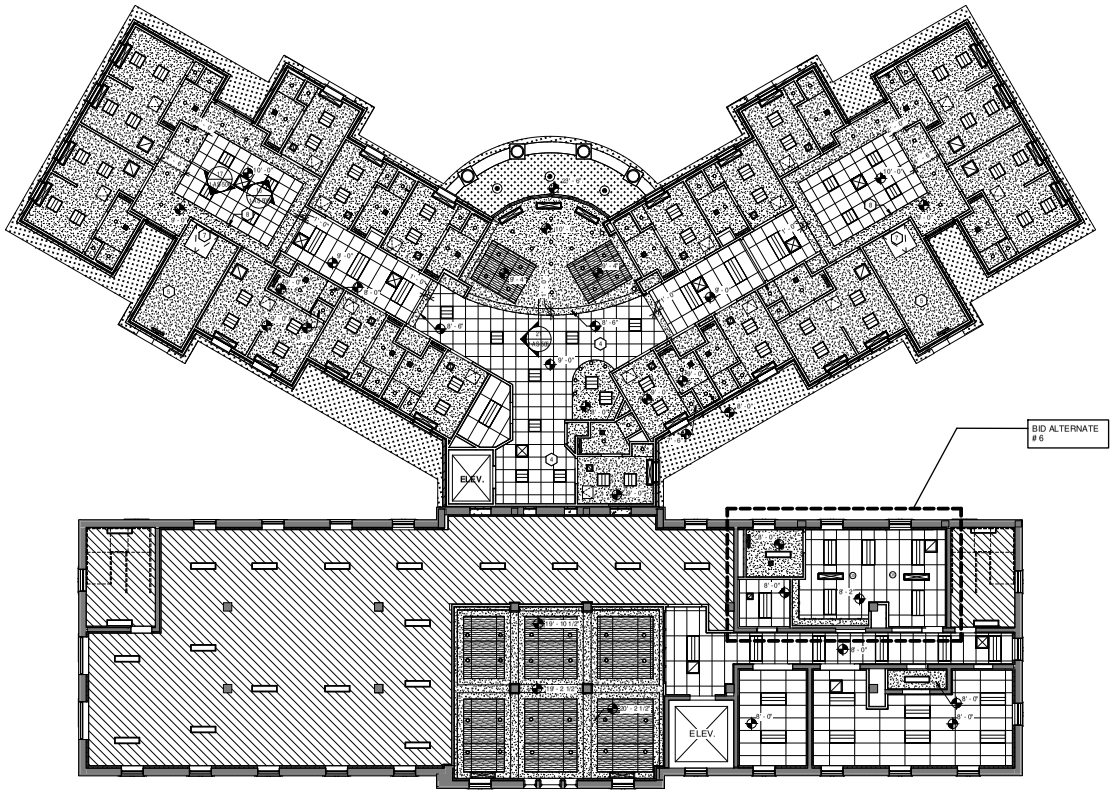

1 SECOND FLOOR REFLECTED CEILING PLAN
SCALE: 1/8" = 1'-0"

N

GENERAL SHEET NOTES

1. PERIMETER CEILING TILES SHALL NOT BE LESS THAN 4'.
2. LOCATE ALL SPRINKLER HEADS, SMOKE DETECTORS, AUDIO SPEAKERS, HEAT SENSORS, ETC IN THE CENTER OF CEILING TILE (OR IN THE CENTER OF THE RAISED/RECESSED FIELD OF A PATTERNED TILE.)
3. THE FOLLOWING IN DESCENDING ORDER IS THE PRECEDENCE ASSIGNED THE WORK ITEMS FOR SPACE PRIORITY. RECESSED LIGHT FIXTURES AND SPACE FOR THEIR INSTALLATION IS FIRST PRIORITY. HVAC DUCTWORK SECOND PRIORITY, ETC. AN EXCEPTION TO THE PRECEDENCE LISTING WOULD BE THE GRAVITY FLOOR REQUIREMENT FOR PLUMBING WASTE AND ROOF DRAINAGE. ALL ITEMS ARE TO BE INSTALLED TIGHT TO STRUCTURE OR THE WORK ITEMS ABOVE.
   - -RECESSED LIGHT FIXTURES
   - -DUCTWORK AND APPURTENANCES
   - -MEDICAL GASES
   - -PLUMBING WASTE AND ROOF DRAINAGE
   - -HVAC PIPING
   - -PLUMBING VENT AND SUPPLY PIPING
   - -ELECTRICAL CONDUIT
   - -FIRE PROTECTION SPRINKLER PIPING
4. ALL CEILINGS HEIGHTS AT 9' - 0" A.F.F. UNLESS NOTED OTHERWISE
5. SPRINKLER HEADS ARE TO BE LOCATED PER CERTIFIED INSTALLER, CENTERED IN CEILING TILE, AND RECESSED.
6. U.N.O., CEILINGS IN THE MECHANICAL AND ELECTRICAL ROOMS ARE EXPOSED TO THE FLOOR DECK ABOVE.
7. NOT ALL ACCESS PANELS ARE SHOWN, COORDINATE AND PROVIDE ADDITIONAL ACCESS PANELS AS REQUIRED BY EACH TRADE AT NO ADDITIONAL COST TO THE GOVERNMENT.
8. CONTRACTOR TO PROVIDE ALL REQUIRED CEILING ASSEMBLIES.
9. CONTRACTOR TO PROVIDE ACOUSTICAL PLASTER AT GYP BOARD CEILINGS.

SHEET KEY NOTES

1. OPEN TO ABOVE
2. REPAIR AND PAINT EXISTING WOOD CEILING
3. ATTIC ACCESS ABOVE
4. CEILING ASSEMBLY TO MAINTAIN 1 HR SMOKE BARRIER
5. CEILING ASSEMBLY TO MAINTAIN 1 HR FIRE BARRIER AT STAIRS
6. CEILING EXPANSION JOINT
7. NEW ATTIC ACCESS HATCH. MAINTAIN CEILING ASSEMBLY RATING.
8. PERIMETER COVE LIGHTING, RE: ELECT DWGS
9. CEILING MOUNTED PRIVACY CURTAIN RAIL

GRAPHIC LEGEND

- 2'-0" x 2'-0" SUSPENDED WOOD PANEL SYSTEM
- 2'-0" x 4'-0" SUSPENDED EXPOSED GRID ACOUSTIC CEILING TILE
- 2'-0" x 2'-0" SUSPENDED EXPOSED GRID ACOUSTIC CEILING TILE
- 2'-0" x 4'-0" SUSPENDED WOOD PANEL SYSTEM
- EXPOSED TO STRUCTURE ABOVE
- EXISTING WOOD CEILING AT BLDG 64 PORTICOS
- PREFAB METAL SOFFIT
- NEW GWB CEILING OR BULKHEAD, SEE FINISH SCHEDULE FOR FINISH
- 2' X 4' LUMINAIRE
- 2' X 2' LUMINAIRE
- 6" X 12" LUMINAIRE
- 12" X 4' LUMINAIRE
- DOWNLIGHT
- DIRECTIONAL WALLWASH
- SUPPLY GRILLE
- RETURN GRILLE
- OCCUPANCY SENSOR
- CEILING ACCESS PANEL
- WALL MOUNTED LIGHT FIXTURE
- SURFACE MOUNTED LIGHT FIXTURE
- 48" X 4" LINEAR DIFFUSER
- EXHAUST GRILLE
- EXHAUST GRILLE
- SD SMOKE DETECTOR
- SP SPEAKER
- CEILING PLAN NOTE
- +8'-0" A.F.F. CEILING HEIGHT, ABOVE FINISHED FLOOR
- COVE STRIP LIGHT
- PENDANT LIGHT FIXTURE
- DOUBLE SIDED EXIT SIGNAGE CEILING MOUNTED
- SINGLE SIDED EXIT SIGNAGE CEILING MOUNTED

BUILDING IS FULLY SPRINKLERED

Revisions:	Date

13 MAR. 2015

CONSULTANTS:

Terracon Consulting Engineers & Scientists · Peaks to Plains Design · GreatWest engineering · H2B, INC. Texas Firm Registration No. 8856, 1225 N Loop W, Suite 900, HOUSTON, TX 77008, 713.864.2900 · SSR Smith Seckman Reid, Inc. 7900 East Pinnacle Avenue, Suite 100-E, Greenwood Village, CO 80111, (303) 770-1222, FAX: (303) 694-9144, www.ssr-inc.com

ARCHITECT/ENGINEERS:

COX DESIGN ASSOCIATES

ARCHITECTURE PLANNING INTERIORS

Austin
5121 Bee Caves Road, Suite 203
Austin, Texas 78746
T:512 - 327 - 4149
F:512 - 327 - 7679
coxdesign@austin.rr.com

Chicago
345 N. Canal St. Suite 701
Chicago, IL 60605
T:312 - 698 - 3880
F:312 - 454 - 9439
bcox@coxltd.com

Approved: Chief of MH	Approved: Chief of RMS
Date:	Date:
Approved: Director	Approved: Assoc. Director
Date:	Date:

Drawing Title: **SECOND FLOOR - REFLECTED CEILING PLAN**

Project Name: **EXPAND DOMICILIARY BUILDING 64**

Location: **VAMC SHERIDAN WY 1898 FORT ROAD SHERIDAN, WY 82801**

Building Number	Checked	Drawn
64	RHC	MAG

Project Number: **666-309**

Date: 13 MAR. 2015

Drawing Number: **1-AS-132**

Dwg. of

Office of Construction and Facilities Management

VA FORM 08-6231

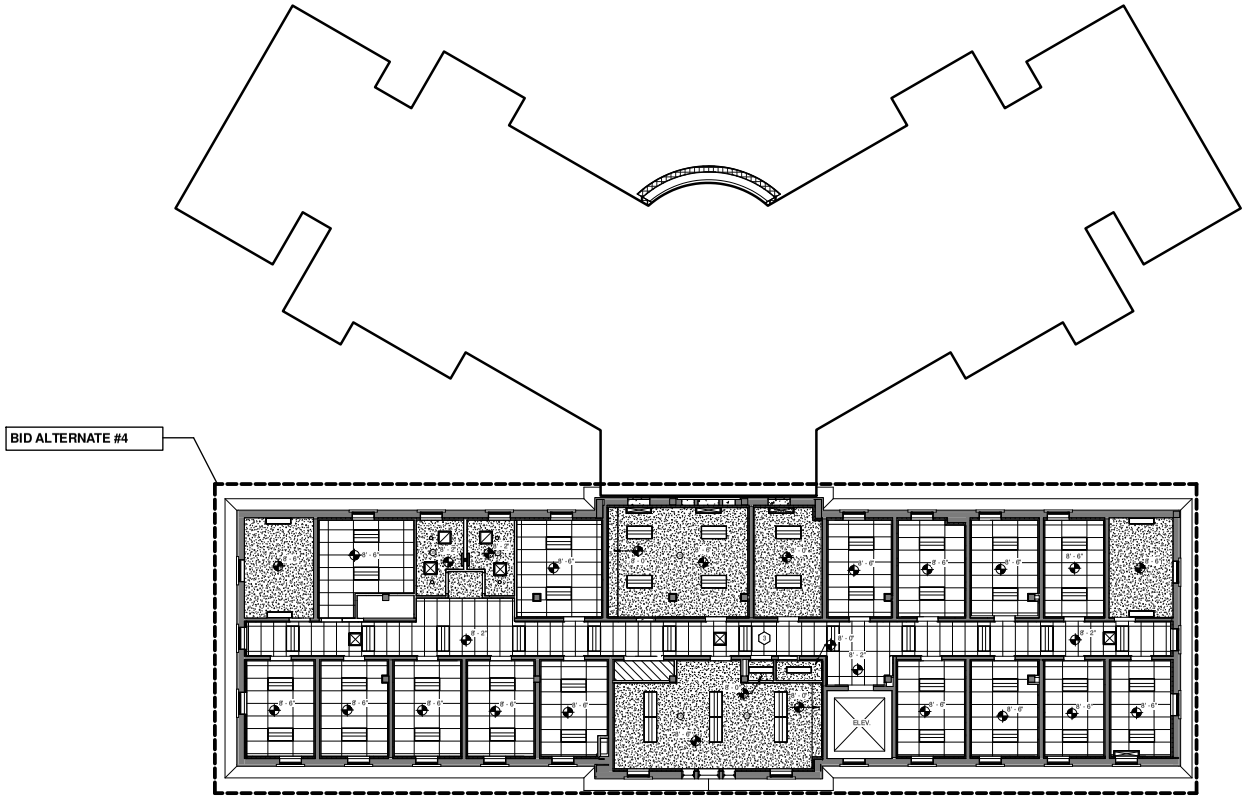

1 THIRD FLOOR REFLECTED CEILING PLAN
SCALE: 1/8" = 1'-0"

N

GENERAL SHEET NOTES

1. PERIMETER CEILING TILES SHALL NOT BE LESS THAN 4'.
2. LOCATE ALL SPRINKLER HEADS, SMOKE DETECTORS, AUDIO SPEAKERS, HEAT SENSORS, ETC IN THE CENTER OF CEILING TILE (OR IN THE CENTER OF THE RAISED/RECESSED FIELD OF A PATTERNED TILE.)
3. THE FOLLOWING IN DESCENDING ORDER IS THE PRECEDENCE ASSIGNED THE WORK ITEMS FOR SPACE PRIORITY. RECESSED LIGHT FIXTURES AND SPACE FOR THEIR INSTALLATION IS FIRST PRIORITY. HVAC DUCTWORK SECOND PRIORITY, ETC. AN EXCEPTION TO THE PRECEDENCE LISTING WOULD BE THE GRAVITY FLOOR REQUIRDMENT FOR PLUMBING WASTE AND ROOF DRAINAGE. ALL ITEMS ARE TO BE INSTALLED TIGHT TO STRUCTURE OR THE WORK ITEMS ABOVE.
   - -RECESSED LIGHT FIXTURES
   - -DUCTWORK AND APPURTENANCES
   - -MEDICAL GASES
   - -PLUMBING WASTE AND ROOF DRAINAGE
   - -HVAC PIPING
   - -PLUMBING VENT AND SUPPLY PIPING
   - -ELECTRICAL CONDUIT
   - -FIRE PROTECTION SPRINKLER PIPING
4. ALL CEILINGS HEIGHTS AT 9'- 0" A.F.F. UNLESS NOTED OTHERWISE
5. SPRINKLER HEADS ARE TO BE LOCATED PER CERTIFIED INSTALLER, CENTERED IN CEILING TILE, AND RECESSED.
6. U.N.O., CEILINGS IN THE MECHANICAL AND ELECTRICAL ROOMS ARE EXPOSED TO THE FLOOR DECK ABOVE.
7. NOT ALL ACCESS PANELS ARE SHOWN, COORDINATE AND PROVIDE ADDITIONAL ACCESS PANELS AS REQUIRED BY EACH TRADE AT NO ADDITIONAL COST TO THE GOVERNMENT.
8. CONTRACTOR TO PROVIDE ALL REQUIRED CEILING ASSEMBLIES.
9. CONTRACTOR TO PROVIDE ACOUSTICAL PLASTER AT GYP BOARD CEILINGS.

SHEET KEY NOTES

1. OPEN TO ABOVE
2. REPAIR AND PAINT EXISTING WOOD CEILING
3. ATTIC ACCESS ABOVE
4. CEILING ASSEMBLY TO MAINTAIN 1 HR SMOKE BARRIER
5. CEILING ASSEMBLY TO MAINTAIN 1 HR FIRE BARRIER AT STAIRS
6. CEILING EXPANSION JOINT
7. NEW ATTIC ACCESS HATCH, MAINTAIN CEILING ASSEMBLY RATING.
8. PERIMETER COVE LIGHTING, RE: ELECT DWGS
9. CEILING MOUNTED PRIVACY CURTAIN RAIL

GRAPHIC LEGEND

- 2'-0" x 2'-0" SUSPENDED WOOD PANEL SYSTEM
- 2'-0" x 4'-0" SUSPENDED EXPOSED GRID ACOUSTIC CEILING TILE
- 2'-0" x 2'-0" SUSPENDED EXPOSED GRID ACOUSTIC CEILING TILE
- 2'-0" x 4'-0" SUSPENDED WOOD PANEL SYSTEM
- EXPOSED TO STRUCTURE ABOVE
- EXISTING WOOD CEILING AT BLDG 64 PORTICOS
- PREFAB METAL SOFFIT
- NEW GWB CEILING OR BULKHEAD, SEE FINISH SCHEDULE FOR FINISH
- 2' X 4' LUMINAIRE
- 2' X 2' LUMINAIRE
- 6" X 12" LUMINAIRE
- 12" X 4' LUMINAIRE
- DOWNLIGHT
- DIRECTIONAL WALLWASH
- SUPPLY GRILLE
- RETURN GRILLE
- OCCUPANCY SENSOR
- CEILING ACCESS PANEL
- WALL MOUNTED LIGHT FIXTURE
- SURFACE MOUNTED LIGHT FIXTURE
- DOUBLE SIDED EXIT SIGNAGE CEILING MOUNTED
- SINGLE SIDED EXIT SIGNAGE CEILING MOUNTED
- 48" X 4" LINEAR DIFFUSER
- EXHAUST GRILLE
- EXHAUST GRILLE
- SD SMOKE DETECTOR
- SP SPEAKER
- CEILING PLAN NOTE
- +8'-0" A.F.F CEILING HEIGHT, ABOVE FINISHED FLOOR
- COVE STRIP LIGHT
- PENDANT LIGHT FIXTURE

BUILDING IS FULLY SPRINKLERED

Revisions:	Date

13 MAR. 2015

CONSULTANTS:

Terracon Consulting Engineers & Scientists | Peaks to Plains Design | GreatWest engineering | H2B, INC. Texas Firm Registration No. 8856 1225 N Loop W, Suite 900 HOUSTON, TX 77008 713.864.2900 | SSR Smith Seckman Reid, Inc. 7915 East Prentice Avenue, Suite 100-E Greenwood Village, CO 80111 (303) 770-1221 FAX: (303) 694-9144 www.ssr-inc.com

ARCHITECT/ENGINEERS:

COX DESIGN ASSOCIATES

ARCHITECTURE PLANNING INTERIORS

Austin
5121 Bee Caves Road, Suite 203
Austin, Texas 78746
T: 512 - 327 - 4149
F: 512 - 327 - 7679
coxdesign@austin.rr.com

Chicago
345 N. Canal St. Suite 701
Chicago, IL 60605
T: 312 - 698 - 3880
F: 312 - 454 - 9439
bcox@coxltd.com

Approved: Chief of MH	Approved: Chief of RMS
Date:	Date:
Approved: Director	Approved: Assoc. Director
Date:	Date:

Drawing Title: THIRD FLOOR - REFLECTED CEILING PLAN

Location: VAMC SHERIDAN WY
1898 FORT ROAD
SHERIDAN, WY 82801

Project Name: EXPAND DOMICILIARY BUILDING 64

Building Number	Checked	Drawn
64	RHC	MAG

Project Number: 666-309

Date: 13 MAR. 2015

Drawing Number: 1-AS-133

Dwg. of

Office of Construction and Facilities Management

VA FORM 08-6231

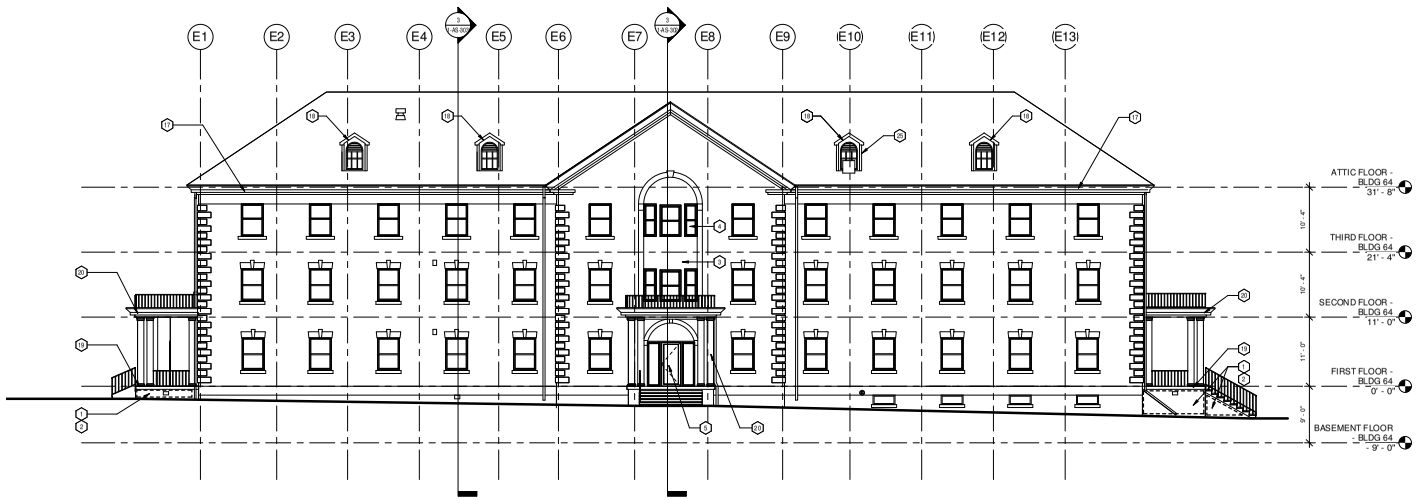

1 **SOUTH ELEVATION - BLDG. 64**
SCALE: 1/8" = 1'-0"

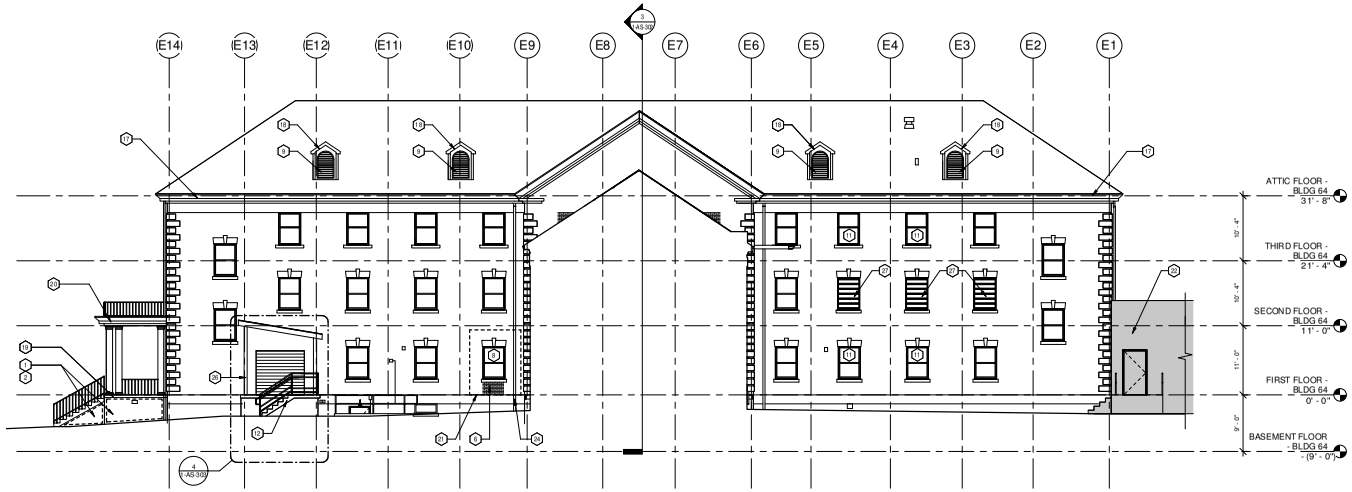

2 **NORTH ELEVATION - BLDG. 64**
SCALE: 1/8" = 1'-0"

GENERAL SHEET NOTES

1. SHADED AREAS GENERALLY OUT OF SCOPE OF THIS PROJECT, UNLESS OTHERWISE NOTED.
2. VERIFY ALL DIMENSIONS AND CONDITIONS AT JOB SITE.
3. MAINTAIN CONTINUOUS UTILITY SERVICE TO ALL SPACES IN THE BUILDING NOT AFFECTED BY THIS WORK. COORDINATE WITH OWNER AND DISRUPTION IN SERVICES REQUIRED TO PERFORM WORK OR TO MODIFY EXISTING PIPING, DUCTWORK, OR ANY ASSOCIATED EQUIPMENT.
4. DIMENSIONS ARE FROM FINISHED FACE OF WALL TO FINISHED FACE OF WALL, UNLESS NOTED OTHERWISE.
5. HILTI SPEED SLEEVE OR APPROVAL EQUAL REQUIRED FOR CONDUIT AND PIPING PENETRATIONS THROUGH FIRE RATED WALLS.
6. DEMOLITION AS REQUIRED FOR ABATEMENT IS TO BE RECONSTRUCTED BY CONTRACTOR AS REQUIRED TO MATCH ADJACENT CONDITIONS
7. REFER TO SHEET 1-AS-602 FOR MATERIAL FINISH SCHEDULE AND NOTES. REFER TO SHEET 1-AS-603 FOR DOOR SCHEDULE, DOOR TYPES, AND NOTES. REFER TO SHEET 1-AS-604 FOR WINDOW SCHEDULE AND NOTES.
8. CONTRACTOR TO PROVIDE SHOP DRAWINGS SHOWING LAYOUT AND DETAIL OF ALL MASONRY EXPANSION JOINTS.
9. DATUM ELEVATION 0' - 0" CORRESPONDS TO TRUE ELEVATION 3887.70', RE: CIVIL

SHEET KEY NOTES

1. REPAIR DAMAGED MORTAR AT AREA SHOWN. TUCK POINTING REQUIRED
2. REPLACE DAMAGED MASONRY AT AREA SHOWN
3. PAINT WOOD TRIM, TYP. REPAIR ALL DAMAGED OR ROTTEN WOOD.
4. PROVIDE NEW CAULKING AT WINDOWS AND DOORS WITH MISSING OR DAMAGED CAULKING, TYP.
5. NEW EXTERIOR DOOR AT EXISTING BLDG 64, RE: DOOR SCHEDULES AS-600.
6. INFILL PREVIOUS DOOR LOCATION WITH WALL TYPE THAT MATCHES ADJACENT FIRE RATING AND FINISH.
7. REPAIR MORTAR, CRACKS, AND SPALLING AT DECORATIVE STONE AND STONE WINDOW SILLS, TYP. TUCK POINTING REQUIRED
8. NEW WINDOW AT EXISTING BLDG. 64, RE: WINDOW SCHEDULE
9. NEW ALUMINUM LOUVER AT EXISTING DORMER, RE: WINDOW SCHEDULE
10. INFILL PREVIOUS SWAMP COOLER PENETRATION AT WINDOW WITH NEW GLAZING.
11. PROVIDE NEW OBSCURE GLAZING AT EXISTING WINDOW
12. NEW CONCRETE STAIRS
13. REMOVE EXISTING DUCTWORK/VENT AND INFILL WALL OPENING WITH INSULATION AND MASONRY TO MATCH ADJACENT CONSTRUCTION.
14. PROVIDE NEW GLASS INFILL PANEL IN WINDOW OPENING AT LOCATION OF DEMOLISHED DUCTWORK/VENT, TYP.
15. NEW ASPHALT ROOF SHINGLES
16. NEW MASONRY VENEER, MATCH EXISTING BLDG 64
17. REPAIR AND PAINT EXISTING FASCIA ON BLDG 64, TYP.
18. REPAIR AND PAINT EXISTING ROOF DORMERS AT BLDG 64, TYP.
19. REPAIR CRACKS AND CONCRETE SPALLING AT PORTICO FLOOR SLAB AND STAIRS
20. PAINT PORCH STRUCTURE AT BLDG 64, TYP. REPAIR ALL ROTTEN OR DAMAGED WOOD.
21. REPAIR BRICK FACADE AS REQUIRED AT BLDG 64 FROM LOADING DOCK DEMOLITION
22. EXISTING TRAMWAY, AREA NOT IN CONTRACT
23. NEW ALUMINUM GUTTER
24. NEW DOWNSPOUT W/ CONCRETE SPLASH BLOCK
25. REPAIR SHINGLES AT DORMER
26. STEEL TUBE COLUMNS, RE: STRUCTURAL
27. NEW CRAWL SPACE VENT
28. LIGHT FIXTURE, RE: ELEC
29. NEW FIBERGLASS COLUMN
30. BRICK QUOIN AT ALL CORNERS, 1" PROUD. SEE DETAIL 4/AS-204
31. CONTINUOUS SOLDIER COURSE, 1" PROUD.
32. CONTINUOUS PRE-CAST CONCRETE BAND, 1" PROUD.
33. NEW FIBER CEMENT FASCIA WITH METAL DRIP EDGE
34. PAINT TRIM, TYP. RE: ROOM FINISH LEGEND

GRAPHIC LEGEND

- AREA IN CONTRACT
- AREA NOT IN CONTRACT
- NEW MASONRY VENEER
- AREA OF BLDG. 64 MASONRY REPAIR
- EJ — MASONRY EXPANSION JOINT

BUILDING IS FULLY SPRINKLERED

Revisions:	Date

13 MAR. 2015

CONSULTANTS:

Terracon Consulting Engineers & Scientists
Peaks to Plains Design
GreatWest engineering
H2B, INC. Texas Firm Registration No. 8856 1225 N Loop W, Suite 900 HOUSTON, TX 77008 713.864.2900
SSR Smith Seckman Reid, Inc. 7900 East Pontiac Avenue, Suite 110-E Greenwood Village, CO 80111 (303) 770-1222 FAX: (303) 694-9144 www.ssr-inc.com

ARCHITECT/ENGINEERS:

COX DESIGN ASSOCIATES

ARCHITECTURE PLANNING INTERIORS

Austin
5121 Bee Caves Road, Suite 203
Austin, Texas 78746
T: 512 - 327 - 4149
F: 512 - 327 - 7679
coxdesign@austin.rr.com

Chicago
345 N. Canal St. Suite 701
Chicago, IL 60605
T: 312 - 698 - 3880
F: 312 - 454 - 9439
bcox@coxltd.com

Approved: Chief of MH	Approved: Chief of FMS
Date:	Date:
Approved: Director	Approved: Assoc. Director
Date:	Date:

Drawing Title: **ELEVATIONS**

Project Name: **EXPAND DOMICILIARY BUILDING 64**

Location: **VAMC SHERIDAN WY 1898 FORT ROAD SHERIDAN, WY 82801**

Building Number	Checked	Drawn
64	RHC	MAG

Project Number: **666-309**
Date: 13 MAR. 2015
Drawing Number: **1-AS-201**
Dwg. of

Office of Construction and Facilities Management

VA FORM 08-6231

1 **WEST ELEVATION**
SCALE: 1/8" = 1'-0"

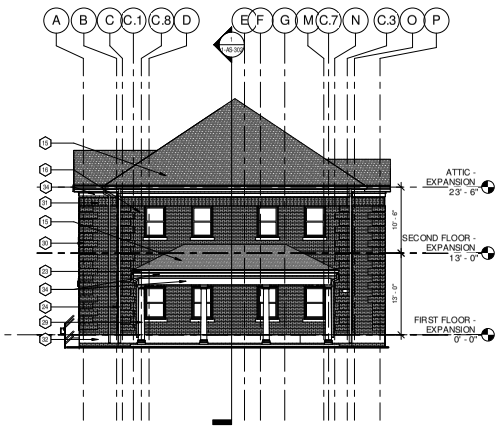

2 **NORTHWEST ELEVATION - EXPANSION**
SCALE: 1/8" = 1'-0"

3 **EAST ELEVATION**
SCALE: 1/8" = 1'-0"

4 **NORTHEAST ELEVATION - EXPANSION**
SCALE: 1/8" = 1'-0"

GENERAL SHEET NOTES

1. SHADED AREAS GENERALLY OUT OF SCOPE OF THIS PROJECT, UNLESS OTHERWISE NOTED.
2. VERIFY ALL DIMENSIONS AND CONDITIONS AT JOB SITE.
3. MAINTAIN CONTINUOUS UTILITY SERVICE TO ALL SPACES IN THE BUILDING NOT AFFECTED BY THIS WORK. COORDINATE WITH OWNER AND DISRUPTION IN SERVICES REQUIRED TO PERFORM WORK OR TO MODIFY EXISTING PIPING, DUCTWORK, OR ANY ASSOCIATED EQUIPMENT.
4. DIMENSIONS ARE FROM FINISHED FACE OF WALL TO FINISHED FACE OF WALL, UNLESS NOTED OTHERWISE.
5. HILTI SPEED SLEEVE OR APPROVAL EQUAL REQUIRED FOR CONDUIT AND PIPING PENETRATIONS THROUGH FIRE RATED WALLS.
6. DEMOLITION AS REQUIRED FOR ABATEMENT IS TO BE RECONSTRUCTED BY CONTRACTOR AS REQUIRED TO MATCH ADJACENT CONDITIONS
7. REFER TO SHEET 1-AS-602 FOR MATERIAL FINISH SCHEDULE AND NOTES. REFER TO SHEET 1-AS-603 FOR DOOR SCHEDULE, DOOR TYPES, AND NOTES. REFER TO SHEET 1-AS-604 FOR WINDOW SCHEDULE AND NOTES.
8. CONTRACTOR TO PROVIDE SHOP DRAWINGS SHOWING LAYOUT AND DETAIL OF ALL MASONRY EXPANSION JOINTS.
9. DATUM ELEVATION 0' - 0" CORRESPONDS TO TRUE ELEVATION 3887.70', RE: CIVIL

SHEET KEY NOTES

1. REPAIR DAMAGED MORTAR AT AREA SHOWN. TUCK POINTING REQUIRED
2. REPLACE DAMAGED MASONRY AT AREA SHOWN
3. PAINT WOOD TRIM, TYP., REPAIR ALL DAMAGED OR ROTTEN WOOD.
4. PROVIDE NEW CAULKING AT WINDOWS AND DOORS WITH MISSING OR DAMAGED CAULKING, TYP.
5. NEW EXTERIOR DOOR AT EXISTING BLDG 64, RE: DOOR SCHEDULE AS-600.
6. INFILL PREVIOUS DOOR LOCATION WITH WALL TYPE THAT MATCHES ADJACENT FIRE RATING AND FINISH.
7. REPAIR MORTAR, CRACKS, AND SPALLING AT DECORATIVE STONE AND STONE WINDOW SILLS, TYP. TUCK POINTING REQUIRED
8. NEW WINDOW AT EXISTING BLDG. 64, RE: WINDOW SCHEDULE
9. NEW ALUMINUM LOUVER AT EXISTING DORMER, RE: WINDOW SCHEDULE
10. INFILL PREVIOUS SWAMP COOLER PENETRATION AT WINDOW WITH NEW GLAZING.
11. PROVIDE NEW OBSCURE GLAZING AT EXISTING WINDOW
12. NEW CONCRETE STAIRS
13. REMOVE EXISTING DUCTWORK/VENT AND INFILL WALL OPENING WITH INSULATION AND MASONRY TO MATCH ADJACENT CONSTRUCTION.
14. PROVIDE NEW GLASS INFILL PANEL IN WINDOW OPENING AT LOCATION OF DEMOLISHED DUCTWORK/VENT, TYP.
15. NEW ASPHALT ROOF SHINGLES
16. NEW MASONRY VENEER, MATCH EXISTING BLDG 64
17. REPAIR AND PAINT EXISTING FASCIA ON BLDG 64, TYP.
18. REPAIR AND PAINT EXISTING ROOF DORMERS AT BLDG 64, TYP.
19. REPAIR CRACKS AND CONCRETE SPALLING AT PORTICO FLOOR SLAB AND STAIRS
20. PAINT PORCH STRUCTURE AT BLDG 64, TYP. REPAIR ALL ROTTEN OR DAMAGED WOOD.
21. REPAIR BRICK FACADE AS REQUIRED AT BLDG 64 FROM LOADING DOCK DEMOLITION
22. EXISTING TRAMWAY, AREA NOT IN CONTRACT
23. NEW ALUMINUM GUTTER
24. NEW DOWNSPOUT W/ CONCRETE SPLASH BLOCK
25. REPAIR SHINGLES AT DORMER
26. STEEL TUBE COLUMNS, RE: STRUCTURAL
27. NEW CRAWL SPACE VENT
28. LIGHT FIXTURE, RE: ELEC
29. NEW FIBERGLASS COLUMN
30. BRICK QUOIN AT ALL CORNERS, 1" PROUD. SEE DETAIL 4/AS-204
31. CONTINUOUS SOLDIER COURSE, 1" PROUD.
32. CONTINUOUS PRE-CAST CONCRETE BAND, 1" PROUD.
33. NEW FIBER CEMENT FASCIA WITH METAL DRIP EDGE
34. PAINT TRIM, TYP. RE: ROOM FINISH LEGEND

GRAPHIC LEGEND

AREA IN CONTRACT

AREA NOT IN CONTRACT

NEW MASONRY VENEER

AREA OF BLDG. 64 MASONRY REPAIR

EJ MASONRY EXPANSION JOINT

BUILDING IS FULLY SPRINKLERED

Revisions:	Date

13 MAR. 2015

CONSULTANTS:

Terracon Consulting Engineers & Scientists
Peaks to Plains Design
GreatWest engineering
H2B, INC. Texas Firm Registration No. 8856 1225 N Loop W, Suite 900 HOUSTON, TX 77008 713.864.2900
SSR Smith Seckman Reid, Inc. 7900 East Pontiac Avenue, Suite 110-E Greenwood Village, CO 80111 (303) 770-1222 FAX: (303) 694-9144 www.ssr-inc.com

ARCHITECT/ENGINEERS:

COX DESIGN ASSOCIATES

ARCHITECTURE PLANNING INTERIORS

Austin
5121 Bee Caves Road, Suite 203
Austin, Texas 78746
T: 512 - 327 - 4149
F: 512 - 327 - 7679
coxdesign@austin.rr.com

Chicago
345 N. Canal St. Suite 701
Chicago, IL 60605
T: 312 - 698 - 3880
F: 312 - 454 - 9439
bcox@coxltd.com

Approved: Chief of MH	Approved: Chief of RMS
Date:	Date:
Approved: Director	Approved: Assoc. Director
Date:	Date:

Drawing Title
ELEVATIONS

Location
VAMC SHERIDAN WY
1898 FORT ROAD
SHERIDAN, WY 82801

Project Name
EXPAND DOMICILIARY BUILDING 64

Building Number	Checked	Drawn
64	RHC	MAG

Project Number
666-309

Date
13 MAR. 2015

Drawing Number
1-AS-202

Dwg. of

Office of Construction and Facilities Management

VA FORM 08-6231

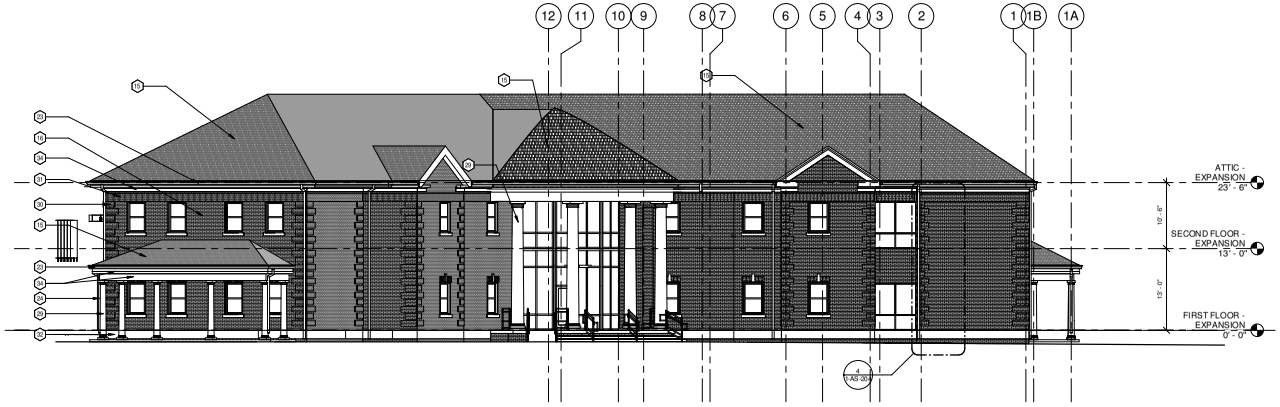

1 NORTHEAST ELEVATION - EXPANSION
SCALE: 1/8" = 1'-0"

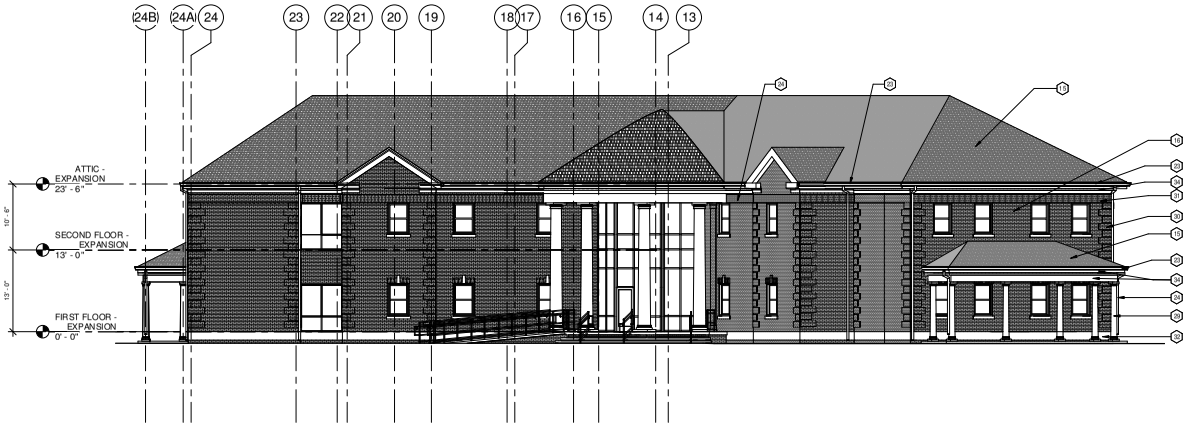

2 NORTHWEST ELEVATION - EXPANSION
SCALE: 1/8" = 1'-0"

GENERAL SHEET NOTES

1. SHADED AREAS GENERALLY OUT OF SCOPE OF THIS PROJECT, UNLESS OTHERWISE NOTED.
2. VERIFY ALL DIMENSIONS AND CONDITIONS AT JOB SITE.
3. MAINTAIN CONTINUOUS UTILITY SERVICE TO ALL SPACES IN THE BUILDING NOT AFFECTED BY THIS WORK. COORDINATE WITH OWNER AND DISRUPTION IN SERVICES REQUIRED TO PERFORM WORK OR TO MODIFY EXISTING PIPING, DUCTWORK, OR ANY ASSOCIATED EQUIPMENT.
4. DIMENSIONS ARE FROM FINISHED FACE OF WALL TO FINISHED FACE OF WALL, UNLESS NOTED OTHERWISE.
5. HILTI SPEED SLEEVE OR APPROVAL EQUAL REQUIRED FOR CONDUIT AND PIPING PENETRATIONS THROUGH FIRE RATED WALLS.
6. DEMOLITION AS REQUIRED FOR ABATEMENT IS TO BE RECONSTRUCTED BY CONTRACTOR AS REQUIRED TO MATCH ADJACENT CONDITIONS
7. REFER TO SHEET 1-AS-602 FOR MATERIAL FINISH SCHEDULE AND NOTES. REFER TO SHEET 1-AS-603 FOR DOOR SCHEDULE, DOOR TYPES, AND NOTES. REFER TO SHEET 1-AS-604 FOR WINDOW SCHEDULE AND NOTES.
8. CONTRACTOR TO PROVIDE SHOP DRAWINGS SHOWING LAYOUT AND DETAIL OF ALL MASONRY EXPANSION JOINTS.
9. DATUM ELEVATION 0' - 0' CORRESPONDS TO TRUE ELEVATION 3897.70', RE: CIVIL

SHEET KEY NOTES

1. REPAIR DAMAGED MORTAR AT AREA SHOWN, TUCK POINTING REQUIRED
2. REPLACE DAMAGED MASONRY AT AREA SHOWN
3. PAINT WOOD TRIM, TYP. REPAIR ALL DAMAGED OR ROTTEN WOOD.
4. PROVIDE NEW CAULKING AT WINDOWS AND DOORS WITH MISSING OR DAMAGED CAULKING, TYP.
5. NEW EXTERIOR DOOR AT EXISTING BLDG. 64, RE: DOOR SCHEDULES AS-600.
6. INFILL PREVIOUS DOOR LOCATION WITH WALL TYPE THAT MATCHES ADJACENT FIRE RATING AND FINISH.
7. REPAIR MORTAR, CRACKS, AND SPALLING AT DECORATIVE STONE AND STONE WINDOW SILLS, TYP. TUCK POINTING REQUIRED
8. NEW WINDOW AT EXISTING BLDG. 64, RE: WINDOW SCHEDULE
9. NEW ALUMINUM LOUVER AT EXISTING DORMER, RE: WINDOW SCHEDULE
10. INFILL PREVIOUS SWAMP COOLER PENETRATION AT WINDOW WITH NEW GLAZING.
11. PROVIDE NEW OBSCURE GLAZING AT EXISTING WINDOW
12. NEW CONCRETE STAIRS
13. REMOVE EXISTING DUCTWORK VENT AND INFILL WALL OPENING WITH INSULATION AND MASONRY TO MATCH ADJACENT CONSTRUCTION
14. PROVIDE NEW GLASS INFILL PANEL IN WINDOW OPENING AT LOCATION OF DEMOLISHED DUCTWORK VENT, TYP.
15. NEW ASPHALT ROOF SHINGLES
16. NEW MASONRY VENEER, MATCH EXISTING BLDG 64
17. REPAIR AND PAINT EXISTING FASCIA ON BLDG 64, TYP.
18. REPAIR AND PAINT EXISTING ROOF DORMERS AT BLDG 64, TYP.
19. REPAIR CRACKS AND CONCRETE SPALLING AT PORTICO FLOOR SLAB AND STAIRS
20. PAINT PORCH STRUCTURE AT BLDG 64, TYP. REPAIR ALL ROTTEN OR DAMAGED WOOD.
21. REPAIR BRICK FACADE AS REQUIRED AT BLDG 64 FROM LOADING DOCK DEMOLITION
22. EXISTING TRAMWAY, AREA NOT IN CONTRACT
23. NEW ALUMINUM GUTTER
24. NEW DOWNSPOUT W/ CONCRETE SPLASH BLOCK
25. REPAIR SHINGLES AT DORMER
26. STEEL TUBE COLUMNS, RE: STRUCTURAL
27. NEW CRAWL SPACE VENT
28. LIGHT FIXTURE, RE: ELEC
29. NEW FIBERGLASS COLUMN
30. BRICK QUOIN AT ALL CORNERS, 1" PROUD. SEE DETAIL 4/AS-20.4
31. CONTINUOUS SOLDIER COURSE, 1" PROUD.
32. CONTINUOUS PRE-CAST CONCRETE BAND, 1" PROUD.
33. NEW FIBER CEMENT FASCIA WITH METAL DRIP EDGE
34. PAINT TRIM, TYP. RE: ROOM FINISH LEGEND

GRAPHIC LEGEND

AREA IN CONTRACT
AREA NOT IN CONTRACT
NEW MASONRY VENEER
AREA OF BLDG. 64 MASONRY REPAIR
EJ MASONRY EXPANSION JOINT

BUILDING IS FULLY SPRINKLERED

Revisions:	Date

13 MAR. 2015

CONSULTANTS:

Terracon Consulting Engineers & Scientists
Peaks to Plains Design
GreatWest engineering
H2B, INC. Texas Firm Registration No. 8856 1225 N Loop W, Suite 900 HOUSTON, TX 77008 713.864.2900
SSR Smith Seckman Reid, Inc. 7915 East Prentice Avenue, Suite 100-E Greenwood Village, CO 80111 (303) 770-1221 FAX: (303) 694-9144 www.ssr-inc.com

ARCHITECT/ENGINEERS:
COX DESIGN ASSOCIATES
ARCHITECTURE PLANNING INTERIORS
Austin
5121 Bee Caves Road, Suite 203
Austin, Texas 78746
T: 512 - 327 - 4149
F: 512 - 327 - 7679
coxdesign@austin.rr.com
Chicago
345 N. Canal St. Suite 701
Chicago, IL 60605
T: 312 - 698 - 3880
F: 312 - 454 - 9439
bcox@coxltd.com

Approved: Chief of MH	Approved: Chief of RMS
Date:	Date:
Approved: Director	Approved: Assoc. Director
Date:	Date:

Drawing Title: ELEVATIONS

Project Name: EXPAND DOMICILIARY BUILDING 64

Project Number: 666-309

Date: 13 MAR. 2015

Location: VAMC SHERIDAN WY
1898 FORT ROAD
SHERIDAN, WY 82801

Building Number	Checked	Drawn
64	RHC	MAG

Drawing Number: 1-AS-203

Dwg. of

Office of Construction and Facilities Management

VA FORM 08-6231

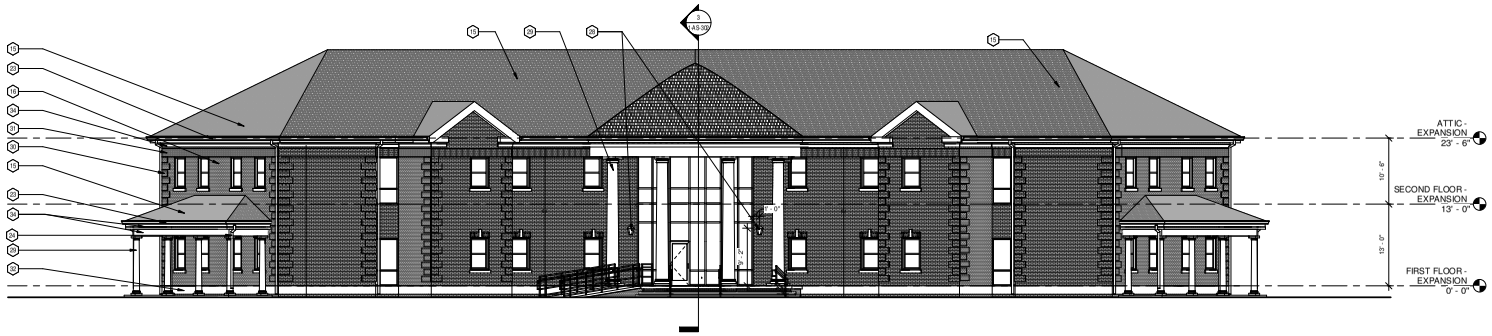

1 **NORTH ELEVATION - EXPANSION**
SCALE: 1/8" = 1'-0"

2 **SOUTHEAST ELEVATION - EXPANSION**
SCALE: 1/8" = 1'-0"

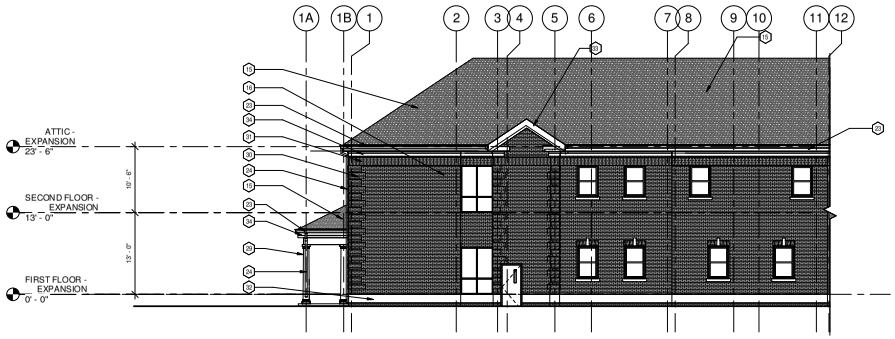

3 **SOUTHWEST ELEVATION - EXPANSION**
SCALE: 1/8" = 1'-0"

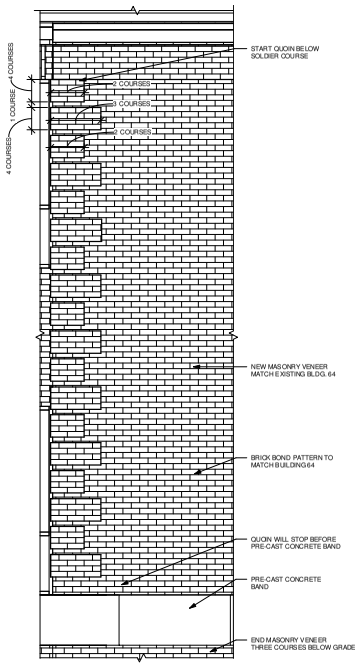

4 **RUSTICATION DETAIL**
SCALE: 1/2" = 1'-0"

GENERAL SHEET NOTES

1. SHADED AREAS GENERALLY OUT OF SCOPE OF THIS PROJECT, UNLESS OTHERWISE NOTED.
2. VERIFY ALL DIMENSIONS AND CONDITIONS AT JOB SITE.
3. MAINTAIN CONTINUOUS UTILITY SERVICE TO ALL SPACES IN THE BUILDING NOT AFFECTED BY THIS WORK. COORDINATE WITH OWNER AND DISRUPTION IN SERVICES REQUIRED TO PERFORM WORK OR TO MODIFY EXISTING PIPING, DUCTWORK, OR ANY ASSOCIATED EQUIPMENT.
4. DIMENSIONS ARE FROM FINISHED FACE OF WALL TO FINISHED FACE OF WALL, UNLESS NOTED OTHERWISE.
5. HILTI SPEED SLEEVE OR APPROVAL EQUAL REQUIRED FOR CONDUIT AND PIPING PENETRATIONS THROUGH FIRE RATED WALLS.
6. DEMOLITION AS REQUIRED FOR ABATEMENT IS TO BE RECONSTRUCTED BY CONTRACTOR AS REQUIRED TO MATCH ADJACENT CONDITIONS
7. REFER TO SHEET 1-AS-602 FOR MATERIAL FINISH SCHEDULE AND NOTES. REFER TO SHEET 1-AS-403 FOR DOOR SCHEDULE, DOOR TYPES, AND NOTES. REFER TO SHEET 1-AS-404 FOR WINDOW SCHEDULE AND NOTES.
8. CONTRACTOR TO PROVIDE SHOP DRAWINGS SHOWING LAYOUT AND DETAIL OF ALL MASONRY EXPANSION JOINTS.
9. DATUM ELEVATION 0' - 0" CORRESPONDS TO TRUE ELEVATION 3887.70', RE: CIVIL

SHEET KEY NOTES

1. REPAIR DAMAGED MORTAR AT AREA SHOWN, TUCK POINTING REQUIRED
2. REPLACE DAMAGED MASONRY AT AREA SHOWN
3. PAINT WOOD TRIM, TYP. REPAIR ALL DAMAGED OR ROTTEN WOOD.
4. PROVIDE NEW CAULKING AT WINDOWS AND DOORS WITH MISSING OR DAMAGED CAULKING, TYP.
5. NEW EXTERIOR DOOR AT EXISTING BLDG 64, RE: DOOR SCHEDULES AS-600.
6. INFILL PREVIOUS DOOR LOCATION WITH WALL TYPE THAT MATCHES ADJACENT FIRE RATING AND FINISH.
7. REPAIR MORTAR, CRACKS, AND SPALLING AT DECORATIVE STONE AND STONE WINDOW SILLS, TYP. TUCK POINTING REQUIRED
8. NEW WINDOW AT EXISTING BLDG. 64, RE: WINDOW SCHEDULE
9. NEW ALUMINUM LOUVER AT EXISTING DORMER, RE: WINDOW SCHEDULE
10. INFILL PREVIOUS SWAMP COOLER PENETRATION AT WINDOW WITH NEW GLAZING.
11. PROVIDE NEW OBSCURE GLAZING AT EXISTING WINDOW
12. NEW CONCRETE STAIRS
13. REMOVE EXISTING DUCTWORK VENT AND INFILL WALL OPENING WITH INSULATION AND MASONRY TO MATCH ADJACENT CONSTRUCTION.
14. PROVIDE NEW GLASS INFILL PANEL IN WINDOW OPENING AT LOCATION OF DEMOLISHED DUCTWORK VENT, TYP.
15. NEW ASPHALT ROOF SHINGLES
16. NEW MASONRY VENEER, MATCH EXISTING BLDG 64
17. REPAIR AND PAINT EXISTING FASCIA ON BLDG 64, TYP.
18. REPAIR AND PAINT EXISTING ROOF DORMERS AT BLDG 64, TYP.
19. REPAIR CRACKS AND CONCRETE SPALLING AT PORTICO FLOOR SLAB AND STAIRS
20. PAINT PORCH STRUCTURE AT BLDG 64, TYP. REPAIR ALL ROTTEN OR DAMAGED WOOD.
21. REPAIR BRICK FACADE AS REQUIRED AT BLDG 64 FROM LOADING DOCK DEMOLITION
22. EXISTING TRAMWAY, AREA NOT IN CONTRACT
23. NEW ALUMINUM GUTTER
24. NEW DOWNSPOUT W/ CONCRETE SPLASH BLOCK
25. REPAIR SHINGLES AT DORMER
26. STEEL TUBE COLUMNS, RE: STRUCTURAL
27. NEW CRAWL SPACE VENT
28. LIGHT FIXTURE, RE: ELEC
29. NEW FIBERGLASS COLUMN
30. BRICK QUOIN AT ALL CORNERS, 1" PROUD. SEE DETAIL 4/AS-204
31. CONTINUOUS SOLDIER COURSE, 1" PROUD.
32. CONTINUOUS PRE-CAST CONCRETE BAND, 1" PROUD.
33. NEW FIBER CEMENT FASCIA WITH METAL DRIP EDGE
34. PAINT TRIM, TYP. RE: ROOM FINISH LEGEND

GRAPHIC LEGEND

- AREA IN CONTRACT
- AREA NOT IN CONTRACT
- NEW MASONRY VENEER
- AREA OF BLDG. 64 MASONRY REPAIR
- EJ — MASONRY EXPANSION JOINT

BUILDING IS FULLY SPRINKLERED

Revisions:	Date

13 MAR. 2015

CONSULTANTS:

Terracon — Consulting Engineers & Scientists
Peaks to Plains Design
GreatWest engineering
H2B, INC. — Texas Firm Registration No. 8856 — 1225 N Loop W, Suite 900 HOUSTON, TX 77008 — 713.864.2900
SSR Smith Seckman Reid, Inc. — 7900 East Pontiac Avenue, Suite 110-E Greenwood Village, CO 80111 — (303) 770-1222 — FAX: (303) 694-9144 — www.ssr-inc.com

ARCHITECT/ENGINEERS:

COX DESIGN ASSOCIATES

ARCHITECTURE PLANNING INTERIORS

Austin
5121 Bee Caves Road, Suite 203
Austin, Texas 78746
T: 512 - 327 - 4149
F: 512 - 327 - 7679
coxdesign@austin.rr.com

Chicago
345 N. Canal St. Suite 701
Chicago, IL 60605
T: 312 - 698 - 3880
F: 312 - 454 - 9439
bcox@coxltd.com

Approved: Chief of MH	Approved: Chief of FMS
Date:	Date:
Approved: Director	Approved: Assoc. Director
Date:	Date:

Drawing Title: **ELEVATIONS**

Project Name: **EXPAND DOMICILIARY BUILDING 64**

Location: **VAMC SHERIDAN WY 1898 FORT ROAD SHERIDAN, WY 82801**

Building Number	Checked	Drawn
64	RHC	MAG

Project Number: **666-309**
Date: 13 MAR. 2015
Drawing Number: **1-AS-204**
Dwg. of

Office of Construction and Facilities Management

VA FORM 08-6231

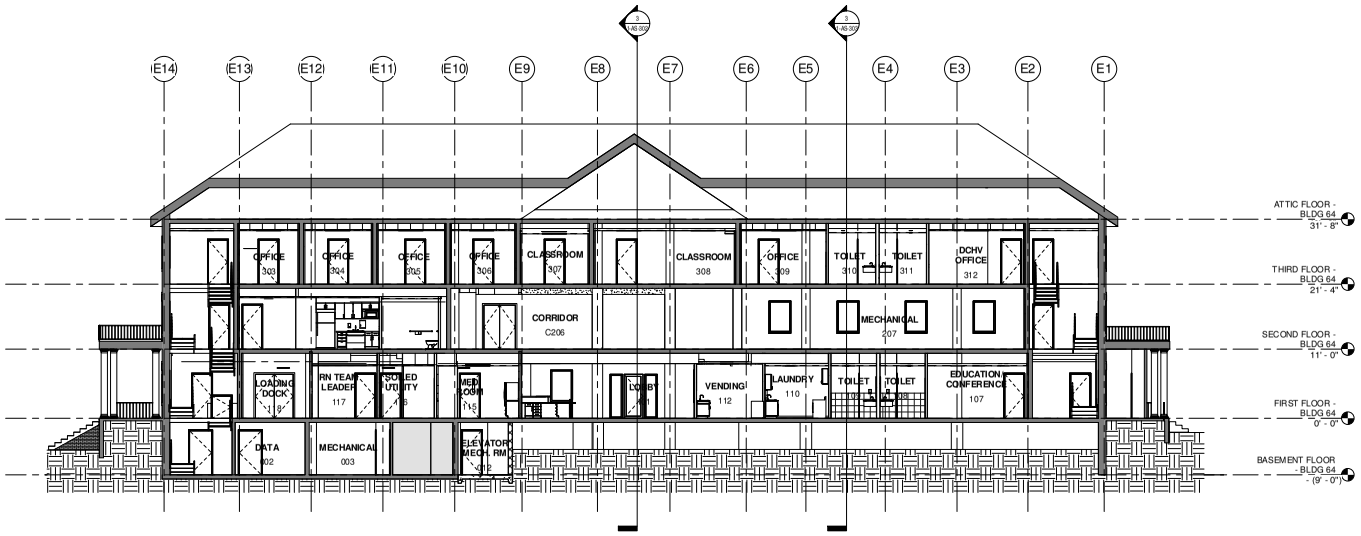

1 BUILDING SECTION - BLDG. 64
SCALE: 1/8" = 1'-0"

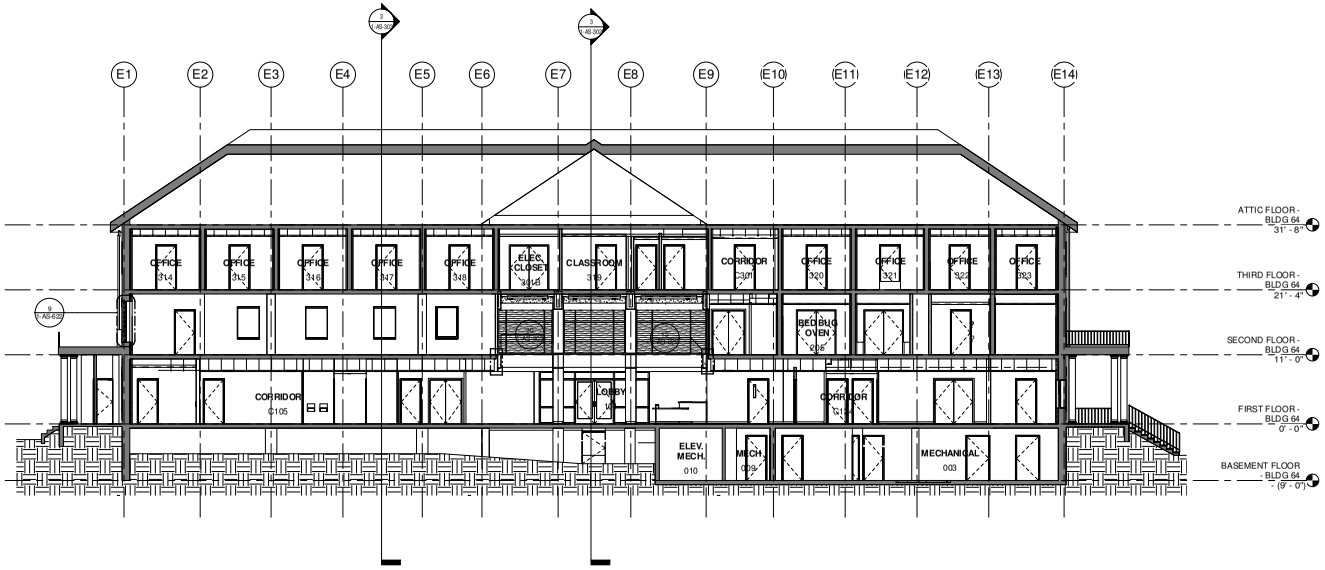

2 BUILDING SECTION - BLDG. 64
SCALE: 1/8" = 1'-0"

BUILDING IS FULLY SPRINKLERED

Revisions:	Date

13 MAR. 2015

CONSULTANTS:

Terracon Consulting Engineers & Scientists
Peaks to Plains Design
GreatWest engineering
H2B, INC. Texas Firm Registration No. 8856 1225 N Loop W, Suite 900 HOUSTON, TX 77008 713.864.2900
SSR Smith Seckman Reid, Inc. 7900 East Pinnacle Avenue, Suite 104-E Greenwood Village, CO 80111 (303) 770-1222 FAX: (303) 694-9144 www.ssr-inc.com

ARCHITECT/ENGINEERS:

COX DESIGN ASSOCIATES

ARCHITECTURE PLANNING INTERIORS

Austin
5121 Bee Caves Road, Suite 203
Austin, Texas 78746
T: 512 - 327 - 4149
F: 512 - 327 - 7679
coxdesign@austin.rr.com

Chicago
345 N. Canal St. Suite 701
Chicago, IL 60605
T: 312 - 698 - 3880
F: 312 - 454 - 9439
bcox@coxltd.com

Approved: Chief of MH	Approved: Chief of RMS
Date:	Date:
Approved: Director	Approved: Assoc. Director
Date:	Date:

Drawing Title: BUILDING SECTIONS

Project Name: EXPAND DOMICILIARY BUILDING 64

Project Number: 666-309

Date: 13 MAR. 2015

Drawing Number: 1-AS-301

Dwg. of

Location: VAMC SHERIDAN WY 1898 FORT ROAD SHERIDAN, WY 82801

Building Number	Checked	Drawn
64	RHC	MAG

Office of Construction and Facilities Management

VA FORM 08-6231

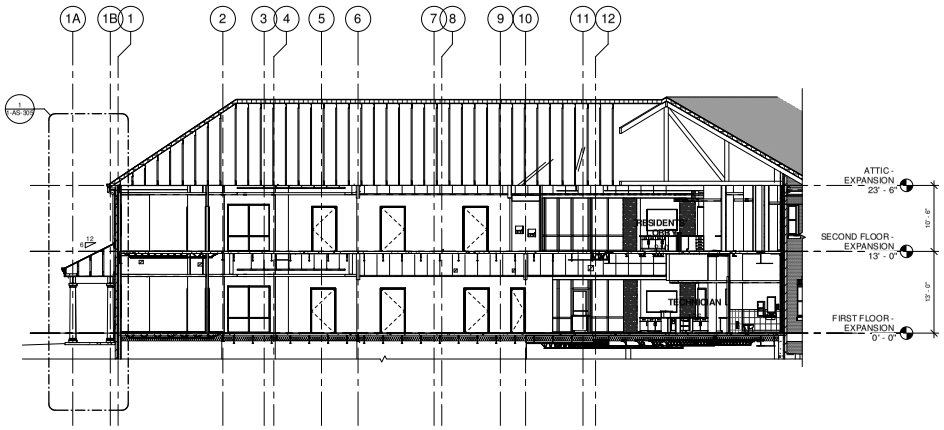

1 BUILDING SECTION - EXPANSION
SCALE: 1/8" = 1'-0"

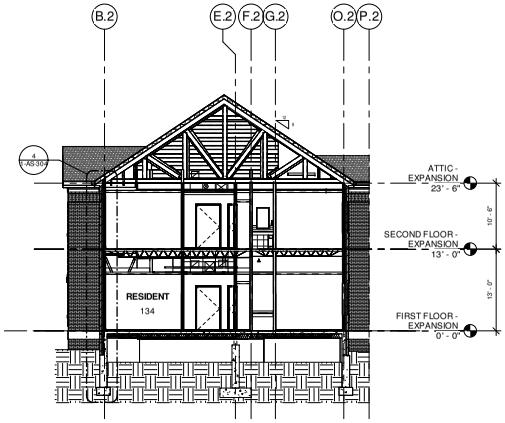

2 BUILDING SECTION - EXPANSION
SCALE: 1/8" = 1'-0"

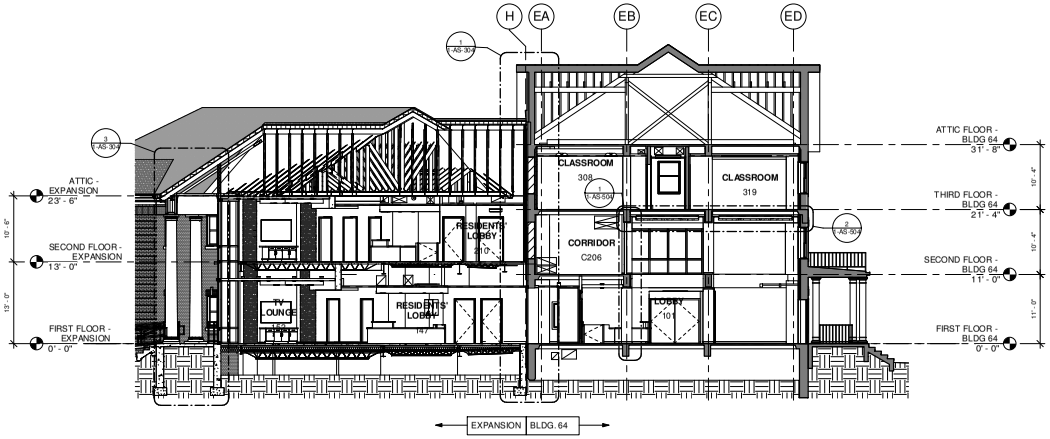

3 BUILDING SECTION
SCALE: 1/8" = 1'-0"

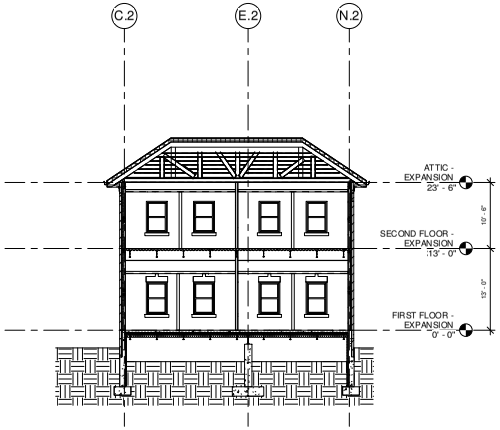

4 BUILDING SECTION - EXPANSION
SCALE: 1/8" = 1'-0"

BUILDING IS FULLY SPRINKLERED

Revisions:	Date

13 MAR. 2015

CONSULTANTS:

Terracon Consulting Engineers & Scientists
Peaks to Plains Design
GreatWest engineering
H2B, INC. Texas Firm Registration No. 8856 1225 N Loop W, Suite 900 HOUSTON, TX 77008 713.864.2900
SSR Smith Seckman Reid, Inc. 7900 East Pontiac Avenue, Suite 100-E Greenwood Village, CO 80111 (303) 770-1222 FAX: (303) 694-9144 www.ssr-inc.com

ARCHITECT/ENGINEERS:

COX DESIGN ASSOCIATES

ARCHITECTURE PLANNING INTERIORS

Austin
5121 Bee Caves Road, Suite 203
Austin, Texas 78746
T: 512 - 327 - 4149
F: 512 - 327 - 7679
coxdesign@austin.rr.com

Chicago
345 N. Canal St. Suite 701
Chicago, IL 60605
T: 312 - 698 - 3880
F: 312 - 454 - 9439
bcox@coxltd.com

Approved: Chief of MH	Approved: Chief of FMS
Date:	Date:
Approved: Director	Approved: Assoc. Director
Date:	Date:

Drawing Title
BUILDING SECTIONS

Location
VAMC SHERIDAN WY
1898 FORT ROAD
SHERIDAN, WY 82801

Project Name
EXPAND DOMICILIARY BUILDING 64

Building Number	Checked	Drawn
64	RHC	MAG

Project Number
666-309

Date
13 MAR. 2015

Drawing Number
1-AS-302

Dwg. of

Office of Construction and Facilities Management

VA FORM 08-6231