

FEATURES & SPECIFICATIONS

INTENDED USE — Certain airborne contaminants can diminish integrity of acrylic. [Click here for Acrylic Environmental Compatibility table for suitable uses.](#)

CONSTRUCTION — One-piece, extruded aluminum housing with brushed finish and chrome trim.

Woodgrain vinyl laminated to injection-molded ends — brushed aluminum end appliques optional.

Up/down light distribution options.

Lens housing secured to channel assembly by spring-loaded latches.

Gasketed back plate and silicone-sealed housing eliminate light leaks.

Convenience outlet available on 120V units.

Parts are die-formed from code-gauge steel.

Finish: Five-stage iron-phosphate pretreatment ensures superior paint adhesion and rust resistance. Standard finish is high-gloss, baked white enamel. All parts PAF.

Ballast is thermally-protected, Class P, HPF, non-PCB, UL listed, CSA certified ballast is standard. Sound rated A.

ELECTRICAL — Fixture conforms to UL 1570 and is suitable for damp locations. AWM, TFN or THHN wire used throughout, rated for required temperatures.

Luminaire Efficacy Rating (LER) and Annual Energy Cost: Two-lamp LER.FW = 58. Annual Energy Cost = \$4.14. Based on 32W T8 lamp (2850 lumens) and energy-saving electronic ballast. Ballast factor = .88, input watts = 54.

Calculated in accordance with NEMA standard LE-5.

LISTINGS — UL listed and labeled. Listed and labeled to comply with Canadian and Mexican Standards (see Options).

Note: Specifications subject to change without notice.

Catalog Number
Notes
Type

Surface Commercial




W

CONTEMPORARY WALL BRACKET
1', 2', 3' or 4' Lengths
1 or 2 Lamps

Specifications

Length:	13-5/8 (34.6)
	24-3/8 (61.9)
	36-3/8 (92.9)
	48-3/8 (122.9)
Depth:	7-1/8 (18.1)
Height:	5-1/8 (13.0)



All dimensions are shown in inches (centimeters) unless otherwise specified.

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: W 2 32 120 GEB10IS CO

Series	Number of lamps	Lamp type	Diffuser type/ light distribution	Voltage	Options
W Wall bracket	1	U16 16W T8 U (12")	(blank) #12 pattern .125" thick lower, matte; opal acrylic .187" thick upper lens	120	CO Grounded convenience outlet, 120V only (lower right) ²
	2	17 17W T8 (24")		277	AE Brushed aluminum end cap appliques
	Not included	CF18 18W TT5 RS (12")		347	S1 Pull-chain switch; installed bottom left; on/off operation of all lamps only (120V only) ²
		25 25W T8 (36")	A12U #12 pattern .125" lower and upper lens	MVOLT	S2 Pull-chain switch, on/off operation of forward (down) lamp, rear (up) lamp remote-switched (120V only) ^{2,3,4}
		32 32W T8 (48")	DO Downlight only	Others available	S4 Pull-chain switch; four position — front only, rear only, all on, all off; installed bottom left (120V only) ^{2,3,4}
					2/1 Two 1-lamp ballasts ^{3,4}
					BF Internal baffle for up and down light separation ⁵
					GEB10IS Electronic ballasts, ≤ 10% THD, Instant Start
					GEB10RS Electronic ballasts, ≤ 10% THD, Program Rapid Start
					ES Energy saving ballasts
					N Unswitched night light for 7W C7 lamp; top left (120V only)
					NS Night light with push-switch for 7W C7 lamp; top left (120V only)
					MB Matte black finish
					MW Matte white finish
					CSA Listed and labeled to comply with Canadian Standards
					NOM Listed and labeled to comply with Mexican Standards


Notes

- One lamp only.
- For optional locations, consult factory.
- BF option must be specified if separation of up and down light is desired.
- Required with S2 or S4 options.
- Requires 2/1 option (2-lamp only).

W Wall Bracket, Contemporary





DIMENSIONS

Inches (centimeters). Subject to change without notice.

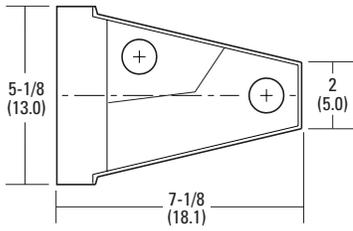

MOUNTING DATA

E = 2(51) Dia. K.O.
R = Keyhole Slot

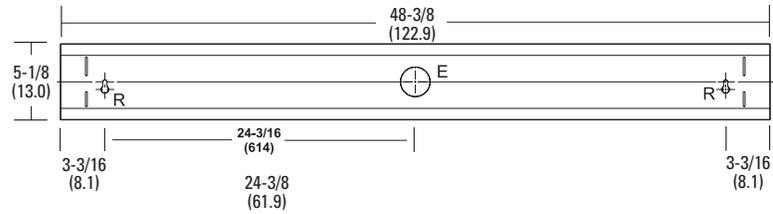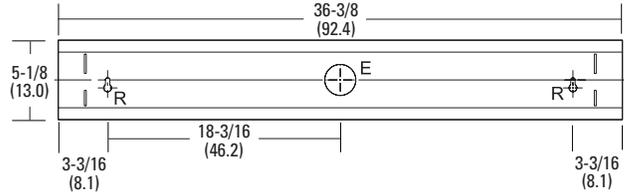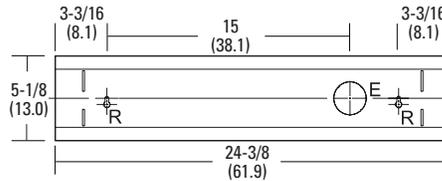

PHOTOMETRICS

Full photometric reports available upon request.