

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, living rooms, bedrooms, offices, stairways and more.

CONSTRUCTION

Timeless design mixes a solid brushed aluminum exterior with a matte white acrylic diffuser for a great look in any setting or decor.

OPTICS

Produces 1,400 lumens at 50,000 hours of life.

ELECTRICAL

Fixture operates at 120 volts, 60Hz. Standard input = 24 watts, 58 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

INSTALLATION

All mounting hardware included for mounting to a standard junction box.

LISTINGS

UL Listed to US and Canadian standards and suitable for damp locations. ENERGY STAR® certified.

WARRANTY

5-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx


NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25°C.

Specifications subject to change without notice.

Decorative Indoor

Lacuna LED Flush Mount

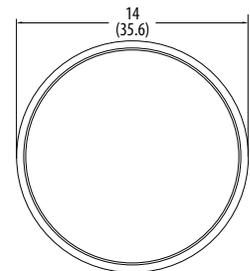

Specifications

Depth: 3-3/8 (8.6)
Diameter: 14 (35.6)
Weight: 3 lbs.

All dimensions are inches (centimeters) unless otherwise indicated.

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: FMLACL 14 20830 BA

Series	Module/CRI	Color temperature	Finish
FMLACL 14 LED flush mount 14" diameter	208 >80	40 4000K 35 3500K ¹ 30 3000K 27 2700K ¹	BA Brushed aluminum

Replacement parts: Order as separate catalog number.	
DFMLACL 14	14" acrylic diffuser



Notes

¹ Minimum 90-day lead time for non-standard color temperatures; minimum 50 order quantity.

LED Flush Mount FMLACL

PHOTOMETRICS

To request a photometric data report, please contact factory.

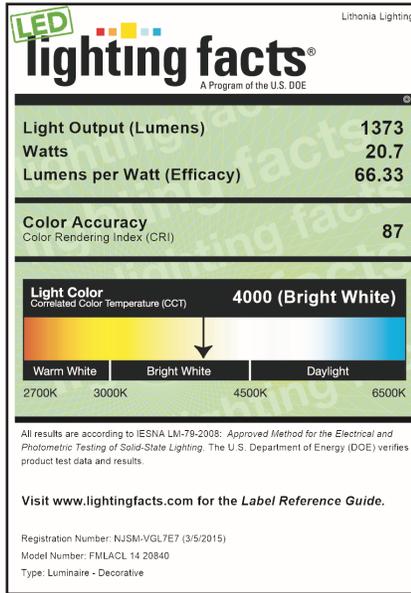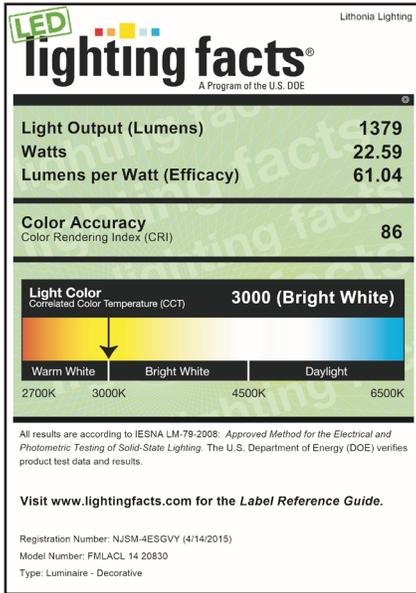

SUGGESTED DIMMERS

The FMDDHL is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	Skylark 300P
	NTELV 300
	NLV 600
Synergy	ISD 600 I 120