

Catalog Number
Notes
Type

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, living rooms, bedrooms, offices, stairways and more.

### CONSTRUCTION

Decorative traditional design with a metallic ring in a chrome finish and a matte white acrylic diffuser.

### OPTICS

Produces between 1,300 and 1,400 lumens at 50,000 hours of life.

### ELECTRICAL

Fixture operates at 120 volts, 60Hz. Standard input = 24 watts, 58 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

### INSTALLATION

All mounting hardware included for mounting to a standard junction box.

### LISTINGS

UL Listed to US and Canadian standards and suitable for damp locations. ENERGY STAR® certified.

### WARRANTY

5-year limited warranty. Complete warranty terms located at

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)


NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25°C.

Specifications subject to change without notice.

Decorative Indoor


# Castleberry LED Flush Mount



### Specifications

Depth: 4-1/16 (10.3)  
 Diameter: 13-3/4 (34.9)  
 Weight: 3.5 lbs.

All dimensions are inches (centimeters) unless otherwise indicated.



### ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

**Example:** FMCSTL 14 20830 KR

Series	Module/CRI	Color temperature	Finish
<b>FMCSTL 14</b> LED flush mount 14" diameter	<b>208</b> >80	<b>40</b> 4000K 35 3500K <sup>1</sup> <b>30</b> 3000K 27 2700K <sup>1</sup>	<b>KR</b> Chrome

<b>Accessories:</b> Order as separate catalog number.	
DFMCSTL 14	14" acrylic diffuser



### Notes

<sup>1</sup> Minimum 90-day lead time for non-standard color temperatures; minimum 50 order quantity.

# LED Flush Mount Castleberry

## PHOTOMETRICS

To request a photometric data report, please contact factory.

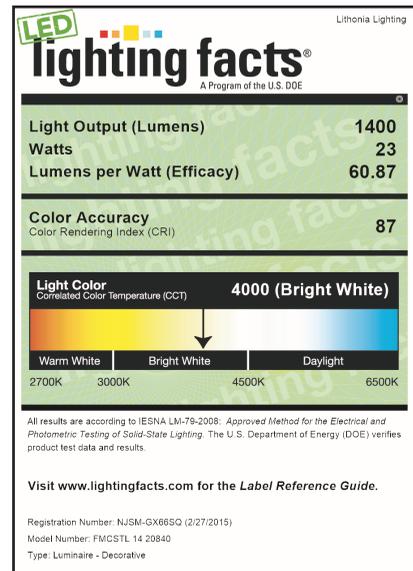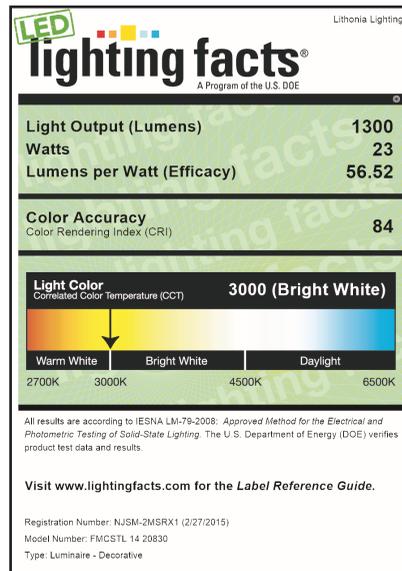

### SUGGESTED DIMMERS

The FMDDHL is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	Skylark 300P
	NTELV 300
	NLV 600
Synergy	ISD 600 I 120