

three inches = one foot
 One and one-half inches = one foot
 one inch = one foot
 three-quarters inch = one foot
 one-half inch = one foot
 three-eighths inch = one foot
 one-quarter inch = one foot
 one-eighth inch = one foot

SCOPE OF WORK:
 A. REMOVE EXIST BUR SYS & INSUL TO EXPOSE EXIST MTL DECK.
 B. PROVIDE NEW BUR SYS CONSISTING OF AGREGATE ON BUR OVER TAPERED PERLITE INSUL MOPPED TO 1.3" ISOCYANURATE INSUL WHICH IS MOPPED TO VAPOR RETARDER (2 PILES OF FELTS MOPPED TO 3/4" MINERAL BOARD THAT IS MECHANICALLY FASTENED TO THE EXIST MTL DECK).

SCOPE OF WORK:
 A. REMOVE EXIST BUR SYS & INSUL TO EXPOSE EXIST MTL DECK.
 B. PROVIDE NEW BUR SYS CONSISTING OF AGREGATE ON BUR OVER 1 1/2" FIBERBOARD INSUL MOPPED TO 1.3" ISOCYANURATE INSUL WHICH IS MOPPED TO VAPOR RETARDER (2 PILES OF FELTS MOPPED TO 3/4" MINERAL BOARD THAT IS MECHANICALLY FASTENED TO THE EXIST MTL DECK).

SCOPE OF WORK:
 A. REMOVE EXIST BUR SYS TO EXPOSE EXIST WD DECK.
 B. PROVIDE NEW BUR SYS CONSISTING OF AGREGATE ON BUR OVER 1 1/2" FIBERBOARD INSUL MOPPED TO 1.3" ISOCYANURATE INSUL WHICH IS ALSO MOPPED TO VAPOR RETARDER (BASE SHEET) WHICH IS MECHANICALLY FASTENED TO EXIST WD DECK THRU BLDG PAPER.

SCOPE OF WORK:
 A. REMOVE EXIST BUR SYS TO EXPOSE EXIST WD DECK.
 B. PROVIDE NEW BUR SYS CONSISTING OF AGREGATE ON BUR OVER 1 1/2" FIBERBOARD INSUL MOPPED TO 1.5" ISOCYANURATE INSUL WHICH IS ALSO MOPPED TO VAPOR RETARDER (BASE SHEET) WHICH IS MECHANICALLY FASTENED TO EXIST WD DECK THRU BLDG PAPER.

KEY PLAN - ROOF AREA '11A-2'


KEY PLAN - ROOF AREA '11A-1'

KEY PLAN - ROOF AREA '11'


KEY PLAN - ROOF AREA '54'

SCOPE OF WORK:
 A. REMOVE EXIST BUR SYS TO EXPOSE EXIST GYPSUM DECK.
 B. PROVIDE NEW BUR SYS CONSISTING OF AGREGATE ON BUR OVER 1 1/2" FIBERBOARD INSUL MOPPED TO 1.5" ISOCYANURATE INSUL WHICH IS ALSO MOPPED TO A VAPOR RETARDER (BASE SHEET) WHICH IS MECHANICALLY FASTENED TO EXIST GYPSUM DECK THRU BLDG PAPER.

KEY PLAN - ROOF AREA '11A-3'

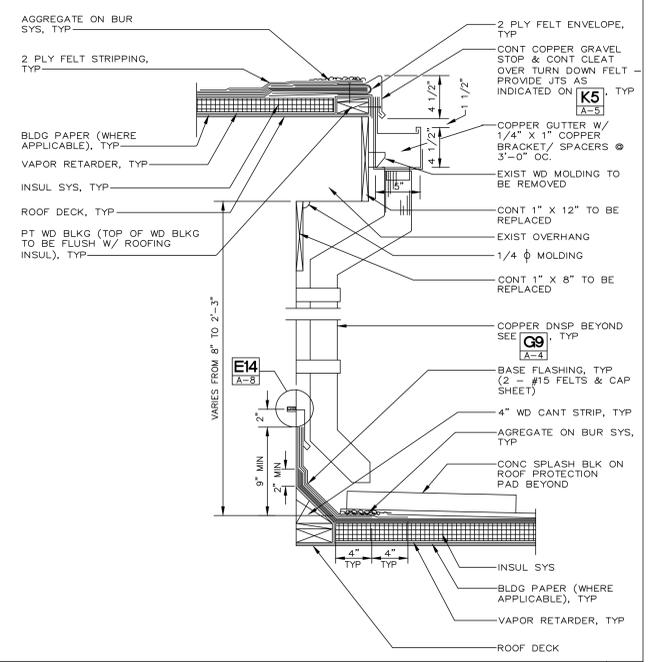

EXPANSION JOINT/GUTTER DETAIL

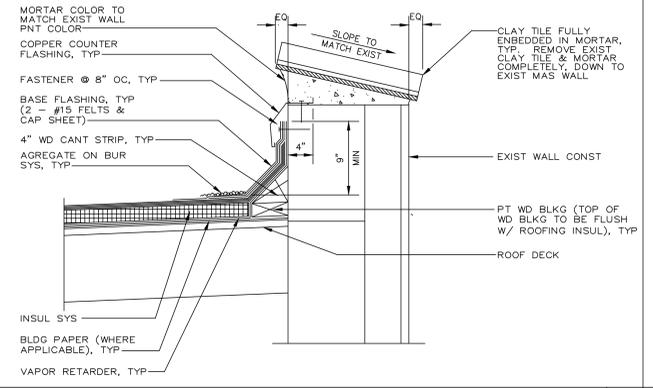

PARAPET WALL DETAIL

- LEGEND:**
- Direction of exist roof slope to be maintained.
 - Direction of new roof slope (1/4" PER FT).
 - New gutter & dnsp @ exist dnsp location indicated.
 - New gutter, & dnsp @ new dnsp location indicated.
 - Vent stack to remain flash as indicated on J12.
 - Exhaust fan to remain, disconnect & reconnect as req'd to flash as indicated on G15.
 - 2'-0" x 4'-0" roof protection pad.
 - Exist clay tile coping to be replaced. See A15 for sim dtl.
 - MIN 18" x 30" CONC SPLASH BLK.
 - EXHAUST & SUPPORT CURB TO BE REMOVED. CLOSE ROOF DECK OPEN W/ 3/4" PWD. PROVIDE 3 - 2" x 6" EQ SPACED & SECURE TO ADJ JSTS.
 - EXIST LADDER, RESET IN PITCH PAN AS INDICATED ON K9.
 - SURFACE MTD HVAC UNIT TO BE REMOVED. SEAL DECK OPNGS AS REQ'D.

GENERAL NOTES:

- PROVIDE BUR TIE-IN DTL @ COMPLETION OF EA DAYS WORK AS INDICATED ON K15.
- FOR ALL VERT TERMINATION OF BUR BASE FLASHING, SEE G7.

SPECIFIC NOTES (X):

- ROOF NOT IN CONTRACT.
- INSUL CRICKET.
- REPLACE EXIST DETERIORATED ROOF W/ NEW PREFORMED ROOF PANEL SYS. EXIST STR TO REMAIN.
- OFFSET DNSP BELOW ROOF & SECURE TO EXIST COL.
- EXIST CONDUIT TO BE REMOVED & REINSTALLED TO ALLOW ROOFING INSTALLATION.
- EXIST THRU-DECK MTL DNSP TO BE REMOVED. SEAL ROOF DECK AS REQ'D.
- RAKE TERRA COTTA JTS MIN 1/4" D BELOW TOP & FILL W/ JT SEALANT.

arkitex 2
 4923 WEST CYPRESS ST.
 TAMPA, FLORIDA 33607
 TELEPHONE: (813) 286-1919
 FACSIMILE: (813) 286-8388

Drawing Title
ROOF PLAN

Approved: Division Chief
 Approved: Service Director

Project Title
REPLACE VARIOUS ROOFS - PHASE 1

Building Number
11, 11A, 54

Location
 DEPARTMENT OF VETERAN AFFAIRS
 MEDICAL CENTER, BAY PINES, FL 33504

Date
 8-25-95

Project No.
 516-95-102

DRAWING NO.
A-3

Dwg. 4 of 18

