



Drawing File: H:\301A\5317-Correct Facility Life Safety Deficiencies\Drawings\5317 FP104.dwg
Plotted by: microvell
Plotted Date: Sep 04, 2014 - 2:33pm

one-eighth inch = one foot
one-quarter inch = one foot
three-eighths inch = one foot
one-half inch = one foot
three-quarters inch = one foot
one inch = one foot
one and one-half inches = one foot
three inches = one foot

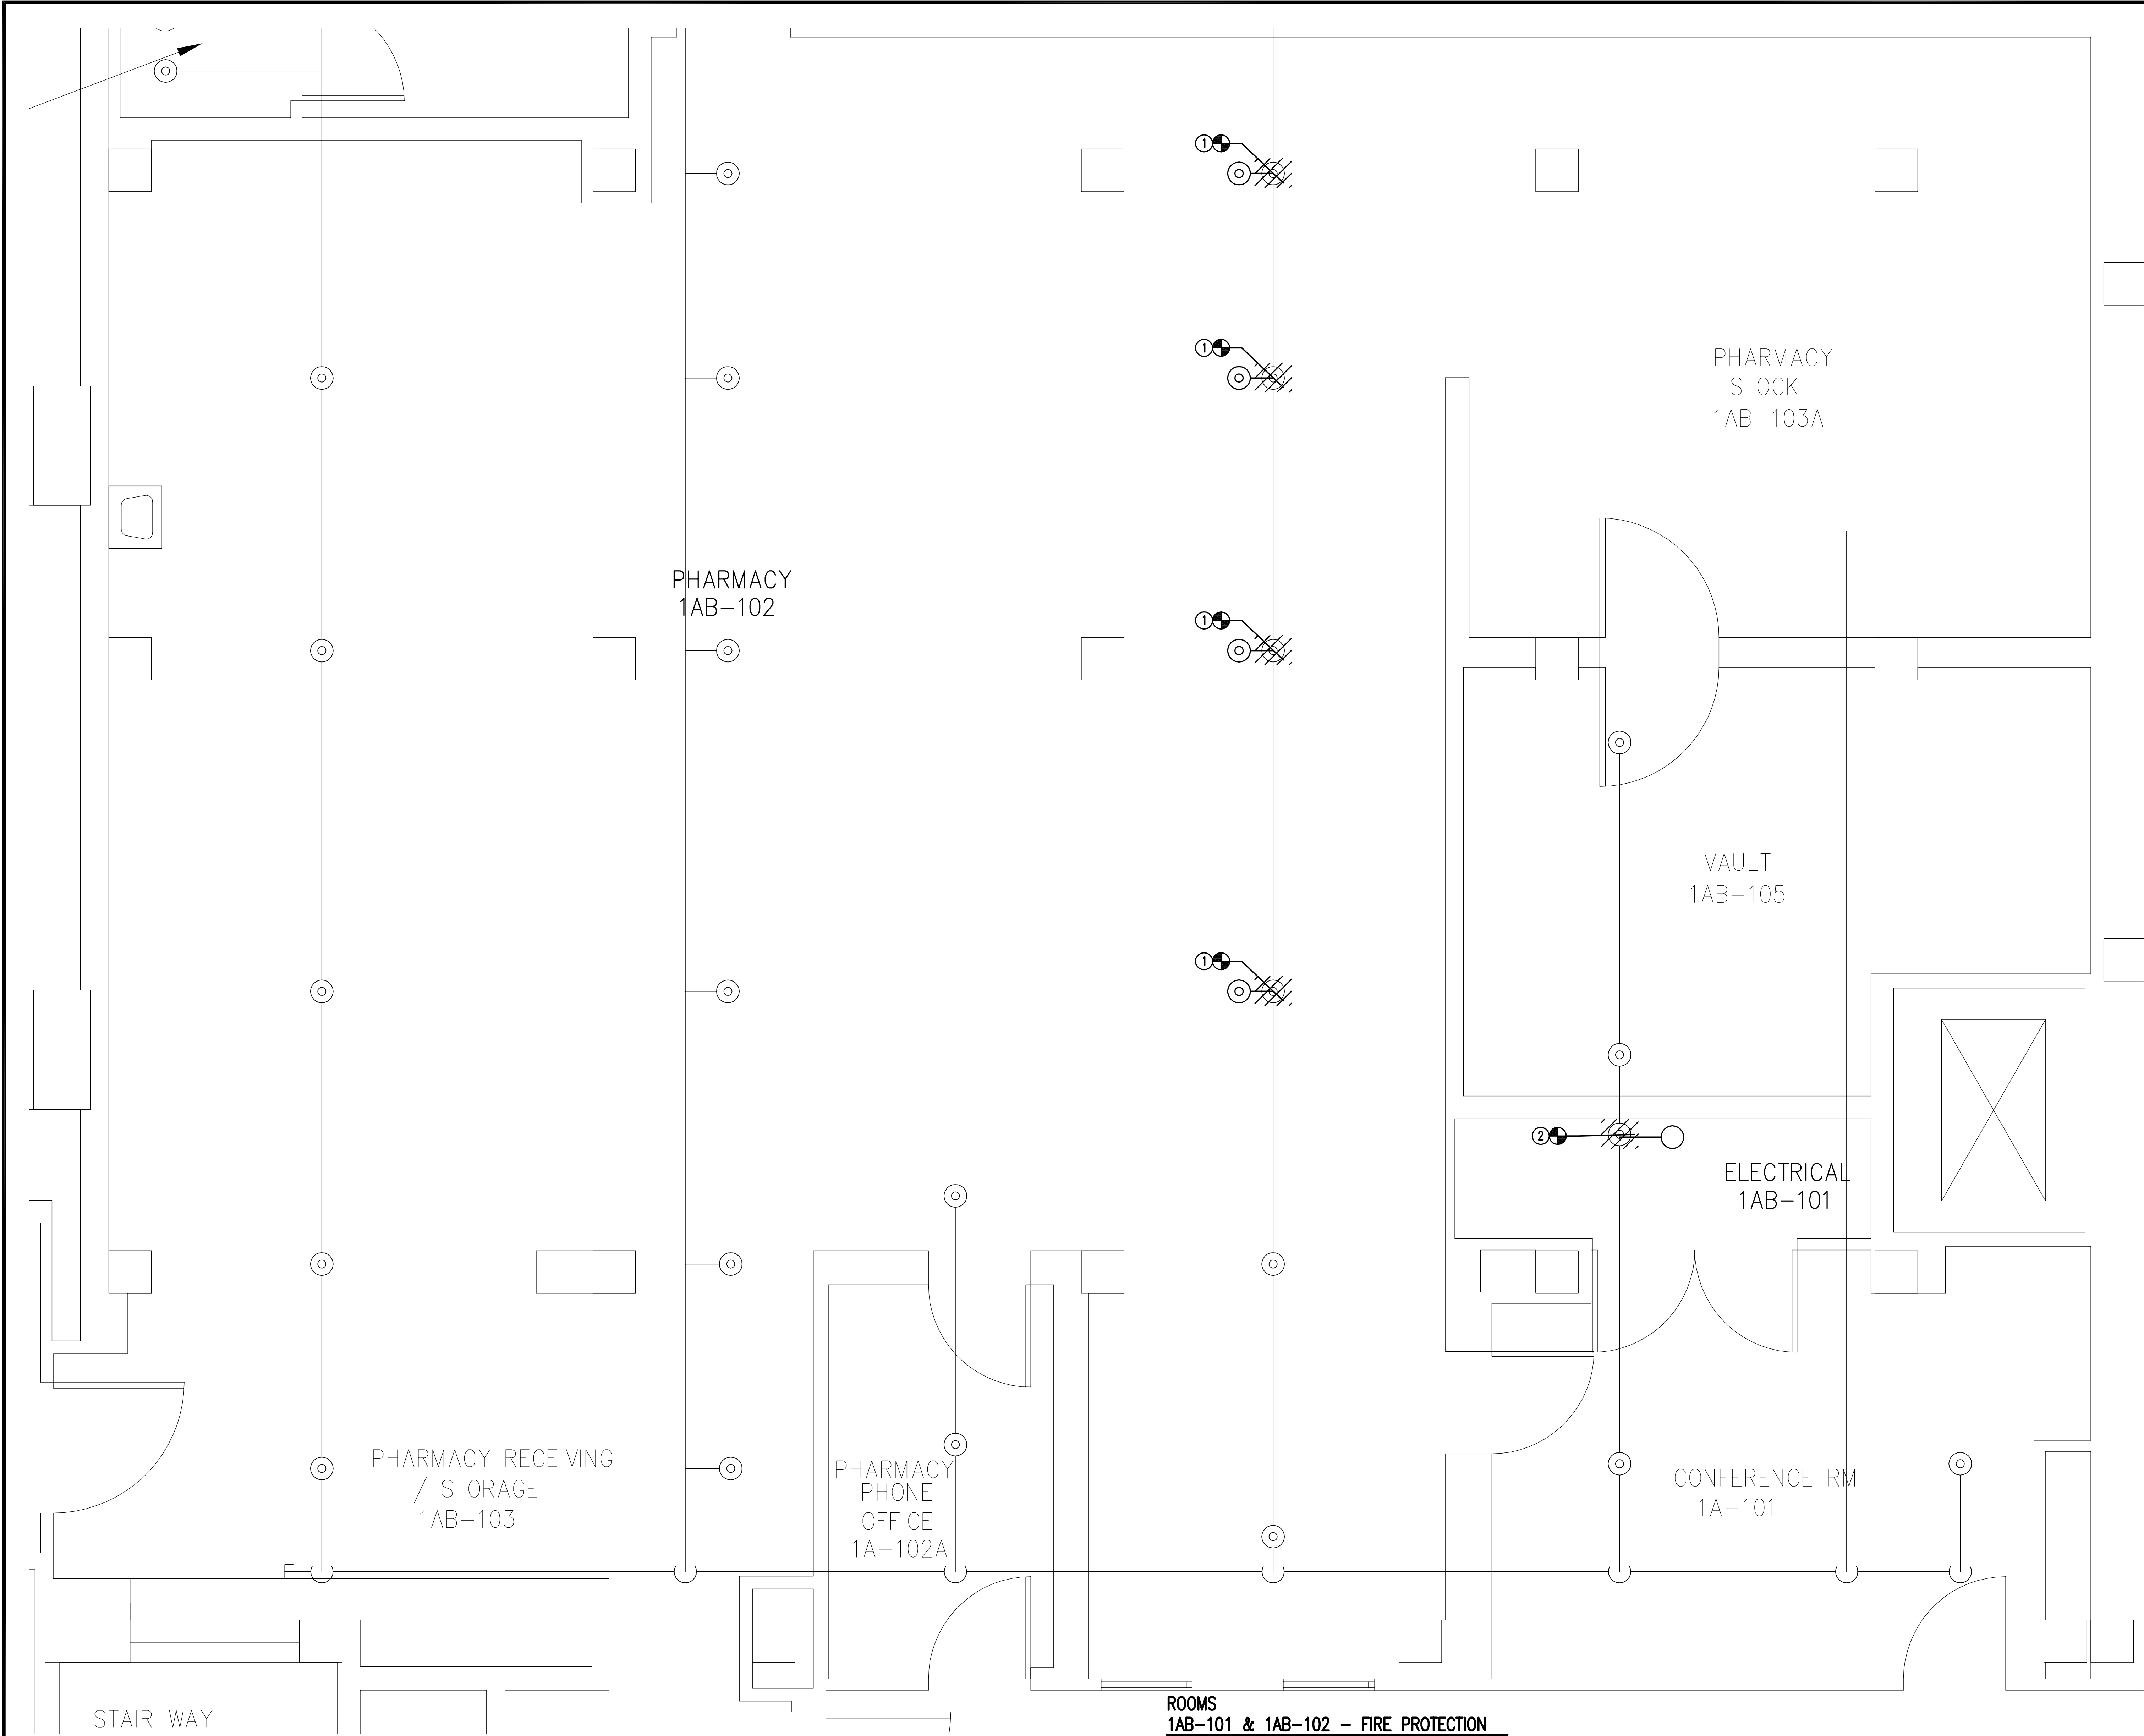

- NOTES:**
(THIS SHEET ONLY)
- 1 REMOVE EXISTING PENDENT SPRINKLER HEADS AS INDICATED AND INSTALL NEW PENDENT SPRINKLER HEAD A MINIMUM OF 12 INCHES CLOSER TO CENTER ROW OF SPRINKLER HEADS TO PROVIDE COVERAGE IN ACCORDANCE WITH NFPA 13.
 - 2 REMOVE EXISTING PENDENT SPRINKLER HEAD AND ROUTE SPRINKLER PIPE UP AND INSTALL AN UPRIGHT SPRINKLER HEAD IN ACCORDANCE WITH NFPA 13.

- GENERAL NOTES:**
(THIS SHEET ONLY)
1. ALL MATERIALS AND EQUIPMENT USED ON THIS PROJECT SHALL BE UL LISTED AND FM APPROVED.
 2. EXISTING PIPING IS THREADED SCHEDULE 40 BLACK STEEL PIPE. NEW PIPING SHALL MATCH EXISTING.
 3. EXISTING PIPING WILL BE PERMITTED TO BE REUSED BUT FITTINGS AND HEADS SHALL BE NEW.
 4. ALL PIPING AND EQUIPMENT INSTALLED ON THIS PROJECT SHALL BE INSTALLED IN ACCORDANCE WITH NFPA 13 AND VA FIRE PROTECTION DESIGN GUIDE.
 5. ALL NEW PENDENT HEADS INSTALLED SHALL BE ON A RETURN BEND CONFIGURATION.

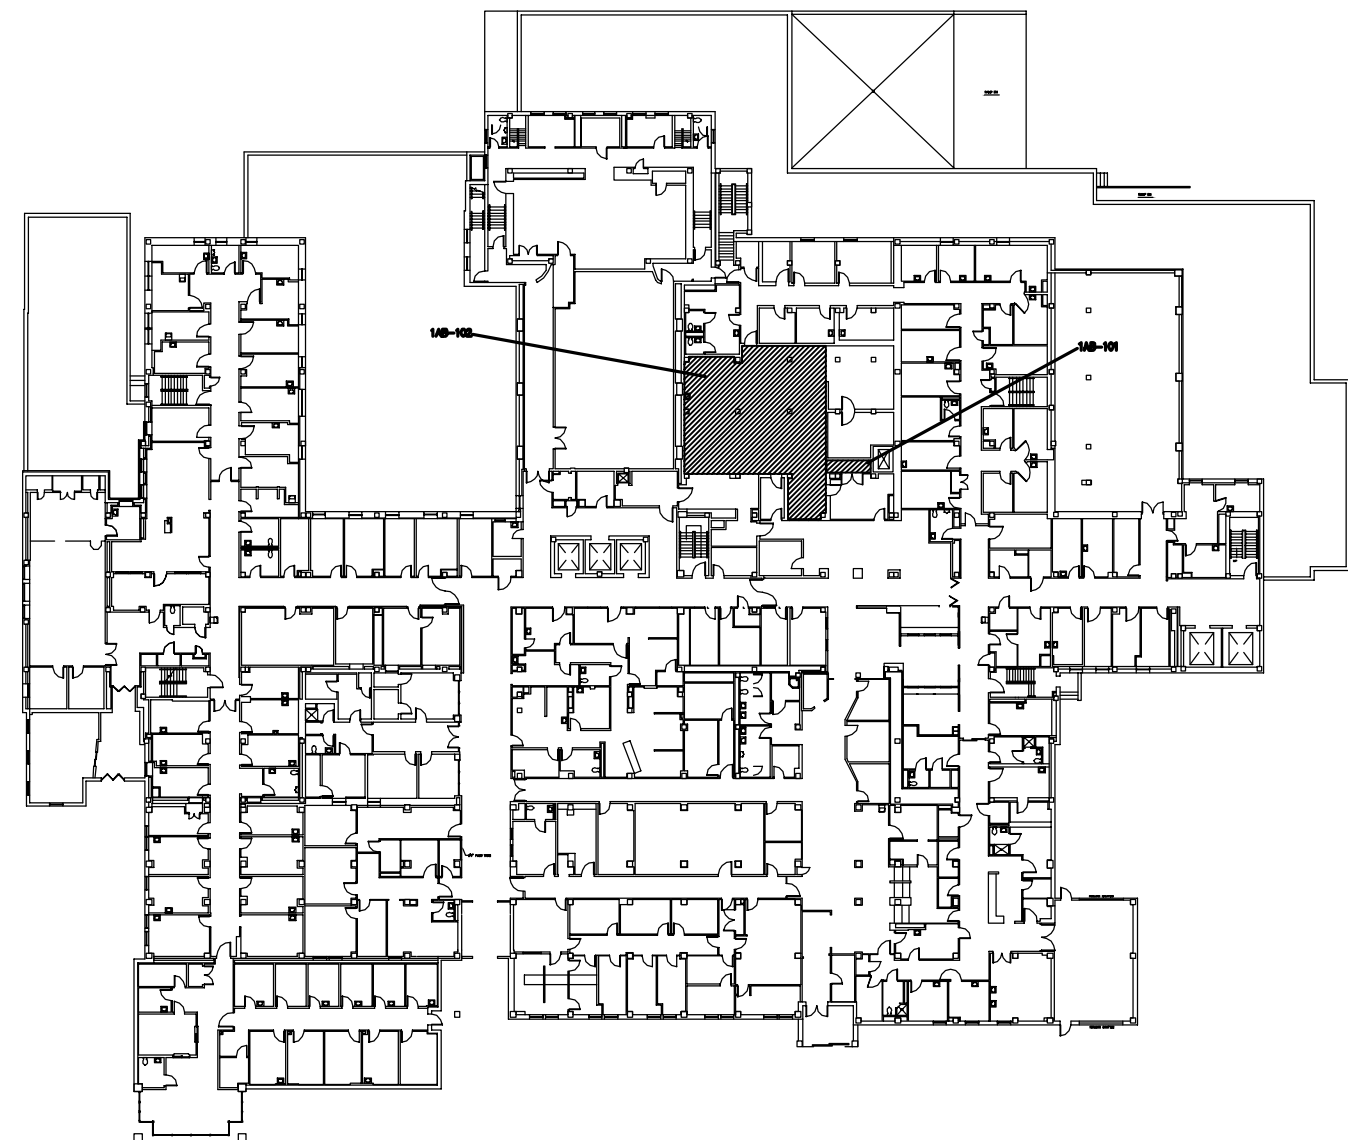

FIRST FLOOR KEY PLAN
SCALE: NTS

ROOMS
1AB-101 & 1AB-102 - FIRE PROTECTION
SCALE: 1/2" = 1'-0"

Revisions	Date



CORPORATE OFFICE
590 Means St. NW, Ste. 200
Atlanta, GA 30318
404.214.9774



CLARK•NEXSEN

440 MARTIN LUTHER KING, JR. BLVD
MACON, GEORGIA 31201
478-743-8415 FAX 478-743-8239
WWW.CLARKNEXSEN.COM

Drawing Title
PARTIAL FIRST FLOOR PLAN FIRE PROTECTION
Approved Project Engineer

Project Title
CORRECT LIFE SAFETY DEFICIENCIES BECKLEY VAMC
FINAL SUBMITTAL
Building Number
Checked
Drawn
Location
BECKLEY, W.V.

Date
09-05-2014
Project No.
517-14-106
DRAWING NO.
FP104
Dwg. XX Of XX

**Veterans
Administration**