

|            |      |
|------------|------|
| Revisions: | Date |
|            |      |
|            |      |
|            |      |
|            |      |
|            |      |
|            |      |
|            |      |
|            |      |
|            |      |


|   |  |
|---|--|
| <b>CONSULTANTS:</b>   |  |
| SURVEYOR<br>BERRY, CHERRY & FARM<br>1000 W. 14TH ST.<br>CLOVIS, CA 95312<br>(559) 328-1400 PHONE                  | GEOTECHNICAL ENGINEER<br>STRONG, MARINE & BAILEY<br>1000 W. 14TH ST.<br>CLOVIS, CA 95312<br>(559) 328-1400 PHONE |
| COST ESTIMATING<br>LTD.<br>5000 WEST SPRING VALLEY RD., SUITE 102<br>SACRAMENTO, CA 95827<br>(916) 925-4000 PHONE |  |

|  |  |
|--|--|
| <b>ARCHITECT/ENGINEERS:</b>  |  |
| <b>JACOBS</b><br>Jacobs Engineering Group Inc.<br>Consultants in Architecture, Engineering,<br>Planning, and the Environment<br>10000 Corporate Office Site 200<br>Sacramento, California 95831<br>(916) 929-5323 Fax (916) 929-1772 |  |


|   |                            |
|---|----------------------------|
| <b>CONSTRUCTION DOCUMENTS</b>   |                            |
| Project Title<br>SAN JOAQUIN VALLEY<br>NATIONAL CEMETERY<br>PRE-PLACED CRIPPS IN SECTION 21 | Project Number<br>9130M012 |
| Location<br>SAN JOAQUIN VALLEY NATIONAL CEMETERY<br>SANTA NEILA CALIFORNIA                  | Drawing Number<br>I-601    |
| Date<br>09/28/2015  | Checked<br>MS              |
|   | Drawn<br>RAM               |
|   | Dwg. 21 of 25              |

|   |  |
|---|--|
| <b>NATIONAL CEMETERY ADMINISTRATION DESIGN AND CONSTRUCTION SERVICE</b> |  |
| Department of Veterans Affairs  |  |


**F1 GROUND COVER PLANTING**  
NOT TO SCALE

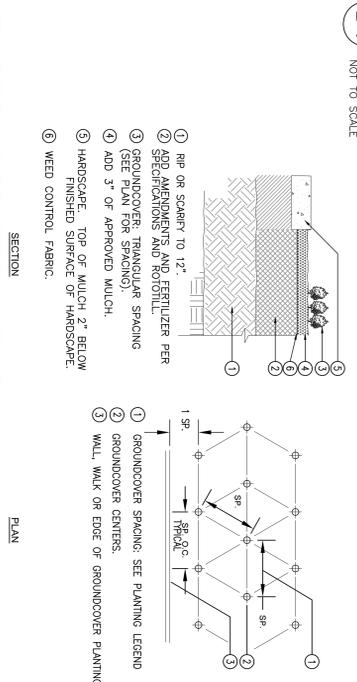


**D1 SHRUB PLANTING DETAIL**  
NOT TO SCALE

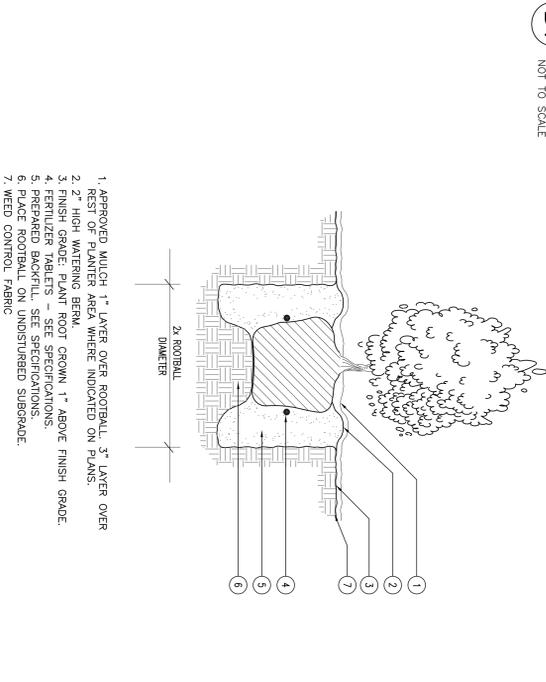


**B1 TREE PLANTING**  
NOT TO SCALE

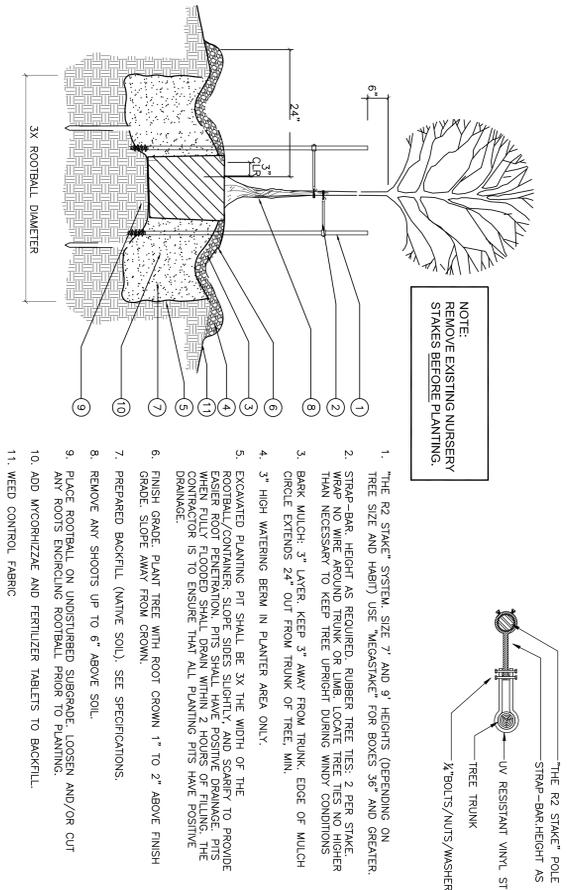

**B4 METAL (STEEL) LANDSCAPE EDGING**  
NOT TO SCALE

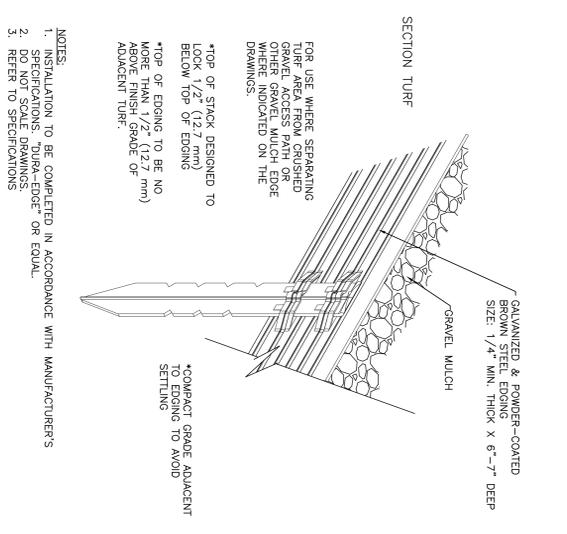

**E6 GRAVEL ACCESS PATH SECTION DETAIL**  
NOT TO SCALE

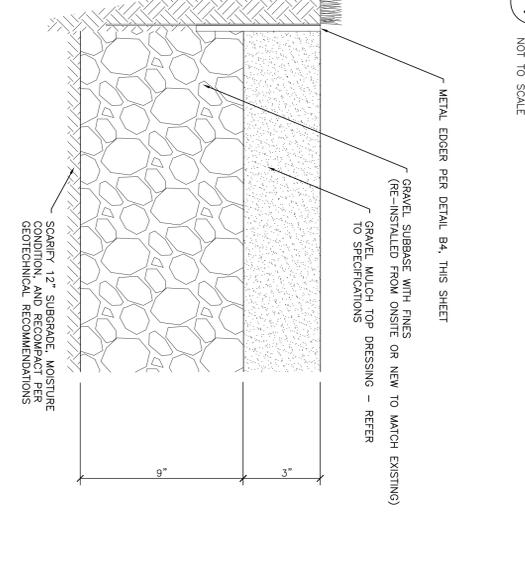

**PLANTING NOTES**

- PLANT MATERIAL QUANTITIES SHOWN ON DRAWINGS ARE REGULATORY ONLY. THE CONTRACTOR IS RESPONSIBLE FOR ALL PLANT MATERIAL REQUIRED AS INDICATED IN THE DRAWINGS.
- ALL PLANT MATERIALS SHALL COMPLY WITH FORM AND CHARACTERISTIC REQUIREMENTS AS SPECIFIED. ALL PLANT MATERIAL WILL COMPLY WITH ANSI Z601 STANDARD FOR NURSERY STOCK - LATEST EDITION.
- IMMEDIATELY AFTER AWARD OF CONTRACT THE CONTRACTOR SHALL NOTIFY THE LANDSCAPE ARCHITECT IF SPECIFIED PLANT MATERIAL IS NOT AVAILABLE FROM COMMERCIAL NURSERIES, IN CASE SELECTIONS NOT AVAILABLE. THE LANDSCAPE ARCHITECT WILL PROVIDE ALTERNATE PLANT MATERIAL SELECTIONS.
- EXCAVATED PLANT PITS SHALL HAVE POSITIVE DRAINAGE. PLANT PITS SHALL BE FULLY FLOODED WITH WATER SHALL DRAIN WITHIN 8 HOURS OF FILLING. THE CONTRACTOR SHALL ENSURE ALL PLANT PITS HAVE POSITIVE DRAINAGE.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DESIGN / REPLACEMENT OF DAMAGED UTILITIES TO THE SATISFACTION OF THE OWNER OR GOVERNING AGENCY AND AT NO EXTRA COST TO THE OWNER.
- THE CONTRACTOR IS RESPONSIBLE FOR SOIL EROSION CONTROL MEASURES THAT MAY BE REQUIRED THROUGH THE DURATION OF THE CONTRACT PERIOD.
- THESE LOCATIONS MAY REQUIRE ADJUSTING IN FIELD TO ACCOMMODATE LIGHT POLES, SPRINKLERS AND UTILITY STRUCTURES.
- WHERE TREE PLACEMENT IS WITHIN 5' OF PAVING, CONTRACTOR SHALL INSTALL A 12" OR 18" DEPTH ROOT BARRIER. SEE TREE PLANTING DETAIL FOR ADDITIONAL INFORMATION.
- TREE PLANTING NOTES:
  - 12" OF THE ROOTBALL SHALL BE ABOVE THE FINISH GRADE OF THE SITE.
  - THE MANUFACTURER'S TAGS IDENTIFIED WHILE REMOVING NORMAL STAKE OF TREE.
  - NEVER CUT A LEADER, BRANCH OR DISTURB WHILE REMOVING NORMAL STAKE OF TREE.
  - PLACE 2 STAKES PER TREE OR 3 80# WIRES, 8" AND TALLER SHALL BE GIVED AS SHOWN IN DETAIL B3 THIS SHEET.
  - ALL TREE STAKES WITH WATER HOSE TO BE UNIFORM IN COLOR.
  - PLANTING PITS SHALL BE FULLY FLOODED WITH WATER TO PROVIDE POSITIVE DRAINAGE. PITS SHALL HAVE POSITIVE DRAINAGE. PITS SHALL BE FULLY FLOODED WITHIN 2 HOURS OF FILLING. THE CONTRACTOR IS TO ENSURE THAT ALL PLANTING PITS SHALL HAVE POSITIVE DRAINAGE.
  - REMOVE ANY SHOOTS UP TO 6" ABOVE SOIL.
  - REMOVE EXISTING NURSERY STAKES BEFORE PLANTING.
- REFER TO SPECIFICATIONS FOR BACK FILL FOR TREES, SHRUBS AND ONE GALLON GROUND COVERS.
- ALL PLANTING INSTALLATION INSTRUCTIONS THAT REQUIRE FERTILIZATION AND SOIL AMENDMENTS SHALL FOLLOW THE SOIL ANALYSIS RECOMMENDATIONS IN THE SOILS REPORT PROVIDED BY THE CONTRACTOR AS REQUIRED IN SPECIFICATIONS.
- APPLY A PRE-EMERGENT HERBICIDE AS APPROVED FOR USE IN THE STATE OF CALIFORNIA TO ALL PLANTING AND GRAVEL MULCH AREAS IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDED RATES.
- THE COR SHALL REVIEW THE INSTALLATION FOR COMPLIANCE TO PLANS AND SPECIFICATIONS.
- ALL LANDSCAPE AREAS SHALL BE MAINTAINED BY THE CONTRACTOR UNTIL FINAL ACCEPTANCE. LANDSCAPE PLANT ACCEPTANCE WILL OCCUR AFTER COMPLETION OF THE LANDSCAPE PLANT ESTABLISHMENT PERIOD. FOR FOLLOW UP MAINTENANCE, APPLY 5 POUNDS OF AMMONIUM SULFATE ESTABLISHMENT, APPLY 25-5-4 OR SIMILAR FERTILIZER TO PROVIDE DESIRED GROWTH RATE AND COLOR. REFER TO RESULTS OF SOILS ANALYSIS FOR ANY MODIFICATIONS TO THESE MAINTENANCE RECOMMENDATIONS.
- LONG TERM MAINTENANCE, EQUIPMENT REPLACEMENT AND/OR REPAIRS, AND IRRIGATION SCHEDULES SHALL FOLLOW GUIDELINES ESTABLISHED BY THE PLANS AND SPECIFICATIONS.

**CONSTRUCTION DOCUMENTS**

|   |                            |
|---|----------------------------|
| Project Title<br>SAN JOAQUIN VALLEY<br>NATIONAL CEMETERY<br>PRE-PLACED CRIPPS IN SECTION 21 | Project Number<br>9130M012 |
| Location<br>SAN JOAQUIN VALLEY NATIONAL CEMETERY<br>SANTA NEILA CALIFORNIA                  | Drawing Number<br>I-601    |
| Date<br>09/28/2015  | Checked<br>MS              |
|   | Drawn<br>RAM               |
|   | Dwg. 21 of 25              |

|   |  |
|---|--|
| <b>NATIONAL CEMETERY ADMINISTRATION DESIGN AND CONSTRUCTION SERVICE</b> |  |
| Department of Veterans Affairs  |  |