

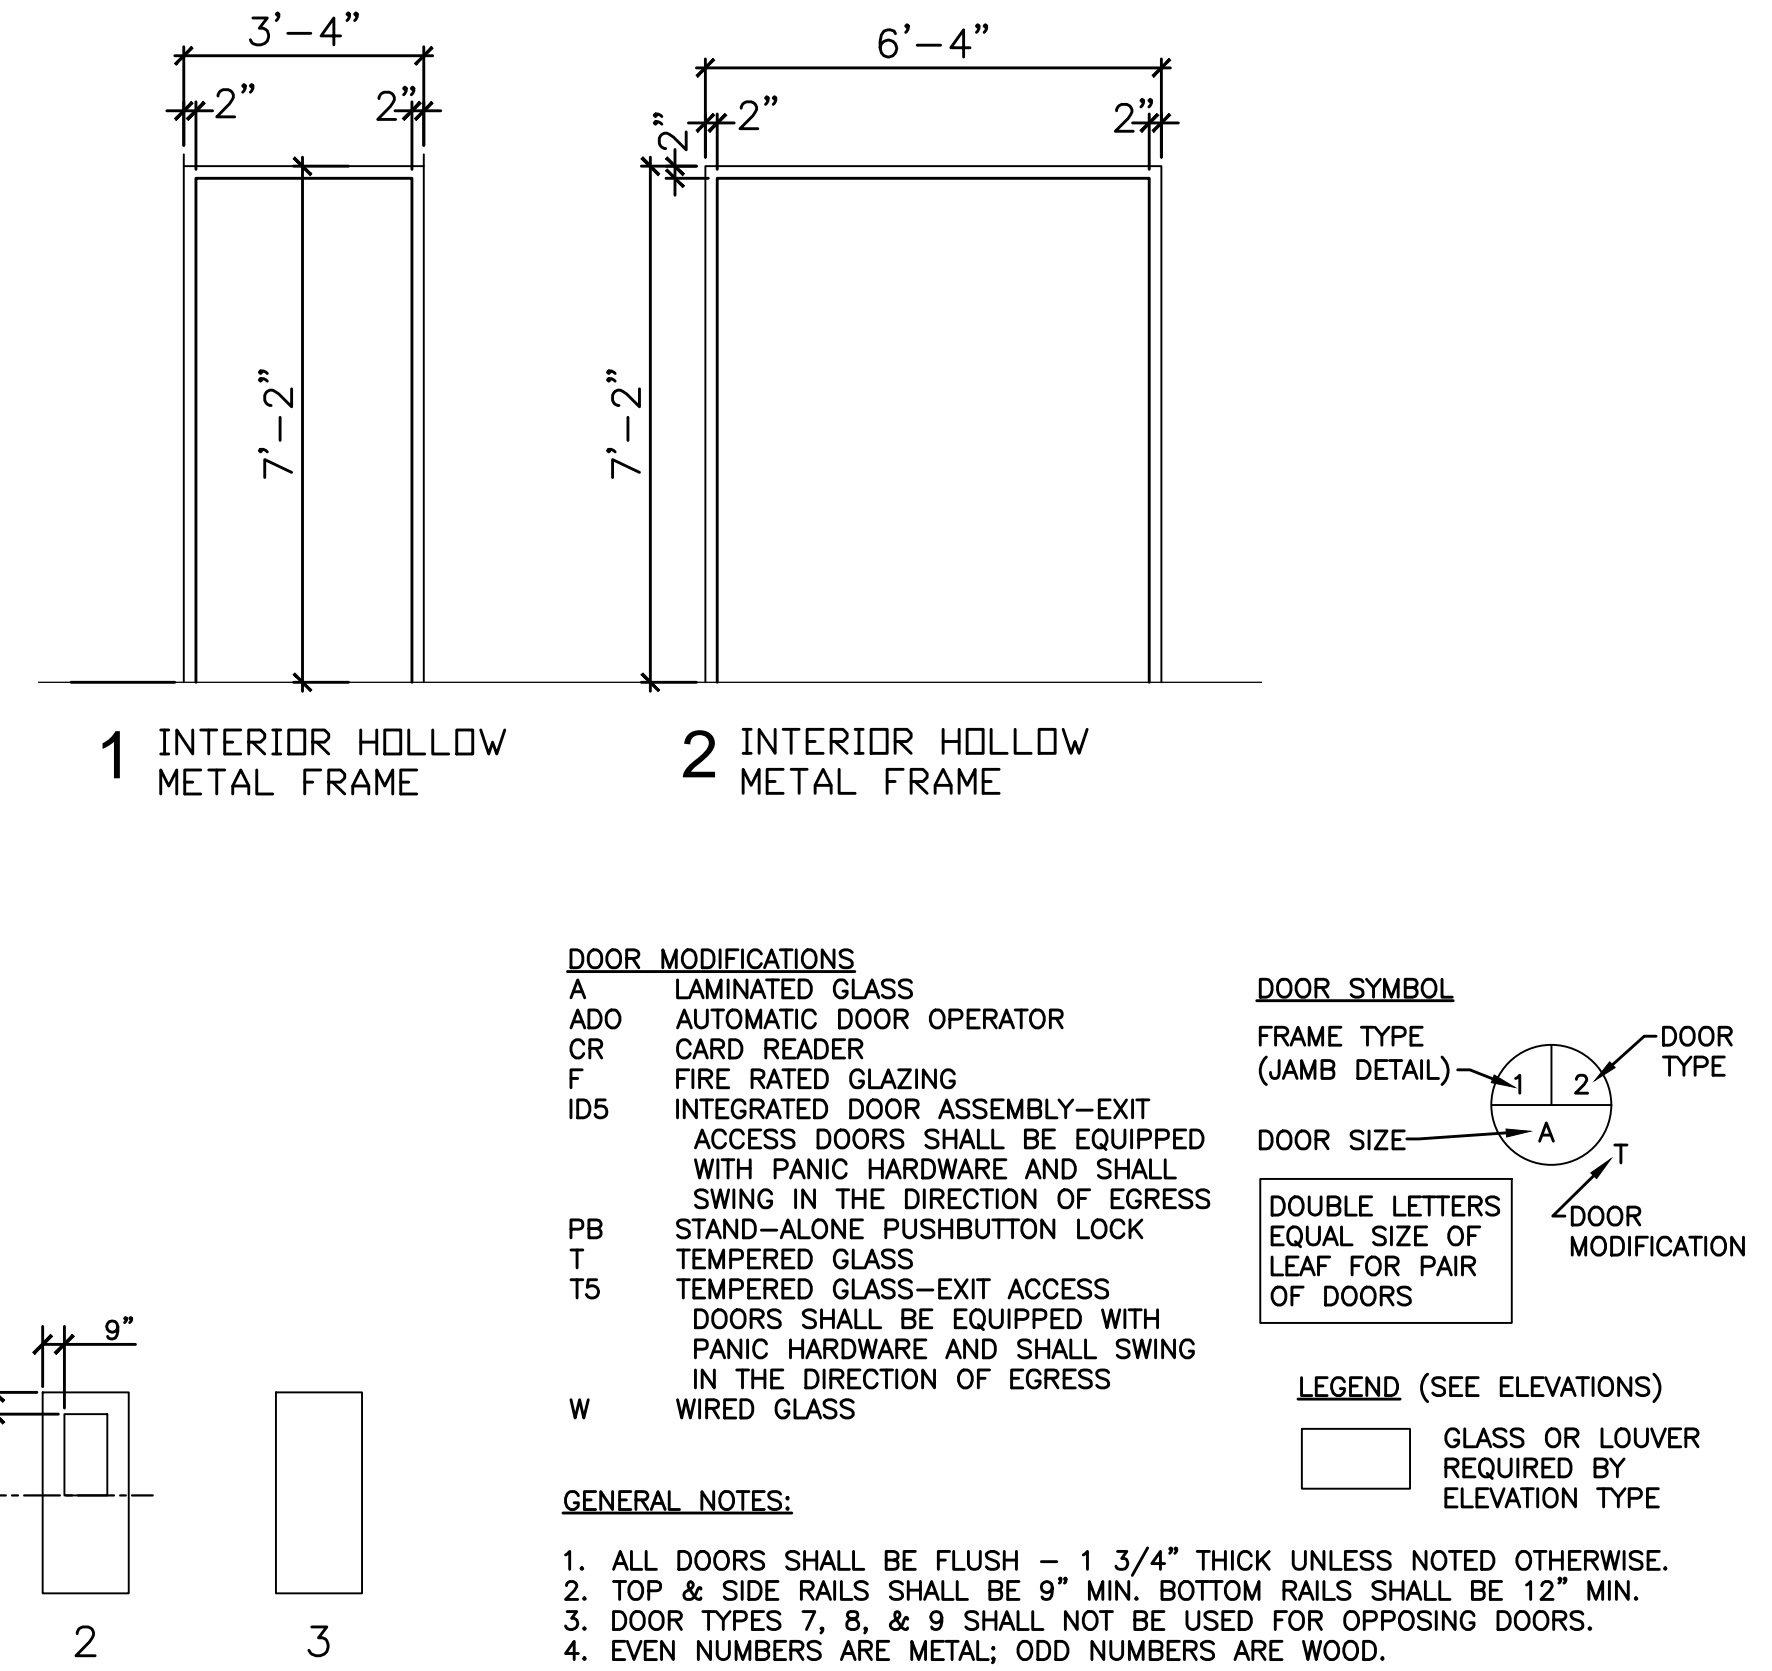
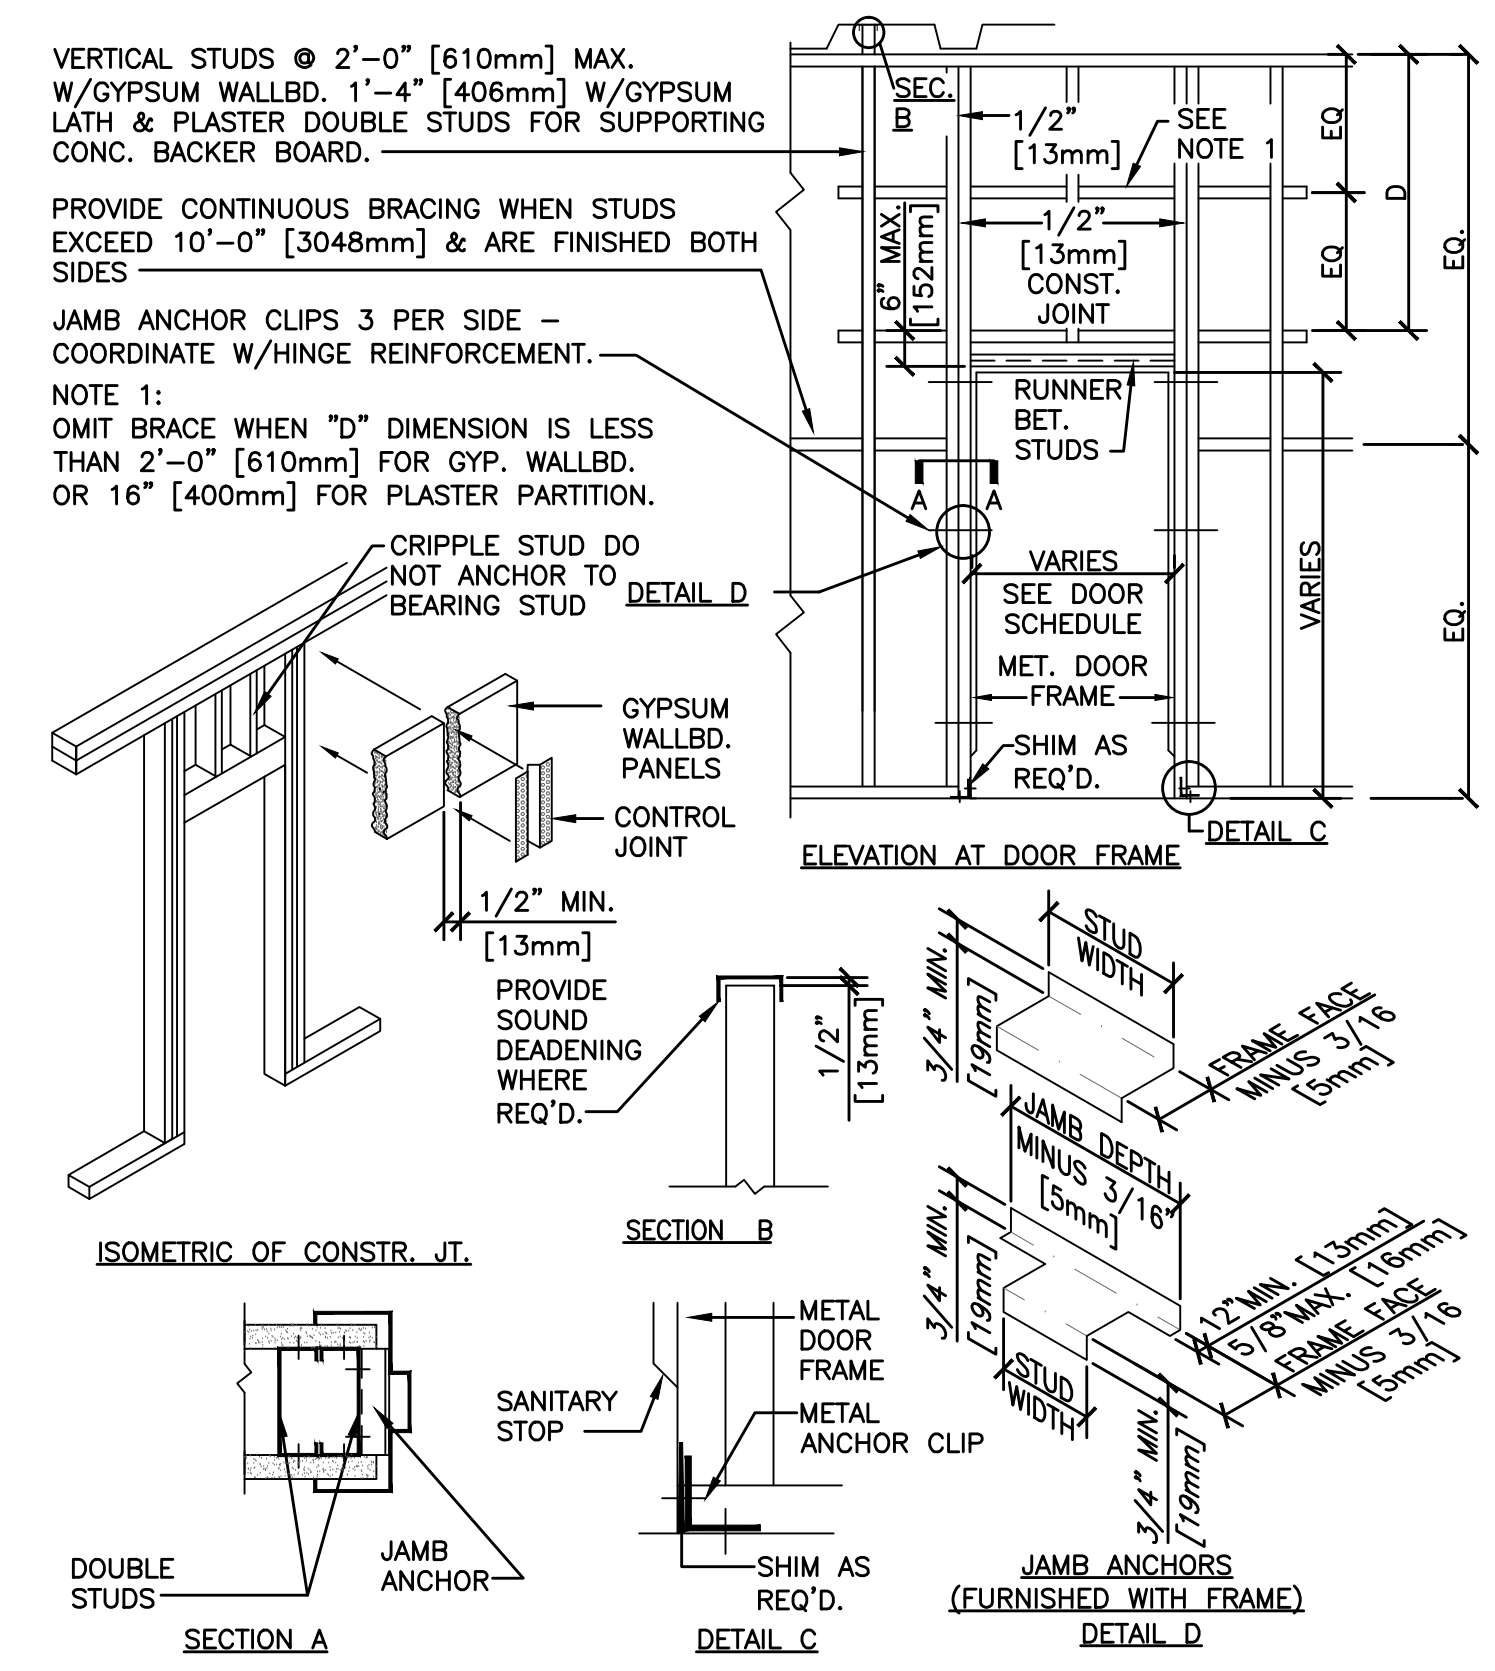
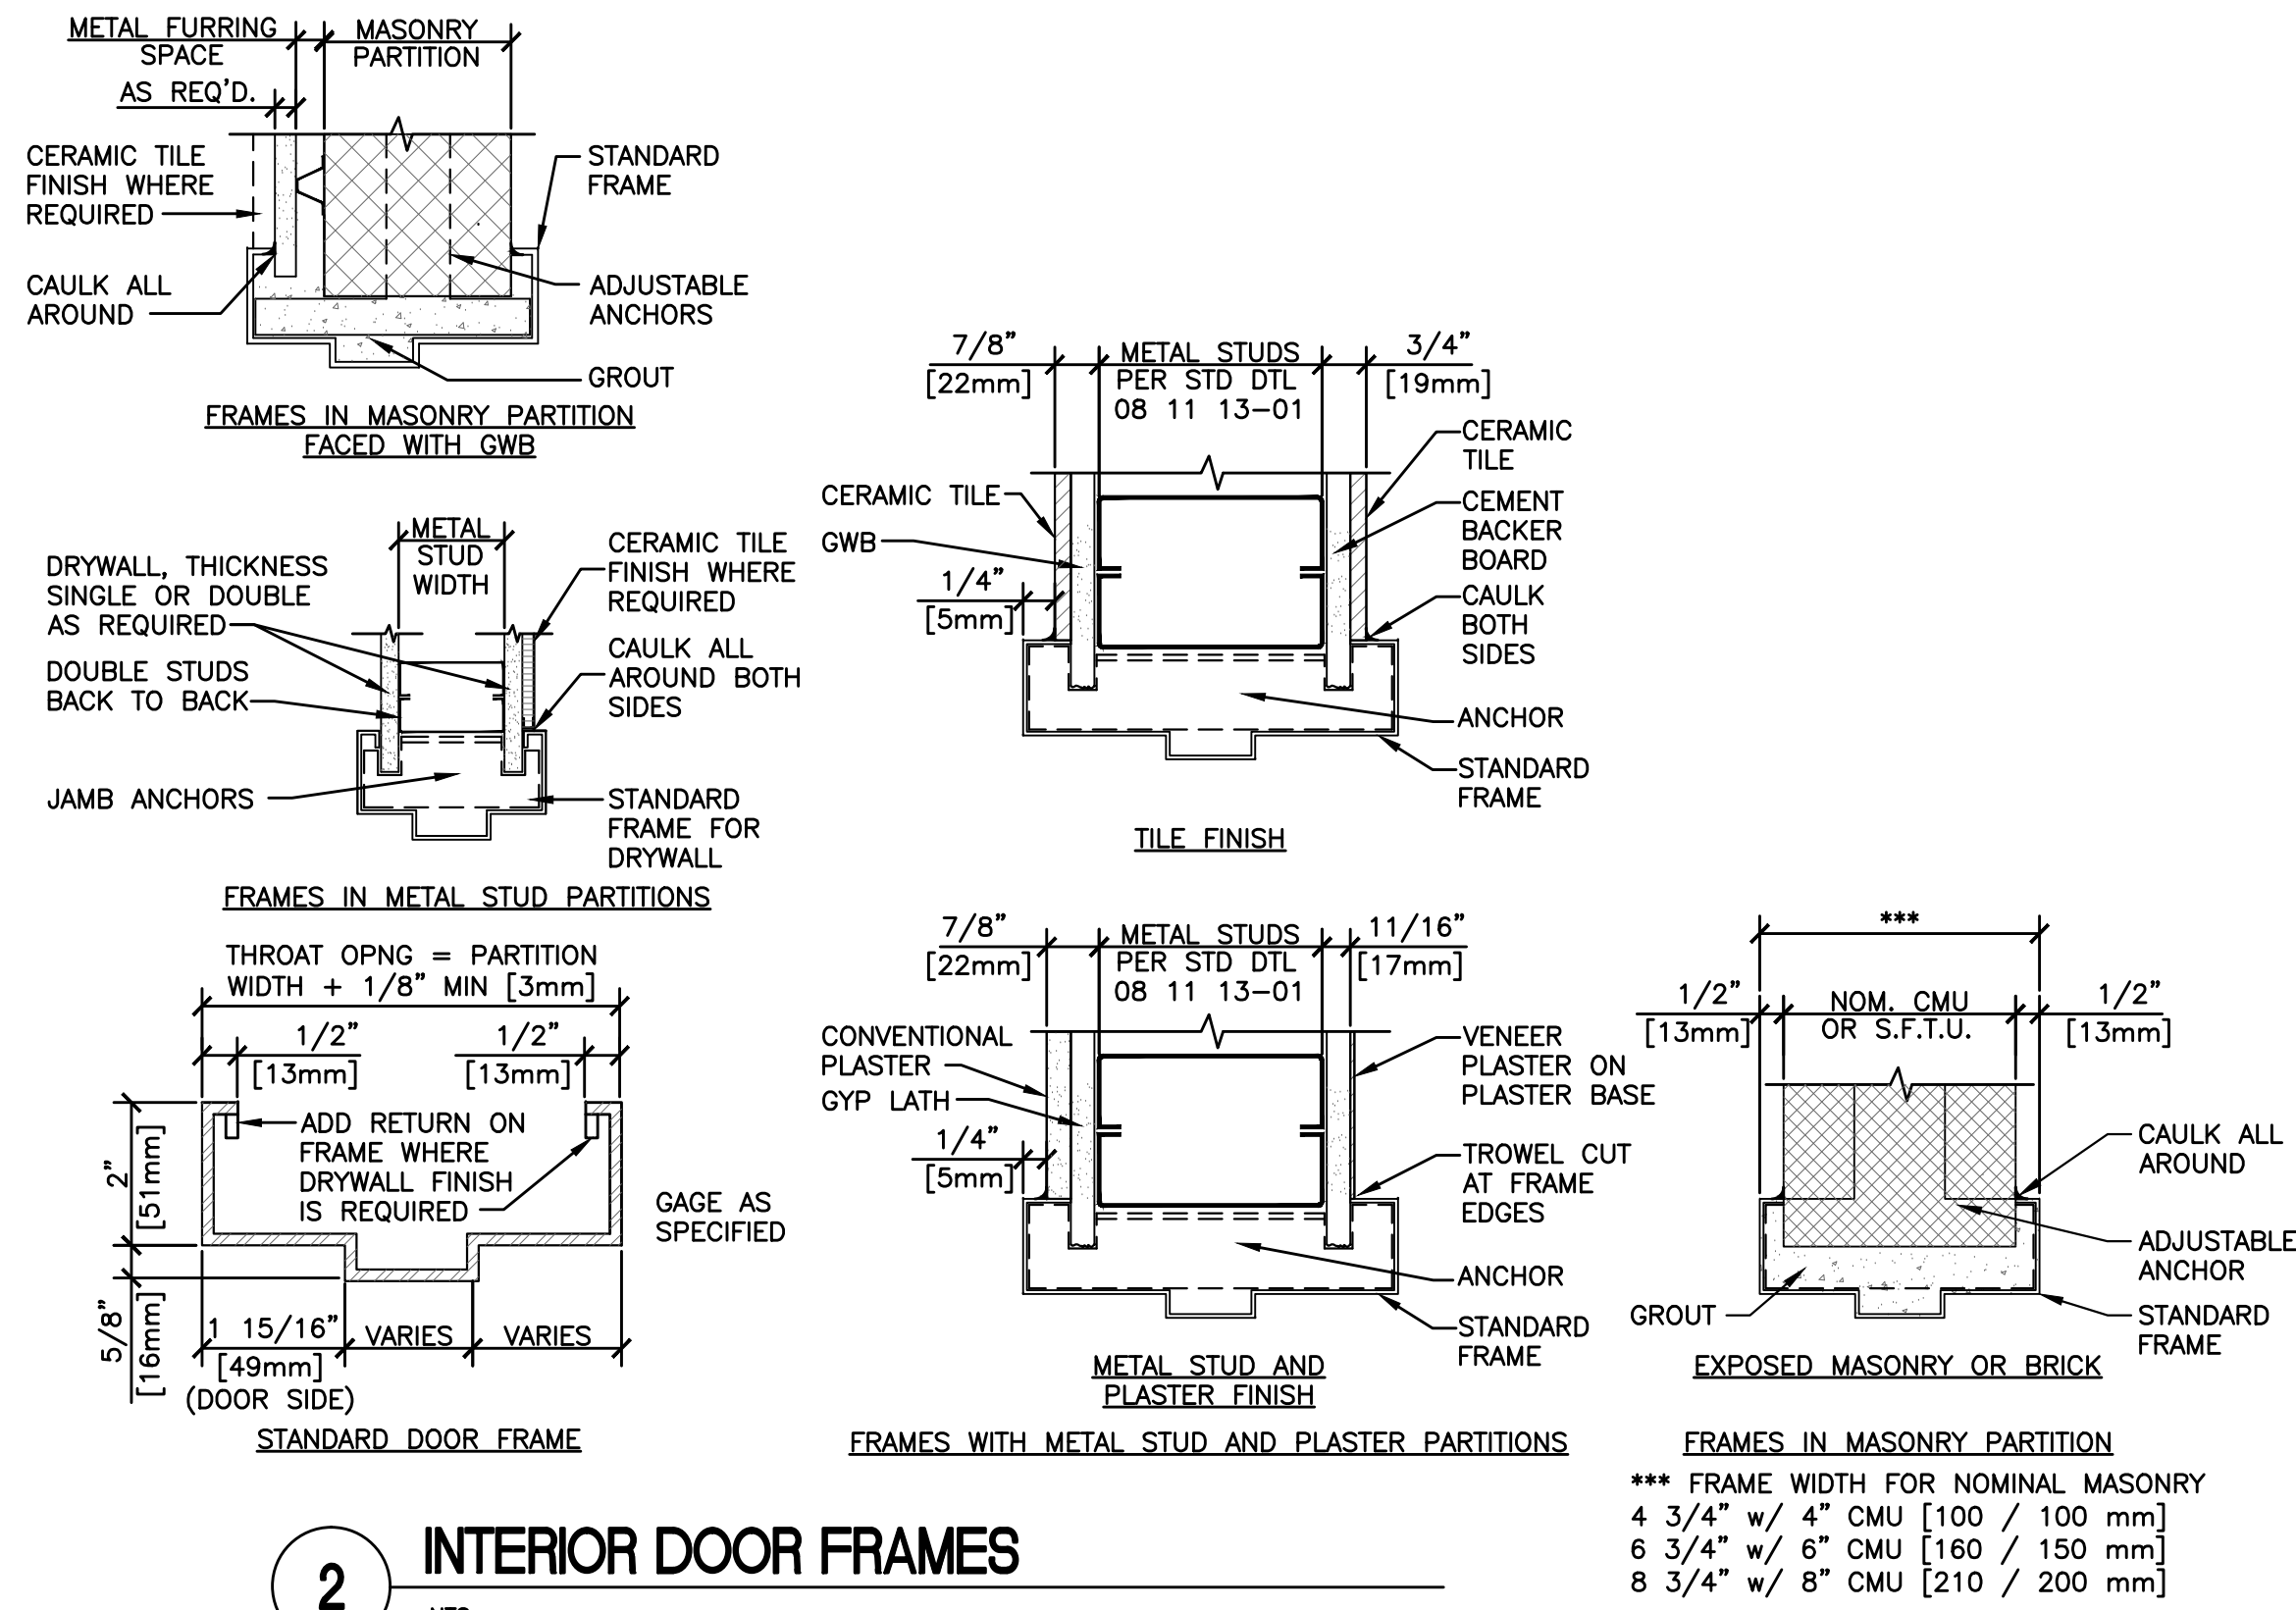


three inches = one foot  
one and one half inches = one foot  
one inch = one foot  
three quarters inch = one foot  
one half inch = one foot  
three eighths inch = one foot  
one quarter inch = one foot  
one eighth inch = one foot

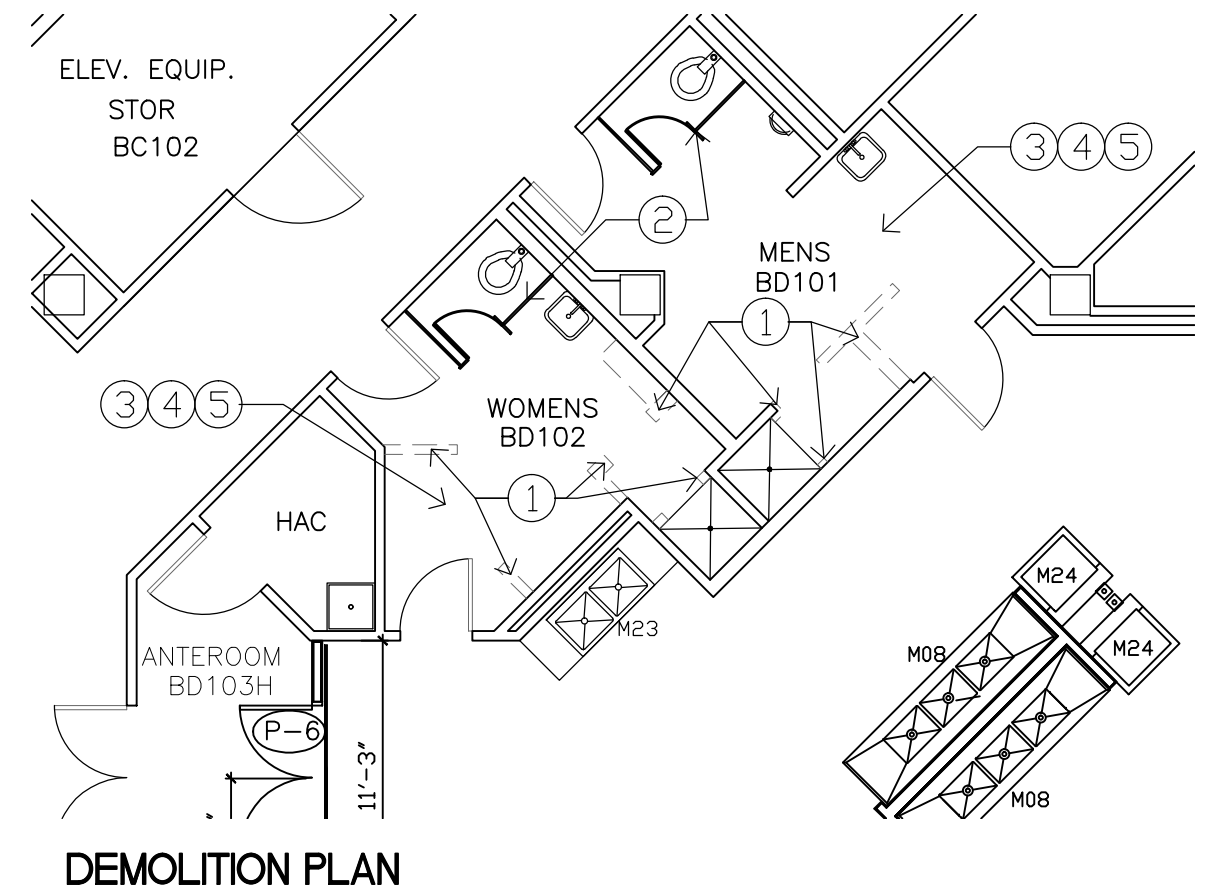

## ALTERNATE 2 - KEYED NOTES

- SCOPE OF WORK - ALT 2
1. REMOVE EXISTING WALLS AND LOCKERS IN THEIR ENTIRETY
  2. REMOVE EXISTING TOILET PARTITIONS - STORE FOR REINSTALLATION AFTER TILE WORK
  3. REMOVE ALL WALL AND FLOOR TILE - PREP FOR NEW TILE INSTALLATION
  4. INSTALL NEW 12x12 PORCELAIN TILE FULL HEIGHT ON WALLS AND ALL FLOORS
  5. REPAIR & REPAINT GYP CEILING
  6. INSTALL (12) 12x18x72 DOUBLE TIERED LOCKERS W/ SLOPED TOPS & SEALED ENDS

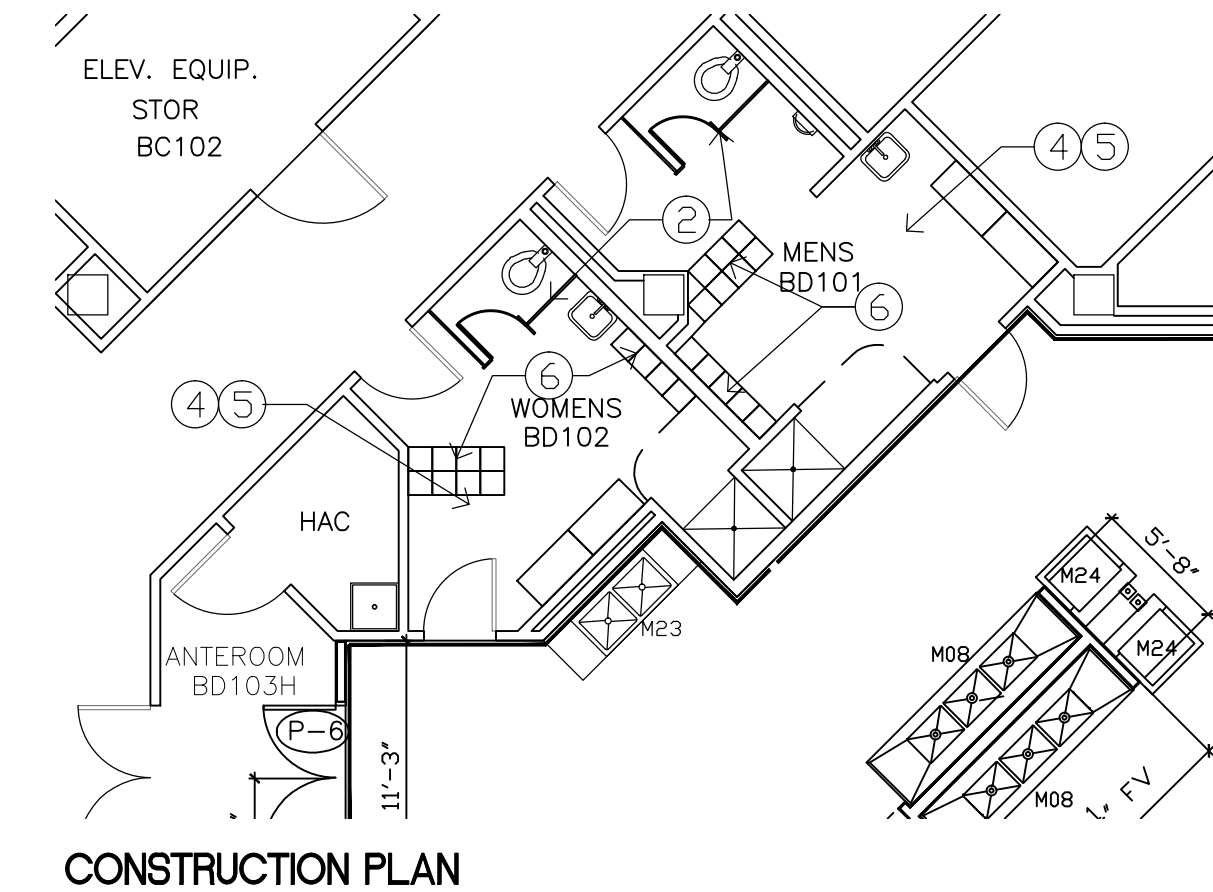

## BASEMENT FLOOR PLAN - ALTERNATE #2

SCALE: 1/8"=1'-0"

### FINISH SCHEDULE

ROOM	ROOM	FLOOR	CEILING	WALLS	NOTES:
BD101	MENS	PORCELAIN TILE	EXIST. LAY-IN	PORCELAIN TILE	ALTERNATE #2
BD102	WOMENS	PORCELAIN TILE	EXIST. LAY-IN	PORCELAIN TILE	ALTERNATE #2
BD103D	SOILED ROOM & DECON	RESINOUS FLOORING	GLOSS PAINT	VINYL SHEET	EXISTING WALLS TO REMAIN
BD103E	MEDIVATOR	RESINOUS FLOORING	GLOSS PAINT	VINYL SHEET	EXISTING WALLS TO REMAIN
BD103F	DIRTY	RESINOUS FLOORING	GLOSS PAINT	GLOSS PAINT / PLASTIC	TEMPORARY ROOM - MATERIALS IN PH #3
BD103G	VESTIBULE	RESINOUS FLOORING	GLOSS PAINT	GLOSS PAINT / PLASTIC	TEMPORARY ROOM - MATERIALS IN PH #3
BD103H	CART WASH	EXISTING EPOXY	EXISTING / PLASTIC	VINYL SHEET / PLASTIC	TEMPORARY ROOM
BD103H	ANTEROOM	RESINOUS FLOORING	GLOSS PAINT	VINYL SHEET	PERMANENT TO REPLACE CART WASH
BD108	PREPARATION ROOM	RESINOUS FLOORING	GLOSS PAINT	VINYL SHEET	
BD108A	MECHANICAL	EXISTING EPOXY	GLOSS PAINT	GLOSS PAINT	
2D103	STERILE	RESILIENT FLOORING	GLOSS PAINT	GLOSS PAINT	
2D106	DIRTY	RESILIENT FLOORING	GLOSS PAINT	GLOSS PAINT	

NOTES:  
THE EXISTING CEILING HEIGHT IS 9'-0" A.F.F. IN ALL ROOMS AND WILL REMAIN AT 9'-0"  
VINYL SHEET WALL COVERING TO BE PURCHASED AND PROVIDED BY THE VA - CONTRACTOR  
TO BE RESPONSIBLE FOR INSTALLATION PER MANUFACTURER'S RECOMMENDATIONS

WALL FINISH CLARIFICATIONS

10/9/15

Revisions

Date

CONSULTANTS:

**Architectural Edge Inc.**  
3010 Scott Blvd. Suite 102 Temple, Texas 76504  
254.771.2054 P 254.773.2144 F

**REGISTERED ARCHITECT**  
MARTIN R. STUMPF  
14797  
06/15/15

**ARCHITECT/ENGINEERS:**  
Mendez Engineering  
Registration # F-14070  
2342 Mountain Fall  
San Antonio, Texas 78258  
Office: 830-438-0337  
www.MendezEngineering.com

image1.png

Department of Veterans Affairs Certified

Drawing Title

**PLANS AND SCHEDULES**

Approved: Chief Engineering Services  
DAVID SUMMERS  
Approved Contracting Officer Representative  
KELLY GARCIA

Project Title

**IMPROVEMENTS TO SPS AREAS  
- BUILDING 163**

Location  
TEMPLE VAMC TX

Date  
06/15/15

Checked  
rs

Drawn  
rs

Project Number

674-14-144

Building Number

163

Drawing Number

**AE-1.4**

Dwg. of

Office of  
Construction  
and Facilities  
Management

Department of  
Veterans Affairs