

ABBREVIATIONS:

Table with 3 columns: Symbol, Description, and Abbreviation. Includes terms like AFC, AFF, AFG, ALV, APPROX, AHJ, AUX, BFF, BTU, BFV, CI, DEG(*), DIA, DCA, DCCA, DI, ELEV, EX(EXIST), FPS, GAL, GPM, HGT, HP.

FIRE PROTECTION SYMBOLS:

Table with 2 columns: Symbol and Description. Includes symbols for concealed pendent sprinkler, upright sprinkler, 2-way earthquake sway brace, 4-way earthquake sway brace, pipe hanger locations, fire sprinkler riser, fire hydrant, inspector's test connection, riser nipple, new piping, existing piping, dedicated underground fire line, and hydraulic reference point.

FIRE ALARM SYMBOLS:

Table with 2 columns: Symbol and Description. Includes symbols for ceiling mount speaker and clear strobe, wall mount speaker and clear strobe, wall mount single horn speaker and clear strobe, ceiling mount speaker, wall mount speaker, ceiling mount clear strobe, and wall mount clear strobe.

Table with 2 columns: Symbol and Description. Includes symbols for spot-type smoke detector, duct smoke detector, heat detector, manual pull station, water flow switch, valve supervisory switch, door hold open module, electric bell, and addressable module.

Table with 2 columns: Symbol and Description. Includes symbols for fire alarm control panel, notification appliance circuit amplifier, mass notification/emergency communication local operator's control, and wall mounted visual devices.

NOTE: ALL SYMBOLS MAY NOT BE USED.

GENERAL SYSTEM NOTES:

- 1. ALL SYSTEM PIPING SHALL BE HYDROSTATICALLY TESTED @ 200 PSI FOR TWO HOURS OR AT 50 PSI ABOVE THE OPERATIONAL STATIC PRESSURE OF THE SYSTEM...
2. EACH VALVE SHALL HAVE A PERMANENTLY AFFIXED SIGN INDICATING ITS FUNCTION...
3. A STOCK OF SPARE SPRINKLERS, NOT LESS THAN 6, CONSISTING OF A REPRESENTATIVE MIX OF EACH STYLE AND TEMPERATURE RATING SHALL BE PROVIDED WITH A WRENCH AND BE LOCATED NEAR THE RISER...

FIRE PROTECTION GENERAL NOTES:

- 1. THE CONTRACTOR SHALL PROVIDE MODIFICATIONS TO AND EXTENSIONS OF THE EXISTING AUTOMATIC FIRE SPRINKLER SYSTEM TO FULLY PROTECT THIS FACILITY...
2. THE SPRINKLER CONTRACTOR SHALL SUBMIT COMPLETE FIRE SPRINKLER SYSTEM SHOP DRAWINGS BASED ON NFPA 13, UFC 3-600-01, AND SPECIFICATION REQUIREMENTS AND SUBMIT FOR APPROVAL PRIOR TO INSTALLATION...

FIRE ALARM GENERAL NOTES:

- 1. FIRE ALARM SYSTEM AND DEVICES SHALL BE INSTALLED TO THE LATEST EDITION OF NFPA 72, NFPA 70, NFPA 13, UFC 3-600-01, 4-021-01, AND LOCAL REQUIREMENTS...
2. ALL FIRE ALARM INSTALLATIONS, INCLUDING PULLING OF WIRE AND MOUNTING OF DEVICES, SHALL HAVE OVERSIGHT OF A NICET LEVEL II FIRE ALARM TECHNICIAN OR HIGHER...

FIRE ALARM ACCEPTANCE TESTING:

- 1. A COMPLETED AND SIGNED RECORD (CERTIFICATE) OF COMPLETION FORM SHALL BE PROVIDED BY THE CONTRACTOR TO THE AHJ, OWNER, AND ARCHITECT ENGINEER PRIOR TO COMMISSIONING TESTING...
2. ALL SMOKE DETECTORS SHALL BE COMMISSIONED USING CANNED SMOKE OR A METHOD THAT WILL FUNCTIONALLY TEST THE SMOKE CHAMBER...
3. EACH AND EVERY DEVICE SHALL BE TESTED DURING COMMISSIONING AND PRIOR TO BEING TURNED OVER TO THE OWNER...

FIRE ALARM PERFORMANCE:

- 1. ANY SMOKE DETECTOR THAT HAS BEEN INSTALLED PRIOR TO THE CONSTRUCTION CLEANUP OF ALL TRADES AND WITHOUT PRIOR WRITTEN APPROVAL OF THE ENGINEER AND LOCAL AHJ SHALL BE MARKED IN A MANNER THAT WILL IDENTIFY IT FROM RE-USE AND SHALL BE REPLACED PRIOR TO COMMISSIONING OF THE SYSTEM OR TURNING OVER TO THE OWNER...

FIRE ALARM LOCATION/SPACING:

- 1. IN ACCORDANCE WITH 2013 NFPA 72, STROBES MAY BE MORE THAN 15 FEET OFF THE END OF A CORRIDOR WHEN ROOM SPACING CRITERIA APPLIES USING THE APPROPRIATE CANDELA...
2. WALL MOUNTED SPEAKERS, STROBES, OR SPEAKER/STROBES SHALL BE AT 90° OR 6" BELOW THE CEILING, WHICHEVER IS LOWER...

CONSULTANTS:

CIVIL: CROMWELL, 101 SOUTH SPRING STREET, LITTLE ROCK, AR 72201, 501.372.2900
MECHANICAL, PLUMBING, ELECTRICAL, FIRE PROTECTION: CROMWELL, 101 SOUTH SPRING STREET, LITTLE ROCK, AR 72201, 501.372.2900

ARCHITECT/ENGINEERS:

BES DESIGN/BUILD, LLC, 766 Middle St, Fairhope, AL 36532, Phone: 251.990.5778, Fax: 251.990.3716

FIRE PROTECTION LEGEND AND NOTES

Approved: Project Director

Project Title: EMERGENCY DEPARTMENT MENTAL HEALTH IMPROVEMENTS

Location: LITTLE ROCK, ARKANSAS

Date: 2015.03.06, Drawn: BMG, Checked: RLS

Project Number: CSI-112, Building Number: 1

Drawing Number: FI001

Dwg. 68 of 127


CENTRAL ARKANSAS VETERANS AFFAIRS HEALTHCARE SYSTEM




Vertical scale markings on the left side of the page, including 'three eighths inch = one foot' and 'one eighth inch = one foot'.

Vertical scale markings on the right side of the page, including 'three eighths inch = one foot' and 'one eighth inch = one foot'.

three inches = one foot
 one and one half inches = one foot
 one inch = one foot
 three quarters inch = one foot
 one half inch = one foot
 one quarter inch = one foot
 one eighth inch = one foot

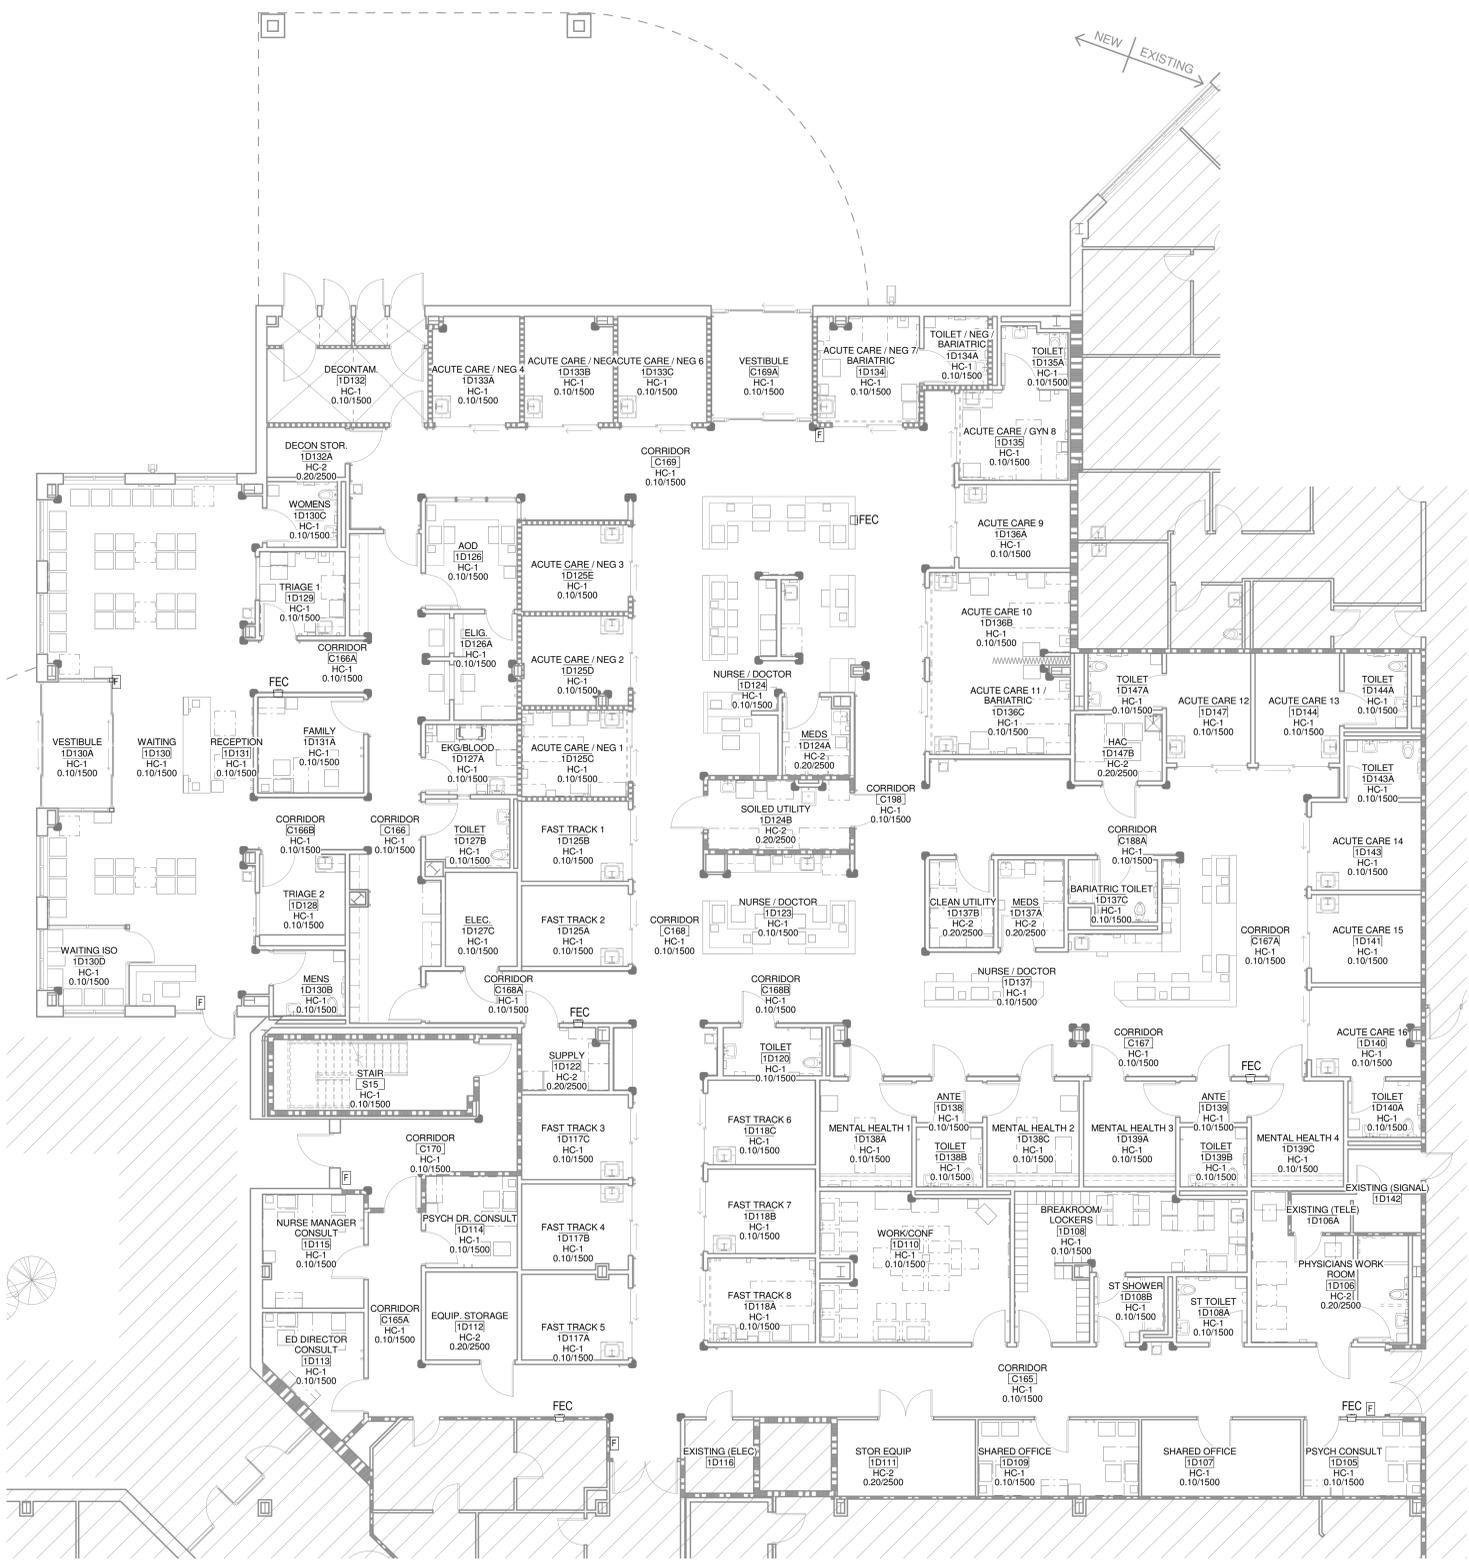

1 FIRST FLOOR FIRE PROTECTION PLAN
 1/8" = 1'-0"



0 4' 8' 16'
 SCALE: 1/8" = 1'-0"
 PLAN NORTH

CONSTRUCTION DOCUMENTS SUBMISSION
 FULLY SPRINKLERED

Revisions:	Date:

CONSULTANTS:	
CIVIL: CROMWELL 101 SOUTH SPRING STREET LITTLE ROCK, AR 72201 501.372.2900	MECHANICAL, PLUMBING, ELECTRICAL, FIRE PROTECTION: CROMWELL 101 SOUTH SPRING STREET LITTLE ROCK, AR 72201 501.372.2900



ARCHITECT/ENGINEERS:	BES DESIGN/BUILD
BES DESIGN/BUILD, LLC 766 Middle St, Fairhope, AL 36532 Phone: 251.990.5778 Fax: 251.990.3716	

Drawing Title FIRST FLOOR FIRE PROTECTION PLAN
Approved: Project Director


Project Title EMERGENCY DEPARTMENT MENTAL HEALTH IMPROVEMENTS		
Location LITTLE ROCK, ARKANSAS		
Date 2015.03.06	Drawn BMG	Checked RLS

Project Number CSI-112
Building Number 1
Drawing Number FX101
Dwg. 69 of 127





1 REFLECTED CEILING PLAN
1/8" = 1'-0"

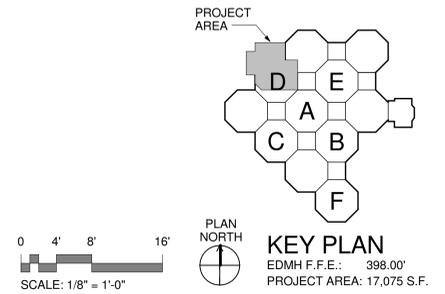

CONSTRUCTION DOCUMENTS SUBMISSION
FULLY SPRINKLERED

Revisions:	Date

CONSULTANTS:

CIVIL:
CROMWELL
101 SOUTH SPRING STREET
LITTLE ROCK, AR 72201
501.372.2900

MECHANICAL, PLUMBING, ELECTRICAL, FIRE PROTECTION:
CROMWELL
101 SOUTH SPRING STREET
LITTLE ROCK, AR 72201
501.372.2900



ARCHITECT/ENGINEERS:

BES DESIGN/BUILD

BES DESIGN/BUILD, LLC
766 Middle St, Fairhope, AL 36532
Phone: 251.990.5778
Fax: 251.990.3716

Drawing Title
FIRE PROTECTION REFLECTED CEILING PLAN

Approved: Project Director

Project Title
EMERGENCY DEPARTMENT MENTAL HEALTH IMPROVEMENTS

Location
LITTLE ROCK, ARKANSAS

Date
2015.03.06

Drawn
BMG

Checked
RLS

Project Number
CSI-112

Building Number
1


Drawing Number
FX201

Dwg. 70 of 127



Space Schedule										
Level	Occupancy Group	Room: Name	Room: Number	Area	Occupant Load Factor	Number of People	Sprinkler Hazard	Sprinkler Density	Sprinkler Type	Sprinkler Finish
FIRST FLOOR	Ambulatory Care	ANTE	1D139	36 SF	100 SF	0	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	ANTE	1D138	36 SF	100 SF	0	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	AOD	1D126	128 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	BARIATRIC TOILET	1D137C	66 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	CORRIDOR	C170	192 SF	100 SF	2	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	CORRIDOR	C165	865 SF	100 SF	9	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	CORRIDOR	C165A	140 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	CORRIDOR	C166A	77 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	CORRIDOR	C166B	77 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	ED DIRECTOR CONSULT	1D113	125 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	EKG/BLOOD	1D127A	83 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	ELEC.	1D127C	87 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	ELIG.	1D126A	100 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	FAMILY	1D131A	131 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	MENS	1D130B	61 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	MENTAL HEALTH 1	1D138A	126 SF	100 SF	1	HC-1	0.10/1500	Institutional	Chrome
FIRST FLOOR	Ambulatory Care	MENTAL HEALTH 2	1D138C	126 SF	100 SF	1	HC-1	0.10/1500	Institutional	Chrome
FIRST FLOOR	Ambulatory Care	MENTAL HEALTH 3	1D139A	126 SF	100 SF	1	HC-1	0.10/1500	Institutional	Chrome
FIRST FLOOR	Ambulatory Care	MENTAL HEALTH 4	1D139C	126 SF	100 SF	1	HC-1	0.10/1500	Institutional	Chrome
FIRST FLOOR	Ambulatory Care	NURSE MANAGER CONSULT	1D115	147 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	PSYCH CONSULT	1D105	116 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	PSYCH DR. CONSULT	1D114	109 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	RECEPTION	1D131	76 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	SHARED OFFICE	1D107	158 SF	100 SF	2	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	SHARED OFFICE	1D109	159 SF	100 SF	2	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	ST SHOWER	1D108B	56 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	ST TOILET	1D108A	60 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	STAIR	S15	183 SF	100 SF	2	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	TOILET	1D120	62 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	TOILET	1D139B	52 SF	100 SF	1	HC-1	0.10/1500	Institutional	White
FIRST FLOOR	Ambulatory Care	TOILET	1D127B	73 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	TOILET	1D138B	51 SF	100 SF	1	HC-1	0.10/1500	Institutional	White
FIRST FLOOR	Ambulatory Care	TRIAGE 1	1D129	93 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	TRIAGE 2	1D128	101 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	VESTIBULE	1D130A	105 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Ambulatory Care	WOMENS	1D130C	59 SF	100 SF	1	HC-1	0.10/1500	Concealed	White
Ambulatory Care: 36				4398 SF		44				
FIRST FLOOR	Assembly	BREAKROOM/ LOCKERS	1D108	300 SF	15 SF	20	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Assembly	WAITING	1D130	1112 SF	15 SF	74	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Assembly	WAITING ISO	1D130D	80 SF	15 SF	5	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Assembly	WORK/CONF	1D110	352 SF	15 SF	23	HC-1	0.10/1500	Concealed	White
Assembly: 4				1844 SF		123				
FIRST FLOOR	Inpatient Treatment	ACUTE CARE 9	1D136A	120 SF	240 SF	1	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE 10	1D136B	162 SF	240 SF	1	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE 11 / BARIATRIC	1D136C	162 SF	240 SF	1	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE 12	1D147	120 SF	240 SF	0	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE 13	1D144	120 SF	240 SF	1	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE 14	1D143	125 SF	240 SF	1	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE 15	1D141	125 SF	240 SF	1	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE 16	1D140	125 SF	240 SF	1	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE / GYN 8	1D135	128 SF	240 SF	1	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE / NEG 1	1D125C	120 SF	240 SF	0	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE / NEG 2	1D125D	122 SF	240 SF	1	HC-1	0.10/1500	Concealed w/ Dust Gasket	White

Space Schedule										
Level	Occupancy Group	Room: Name	Room: Number	Area	Occupant Load Factor	Number of People	Sprinkler Hazard	Sprinkler Density	Sprinkler Type	Sprinkler Finish
FIRST FLOOR	Inpatient Treatment	ACUTE CARE / NEG 3	1D125E	120 SF	240 SF	0	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE / NEG 4	1D133A	119 SF	240 SF	0	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE / NEG 5	1D133B	120 SF	240 SF	1	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE / NEG 6	1D133C	123 SF	240 SF	1	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	ACUTE CARE / NEG 7 / BARIATRIC	1D134	139 SF	240 SF	1	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	CORRIDOR	C169	634 SF	240 SF	3	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	CORRIDOR	C168	801 SF	240 SF	3	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	CORRIDOR	C168B	132 SF	240 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	CORRIDOR	C198	570 SF	240 SF	2	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	CORRIDOR	C168A	141 SF	240 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	CORRIDOR	C166	396 SF	240 SF	2	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	CORRIDOR	C188A	440 SF	240 SF	2	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	CORRIDOR	C167A	138 SF	240 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	CORRIDOR	C167	361 SF	240 SF	2	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	DECONTAM.	1D132	220 SF	240 SF	1	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	FAST TRACK 1	1D125B	111 SF	240 SF	0	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	FAST TRACK 2	1D125A	111 SF	240 SF	0	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	FAST TRACK 3	1D117C	117 SF	240 SF	0	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	FAST TRACK 4	1D117B	118 SF	240 SF	0	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	FAST TRACK 5	1D117A	117 SF	240 SF	0	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	FAST TRACK 6	1D118C	118 SF	240 SF	0	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	FAST TRACK 7	1D118B	118 SF	240 SF	0	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	FAST TRACK 8	1D118A	118 SF	240 SF	0	HC-1	0.10/1500	Concealed w/ Dust Gasket	White
FIRST FLOOR	Inpatient Treatment	NURSE / DOCTOR	1D123	186 SF	240 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	NURSE / DOCTOR	1D137	316 SF	240 SF	1	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	NURSE / DOCTOR	1D124	448 SF	240 SF	2	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	TOILET	1D147A	55 SF	240 SF	0	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	TOILET	1D140A	54 SF	240 SF	0	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	TOILET	1D143A	53 SF	240 SF	0	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	TOILET	1D144A	62 SF	240 SF	0	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	TOILET	1D135A	51 SF	240 SF	0	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	TOILET / NEG / BARIATRIC	1D134A	57 SF	240 SF	0	HC-1	0.10/1500	Concealed	White
FIRST FLOOR	Inpatient Treatment	VESTIBULE	C169A	136 SF	240 SF	1	HC-1	0.10/1500	Concealed	White
Inpatient Treatment: 44				8227 SF		34				
FIRST FLOOR	Mechanical	EXISTING (ELEC)	1D116	65 SF	0 SF	0				
FIRST FLOOR	Mechanical	EXISTING (SIGNAL)	1D142	77 SF	0 SF	0				
FIRST FLOOR	Mechanical	EXISTING (TELE)	1D106A	30 SF	0 SF	0				
Mechanical: 3				172 SF		0				
FIRST FLOOR	Storage	CLEAN UTILITY	1D137B	73 SF	500 SF	0	HC-2	0.20/2500	Concealed	White
FIRST FLOOR	Storage	DECON STOR.	1D132A	51 SF	500 SF	0	HC-2	0.20/2500	Concealed	White
FIRST FLOOR	Storage	EQUIP. STORAGE	1D112	104 SF	500 SF	0	HC-2	0.20/2500	Concealed	White
FIRST FLOOR	Storage	HAC	1D147B	75 SF	500 SF	0	HC-2	0.20/2500	Concealed	White
FIRST FLOOR	Storage	MEDS	1D124A	66 SF	500 SF	0	HC-2	0.20/2500	Concealed	White
FIRST FLOOR	Storage	MEDS	1D137A	75 SF	500 SF	0	HC-2	0.20/2500	Concealed	White
FIRST FLOOR	Storage	PHYSICIANS WORK ROOM	1D106	162 SF	500 SF	0	HC-2	0.20/2500	Concealed	White
FIRST FLOOR	Storage	SOILED UTILITY	1D124B	126 SF	500 SF	0	HC-2	0.20/2500	Concealed	White
FIRST FLOOR	Storage	STOR EQUIP	1D111	137 SF	500 SF	0	HC-2	0.20/2500	Concealed	White
FIRST FLOOR	Storage	SUPPLY	1D122	68 SF	500 SF	0	HC-2	0.20/2500	Concealed	White
Storage: 10				938 SF		2				
FIRST FLOOR: 97				15579 SF		203				
Grand total: 97				15579 SF		203				



CONSTRUCTION DOCUMENTS SUBMISSION
FULLY SPRINKLERED

Revisions:	Date

CONSULTANTS:

CIVIL: CROMWELL 101 SOUTH SPRING STREET LITTLE ROCK, AR 72201 501.372.2900	MECHANICAL, PLUMBING, ELECTRICAL, FIRE PROTECTION: CROMWELL 101 SOUTH SPRING STREET LITTLE ROCK, AR 72201 501.372.2900
---	---



ARCHITECT/ENGINEERS:

BES DESIGN/BUILD

BES DESIGN/BUILD, LLC
766 Middle St, Fairhope, AL 36532
Phone: 251.990.5778
Fax: 251.990.3716

Drawing Title
FIRE PROTECTION SCHEDULES

Approved: Project Director

Project Title
EMERGENCY DEPARTMENT MENTAL HEALTH IMPROVEMENTS

Location
LITTLE ROCK, ARKANSAS

Date
2015.03.06

Drawn
BMG

Checked
RLS

Project Number
CSI-112

Building Number
1

Drawing Number
FX601

Dwg. 71 of 127

CENTRAL ARKANSAS VETERANS AFFAIRS HEALTHCARE SYSTEM

Department of Veterans Affairs