



## **PROJECT MANUAL**

Department of Veteran Affairs  
Project No. 549-130

## **RENOVATE & EXPAND AMBULATORY CARE & LAB**

Sam Rayburn Memorial Veterans Center  
Bonham, Texas

100% ISSUED FOR CONSTRUCTION  
April 13, 2015



**Michael Roth & Associates  
Architects and Planners, Inc.**

200 S. Hanley Road, Suite 1105  
St. Louis, Missouri 63105

in association with

VOA Associates, Incorporated  
KJWW Engineering Consultants

John A. Jurgiel & Associates

James DeOtte Engineering, Inc.

Moss Construction Cost Management

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION

**DEPARTMENT OF VETERANS AFFAIRS  
 VHA MASTER SPECIFICATIONS**

**TABLE OF CONTENTS  
 Section 00 01 10**

	<b>DIVISION 00 - SPECIAL SECTIONS</b>	<b>DATE</b>
00 01 15	List of Drawing Sheets	09-11
	<b>DIVISION 01 - GENERAL REQUIREMENTS</b>	
01 00 00	General Requirements	10-13
01 32 16.15	Project Schedules	04-13
01 33 23	Shop Drawings, Product Data, and Samples	11-08
01 35 26	Safety Requirements	09-14
01 42 19	Reference Standards	09-11
01 45 29	Testing Laboratory Services	07-13
01 50 00	Temporary Facilities And Controls	
01 57 19	Temporary Environmental Controls	01-11
01 58 16	Temporary Interior Signage	08-11
01 74 19	Construction Waste Management	09-13
01 81 11	Sustainable Design Requirements	02-13
01 91 00	General Commissioning Requirements	06-13
	<b>DIVISION 02 - EXISTING CONDITIONS</b>	
02 41 00	Demolition	04-13
02 82 11	Traditional Asbestos Abatement	07-11
02 82 13.21	Asbestos Roofing Abatement	07-11
02 83 33.13	Lead-Based Paint Removal and Disposal	08-11
	<b>DIVISION 03 - CONCRETE</b>	
03 30 00	Cast-in-Place Concrete	10-12
03 41 13	Precast Concrete Hollow Core Planks	07-11
03 41 33	Precast Structural Pretension Concrete	07-11
	<b>DIVISION 04 - MASONRY</b>	
04 05 13	Masonry Mortaring	09-11
04 20 00	Unit Masonry	05-12
04 72 00	Cast Stone Masonry	06-13
	<b>DIVISION 05 - METALS</b>	
05 12 00	Structural Steel Framing	11-12
05 21 00	Steel Joist Framing	03-10
05 31 00	Steel Decking	10-12
05 36 00	Composite Metal Decking	07-11
05 40 00	Cold-Formed Metal Framing	07-11
05 50 00	Metal Fabrications	09-11
05 51 00	Metal Stairs	09-11
	<b>DIVISION 06 - WOOD, PLASTICS AND COMPOSITES</b>	
06 10 00	Rough Carpentry	09-11
06 65 10	Solid Surface Fabrications	12-04

	<b>DIVISION 07 - THERMAL AND MOISTURE PROTECTION</b>	
07 01 50.19	Preparation for Re-Roofing	10-10
07 21 13	Thermal Insulation	03-09
07 22 00	Roof and Deck Insulation	10-10
07 27 13	Sheet Air Barriers	
07 40 00	Roofing and Siding Panels	10-11
07 54 23	Thermoplastic Polyolefin (TPO) Roofing	01-13
07 60 00	Flashing and Sheet Metal	12-13
07 72 00	Roof Accessories	10-11
07 84 00	Firestopping	10-11
07 92 00	Joint Sealants	12-11
07 95 13	Expansion Joint Cover Assemblies	10-11
	<b>DIVISION 08 - OPENINGS</b>	
08 11 13	Hollow Metal Doors and Frames	01-13
08 14 00	Interior Wood Doors	10-12
08 31 13	Access Doors and Frames	10-11
08 41 13	Aluminum-Framed Entrances and Storefronts	10-11
08 45 00	All-Glass Entrances	
08 45 23	Insulated Translucent Panels	
08 51 13	Aluminum Windows	
08 62 50	Tubular Daylighting Device	
08 71 00	Door Hardware	12-13
08 71 13	Automatic Door Operators	12-09
08 80 00	Glazing	10-12
08 90 00	Louvers and Vents	10-11
	<b>DIVISION 09 - FINISHES</b>	
09 05 16	Subsurface Preparation For Floor Finishes	04-14
09 22 16	Non-Structural Metal Framing	07-13
09 29 00	Gypsum Board	02-13
09 30 13	Ceramic Tiling	
09 51 00	Acoustical Ceilings	12-13
09 54 23	Linear Metal Ceilings	10-11
09 65 13	Resilient Base and Accessories	10-11
09 65 16	Resilient Sheet Flooring	07-13
09 65 19	Resilient Tile Flooring	03-11
09 67 23.50	Resinous Terrazzo Flooring	07-14
09 68 00	Carpeting	10-11
09 72 16	Vinyl-Coated Fabric Wall Coverings	11-11
09 91 00	Painting	07-13
09 96 59	High-Build Glazed Coatings	
	<b>DIVISION 10 - SPECIALTIES</b>	
10 21 13	Toilet Compartments	05-12
10 21 23	Cubicle Curtain Tracks	11-11
10 26 00	Wall and Door Protection	01-11
10 28 00	Toilet, Bath, and Laundry Accessories	11-11
10 44 13	Fire Extinguisher Cabinets	11-11
10 55 00	Metal Lockers	11-11
10 55 10	Evidence Lockers	
10 75 00	Flagpoles	11-11
	<b>DIVISION 12 - FURNISHINGS</b>	
12 30 20	Wood Casework	11-11

	<b>DIVISION 13 - SPECIAL CONSTRUCTION</b>	
13 05 41	Seismic Restraint Requirements for Non-Structural Components	01-14
	<b>DIVISION 21- FIRE SUPPRESSION</b>	
21 05 11	Common Work Results for Fire Suppression	11-09
21 08 00	Commissioning of Fire Suppression System	06-13
21 13 13	Wet-Pipe Sprinkler Systems	05-08
	<b>DIVISION 22 - PLUMBING</b>	
22 05 11	Common Work Results for Plumbing	04-11
22 05 12	General Motor Requirements for Plumbing Equipment	12-09
22 05 19	Gages for Plumbing Piping	02-10
22 05 23	General-Duty Valves for Plumbing Piping	12-09
22 07 11	Plumbing Insulation	05-11
22 08 00	Commissioning of Plumbing Systems	06-13
22 11 00	Facility Water Distribution	01-14
22 11 23	Domestic Water Pumps	01-14
22 13 00	Facility Sanitary and Vent Piping	06-12
22 14 00	Facility Storm Drainage	12-09
22 40 00	Plumbing Fixtures	01-14
22 63 00	Gas Systems for Laboratory and Healthcare Facilities	12-10
	<b>DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)</b>	
23 05 11	Common Work Results for HVAC	11-10
23 05 12	General Motor Requirements for HVAC and Steam Generation Equipment	11-10
23 05 41	Noise and Vibration Control for HVAC Piping and Equipment	11-10
23 05 93	Testing, Adjusting, and Balancing for HVAC	05-11
23 07 11	HVAC and Boiler Plant Insulation	05-11
23 08 00	Commissioning of HVAC Systems	06-13
23 09 23	Direct-Digital Control System for HVAC	09-11
23 21 13	Hydronic Piping	09-12
23 21 23	Hydronic Pumps	02-10
23 22 13	Steam and Condensate Heating Piping	03-10
23 22 23	Steam Condensate Pumps	02-10
23 25 00	HVAC Water Treatment	02-10
23 31 00	HVAC Ducts and Casings	03-13
23 34 00	HVAC Fans	11-09
23 36 00	Air Terminal Units	03-10
23 37 00	Air Outlets and Inlets	11-09
23 40 00	HVAC Air Cleaning Devices	02-12
23 64 00	Packaged Water Chillers	04-11
23 73 00	Indoor Central-Station Air-Handling Units	04-11
23 82 00	Convection Heating and Cooling Units	04-11
23 82 16	Air Coils	04-11
	<b>DIVISION 26 - ELECTRICAL</b>	
26 05 11	Requirements for Electrical Installations	12-12
26 05 19	Low-Voltage Electrical Power Conductors and Cables	07-13
26 05 26	Grounding and Bonding for Electrical Systems	12-12
26 05 33	Raceway and Boxes for Electrical Systems	09-10
26 09 23	Lighting Controls	09-10

26 24 16	Panelboards	05-14
26 27 26	Wiring Devices	12-12
26 29 21	Enclosed Switches and Circuit Breakers	12-12
26 41 00	Facility Lightning Protection	12-12
26 51 00	Interior Lighting	12-12
	<b>DIVISION 27 - COMMUNICATIONS</b>	
27 05 11	Requirements for Communications Installations	11-09
27 05 26	Grounding and Bonding for Communications Systems	10-06
27 05 33	Raceways and Boxes for Communications Systems	12-05
27 08 00	Commissioning of Communications Systems	06-13
27 10 00	Structured Cabling	12-05
27 11 00	Communications Equipment Room Fittings	06-13
27 15 00	Communications Horizontal Cabling	06-13
27 41 31	Master Antenna Television Equipment and Systems	06-13
27 51 16	Public Address System	06-13
27 52 23	Nurse Call System	06-13
	<b>DIVISION 28 - ELECTRONIC SAFETY AND SECURITY</b>	
28 05 00	Common Work Results for Electronic Safety and Security	09-11
28 05 13	Conductors and Cables for Electronic Safety and Security	09-11
28 05 26	Grounding and Bonding for Electronic Safety and Security	09-11
28 05 28.33	Conduits and Backboxes for Electronic Safety and Security	09-11
28 08 00	Commissioning of Electronic Safety and Security Systems	06-13
28 13 00	Physical Access Control System	10-11
28 31 00	Fire Detection and Alarm	10-11
	<b>DIVISION 31 - EARTHWORK</b>	
31 20 00	Earthwork	10-12
31 23 19	Dewatering	10-12
31 23 23.33	Flowable Fill	10-12
31 63 26	Drilled Caissons	10-12
	<b>DIVISION 32 - EXTERIOR IMPROVEMENTS</b>	
32 05 23	Cement and Concrete for Exterior Improvements	05-13
32 11 29	Lime Treated Base Courses	
32 12 13	Concrete Paving	10-09
32 17 23	Pavement Markings	04-10
32 90 00	Planting	10-11
	<b>DIVISION 33 - UTILITIES</b>	
33 08 00	Commissioning of Site Utility Systems	06-13
33 10 00	Water Utilities	01-14
33 30 00	Sanitary Sewerage Utilities	06-13
33 40 00	Storm Drainage Utilities	10-11
	<b>DIVISION 34 - TRANSPORTATION</b>	
34 71 13	Vehicle Barriers	05-13
34 75 13.13	Active Vehicle Barriers	05-13

**SECTION 00 01 15**  
**LIST OF DRAWING SHEETS**

The drawings listed below accompanying this specification form a part of  
the contract.

<u>Drawing No.</u>	<u>Title</u>
GENERAL	
GS101	COVER SHEET
GS102	PHASING PLANS GS102
GS103	DEDUCT OPTION PLAN GS103
ABATEMENT	
HA100	GENERAL AND KEYED NOTES
HA101	HAZARDOUS MATERIALS CRAWL SPACE AND BASEMENT
HA102	HAZARDOUS MATERIALS PHASE 1, 2 AND 3 - FIRST FLOOR
HA103	HAZARDOUS MATERIALS PHASE 1, 2, AND 3 - ROOF
HA104	HAZARDOUS MATERIALS PHASE 4 - FIRST FLOOR
HA105	HAZARDOUS MATERIALS PHASE 5 - FIRST FLOOR
CIVIL	
C101	SITE PHASING PLAN
C102	DEMOLITION PLAN
C103	COORDINATE CONTROL PLAN
C104	DRAINAGE AREA MAP
C105	GRADING PLAN
C106	WATER PLAN
C107	SANITARY SEWER PLAN
C108	STORM DRAIN PLAN
C109	FRANCHISE UTILITY RELOCATION PLAN
C110	PAVING & JOINTING PLAN
C111	PAVING & JOINTING PLAN DETAILS
C112	EROSION CONTROL PLAN
ARCHITECTURAL	
AS101	DEMOLITION PLAN
AS102	OVERALL FLOOR PLAN
AS103	ENLARGED FLOOR PLAN - AMBULATORY CARE PLAN
AS104	ENLARGED FLOOR PLAN - LABORATORY AND SECURITY PLAN
AS105	ENLARGED REFLECTED CEILING PLAN - AMBULATORY CARE

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
Sam Rayburn Memorial Veterans Center, Bonham, Texas  
100% ISSUED FOR CONSTRUCTION  
09-11

AS106 ENLARGED REFLECTED CEILING PLAN - LABORATORY &  
SECURITY

AS107 ROOF PLAN

AS201 BUILDING EXTERIOR ELEVATIONS

AS301 WALL SECTIONS - NEW ADDITION

AS302 WALL SECTIONS - NEW ADDITION

AS303 WALL SECTIONS - CEILING SECTION

AS304 WALL SECTIONS - PORTE COCHERE

AS305 WALL SECTIONS - EXISTING

AS306 WALL SECTIONS - EXISTING

AS307 WALL SECTIONS - EXISTING

AS401 INTERIOR ELEVATIONS

AS402 INTERIOR ELEVATIONS

AS501 PARTITION TYPES

AS502 ENLARGED PLANS: STAIRS AND RAMPS

AS503 DETAILS: STAIRS AND RAMPS

AS504 DETAILS

AS601 DOOR SCHEDULE, DETAILS

AS602 FINISH SCHEDULE

AS603 FINISH PLAN

STRUCTURAL

SS000 STRUCTURAL GENERAL NOTES

SS100 FOUNDATION PLAN - AMBULATORY CARE

SS101 FIRST FLOOR FRAMING PLAN - AMBULATORY CARE

SS102 FIRST FLOOR FRAMING PLAN - LABORATORY AND SECURITY

SS103 LOW ROOF FRAMING PLAN - AMBULATORY CARE

SS104 ENLARGED FRAMING PLANS - AMBULATORY CARE

SS105 UPPER ROOF FRAMING PLAN - AMBULATORY CARE

SS201 BRACED FRAME ELEVATIONS

SS301 FOUNDATION DETAILS

SS302 FOUNDATION DETAILS

SS501 FRAMING DETAILS

SS502 FRAMING DETAILS

SS503 FRAMING DETAILS

MECHANICAL

MH001 VENTILATION VENTILATION COVER SHEET

MH101 FIRST FLOOR PLAN - VENTILATION-DEMO

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
Sam Rayburn Memorial Veterans Center, Bonham, Texas  
100% ISSUED FOR CONSTRUCTION  
09-11

MH102 BASEMENT FLOOR PLAN - VENTILATION  
MH103 OVERALL FIRST FLOOR PLAN-ADDITION AND RENOVATION -  
VENTILATION  
MH104 FIRST FLOOR PLAN - AMBULATORY CARE - VENTILATION  
MH105 ENLARGED FLOOR PLAN - LABORATORY AND SECURITY - VENTILATION  
MH106 PENTHOUSE AND ROOF PLAN - VENTILATION  
MH301 DETAILS - VENTILATION  
MH302 DETAILS - VENTILATION  
MH303 ENLARGED AIR HANDLING UNIT PLAN  
MH501 MECHANICAL SCHEDULES  
MH601 CONTROL DIAGRAM - VENTILATION  
MH602 CONTROL DIAGRAM - VENTILATION

MECHANICAL - PIPING

MP001 PIPING COVER SHEET  
MP101 BASEMENT FLOOR PLAN - PIPING - DEMO  
MP102 FIRST FLOOR PLAN - PIPING - DEMO  
MP103 BASEMENT FLOOR PLAN - PIPING  
MP104 OVERALL FIRST FLOOR PLAN - ADDITION AND RENOVATION - PIPING  
MP105 FIRST FLOOR PLAN - AMBULATORY CARE - PIPING  
MP106 ENLARGED FLOOR PLAN - LABORATORY AND SECURITY - PIPING  
MP107 PENTHOUSE AND ROOF PLAN - PIPING  
MP301 DETAILS - PIPING  
MP302 DETAILS - PIPING  
MP401 FLOW DIAGRAM - PIPING  
MP402 FLOW DIAGRAM - PIPING  
MP501 PIPING SCHEDULES  
MP601 CONTROL DIAGRAM - PIPING

PLUMBING

PL001 PLUMBING COVER SHEET  
PL101 BASEMENT FLOOR PLAN - PLUMBING - DEMO  
PL102 FIRST FLOOR PLAN - PLUMBING - DEMO  
PL103 BASEMENT FLOOR PLAN - PLUMBING  
PL104 FOUNDATION FLOOR PLAN - PLUMBING  
PL105 OVERALL FIRST FLOOR PLAN-ADDITION AND RENOVATION-PLUMBING  
PL106 FIRST FLOOR PLAN - AMBULATORY CARE - PLUMBING  
PL107 ENLARGED FLOOR PLAN - LABORATORY AND SECURITY-PLUMBING  
PL108 PENTHOUSE AND ROOF PLAN - PLUMBING



PL301                   DETAILS - PLUMBING  
PL501                   PLUMBING MATERIALS LIST  
PL601                   SAN-VENT RISER DIAGRAM - PLUMBING  
PL602                   SAN-VENT RISER DIAGRAM - PLUMBING  
PL603                   DOMESTIC RISER   DIAGRAM - PLUMBING  
PL604                   DOMESTIC RISER   DIAGRAM - PLUMBING

FIRE PROTECTION

FX001                   FIRE PROTECTION COVER SHEET  
FX101                   BASEMENT FLOOR PLAN - FIRE PROTECTION - DEMO  
FX102                   FIRST FLOOR PLAN - FIRE PROTECTION - DEMO  
FX103                   BASEMENT FLOOR PLAN - FIRE PROTECTION  
FX104                   OVERALL FIRST FLOOR PLAN - ADDITION AND RENOVATION - FIRE  
                          PROTECTION  
FX105                   FIRST FLOOR PLAN - AMBULATORY CARE - FIRE PROTECTION  
FX106                   ENLARGED FLOOR PLAN - LABORATORY AND SECURITY - FIRE  
                          PROTECTION  
FX107                   PENTHOUSE PLAN - FIRE PROTECTION

ELECTRICAL

E000                   ELECTRICAL COVERSHEET  
E100                   SITE PLAN - ELECTRICAL  
E101                   OVERALL FIRST FLOOR PLAN - ELECTRICAL  
E300                   ELECTRICAL DETAILS  
E301                   ELECTRICAL DETAILS  
E400                   ELECTRICAL ONE-LINE DIAGRAM - DEMOLITION  
E401                   ELECTRICAL ONE-LINE DIAGRAM - NEW WORK  
E500                   ELECTRICAL SCHEDULES  
E600                   ELECTRICAL SCHEDULES  
ED101                   FIRST FLOOR PLAN - ELECTRICAL - DEMOLITION  
EL101                   ENLARGED PLAN - AMBULATORY CARE - LIGHTING  
EL102                   ENLARGED FLOOR PLAN - LABORATORY AND SECURITY - LIGHTING  
EL103                   PENTHOUSE PLAN - LIGHTING  
EP100                   BASEMENT FLOOR PLAN - ELECTRICAL  
EP101                   ENLARGED PLAN - AMBULATORY CARE - POWER  
EP102                   ENLARGED FLOOR PLAN - LABORATORY AND SECURITY - POWER  
EP103                   PENTHOUSE PLAN - POWER  
EY103                   ROOF PLAN - LIGHTNING PROTECTION  
FA101                   ENLARGED PLAN - AMBULATORY CARE - FIRE ALARM

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
Sam Rayburn Memorial Veterans Center, Bonham, Texas  
100% ISSUED FOR CONSTRUCTION  
09-11

FA102 OVERALL FIRST FLOOR PLAN - ADDITION AND RENOVATION - FIRE  
ALARM

FA103 PENTHOUSE PLAN - FIRE ALARM

TECHNOLOGY

T100 TECHNOLOGY COVER SHEET

T001 SITE PLAN - TECHNOLOGY

T100 BASEMENT FLOOR PLAN - TECHNOLOGY

T101 FIRST FLOOR PLAN - TECHNOLOGY - DEMO

T102 OVERALL FIRST FLOOR PLAN - ADDITION AND RENOVATION -  
TECHNOLOGY

T103 ENLARGED PLAN - AMBULATORY CARE - TECHNOLOGY

T104 ENLARGED FLOOR PLAN - LABORATORY AND SECURITY - TECHNOLOGY

T105 ROOF PLAN - TECHNOLOGY

T106 OVERALL FIRST FLOOR PLAN - ADDITION AND RENOVATION ALT. -  
TECHNOLOGY

T401 ROOM ENLARGEMENTS - TECHNOLOGY

T501 DETAILS - TECHNOLOGY

T502 DETAILS - TECHNOLOGY

T601 SCHEDULES - TECHNOLOGY

- - - END - - -

**(SAMPLE LIST OF DRAWINGS)**

VAMC (NAME)

(SPEC No.)

**SECTION 00 01 15  
LIST OF DRAWINGS**

The drawings listed below accompanying this specification form a part of the contract.

Drawing No.	Title
	SITE PLANNING
L1	Site Plan
L2	Planting Plan
L3	Site and Planting Details
	<b>ARCHITECTURAL</b>
30-1	Ground Floor Plan
30-2	Elevations
30-3	Wall Sections and Details
30-4	Industrial Stair, Dock Leveler, Areaway Sections and Details
30-5	Reflected Ceiling Plan
30-6	Schedules
	- - - E N D - - -

**SECTION 01 00 00**  
**GENERAL REQUIREMENTS**

**TABLE OF CONTENTS**

1.1 GENERAL INTENTION.....	1
1.2 STATEMENT OF BID ITEM(S).....	1
1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR.....	2
1.4 CONSTRUCTION SECURITY REQUIREMENTS.....	2
1.5 FIRE SAFETY.....	3
1.6 OPERATIONS AND STORAGE AREAS.....	5
1.7 ALTERATIONS.....	7
1.8 INFECTION PREVENTION MEASURES.....	8
1.9 DISPOSAL AND RETENTION.....	10
1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS.....	11
1.11 RESTORATION.....	12
1.12 PHYSICAL DATA.....	12
1.13 PROFESSIONAL SURVEYING SERVICES.....	13
1.14 LAYOUT OF WORK.....	13
1.15 AS-BUILT DRAWINGS.....	14
1.16 USE OF ROADWAYS.....	14
1.17 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.....	14
1.18 TEMPORARY USE OF EXISTING ELEVATORS.....	15
1.19 TEMPORARY TOILETS.....	15
1.20 AVAILABILITY AND USE OF UTILITY SERVICES.....	15
1.21 NEW TELEPHONE EQUIPMENT.....	16
1.22 TESTS.....	16
1.23 INSTRUCTIONS.....	16
1.24 RELOCATED EQUIPMENT and ITEMS.....	17
1.25 CONSTRUCTION SIGN.....	17
1.26 SAFETY SIGN.....	18
1.27 HISTORIC PRESERVATION.....	18
1.28 VA TRIRIGA CPMS.....	18

**SECTION 01 00 00**  
**GENERAL REQUIREMENTS**

**1.1 GENERAL INTENTION**

- A. Contractor shall completely prepare site for building operations, including demolition and removal of existing structures, and furnish labor and materials and perform work for Project 549A4-130 EXPAND-RENOVATE AMBULATORY CARE AND LAB as required by drawings and specifications.
- B. Visits to the site by Bidders may be made only by appointment with the Medical Center Engineering Officer Mr. David Tolle. A pre-bid meeting will be held at the project site so that the bidders can become familiar with the project and ask the VA and the design team questions. The date, time and location shall be included in the solicitation/bid documents.
- C. Offices of MICHAEL ROTH & ASSOCIATES, ARCHITECTS AND PLANNERS, INC., as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.
- D. Before placement and installation of work subject to tests by testing laboratory retained the Contractor, notify the COR in sufficient time to enable testing laboratory personnel to be present at the site in time for proper taking and testing of specimens and field inspection. Such prior notice shall be not less than three work days unless otherwise designated by the COR.
- E. All employees of General Contractor and subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.
- F. Prior to commencing work, General Contractor shall provide proof that a OSHA designated "competent person" (CP) (29 CFR 1926.20(b)(2)) will maintain a presence at the work site whenever the general or subcontractors are present.
- G. Training:
  - 1. All employees of General Contractor or subcontractors shall have the 10-hour or 30-hour OSHA Construction Safety course and other relevant competency training, as determined by COR acting as the Construction Safety Officer with input from the facility Construction Safety Committee.
  - 2. Submit training records of all such employees for approval before the start of work.
- H. VHA Directive 2011-36, Safety and Health during Construction, dated 9/22/2011 in its entirety is made a part of this section

**1.2 STATEMENT OF BID ITEM(S)**

- A. ITEM I, GENERAL CONSTRUCTION: Work includes general construction, alterations, parking lots, walks, grading, drainage, mechanical and electrical work, utility systems, necessary removal of existing structures and construction and certain other items.
- B. Deduct Option 1: State amount to be deducted from the Base Bid to delete work indicated for rooms: Conference F100, Operations F101, Holding F102, Office F103, Office F104, Office F105, Lockers F106, Storage F107, Armory F108, Shower F109, Toilet F110, and Evidence F111.
- C. Deduct Option 2: State amount to be deducted from the Base Bid to delete work indicated for rooms: Waiting H100, Reception H101, Blood Draw Rooms H102, thru H105, Corridor H106, Alcove H107, Toilet H108, thru H110, Storage H111, Corridor H112, Toilet H113, Admin Office H114, Chief

Office H115, IT H116, HAC H117, Bulk Storage H118, Conference H119,  
Corridors H120 and H121, Lab H122 and Corridor G147.

- D. Deduct Option 3: State amount to be deducted from the Base Bid to delete work indicated for rooms: Corridor A100, Waiting A101, MD/SCI A102, MD A103, RN A104, LVN A105, RN A106, HAC A107, LVN A108, Corridor A109, MD A110, LVN A111, RN A112, Mental Health A113, Social Worker A114, Pharmacy A115, Corridor B100, Copy B101, Social Worker B102, Scale B103, RN B104, LVN B105, MD B106, Toilet B107, LVN B108, RN B100, LVN B110, RN B111, MD B112, MD B113, and Waiting B114.

### 1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR

- A. AFTER AWARD OF CONTRACT, the Contractor will be given electronic versions of the Construction Documents. Contractor may print as many hardcopies of the Construction Documents as deemed necessary for the expeditious pursuit of the work, at no additional cost to the Government.

### 1.4 CONSTRUCTION SECURITY REQUIREMENTS

- A. Security Plan:
1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
  2. The General Contractor is responsible for assuring that all sub-contractors working on the project and their employees also comply with these regulations.
- B. Security Procedures:
1. General Contractor's employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
  2. For working outside the "regular hours" as defined in the contract, The General Contractor shall give 3 days notice to the Contracting Officer so that security escort or arrangements can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.
  3. No photography of VA premises is allowed without written permission of the Contracting Officer.
  4. VA reserves the right to close down or shut down the project site and order General Contractor's employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.
- C. Key Control:
1. The General Contractor shall provide duplicate keys and lock combinations to the COR for the purpose of security inspections of every area of project including tool boxes and parked machines and take any emergency action.
  2. The General Contractor shall turn over all permanent lock cylinders to the VA locksmith for permanent installation. See Section 08 71 00, DOOR HARDWARE and coordinate.
- D. Document Control:
1. Before starting any work, the General Contractor/Sub Contractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of "sensitive information".
  2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This information shall be shared only with those with a specific need to accomplish the project.
  3. Certain documents, sketches, videos or photographs and drawings may be marked "Law Enforcement Sensitive" or "Sensitive Unclassified". Secure such information in separate containers and limit the access

to only those who will need it for the project. Return the information to the Contracting Officer upon request.

4. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
5. All paper waste or electronic media such as CD's and diskettes shall be shredded and destroyed in a manner acceptable to the VA.
6. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of "sensitive information".
7. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
  - a. Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
  - b. "Sensitive information" including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

E. Motor Vehicle Restrictions

1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping **off materials and supplies**.
2. Separate permits shall be issued for General Contractor and its employees for parking in designated areas only.

**1.5 FIRE SAFETY**

A. Applicable Publications: Publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

1. American Society for Testing and Materials (ASTM):  
E84-2009.....Surface Burning Characteristics of Building Materials
2. National Fire Protection Association (NFPA):  
10-2010.....Standard for Portable Fire Extinguishers  
30-2008.....Flammable and Combustible Liquids Code  
51B-2009.....Standard for Fire Prevention During Welding, Cutting and Other Hot Work  
70-2011.....National Electrical Code  
101-2012.....Life Safety Code  
241-2009.....Standard for Safeguarding Construction, Alteration, and Demolition Operations
3. Occupational Safety and Health Administration (OSHA):  
29 CFR 1926.....Safety and Health Regulations for Construction
4. VHA Directive 2005-007

B. Fire Safety Plan: Establish and maintain a fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to COR for review for compliance with VHA Directive 2005-007, NFPA 101 and NFPA 241. Prior to beginning work, all employees of the Contractor and/or any subcontractors shall undergo a safety briefing provided by the General Contractor's competent person per OSHA requirements. This briefing shall include information on the construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, etc. Provide documentation to the COR that all construction workers have undergone contractor's safety briefing.

C. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.

- D. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).
- E. Temporary Construction Partitions:
  - 1. Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas, the areas that are described in phasing requirements and adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of fire retardant treated wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab deck or roof. Seal joints and penetrations. At door openings, install Class C,  $\frac{3}{4}$  hour fire/smoke rated doors with self-closing devices.
  - 2. Install fire-rated temporary construction partitions as shown on drawings to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.
  - 3. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.
- F. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.
- G. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with COR.
- H. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to COR.
- I. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- J. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.
- K. Sprinklers: Install, test and activate new automatic sprinklers prior to removing existing sprinklers.
- M. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with COR. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the Medical Center. Parameters for the testing and results of any tests performed shall be recorded by the Medical Center and copies provided to the COR.
- N. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with COR.
- O. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with COR. Obtain permits from COR at least 48 hours in advance. Designate Contractor's responsible project-site fire prevention program manager to permit hot work.
- P. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to COR.
- Q. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking areas.



- R. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.
- S. Perform other construction, alteration and demolition operations in accordance with 29 CFR 1926.
- T. If required, submit documentation to the COR that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.

#### **1.6 OPERATIONS AND STORAGE AREAS**

- A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.
- B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.
- C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.
- D. Working space and space available for storing materials shall be as determined by or approved by the COR.
- E. Workmen are subject to rules of the Medical Center applicable to their conduct.
- F. Execute work in such a manner as to interfere as little as possible with work being done by others. Keep roads clear of construction materials, debris, standing construction equipment and vehicles at all times.
- G. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly by patients or medical personnel, and Contractor's personnel, except as permitted by COR where required by limited working space.
  - 1. Do not store materials and equipment in other than assigned areas.
  - 2. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient for not more than two work days. Provide unobstructed access to Medical Center areas required to remain in operation.
  - 3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements.
- H. Utilities Services: Where necessary to cut existing pipes, electrical wires, conduits, cables, etc., of utility services, or of fire protection systems or communications systems (except telephone), they

shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COR. All such actions shall be coordinated with the Utility Company involved:

1. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.
- I. Phasing: To insure such executions, Contractor shall furnish the COR with a schedule of approximate phasing dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the COR two weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such phasing to insure accomplishment of this work in successive phases mutually agreeable to Medical Center Director, COR and Contractor. Scope and intent of phasing is shown on Drawings.
1. Existing renovation areas will be occupied during performance of work but will be vacated by the Government in accordance to the phasing plan indicated in the drawings and the activation periods listed below.
  2. Government activation time periods during space activations are as follows:
    - a. Phase 3: Activation to relocate existing Ambulatory Care to new addition space; clearing the space for the new Lab - max. 60 days
    - b. Phase 4: Activation to relocate Lab into new space - max. 60 days
    - c. Phase 5: Activation to relocate AOD, MAS, check-in and Police prior to renovation - max. 30 days
  3. The Contractor may continue work if activation is less than the maximum times indicated.
- J. Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the Medical Centers operations will not be hindered. Contractor shall permit access to Department of Veterans Affairs personnel and patients through other construction areas that serve as routes of access to such affected areas and equipment. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Medical Center operations will continue during the construction period.
- K. Construction Fence: Before construction operations begin, Contractor shall provide a chain link construction fence, 2.1m (seven feet) minimum height, around the construction area indicated on the drawings. Provide gates as required for access with necessary hardware, including hasps and padlocks. Fasten fence fabric to terminal posts with tension bands and to line posts and top and bottom rails with tie wires spaced at maximum 375mm (15 inches). Bottom of fences shall extend to 25mm (one inch) above grade. Remove the fence when directed by COR.
- L. When a building or portion of a building is turned over to Contractor, Contractor shall accept entire responsibility thereof.
1. Contractor shall maintain a minimum temperature of 4 degrees C (40 degrees F) at all times, except as otherwise specified.
  2. Contractor shall maintain in operating condition existing fire protection and alarm equipment. In connection with fire alarm equipment, Contractor shall make arrangements for pre-inspection of site with Fire Department or Company (Department of Veterans Affairs or municipal) whichever will be required to respond to an alarm from Contractor's employee or watchman.
- M. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials,

equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COR.

1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of COR. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without the Medical Center Director's prior knowledge and written approval. Refer to specification Sections 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS and 28 05 11, REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS for additional requirements.
  2. Contractor shall submit a request to interrupt any such services to COR, in writing, 48 hours in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
  3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than Contractor's normal working hours.
  4. Major interruptions of any system must be requested, in writing, at least 15 calendar days prior to the desired time and shall be performed as directed by the COR.
  5. In case of a contract construction emergency, service will be interrupted on approval of COR. Such approval will be confirmed in writing as soon as practical.
  6. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.
- N. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, which are to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.
- O. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:
1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles. Wherever excavation for new utility lines cross existing roads, at least one lane must be open to traffic at all times.
  2. Method and scheduling of required cutting, altering and removal of existing roads, walks and entrances must be approved by the COR.
- P. Coordinate the work for this contract with other construction operations as directed by COR. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.

#### 1.7 ALTERATIONS

- A. Survey: Before any work is started, the Contractor shall make a thorough survey with the COR of buildings and areas of buildings in which

alterations occur and areas which are anticipated routes of access, and furnish a report, signed by both to the Contracting Officer. This report shall list by rooms and spaces:

1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of buildings.
  2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, blinds, shades, etc., required by drawings to be either reused or relocated, or both.
  3. Shall note any discrepancies between drawings and existing conditions at site.
  4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and COR.
- B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of COR to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this subparagraph B, the contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).
- C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and COR together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:
1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and, will form basis for determining extent of repair work required of Contractor to restore damage caused by Contractor's workmen in executing work of this contract.
- D. Protection: Provide the following protective measures:
1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
  2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
  3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

#### **1.8 INFECTION PREVENTION MEASURES**

- A. Implement the requirements of VAMC's Infection Control Risk Assessment (ICRA) team. ICRA Group may monitor dust in the vicinity of the construction work and require the Contractor to take corrective action immediately if the safe levels are exceeded.
- B. Establish and maintain a dust control program as part of the contractor's infection preventive measures in accordance with the guidelines provided by ICRA Group. Prior to start of work, prepare a plan detailing project-specific dust protection measures, including periodic status reports, and submit to COR and Facility ICRA team for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

1. All personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the Medical Center.
- C. Medical Center Infection Control personnel shall monitor for airborne disease (e.g. aspergillosis) as appropriate during construction. A baseline of conditions may be established by the Medical Center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality. In addition:
1. The RE and VAMC Infection Control personnel shall review pressure differential monitoring documentation to verify that pressure differentials in the construction zone and in the patient-care rooms are appropriate for their settings. The requirement for negative air pressure in the construction zone shall depend on the location and type of activity. Upon notification, the contractor shall implement corrective measures to restore proper pressure differentials as needed.
  2. In case of any problem, the Medical Center, along with assistance from the contractor, shall conduct an environmental assessment to find and eliminate the source.
- D. In general, following preventive measures shall be adopted during construction to keep down dust and prevent mold.
1. Dampen debris to keep down dust and provide temporary construction partitions in existing structures where directed by COR. Blank off ducts and diffusers to prevent circulation of dust into occupied areas during construction.
  2. Do not perform dust producing tasks within occupied areas without the approval of the COR. For construction in any areas that will remain jointly occupied by the Medical Center and Contractor's workers, the Contractor shall:
    - a. Provide dust proof fire-rated temporary drywall construction barriers to completely separate construction from the operational areas of the hospital in order to contain dirt debris and dust. Barriers shall be sealed and made presentable on hospital occupied side. Install a self-closing rated door in a metal frame, commensurate with the partition, to allow worker access. Maintain negative air at all times. A fire retardant polystyrene, 6-mil thick or greater plastic barrier meeting local fire codes may be used where dust control is the only hazard, and an agreement is reached with the COR and Medical Center.
    - b. HEPA filtration is required where the exhaust dust may reenter the breathing zone. Contractor shall verify that construction exhaust to exterior is not reintroduced to the Medical Center through intake vents, or building openings. Install HEPA (High Efficiency Particulate Accumulator) filter vacuum system rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. Insure continuous negative air pressures occurring within the work area. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Exhaust hoses shall be heavy duty, flexible steel reinforced and exhausted so that dust is not reintroduced to the Medical Center.
    - c. Adhesive Walk-off/Carpet Walk-off Mats, minimum 600mm x 900mm (24" x 36"), shall be used at all interior transitions from the construction area to occupied Medical Center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
    - d. Vacuum and wet mop all transition areas from construction to the occupied Medical Center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently.

Remove debris as they are created. Transport these outside the construction area in containers with tightly fitting lids.

- e. The Contractor shall not haul debris through patient-care areas without prior approval of the COR and the Medical Center. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.
  - f. Using a HEPA vacuum, clean inside the barrier and vacuum ceiling tile prior to replacement. Any ceiling access panels opened for investigation beyond sealed areas shall be sealed immediately when unattended.
  - g. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.
  - h. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.
- E. Final Cleanup:
1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
  2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
  3. All new air ducts shall be cleaned prior to final inspection.

#### **1.9 DISPOSAL AND RETENTION**

- A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:
1. Reserved items which are to remain property of the Government are identified by attached tags or noted on drawings or in specifications as items to be stored. Items that remain property of the Government shall be removed from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where and as directed by COR.
  2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.
  3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.
  4. PCB Transformers and Capacitors: The Contractor shall be responsible for disposal of the Polychlorinated Biphenyl (PCB) transformers and capacitors. The transformers and capacitors shall be taken out of service and handled in accordance with the procedures of the Environmental Protection Agency (EPA) and the Department of Transportation (DOT) as outlined in Code of Federal Regulation (CFR), Titled 40 and 49 respectively. The EPA's Toxic Substance Control Act (TSCA) Compliance Program Policy Nos. 6-PCB-6 and 6-PCB-7 also apply. Upon removal of PCB transformers and capacitors for disposal, the

"originator" copy of the Uniform Hazardous Waste Manifest (EPA Form 8700-22), along with the Uniform Hazardous Waste Manifest Continuation Sheet (EPA Form 8700-22A) shall be returned to the Contracting Officer who will annotate the contract file and transmit the Manifest to the Medical Center's Chief.

- a. Copies of the following listed CFR titles may be obtained from the Government Printing Office:
- 40 CFR 261.....Identification and Listing of Hazardous Waste
  - 40 CFR 262.....Standards Applicable to Generators of Hazardous Waste
  - 40 CFR 263.....Standards Applicable to Transporters of Hazardous Waste
  - 40 CFR 761.....PCB Manufacturing, Processing, Distribution in Commerce, and use Prohibitions
  - 49 CFR 172.....Hazardous Material tables and Hazardous Material Communications Regulations
  - 49 CFR 173.....Shippers - General Requirements for Shipments and Packaging
  - 49 CFR 173.....Subpart A General
  - 49 CFR 173.....Subpart B Preparation of Hazardous Material for Transportation
  - 49 CFR 173.....Subpart J Other Regulated Material; Definitions and Preparation
  - TSCA.....Compliance Program Policy Nos. 6-PCB-6 and 6-PCB-7

**1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS**

- A. The Contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so, and shall avoid damaging vegetation that will remain in place. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workmen, the Contractor shall trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound as directed by the Contracting Officer.
- B. The Contractor shall protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.
- C. Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, for additional requirements on protecting vegetation, soils and the environment. Refer to Articles, "Alterations", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements.
- D. Refer to FAR clause 52.236-7, "Permits and Responsibilities," which is included in General Conditions. A National Pollutant Discharge Elimination System (NPDES) permit is required for this project. The Contractor is considered an "operator" under the permit and has extensive responsibility for compliance with permit requirements. VA will make the permit application available at the (appropriate Medical Center) office. The apparent low bidder, contractor and affected

subcontractors shall furnish all information and certifications that are required to comply with the permit process and permit requirements. Many of the permit requirements will be satisfied by completing construction as shown and specified. Some requirements involve the Contractor's method of operations and operations planning and the Contractor is responsible for employing best management practices. The affected activities often include, but are not limited to the following:

- Designating areas for equipment maintenance and repair;
- Providing waste receptacles at convenient locations and provide regular collection of wastes;
- Locating equipment wash down areas on site, and provide appropriate control of wash-waters;
- Providing protected storage areas for chemicals, paints, solvents, fertilizers, and other potentially toxic materials; and
- Providing adequately maintained sanitary facilities.

#### **1.11 RESTORATION**

- A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the COR. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the COR before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.
- B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.
- C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workmen to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are indicated on drawings and which are not scheduled for discontinuance or abandonment.
- D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).

#### **1.12 PHYSICAL DATA**

- A. Data and information furnished or referred to below is for the Contractor's information. The Government shall not be responsible for any interpretation of or conclusion drawn from the data or information by the Contractor.
- B. Subsurface conditions have been developed by core borings. Logs of subsurface exploration are shown diagrammatically in the soils report.
- C. A copy of the soil report will be made available for inspection by bidders upon request to the Engineering Officer at the VA Medical Center, and shall be considered part of the contract documents.
- D. Government does not guarantee that other materials will not be encountered nor that proportions, conditions or character of several materials will not vary from those indicated by explorations. Bidders are expected to examine site of work and logs of borings; and, after investigation, decide for themselves character of materials and make their bids accordingly. Upon proper application to Department of



Veterans Affairs, bidders will be permitted to make subsurface explorations of their own at site.

#### **1.13 PROFESSIONAL SURVEYING SERVICES**

- A. A registered professional land surveyor or registered civil engineer whose services are retained and paid for by the Contractor shall perform services specified herein and in other specification sections. The Contractor shall certify that the land surveyor or civil engineer is not one who is a regular employee of the Contractor, and that the land surveyor or civil engineer has no financial interest in this contract.

#### **1.14 LAYOUT OF WORK**

- A. The Contractor shall lay out the work from Government established base lines and bench marks, indicated on the drawings, and shall be responsible for all measurements in connection with the layout. The Contractor shall furnish, at Contractor's own expense, all stakes, templates, platforms, equipment, tools, materials, and labor required to lay out any part of the work. The Contractor shall be responsible for executing the work to the lines and grades that may be established or indicated by the Contracting Officer. The Contractor shall also be responsible for maintaining and preserving all stakes and other marks established by the Contracting Officer until authorized to remove them. If such marks are destroyed by the Contractor or through Contractor's negligence before their removal is authorized, the Contracting Officer may replace them and deduct the expense of the replacement from any amounts due or to become due to the Contractor.
- B. Establish and plainly mark center lines for each building and/or addition to each existing building and such other lines and grades that are reasonably necessary to properly assure that location, orientation, and elevations established for each such structure and/or addition, roads, parking lots, are in accordance with lines and elevations shown on contract drawings.
- C. Following completion of general mass excavation and before any other permanent work is performed, establish and plainly mark (through use of appropriate batter boards or other means) sufficient additional survey control points or system of points as may be necessary to assure proper alignment, orientation, and grade of all major features of work. Survey shall include, but not be limited to, location of lines and grades of footings, exterior walls, center lines of columns in both directions, major utilities and elevations of floor slabs:
  - 1. Such additional survey control points or system of points thus established shall be checked and certified by a registered land surveyor or registered civil engineer. Furnish such certification to the COR before any work (such as footings, floor slabs, columns, walls, utilities and other major controlling features) is placed.
- D. During progress of work, and particularly as work progresses from floor to floor, Contractor shall have line grades and plumbness of all major form work checked and certified by a registered land surveyor or registered civil engineer as meeting requirements of contract drawings. Furnish such certification to the COR before any major items of concrete work are placed. In addition, Contractor shall furnish to the COR certificates from a registered land surveyor or registered civil engineer that the following work is complete in every respect as required by contract drawings.
  - 1. Lines of each building and/or addition.
  - 2. Elevations of bottoms of footings and tops of floors of each building and/or addition.
  - 3. Lines and elevations of sewers and of all outside distribution systems.
  - 5. Lines of elevations of all swales and interment areas.

6. Lines and elevations of roads, streets and parking lots.
- E. Whenever changes from contract drawings are made in line or grading requiring certificates, record such changes on a reproducible drawing bearing the registered land surveyor or registered civil engineer seal, and forward these drawings upon completion of work to COR.
  - F. The Contractor shall perform the surveying and layout work of this and other articles and specifications in accordance with the provisions of Article "Professional Surveying Services".

#### **1.15 AS-BUILT DRAWINGS**

- A. The Contractor shall maintain two full size sets of as-built drawings, which are to be kept current during construction of the project and to include all contract changes, modifications and clarifications.
- B. All variations shall be shown in the same general detail as used in the contract drawings. To insure compliance, as-built drawings shall be made available for the COR's review, as often as requested.
- C. Contractor shall deliver two approved completed sets of as-built drawings to the COR within 15 calendar days after each completed phase and after the acceptance of the project by the COR.
- D. Paragraphs A, B, & C above apply to all shop drawings as well.

#### **1.16 USE OF ROADWAYS**

- A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the COR, such temporary roads which are necessary in the performance of contract work. Temporary roads shall be constructed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.
- B. When new permanent roads are to be a part of this contract, Contractor may construct them immediately for use to facilitate building operations. These roads may be used by all who have business thereon within zone of building operations.
- C. When certain buildings (or parts of certain buildings) are required to be completed in advance of general date of completion, all roads leading thereto must be completed and available for use at time set for completion of such buildings or parts thereof.

#### **1.17 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT**

- A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to compliance with the following provisions:
  - 1. Permission to use each unit or system must be given by COR. If the equipment is not installed and maintained in accordance with the following provisions, the COR will withdraw permission for use of the equipment.
  - 2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.
  - 3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be eliminated.
  - 4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.

5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be replaced at completion of construction and prior to testing and balancing of system.
6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government.
- B. Prior to final inspection, the equipment or parts used, which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.
- C. This paragraph shall not reduce the requirements of the mechanical and electrical specifications sections.

**1.18 TEMPORARY USE OF EXISTING ELEVATORS**

- A. Contractor will not be allowed the use of existing elevators. Outside type hoist shall be used by Contractor, at Contractor's expense, for transporting materials and equipment if needed.

**1.19 TEMPORARY TOILETS**

- A. Provide, for use of all Contractor's workers, ample temporary sanitary toilet accommodations. Keep such places clean and free from flies, and all connections and appliances connected therewith are to be removed prior to completion of contract, and premises left perfectly clean.

**1.20 AVAILABILITY AND USE OF UTILITY SERVICES**

- A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the Contract. The Contractor shall carefully conserve any utilities furnished without charge.
- B. The Contractor, at Contractor's expense and in a workmanlike manner satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia.
- C. Contractor shall install meters at Contractor's expense and furnish the Medical Center a monthly record of the Contractor's usage of electricity as hereinafter specified.
- D. Heat: Furnish temporary heat necessary to prevent injury to work and materials through dampness and cold. Use of open salamanders or any temporary heating devices which may be fire hazards or may smoke and damage finished work, will not be permitted. Maintain minimum temperatures as specified for various materials:
  1. Obtain heat by connecting to Medical Center heating distribution system.
- E. Electricity (for Construction and Testing): Furnish all temporary electric services.
  1. Obtain electricity by connecting to the Medical Center electrical distribution system. The Contractor shall meter for electricity required for electric cranes and hoisting devices, electrical welding devices and any electrical heating devices providing temporary heat. Electricity for all other uses is available at no cost to the Contractor.
- F. Water (for Construction and Testing): Furnish temporary water service.
  1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection. Water is available at no cost to the Contractor.

2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (at COR's discretion) of use of water from Medical Center's system.
- G. Steam: Furnish steam system for testing required in various sections of specifications.
  1. Obtain steam for testing by connecting to the Medical Center steam distribution system. Steam is available at no cost to the Contractor.
  2. Maintain connections, pipe, fittings and fixtures and conserve steam-use so none is wasted. Failure to stop leakage or other waste will be cause for revocation (at COR's discretion), of use of steam from the Medical Center's system.

#### **1.21 NEW TELEPHONE EQUIPMENT**

- A. The contractor shall coordinate with the work of installation of telephone equipment by others. This work shall be completed before the building is turned over to VA.

#### **1.22 TESTS**

- A. Pre-test mechanical and electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.
- B. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.
- C. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire complex, which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system, which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a complex, which involves several components of different disciplines, is a boiler installation. Efficient and acceptable boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feedwater, condensate and other related components.
- D. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably short period of time during which operating and environmental conditions remain reasonably constant.
- E. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

#### **1.23 INSTRUCTIONS**

- A. Contractor shall furnish Maintenance and Operating manuals (hard copies and electronic) and verbal instructions when required by the various sections of the specifications and as hereinafter specified.
- B. Manuals: Maintenance and operating manuals and one compact disc (four hard copies and one electronic copy each) for each separate piece of equipment shall be delivered to the COR coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts

clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.

- C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed instructions to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the COR and shall be considered concluded only when the COR is satisfied in regard to complete and thorough coverage. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the COR, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

#### **1.24 RELOCATED EQUIPMENT AND ITEMS**

- A. Contractor shall disconnect, dismantle as necessary, remove and reinstall in new location, existing equipment and items indicated to be relocated by the Contractor.
- B. Perform relocation of such equipment or items at such times and in such a manner as directed by the COR.
- C. Suitably cap existing service lines, such as steam, condensate return, water, drain, gas, air, vacuum and/or electrical, whenever such lines are disconnected from equipment to be relocated. Remove abandoned lines in finished areas and cap as specified herein before under paragraph "Abandoned Lines".
- D. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.
- E. Contractor shall employ services of an installation engineer, who is an authorized representative of the manufacturer of equipment to supervise assembly and installation of existing equipment, required to be relocated.
- F. All service lines such as noted above for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

#### **1.25 CONSTRUCTION SIGN**

- A. Provide a Construction Sign where directed by the COR. All wood members shall be of framing lumber. Cover sign frame with 0.7 mm (24 gage) galvanized sheet steel nailed securely around edges and on all bearings. Provide three 100 by 100 mm (4 inch by 4 inch) posts (or equivalent round posts) set 1200 mm (four feet) into ground. Set bottom of sign

level at 900 mm (three feet) above ground and secure to posts with through bolts. Make posts full height of sign. Brace posts with 50 x 100 mm (two by four inch) material as directed.

- B. Paint all surfaces of sign and posts two coats of white gloss paint. Border and letters shall be of black gloss paint, except project title, which shall be blue gloss paint.
- C. Maintain sign and remove it when directed by the COR.

#### **1.26 SAFETY SIGN**

- A. Provide a Safety Sign where directed by COR. Face of sign shall be 19 mm (3/4 inch) thick exterior grade plywood. Provide two 100 mm by 100 mm (four by four inch) posts extending full height of sign and 900 mm (three feet) into ground. Set bottom of sign level at 1200 mm (four feet) above ground.
- B. Paint all surfaces of Safety Sign and posts with one prime coat and two coats of white gloss paint. Letters and design shall be painted with gloss paint of colors noted.
- C. Maintain sign and remove it when directed by COR.
- D. Standard Detail Drawing Number SD10000-02 (Found on VA TIL) of safety sign showing required legend and other characteristics of sign is shown on the drawings.
- E. Post the number of accident free days on a daily basis.

#### **1.27 HISTORIC PRESERVATION**

- A. Where the Contractor or any of the Contractor's employees, prior to, or during the construction work, are advised of or discover any possible archeological, historical and/or cultural resources, the Contractor shall immediately notify the COR verbally, and then with a written follow up.

#### **1.28 VA TRIRIGA CPMS**

VA contractors, selected by award to perform work, are required to get access to the VA TRIRIGA CPMS. The TRIRIGA CPMS is the management and collaborative environment that the VA uses for all Major, Minor and Non-Recurring Maintenance (NRM) projects within the Office of Construction & Facilities Management (CFM), Veterans Health Administration (VHA), National Cemetery Administration (NCA), and the Veterans Benefits Administration (VBA).

The contractor is solely responsible for acquiring access to the VA TRIRIGA CPMS.

To gain access to the VA TRIRIGA CPMS the contractor is encouraged to follow the licensing process outline as specified below:

- A. Requirement: TRIRIGA is the management and collaborative environment that VA uses for all construction projects. VA requires its contractors to procure TRIRIGA access as part of the cost of performance for a VA construction related contract.
- B. Access Request and Payment can be made through the following URL <https://valicensing.oncfi.com/>  
Inquiries or to request additional services, contact the following:  
Craig Alsheimer, Federal Account Manager  
Computerized Facility Integrations, LLC  
18000 West Nine Mile Road  
Suite 700  
Southfield, MI 48075  
Email: [calsheimer@gocfi.com](mailto:calsheimer@gocfi.com)  
Phone: 248-557-4234 Extension 6010; 410-292-7006
- C. Process:

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
Sam Rayburn Memorial Veterans Center, Bonham, Texas  
100% ISSUED FOR CONSTRUCTION  
05-01-13

1. Once the contractor has been notified by VA of the award and a unique contract number, the contractor can enter a request for access to TRIRIGA at URL <https://valicensing.oncfi.com/>
2. CFI will process the request for access and payment. CFI will create the USER ID and a password. Security provisions required to align the contractor to the Contract Number will be entered and an email will be generated and submitted to the requestor.
3. CFI will also provide standard terms and conditions related to the transaction and use agreement.

- - - E N D - - -

**SECTION 01 32 16.15  
PROJECT SCHEDULES**

**PART 1- GENERAL**

**1.1 DESCRIPTION:**

- A. The Contractor shall develop a Critical Path Method (CPM) plan and schedule demonstrating fulfillment of the contract requirements (Project Schedule), and shall keep the Project Schedule up-to-date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating and monitoring work under this contract (including all activities of subcontractors, equipment vendors and suppliers). Conventional Critical Path Method (CPM) technique shall be utilized to satisfy both time and cost applications.

**1.2 COMPUTER PRODUCED SCHEDULES**

- A. The Contractor shall provide monthly, to the Department of Veterans Affairs (VA), all computer-produced time/cost schedules and reports generated from monthly project updates. This monthly computer service will include: three copies of up to five different reports (inclusive of all pages) available within the user defined reports of the scheduling software approved by the Contracting Officer; a hard copy listing of all project schedule changes, and associated data, made at the update and an electronic file of this data; and the resulting monthly updated schedule in PDM format. These must be submitted with and substantively support the contractor's monthly payment request and the signed look ahead report. The COR shall identify the five different report formats that the contractor shall provide.
- B. The Contractor shall be responsible for the correctness and timeliness of the computer-produced reports. The Contractor shall also be responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.
- C. The VA will report errors in computer-produced reports to the Contractor's representative within ten calendar days from receipt of reports. The Contractor shall reprocess the computer-produced reports and associated diskette(s), when requested by the Contracting Officer's representative, to correct errors that affect the payment and schedule for the project.

**1.3 THE COMPLETE PROJECT SCHEDULE SUBMITTAL**

- A. Within 45 calendar days after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; three blue line copies of the interim schedule on sheets of paper 765 x 1070 mm (30 x 42 inches) and an electronic file in the previously approved CPM schedule program. The submittal shall also include three copies of a computer-produced activity/event ID schedule showing project duration; phase completion dates; and other data, including event cost. Each activity/event on the computer-produced schedule shall contain as a minimum, but not limited to, activity/event ID, activity/event description, duration, budget amount, early start date, early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start or start-to-start without lead or lag constraints. Activity/event date constraints, not required by the contract, will not be accepted unless



submitted to and approved by the Contracting Officer. The Contractor shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer's written approval before incorporating them into the network diagram. The Contracting Officer's separate approval of the Project Schedule shall not excuse the contractor of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events, but must have zero duration. The complete working schedule shall reflect the Contractor's approach to scheduling the complete project. **The final Project Schedule in its original form shall contain no contract changes or delays which may have been incurred during the final network diagram development period and shall reflect the entire contract duration as defined in the bid documents.** These changes/delays shall be entered at the first update after the final Project Schedule has been approved. The Contractor should provide their requests for time and supporting time extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

- B. Within 30 calendar days after receipt of the complete project interim Project Schedule and the complete final Project Schedule, the Contracting Officer or his representative, will do one or both of the following:
  - 1. Notify the Contractor concerning his actions, opinions, and objections.
  - 2. A meeting with the Contractor at or near the job site for joint review, correction or adjustment of the proposed plan will be scheduled if required. Within 14 calendar days after the joint review, the Contractor shall revise and shall submit three blue line copies of the revised Project Schedule, three copies of the revised computer-produced activity/event ID schedule and a revised electronic file as specified by the Contracting Officer. The revised submission will be reviewed by the Contracting Officer and, if found to be as previously agreed upon, will be approved.
- C. The approved baseline schedule and the computer-produced schedule(s) generated there from shall constitute the approved baseline schedule until subsequently revised in accordance with the requirements of this section.

#### 1.4 WORK ACTIVITY/EVENT COST DATA

- A. The Contractor shall cost load all work activities/events except procurement activities. The cumulative amount of all cost loaded work activities/events (including alternates) shall equal the total contract price. Prorate overhead, profit and general conditions on all work activities/events for the entire project length. The Contractor shall generate from this information cash flow curves indicating graphically the total percentage of work activity/event dollar value scheduled to be in place on early finish, late finish. These cash flow curves will be used by the Contracting Officer to assist him in determining approval or disapproval of the cost loading. Negative work activity/event cost data will not be acceptable, except on VA issued contract changes.
- B. The Contractor shall cost load work activities/events for guarantee period services, test, balance and adjust various systems in accordance with the provisions in Article, FAR 52.232 - 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.236 - 83 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS).
- C. In accordance with FAR 52.236 - 1 (PERFORMANCE OF WORK BY THE CONTRACTOR) and VAAR 852.236 - 72 (PERFORMANCE OF WORK BY THE CONTRACTOR), the Contractor shall submit, simultaneously with the cost

per work activity/event of the construction schedule required by this Section, a responsibility code for all activities/events of the project for which the Contractor's forces will perform the work.

- D. The Contractor shall cost load work activities/events for all BID ITEMS including ASBESTOS ABATEMENT. The sum of each BID ITEM work shall equal the value of the bid item in the Contractors' bid.

### 1.5 PROJECT SCHEDULE REQUIREMENTS

- A. Show on the project schedule the sequence of work activities/events required for complete performance of all items of work. The Contractor Shall:
1. Show activities/events as:
    - a. Contractor's time required for submittal of shop drawings, templates, fabrication, delivery and similar pre-construction work.
    - b. Contracting Officer's and Architect-Engineer's review and approval of shop drawings, equipment schedules, samples, template, or similar items.
    - c. Interruption of VA Facilities utilities, delivery of Government furnished equipment, and rough-in drawings, project phasing and any other specification requirements.
    - d. Test, balance and adjust various systems and pieces of equipment, maintenance and operation manuals, instructions and preventive maintenance tasks.
    - e. VA inspection and acceptance activity/event with a minimum duration of five work days at the end of each phase and immediately preceding any VA move activity/event required by the contract phasing for that phase.
  2. Show not only the activities/events for actual construction work for each trade category of the project, but also trade relationships to indicate the movement of trades from one area, floor, or building, to another area, floor, or building, for at least five trades who are performing major work under this contract.
  3. Break up the work into activities/events of a duration no longer than 20 work days each or one reporting period, except as to non-construction activities/events (i.e., procurement of materials, delivery of equipment, concrete and asphalt curing) and any other activities/events for which the COR may approve the showing of a longer duration. The duration for VA approval of any required submittal, shop drawing, or other submittals will not be less than 20 work days.
  4. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.
  5. The schedule shall be generally numbered in such a way to reflect either discipline, phase or location of the work.
- B. The Contractor shall submit the following supporting data in addition to the project schedule:
1. The appropriate project calendar including working days and holidays.
  2. The planned number of shifts per day.
  3. The number of hours per shift.
- Failure of the Contractor to include this data shall delay the review of the submittal until the Contracting Officer is in receipt of the missing data.
- C. To the extent that the Project Schedule or any revised Project Schedule shows anything not jointly agreed upon, it shall not be deemed to have been approved by the COR. Failure to include any element of work

required for the performance of this contract shall not excuse the Contractor from completing all work required within any applicable completion date of each phase regardless of the COR's approval of the Project Schedule.

- D. Compact Disk Requirements and CPM Activity/Event Record Specifications: Submit to the VA an electronic file(s) containing one file of the data required to produce a schedule, reflecting all the activities/events of the complete project schedule being submitted.

#### **1.6 PAYMENT TO THE CONTRACTOR:**

- A. Monthly, the contractor shall submit the AIA application and certificate for payment documents G702 & G703 reflecting updated schedule activities and cost data in accordance with the provisions of the following Article, PAYMENT AND PROGRESS REPORTING, as the basis upon which progress payments will be made pursuant to Article, FAR 52.232 - 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.236 - 83 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS). The Contractor shall be entitled to a monthly progress payment upon approval of estimates as determined from the currently approved updated project schedule. Monthly payment requests shall include: a listing of all agreed upon project schedule changes and associated data; and an electronic file (s) of the resulting monthly updated schedule.
- B. Approval of the Contractor's monthly Application for Payment shall be contingent, among other factors, on the submittal of a satisfactory monthly update of the project schedule.

#### **1.7 PAYMENT AND PROGRESS REPORTING**

- A. Monthly schedule update meetings will be held on dates mutually agreed to by the COR and the Contractor. Contractor and their CPM consultant (if applicable) shall attend all monthly schedule update meetings. The Contractor shall accurately update the Project Schedule and all other data required and provide this information to the COR three work days in advance of the schedule update meeting. Job progress will be reviewed to verify:
  - 1. Actual start and/or finish dates for updated/completed activities/events.
  - 2. Remaining duration for each activity/event started, or scheduled to start, but not completed.
  - 3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the Project Schedule.
  - 4. Changes in activity/event sequence and/or duration which have been made, pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
  - 5. Completion percentage for all completed and partially completed activities/events.
  - 6. Logic and duration revisions required by this section of the specifications.
  - 7. Activity/event duration and percent complete shall be updated independently.
- B. After completion of the joint review, the contractor shall generate an updated computer-produced calendar-dated schedule and supply the Contracting Officer's representative with reports in accordance with the Article, COMPUTER PRODUCED SCHEDULES, specified.
- C. After completing the monthly schedule update, the contractor's representative or scheduling consultant shall rerun all current period contract change(s) against the prior approved monthly project schedule. The analysis shall only include original workday durations and schedule logic agreed upon by the contractor and resident engineer for the

contract change(s). When there is a disagreement on logic and/or durations, the Contractor shall use the schedule logic and/or durations provided and approved by the resident engineer. After each rerun update, the resulting electronic project schedule data file shall be appropriately identified and submitted to the VA in accordance to the requirements listed in articles 1.4 and 1.7. This electronic submission is separate from the regular monthly project schedule update requirements and shall be submitted to the resident engineer within fourteen (14) calendar days of completing the regular schedule update. **Before inserting the contract changes durations, care must be taken to ensure that only the original durations will be used for the analysis, not the reported durations after progress. In addition, once the final network diagram is approved, the contractor must recreate all manual progress payment updates on this approved network diagram and associated reruns for contract changes in each of these update periods as outlined above for regular update periods. This will require detailed record keeping for each of the manual progress payment updates.**

- D. Following approval of the CPM schedule, the VA, the General Contractor, its approved CPM Consultant, RE office representatives, and all subcontractors needed, as determined by the SRE, shall meet to discuss the monthly updated schedule. The main emphasis shall be to address work activities to avoid slippage of project schedule and to identify any necessary actions required to maintain project schedule during the reporting period. The Government representatives and the Contractor should conclude the meeting with a clear understanding of those work and administrative actions necessary to maintain project schedule status during the reporting period. This schedule coordination meeting will occur after each monthly project schedule update meeting utilizing the resulting schedule reports from that schedule update. If the project is behind schedule, discussions should include ways to prevent further slippage as well as ways to improve the project schedule status, when appropriate.

#### **1.8 RESPONSIBILITY FOR COMPLETION**

- A. If it becomes apparent from the current revised monthly progress schedule that phasing or contract completion dates will not be met, the Contractor shall execute some or all of the following remedial actions:
1. Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.
  2. Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.
  3. Reschedule the work in conformance with the specification requirements.
- B. Prior to proceeding with any of the above actions, the Contractor shall notify and obtain approval from the COR for the proposed schedule changes. If such actions are approved, the representative schedule revisions shall be incorporated by the Contractor into the Project Schedule before the next update, at no additional cost to the Government.

#### **1.9 CHANGES TO THE SCHEDULE**

- A. Within 30 calendar days after VA acceptance and approval of any updated project schedule, the Contractor shall submit a revised electronic file (s) and a list of any activity/event changes including predecessors and successors for any of the following reasons:

1. Delay in completion of any activity/event or group of activities/events, which may be involved with contract changes, strikes, unusual weather, and other delays will not relieve the Contractor from the requirements specified unless the conditions are shown on the CPM as the direct cause for delaying the project beyond the acceptable limits.
  2. Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.
  3. The schedule does not represent the actual prosecution and progress of the project.
  4. When there is, or has been, a substantial revision to the activity/event costs regardless of the cause for these revisions.
- B. CPM revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, vacating of areas by the VA Facility, contract phase(s) and sub phase(s), utilities furnished by the Government to the Contractor, or any other previously contracted item, shall be furnished in writing to the Contracting Officer for approval.
- C. Contracting Officer's approval for the revised project schedule and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or the VA representative.
- D. The cost of revisions to the project schedule resulting from contract changes will be included in the proposal for changes in work as specified in FAR 52.243 - 4 (Changes) and VAAR 852.236 - 88 (Changes - Supplemental), and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.
- E. The cost of revisions to the Project Schedule not resulting from contract changes is the responsibility of the Contractor.

#### **1.12 ADJUSTMENT OF CONTRACT COMPLETION**

- A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the Contractor shall be supported with a justification, CPM data and supporting evidence as the COR may deem necessary for determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in work days) and costs is obligatory to any approvals. The schedule must clearly display that the Contractor has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.
- B. Actual delays in activities/events which, according to the computer-produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the facts and advise the Contractor in writing of the Contracting Officer's decision.
- C. The Contractor shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under FAR 52.243 - 4 (Changes) and VAAR 852.236 - 88 (Changes - Supplemental). The Contractor shall include, as a part of each change order proposal, a sketch showing all CPM logic revisions,

duration (in work days) changes, and cost changes, for work in question and its relationship to other activities on the approved network diagram.

- D. All delays due to non-work activities/events such as RFI's, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month-by-month basis.

- - - E N D - - -

**SECTION 01 33 23**  
**SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES**

- 1-1. Refer to Articles titled SPECIFICATIONS AND DRAWINGS FOR CONSTRUCTION (FAR 52.236-21) and, SPECIAL NOTES (VAAR 852.236-91), in GENERAL CONDITIONS.
- 1-2. For the purposes of this contract, samples (including laboratory samples to be tested), test reports, certificates, and manufacturers' literature and data shall also be subject to the previously referenced requirements. The following text refers to all items collectively as SUBMITTALS.
- 1-3. Submit for approval, all of the items specifically mentioned under the separate sections of the specification, with information sufficient to evidence full compliance with contract requirements. Materials, fabricated articles and the like to be installed in permanent work shall equal those of approved submittals. After an item has been approved, no change in brand or make will be permitted unless:
  - A. Satisfactory written evidence is presented to, and approved by Contracting Officer, that manufacturer cannot make scheduled delivery of approved item or;
  - B. Item delivered has been rejected and substitution of a suitable item is an urgent necessity or;
  - C. Other conditions become apparent which indicates approval of such substitute item to be in best interest of the Government.
- 1-4. Forward submittals in sufficient time to permit proper consideration and approval action by Government. Time submission to assure adequate lead time for procurement of contract-required items. Delays attributable to untimely and rejected submittals (including any laboratory samples to be tested) will not serve as a basis for extending contract time for completion.
- 1-5. Submittals will be reviewed for compliance with contract requirements by Architect-Engineer, and action thereon will be taken by COR on behalf of the Contracting Officer.
- 1-6. Upon receipt of submittals, Architect-Engineer will assign a file number thereto. Contractor, in any subsequent correspondence, shall refer to this file and identification number to expedite replies relative to previously approved or disapproved submittals.
- 1-7. The Government reserves the right to require additional submittals, whether or not particularly mentioned in this contract. If additional submittals beyond those required by the contract are furnished pursuant to request therefor by Contracting Officer, adjustment in contract price and time will be made in accordance with Articles titled CHANGES (FAR 52.243-4) and CHANGES - SUPPLEMENT (VAAR 852.236-88) of the GENERAL CONDITIONS.
- 1-8. Schedules called for in specifications and shown on shop drawings shall be submitted for use and information of Department of Veterans Affairs and Architect-Engineer. However, the Contractor shall assume responsibility for coordinating and verifying schedules. The Contracting Officer and Architect-Engineer assumes no responsibility for checking schedules or layout drawings for exact sizes, exact numbers and detailed positioning of items.
- 1-9. Submittals must be submitted by Contractor only and shipped prepaid. Contracting Officer assumes no responsibility for checking quantities or exact numbers included in such submittals.
  - A. Submit samples required in Division 9, in quadruplicate. Submit other samples in single units unless otherwise specified. Submit shop drawings, schedules, manufacturers' literature and data, and certificates in quadruplicate, plus the number required to be returned to the Contractor, except where a greater number is specified.
  - B. Submittals will receive consideration only when covered by a transmittal letter signed by Contractor. Letter shall accompany submittals and shall

contain the list of items, name of Medical Center, name of Contractor, contract number, applicable specification paragraph numbers, applicable drawing numbers (and other information required for exact identification of location for each item), manufacturer and brand, ASTM or Federal Specification Number (if any) and such additional information as may be required by specifications for particular item being furnished. In addition, catalogs shall be marked to indicate specific items submitted for approval.

1. A copy of letter must be enclosed with items, and any items received without identification letter will be considered "unclaimed goods" and held for a limited time only.
  2. Each sample, certificate, manufacturers' literature and data shall be labeled to indicate the name and location of the Medical Center, name of Contractor, manufacturer, brand, contract number and ASTM or Federal Specification Number as applicable and location(s) on project.
  3. Required certificates shall be signed by an authorized representative of manufacturer or supplier of material, and by Contractor.
- C. In addition to complying with the applicable requirements specified in preceding Article 1.9, samples which are required to have Laboratory Tests (those preceded by symbol "LT" under the separate sections of the specification shall be tested, at the expense of Contractor, in a commercial laboratory approved by Contracting Officer.
1. Laboratory shall furnish Contracting Officer with a certificate stating that it is fully equipped and qualified to perform intended work, is fully acquainted with specification requirements and intended use of materials and is an independent establishment in no way connected with organization of Contractor or with manufacturer or supplier of materials to be tested.
  2. Certificates shall also set forth a list of comparable projects upon which laboratory has performed similar functions during past five years.
  3. Samples and laboratory tests shall be sent directly to approved commercial testing laboratory.
  4. Contractor shall forward a copy of transmittal letter to COR simultaneously with submission to a commercial testing laboratory.
  5. Laboratory test reports shall be sent directly to COR for appropriate action.
  6. Laboratory reports shall list contract specification test requirements and a comparative list of the laboratory test results. When tests show that the material meets specification requirements, the laboratory shall so certify on test report.
  7. Laboratory test reports shall also include a recommendation for approval or disapproval of tested item.
- D. If submittal samples have been disapproved, resubmit new samples as soon as possible after notification of disapproval. Such new samples shall be marked "Resubmitted Sample" in addition to containing other previously specified information required on label and in transmittal letter.
- E. Approved samples will be kept on file by the Contractor at the site until completion of contract. Where noted in technical sections of specifications, approved samples in good condition may be used in their proper locations in contract work. Disapproved samples that are not requested for return by Contractor will be discarded after completion of contract.
- F. Submittal drawings (shop, erection or setting drawings) and schedules, required for work of various trades, shall be checked before submission by technically qualified employees of Contractor for accuracy, completeness and compliance with contract requirements. These drawings and schedules shall be stamped and signed by Contractor certifying to such check.
1. For each drawing required, submit one legible photographic paper or vellum reproducible.



2. Reproducible shall be full size.
3. Each drawing shall have marked thereon, proper descriptive title, including Medical Center location, project number, manufacturer's number, reference to contract drawing number, detail Section Number, and Specification Section Number.
4. A space 120 mm by 125 mm (4-3/4 by 5 inches) shall be reserved on each drawing to accommodate approval or disapproval stamp.
5. Submit drawings, ROLLED WITHIN A MAILING TUBE, fully protected for shipment.
6. One reproducible print of approved or disapproved shop drawings will be forwarded to Contractor.
7. When work is directly related and involves more than one trade, shop drawings shall be submitted to Architect-Engineer under one cover.
- 1-10. Submittals (except laboratory samples), shop drawings, test reports, certificates and manufacturers' literature and data, shall be submitted for approval to  

Michael Roth & Associates  
200 S. Hanley Blvd, Suite 1105  
St. Louis, MO 63105
- 1-11. At the time of transmittal to the Architect-Engineer, the Contractor shall also send a copy of the complete submittal directly to the COR.
- 1-12. Samples (except laboratory samples) for approval shall be sent to Architect-Engineer, in care of COR, VA Medical Center:

VA Engineering  
Sam Rayburn VA Medical Center  
1201 E. 9th St.  
Bonham, TX 75418

- - - E N D - - -

**SECTION 01 35 26**  
**SAFETY REQUIREMENTS**

**TABLE OF CONTENTS**

1.1	APPLICABLE PUBLICATIONS .....	2
1.2	DEFINITIONS .....	3
1.3	REGULATORY REQUIREMENTS .....	3
1.4	ACCIDENT PREVENTION PLAN (APP).....	4
1.5	ACTIVITY HAZARD ANALYSES (AHAs) .....	8
1.6	PRECONSTRUCTION CONFERENCE .....	9
1.7	"SITE SAFETY AND HEALTH OFFICER" (SSHO) and "COMPETENT PERSON" (CP).....	9
1.8	TRAINING .....	10
1.9	INSPECTIONS .....	11
1.10	ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS .....	12
1.11	PERSONAL PROTECTIVE EQUIPMENT (PPE) .....	12
1.12	INFECTION CONTROL.....	13
1.13	TUBERCULOSIS SCREENING.....	16
1.14	FIRE SAFETY .....	17
1.15	ELECTRICAL.....	19
1.16	FALL PROTECTION.....	20
1.17	SCAFFOLDS AND OTHER WORK PLATFORMS .....	20
1.18	EXCAVATION AND TRENCHES.....	21
1.19	CRANES .....	22
1.20	CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT) .....	22
1.21	CONFINED SPACE ENTRY.....	23
1.22	WELDING AND CUTTING .....	23
1.23	LADDERS.....	23
1.24	FLOOR & WALL OPENINGS .....	23

**SECTION 01 35 26**  
**SAFETY REQUIREMENTS**

1.1 APPLICABLE PUBLICATIONS:

A. Latest publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

1. American Society of Safety Engineers (ASSE):

A10.1-2011.....Pre-Project & Pre-Task Safety and Health  
Planning

A10.34-2012.....Protection of the Public on or Adjacent to  
Construction Sites

A10.38-2013.....Basic Elements of an Employer's Program to  
Provide a Safe and Healthful Work Environment  
American National Standard Construction and  
Demolition Operations

2. American Society for Testing and Materials (ASTM):

E84-2013.....Surface Burning Characteristics of Building  
Materials

3. The Facilities Guidelines Institute (FGI):

FGI Guidelines-2010Guidelines for Design and Construction of  
Healthcare Facilities

4. National Fire Protection Association (NFPA):

10-2013.....Standard for Portable Fire Extinguishers

30-2012.....Flammable and Combustible Liquids Code

51B-2014.....Standard for Fire Prevention During Welding,  
Cutting and Other Hot Work

70-2014.....National Electrical Code

70B-2013.....Recommended Practice for Electrical Equipment  
Maintenance

70E-2012 .....Standard for Electrical Safety in the Workplace

99-2012.....Health Care Facilities Code

241-2013.....Standard for Safeguarding Construction,  
Alteration, and Demolition Operations

5. The Joint Commission (TJC)

TJC Manual .....Comprehensive Accreditation and Certification  
Manual

6. U. S. Nuclear Regulatory Commission

10 CFR 20 .....Standards for Protection Against Radiation

7. U. S. Occupational Safety and Health Administration (OSHA):  
29 CFR 1904 .....Reporting and Recording Injuries & Illnesses  
29 CFR 1910 .....Safety and Health Regulations for General  
Industry  
29 CFR 1926 .....Safety and Health Regulations for Construction  
Industry  
CPL 2-0.124.....Multi-Employer Citation Policy
8. VHA Directive 2005-007

1.2 DEFINITIONS:

- A. OSHA "Competent Person" (CP). One who is capable of identifying existing and predictable hazards in the surroundings and working conditions which are unsanitary, hazardous or dangerous to employees, and who has the authorization to take prompt corrective measures to eliminate them (see 29 CFR 1926.32(f)).
- B. "Qualified Person" means one who, by possession of a recognized degree, certificate, or professional standing, or who by extensive knowledge, training and experience, has successfully demonstrated his ability to solve or resolve problems relating to the subject matter, the work, or the project.
- C. High Visibility Accident. Any mishap which may generate publicity or high visibility.
- D. Medical Treatment. Treatment administered by a physician or by registered professional personnel under the standing orders of a physician. Medical treatment does not include first aid treatment even through provided by a physician or registered personnel.
- E. Recordable Injuries or Illnesses. Any work-related injury or illness that results in:
1. Death, regardless of the time between the injury and death, or the length of the illness;
  2. Days away from work (any time lost after day of injury/illness onset);
  3. Restricted work;
  4. Transfer to another job;
  5. Medical treatment beyond first aid;
  6. Loss of consciousness; or
  7. A significant injury or illness diagnosed by a physician or other licensed health care professional, even if it did not result in (1) through (6) above.

1.3 REGULATORY REQUIREMENTS:

- A. In addition to the detailed requirements included in the provisions of this contract, comply with 29 CFR 1926, comply with 29 CFR 1910 as incorporated by reference within 29 CFR 1926, comply with ASSE A10.34, and all applicable [federal, state, and local] laws, ordinances, criteria, rules and regulations. Submit matters of interpretation of standards for resolution before starting work. Where the requirements of this specification, applicable laws, criteria, ordinances, regulations, and referenced documents vary, the most stringent requirements govern except with specific approval and acceptance by the COR.

1.4 ACCIDENT PREVENTION PLAN (APP):

- A. The APP (aka Construction Safety & Health Plan) shall interface with the Contractor's overall safety and health program. Include any portions of the Contractor's overall safety and health program referenced in the APP in the applicable APP element and ensure it is site-specific. The Government considers the Prime Contractor to be the "controlling authority" for all worksite safety and health of each subcontractor(s). Contractors are responsible for informing their subcontractors of the safety provisions under the terms of the contract and the penalties for noncompliance, coordinating the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts, and inspecting subcontractor operations to ensure that accident prevention responsibilities are being carried out.
- B. The APP shall be prepared as follows:
1. Written in English by a qualified person who is employed by the Prime Contractor articulating the specific work and hazards pertaining to the contract (model language can be found in ASSE A10.33). Specifically articulating the safety requirements found within these VA contract safety specifications.
  2. Address both the Prime Contractors and the subcontractors work operations.
  3. State measures to be taken to control hazards associated with materials, services, or equipment provided by suppliers.
  4. Address all the elements/sub-elements and in order as follows:
    - a. **SIGNATURE SHEET.** Title, signature, and phone number of the following:
      - (1) Plan preparer (Qualified Person such as corporate safety staff person or contracted Certified Safety Professional with construction safety experience);

- (2) Plan approver (company/corporate officers authorized to obligate the company);
  - (3) Plan concurrence (e.g., Chief of Operations, Corporate Chief of Safety, Corporate Industrial Hygienist, project manager or superintendent, project safety professional). Provide concurrence of other applicable corporate and project personnel (Contractor).
- b. **BACKGROUND INFORMATION.** List the following:
- (1) Contractor;
  - (2) Contract number;
  - (3) Project name;
  - (4) Brief project description, description of work to be performed, and location; phases of work anticipated (these will require an AHA).
- c. **STATEMENT OF SAFETY AND HEALTH POLICY.** Provide a copy of current corporate/company Safety and Health Policy Statement, detailing commitment to providing a safe and healthful workplace for all employees. The Contractor's written safety program goals, objectives, and accident experience goals for this contract should be provided.
- d. **RESPONSIBILITIES AND LINES OF AUTHORITIES.** Provide the following:
- (1) A statement of the employer's ultimate responsibility for the implementation of his SOH program;
  - (2) Identification and accountability of personnel responsible for safety at both corporate and project level. Contracts specifically requiring safety or industrial hygiene personnel shall include a copy of their resumes.
  - (3) The names of Competent and/or Qualified Person(s) and proof of competency/qualification to meet specific OSHA Competent/Qualified Person(s) requirements must be attached.;
  - (4) Requirements that no work shall be performed unless a designated competent person is present on the job site;
  - (5) Requirements for pre-task Activity Hazard Analysis (AHAs);
  - (6) Lines of authority;
  - (7) Policies and procedures regarding noncompliance with safety requirements (to include disciplinary actions for violation of safety requirements) should be identified;

- e. **SUBCONTRACTORS AND SUPPLIERS.** If applicable, provide procedures for coordinating SOH activities with other employers on the job site:
- (1) Identification of subcontractors and suppliers (if known);
  - (2) Safety responsibilities of subcontractors and suppliers.
- f. **TRAINING.**
- (1) Site-specific SOH orientation training at the time of initial hire or assignment to the project for every employee before working on the project site is required.
  - (2) Mandatory training and certifications that are applicable to this project (e.g., explosive actuated tools, crane operator, rigger, crane signal person, fall protection, electrical lockout/NFPA 70E, machine/equipment lockout, confined space, etc...) and any requirements for periodic retraining/recertification are required.
  - (3) Procedures for ongoing safety and health training for supervisors and employees shall be established to address changes in site hazards/conditions.
  - (4) OSHA 10-hour training is required for all workers on site and the OSHA 30-hour training is required for Trade Competent Persons (CPs)
- g. **SAFETY AND HEALTH INSPECTIONS.**
- (1) Specific assignment of responsibilities for a minimum daily job site safety and health inspection during periods of work activity: Who will conduct (e.g., "Site Safety and Health CP"), proof of inspector's training/qualifications, when inspections will be conducted, procedures for documentation, deficiency tracking system, and follow-up procedures.
  - (2) Any external inspections/certifications that may be required (e.g., contracted CSP or CSHT)
- h. **ACCIDENT INVESTIGATION & REPORTING.** The Contractor shall conduct mishap investigations of all OSHA Recordable Incidents. The APP shall include accident/incident investigation procedure & identify person(s) responsible to provide the following to the COR:
- (1) Exposure data (man-hours worked);
  - (2) Accident investigations, reports, and logs.
- i. **PLANS (PROGRAMS, PROCEDURES) REQUIRED.** Based on a risk assessment of contracted activities and on mandatory OSHA compliance programs, the Contractor shall address all applicable occupational

risks in site-specific compliance and accident prevention plans.

These Plans shall include but are not be limited to procedures for addressing the risks associates with the following:

- (1) Emergency response ;
- (2) Contingency for severe weather;
- (3) Fire Prevention ;
- (4) Medical Support;
- (5) Posting of emergency telephone numbers;
- (6) Prevention of alcohol and drug abuse;
- (7) Site sanitation (housekeeping, drinking water, toilets);
- (8) Night operations and lighting ;
- (9) Hazard communication program;
- (10) Welding/Cutting "Hot" work ;
- (11) Electrical Safe Work Practices (Electrical LOTO/NFPA 70E);
- (12) General Electrical Safety
- (13) Hazardous energy control (Machine LOTO);
- (14) Site-Specific Fall Protection & Prevention;
- (15) Excavation/trenching;
- (16) Asbestos abatement;
- (17) Lead abatement;
- (18) Crane Critical lift;
- (19) Respiratory protection;
- (20) Health hazard control program;
- (21) Radiation Safety Program;
- (22) Abrasive blasting;
- (23) Heat/Cold Stress Monitoring;
- (24) Crystalline Silica Monitoring (Assessment);
- (25) Demolition plan (to include engineering survey);
- (26) Formwork and shoring erection and removal;
- (27) PreCast Concrete.

- C. Submit the APP to the COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 calendar days prior to the date of the preconstruction conference for acceptance. Work cannot proceed without an accepted APP.
- D. Once accepted by the COR, the APP and attachments will be enforced as part of the contract. Disregarding the provisions of this contract or the accepted APP will be cause for stopping of work, at the discretion of the Contracting Officer, until the matter has been rectified.



E. Once work begins, changes to the accepted APP shall be made with the knowledge and concurrence of the COR. Should any severe hazard exposure, i.e. imminent danger, become evident, stop work in the area, secure the area, and develop a plan to remove the exposure and control the hazard. Notify the Contracting Officer within 24 hours of discovery. Eliminate/remove the hazard. In the interim, take all necessary action to restore and maintain safe working conditions in order to safeguard onsite personnel, visitors, the public (as defined by ASSE/SAFE A10.34) and the environment.

1.5 ACTIVITY HAZARD ANALYSES (AHAs):

- A. AHAs are also known as Job Hazard Analyses, Job Safety Analyses, and Activity Safety Analyses. Before beginning each work activity involving a type of work presenting hazards not experienced in previous project operations or where a new work crew or sub-contractor is to perform the work, the Contractor(s) performing that work activity shall prepare an AHA (Example electronic AHA forms can be found on the US Army Corps of Engineers web site)
- B. AHAs shall define the activities being performed and identify the work sequences, the specific anticipated hazards, site conditions, equipment, materials, and the control measures to be implemented to eliminate or reduce each hazard to an acceptable level of risk.
- C. Work shall not begin until the AHA for the work activity has been accepted by the COR and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.
1. The names of the Competent/Qualified Person(s) required for a particular activity (for example, excavations, scaffolding, fall protection, other activities as specified by OSHA and/or other State and Local agencies) shall be identified and included in the AHA. Certification of their competency/qualification shall be submitted to the Government Designated Authority (GDA) for acceptance prior to the start of that work activity.
  2. The AHA shall be reviewed and modified as necessary to address changing site conditions, operations, or change of competent/qualified person(s).
    - a. If more than one Competent/Qualified Person is used on the AHA activity, a list of names shall be submitted as an attachment to the AHA. Those listed must be Competent/Qualified for the type of work involved in the AHA and familiar with current site safety issues.

- b. If a new Competent/Qualified Person (not on the original list) is added, the list shall be updated (an administrative action not requiring an updated AHA). The new person shall acknowledge in writing that he or she has reviewed the AHA and is familiar with current site safety issues.
  3. Submit AHAs to the COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES for review at least 15 calendar days prior to the start of each phase. Subsequent AHAs as shall be formatted as amendments to the APP. The analysis should be used during daily inspections to ensure the implementation and effectiveness of the activity's safety and health controls.
  4. The AHA list will be reviewed periodically (at least monthly) at the Contractor supervisory safety meeting and updated as necessary when procedures, scheduling, or hazards change.
  5. Develop the activity hazard analyses using the project schedule as the basis for the activities performed. All activities listed on the project schedule will require an AHA. The AHAs will be developed by the contractor, supplier, or subcontractor and provided to the prime contractor for review and approval and then submitted to the COR.
- 1.6 PRECONSTRUCTION CONFERENCE:
- A. Contractor representatives who have a responsibility or significant role in implementation of the accident prevention program, as required by 29 CFR 1926.20(b)(1), on the project shall attend the preconstruction conference to gain a mutual understanding of its implementation. This includes the project superintendent, subcontractor superintendents, and any other assigned safety and health professionals.
  - B. Discuss the details of the submitted APP to include incorporated plans, programs, procedures and a listing of anticipated AHAs that will be developed and implemented during the performance of the contract. This list of proposed AHAs will be reviewed at the conference and an agreement will be reached between the Contractor and the Contracting Officer's representative as to which phases will require an analysis. In addition, establish a schedule for the preparation, submittal, review, and acceptance of AHAs to preclude project delays.
  - C. Deficiencies in the submitted APP will be brought to the attention of the Contractor within 14 days of submittal, and the Contractor shall revise the plan to correct deficiencies and re-submit it for acceptance. Do not begin work until there is an accepted APP.
- 1.7 "SITE SAFETY AND HEALTH OFFICER" (SSHO) and "COMPETENT PERSON" (CP):

- A. The Prime Contractor shall designate a minimum of one SSHO at each project site that will be identified as the SSHO to administer the Contractor's safety program and government-accepted Accident Prevention Plan. Each subcontractor shall designate a minimum of one CP in compliance with 29 CFR 1926.20 (b)(2) that will be identified as a CP to administer their individual safety programs.
  - B. Further, all specialized Competent Persons for the work crews will be supplied by the respective contractor as required by 29 CFR 1926 (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).
  - C. These Competent Persons can have collateral duties as the subcontractor's superintendent and/or work crew lead persons as well as fill more than one specialized CP role (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).
  - D. The SSHO or an equally-qualified Designated Representative/alternate will maintain a presence on the site during construction operations in accordance with FAR Clause 52.236-6: *Superintendence by the Contractor*. CPs will maintain presence during their construction activities in accordance with above mentioned clause. A listing of the designated SSHO and all known CPs shall be submitted prior to the start of work as part of the APP with the training documentation and/or AHA as listed in Section 1.8 below.
  - E. The repeated presence of uncontrolled hazards during a contractor's work operations will result in the designated CP as being deemed incompetent and result in the required removal of the employee in accordance with FAR Clause 52.236-5: *Material and Workmanship, Paragraph (c)*.
- 1.8 TRAINING:
- A. The designated Prime Contractor SSHO must meet the requirements of all applicable OSHA standards and be capable (through training, experience, and qualifications) of ensuring that the requirements of 29 CFR 1926.16 and other appropriate Federal, State and local requirements are met for the project. As a minimum the SSHO must have completed the OSHA 30-hour Construction Safety class and have five (5) years of construction industry safety experience or three (3) years if he/she possesses a Certified Safety Professional (CSP) or certified Construction Safety and Health Technician (CSHT) certification or have a safety and health degree from an accredited university or college.

- B. All designated CPs shall have completed the OSHA 30-hour Construction Safety course within the past 5 years.
  - C. In addition to the OSHA 30 Hour Construction Safety Course, all CPs with high hazard work operations such as operations involving asbestos, electrical, cranes, demolition, work at heights/fall protection, fire safety/life safety, ladder, rigging, scaffolds, and trenches/excavations shall have a specialized formal course in the hazard recognition & control associated with those high hazard work operations. Documented "repeat" deficiencies in the execution of safety requirements will require retaking the requisite formal course.
  - D. All other construction workers shall have the OSHA 10-hour Construction Safety Outreach course and any necessary safety training to be able to identify hazards within their work environment.
  - E. Submit training records associated with the above training requirements to the COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 10 calendar days prior to the date of the preconstruction conference for acceptance.
  - F. Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the SSHO or his/her designated representative. As a minimum, this briefing shall include information on the site-specific hazards, construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, emergency procedures, accident reporting etc... Documentation shall be provided to the COR that individuals have undergone contractor's safety briefing.
  - G. Ongoing safety training will be accomplished in the form of weekly documented safety meeting.
- 1.9 INSPECTIONS:
- A. The SSHO shall conduct frequent and regular safety inspections (daily) of the site and each of the subcontractors CPs shall conduct frequent and regular safety inspections (daily) of the their work operations as required by 29 CFR 1926.20(b)(2). Each week, the SSHO shall conduct a formal documented inspection of the entire construction areas with the subcontractors' "Trade Safety and Health CPs" present in their work areas. Coordinate with, and report findings and corrective actions weekly to COR.
  - B. A Certified Safety Professional (CSP) with specialized knowledge in construction safety or a certified Construction Safety and Health Technician (CSHT) shall randomly conduct a monthly site safety

inspection. The CSP or CSHT can be a corporate safety professional or independently contracted. The CSP or CSHT will provide their certificate number on the required report for verification as necessary.

1. Results of the inspection will be documented with tracking of the identified hazards to abatement.
2. The COR will be notified immediately prior to start of the inspection and invited to accompany the inspection.
3. Identified hazard and controls will be discussed to come to a mutual understanding to ensure abatement and prevent future reoccurrence.
4. A report of the inspection findings with status of abatement will be provided to the COR within one week of the onsite inspection.

1.10 ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS:

- A. Notify the COR as soon as practical, but no more than four hours after any accident meeting the definition of OSHA Recordable Injuries or Illnesses or High Visibility Accidents, property damage equal to or greater than \$5,000, or any weight handling equipment accident. Within notification include contractor name; contract title; type of contract; name of activity, installation or location where accident occurred; date and time of accident; names of personnel injured; extent of property damage, if any; extent of injury, if known, and brief description of accident (to include type of construction equipment used, PPE used, etc.). Preserve the conditions and evidence on the accident site until the COR determine whether a government investigation will be conducted.
- B. Conduct an accident investigation for recordable injuries and illnesses, for Medical Treatment defined in paragraph DEFINITIONS, and property damage accidents resulting in at least \$20,000 in damages, to establish the root cause(s) of the accident. Complete the VA Form 2162, and provide the report to the COR within 5 calendar days of the accident. The COR will provide copies of any required or special forms.
- C. A summation of all man-hours worked by the contractor and associated sub-contractors for each month will be reported to the COR monthly.
- D. A summation of all OSHA recordable accidents experienced on site by the contractor and associated sub-contractors for each month will be provided to the COR monthly. The contractor and associated sub-contractors' OSHA 300 logs will be made available to the COR as requested.

1.11 PERSONAL PROTECTIVE EQUIPMENT (PPE):

- A. PPE is governed in all areas by the nature of the work the employee is performing. For example, specific PPE required for performing work on

electrical equipment is identified in NFPA 70E, Standard for Electrical Safety in the Workplace.

B. Mandatory PPE includes:

1. Hard Hats - unless written authorization is given by the COR in circumstances of work operations that have limited potential for falling object hazards such as during finishing work or minor remodeling. However even with authorization to relax the requirement of hard hats, if a worker becomes exposed to an overhead falling object hazard, then hard hats would be required in accordance with the OSHA regulations.
2. Safety glasses - unless written authorization is given by the COR appropriate safety glasses meeting the ANSI Z.87.1 standard must be worn by each person on site.
3. Appropriate Safety Shoes - based on the hazards present, safety shoes meeting the requirements of ASTM F2413-11 shall be worn by each person on site unless written authorization is given by the COR.
4. Hearing protection - Use personal hearing protection at all times in designated noise hazardous areas or when performing noise hazardous tasks.

1.12 INFECTION CONTROL

- A. Infection Control is critical in all medical center facilities. Interior construction activities causing disturbance of existing dust, or creating new dust, must be conducted within ventilation-controlled areas that minimize the flow of airborne particles into patient areas. Exterior construction activities causing disturbance of soil or creates dust in some other manner must be controlled.
- B. An AHA associated with infection control will be performed by VA personnel in accordance with FGI Guidelines (i.e. Infection Control Risk Assessment (ICRA)). The ICRA procedure found on the American Society for Healthcare Engineering (ASHE) website will be utilized. Risk classifications of Class II or lower will require approval by the COR before beginning any construction work. Risk classifications of Class III or higher will require a permit before beginning any construction work. Infection Control permits will be issued by the COR. The Infection Control Permits will be posted outside the appropriate construction area. More than one permit may be issued for a construction project if the work is located in separate areas requiring separate classes. The primary project scope area for this project is: **Class II**,

however, work outside the primary project scope area may vary. The required infection control precautions with each class are as follows:

1. Class II requirements:

a. During Construction Work:

- i. Notify the COR
- ii. Provide active means to prevent airborne dust from dispersing into atmosphere such as wet methods or tool mounted dust collectors where possible.
- iii. Water mist work surfaces to control dust while cutting.
- iv. Seal unused doors with duct tape.
- v. Block off and seal air vents.
- vi. Remove or isolate HVAC system in areas where work is being performed.

b. Upon Completion:

- i. Wipe work surfaces with cleaner/disinfectant.
- ii. Contain construction waste before transport in tightly covered containers.
- iii. Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area.
- iv. Upon completion, restore HVAC system where work was performed
- v. Notify the COR

C. Products and Materials:

1. Sheet Plastic: Fire retardant polystyrene, 6-mil thickness meeting local fire codes
2. Barrier Doors: Self Closing solid core wood in steel frame, painted
3. Dust proof drywall
4. High Efficiency Particulate Air-Equipped filtration machine rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Maintenance of equipment and replacement of the HEPA filters and other filters will be in accordance with manufacturer's instructions.
5. Exhaust Hoses: Heavy duty, flexible steel reinforced; Ventilation Blower Hose
6. Adhesive Walk-off Mats: Provide minimum size mats of 24 inches x 36 inches

7. Disinfectant: Hospital-approved disinfectant or equivalent product
  8. Portable Ceiling Access Module
- D. Before any construction on site begins, all contractor personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.
- E. A dust control program will be establish and maintained as part of the contractor's infection preventive measures in accordance with the FGI Guidelines for Design and Construction of Healthcare Facilities. Prior to start of work, prepare a plan detailing project-specific dust protection measures with associated product data, including periodic status reports, and submit to // Resident // Project // Engineer // and Facility CSC // for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- F. Medical center Infection Control personnel will monitor for airborne disease (e.g. aspergillosis) during construction. A baseline of conditions will be established by the medical center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality with safe thresholds established.
- H. In general, the following preventive measures shall be adopted during construction to keep down dust and prevent mold.
- C. 1. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents, or building openings. HEPA filtration is required where the exhaust dust may reenter the medical center.
2. Exhaust hoses shall be exhausted so that dust is not reintroduced to the medical center.
  3. Adhesive Walk-off/Carpet Walk-off Mats shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
  4. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as it is created. Transport these outside the construction area in containers with tightly fitting lids.
  5. The contractor shall not haul debris through patient-care areas without prior approval of the COR and the Medical Center. When,



- approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.
6. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.
  7. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.
- I. Final Cleanup:
1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
  2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
  3. New air ducts shall be cleaned prior to final inspection.
- J. Exterior Construction
1. Contractor shall verify that dust will not be introduced into the medical center through intake vents, or building openings. HEPA filtration on intake vents is required where dust may be introduced.
  2. Dust created from disturbance of soil such as from vehicle movement will be wetted with use of a water truck as necessary
  3. All cutting, drilling, grinding, sanding, or disturbance of materials shall be accomplished with tools equipped with either local exhaust ventilation (i.e. vacuum systems) or wet suppression controls.
- 1.13 TUBERCULOSIS SCREENING
- A. Contractor shall provide written certification that all contract employees assigned to the work site have had a pre-placement tuberculin screening within 90 days prior to assignment to the worksite and been found have negative TB screening reactions. Contractors shall be required to show documentation of negative TB screening reactions for any additional workers who are added after the 90-day requirement before they will be allowed to work on the work site. NOTE: This can be the

Center for Disease Control (CDC) and Prevention and two-step skin testing or a Food and Drug Administration (FDA)-approved blood test.

1. Contract employees manifesting positive screening reactions to the tuberculin shall be examined according to current CDC guidelines prior to working on VHA property.
2. Subsequently, if the employee is found without evidence of active (infectious) pulmonary TB, a statement documenting examination by a physician shall be on file with the employer (construction contractor), noting that the employee with a positive tuberculin screening test is without evidence of active (infectious) pulmonary TB.
3. If the employee is found with evidence of active (infectious) pulmonary TB, the employee shall require treatment with a subsequent statement to the fact on file with the employer before being allowed to return to work on VHA property.

#### 1.14 FIRE SAFETY

- A. Fire Safety Plan: Establish and maintain a site-specific fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. This plan may be an element of the Accident Prevention Plan.
- B. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.
- C. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).
- C. Temporary Construction Partitions
  2. Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas the areas that are described in phasing requirements and adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of fire retardant treated wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab deck or roof. Seal joints and penetrations. At door openings, install Class C, ¾ hour fire/smoke rated doors with self-closing devices.

3. Install temporary construction partitions as shown on drawings to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.
  4. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.
- E. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.
- F. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with COR.
- G. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to COR.
- H. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- I. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.
- J. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with COR. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the COR.
- K. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with COR.
- L. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with COR. Obtain permits from COR at least 48 hours in advance. Designate contractor's responsible project-site fire prevention program manager to permit hot work.
- M. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to COR.

N. Smoking: Smoking is prohibited anywhere on VA property except in designated smoke shelters.

O. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.

1.15 ELECTRICAL

A. All electrical work shall comply with NFPA 70 (NEC), NFPA 70B, NFPA 70E, 29 CFR Part 1910 Subpart J - General Environmental Controls, 29 CFR Part 1910 Subpart S - Electrical, and 29 CFR 1926 Subpart K in addition to other references required by contract.

B. All qualified persons performing electrical work under this contract shall be licensed journeyman or master electricians. All apprentice electricians performing under this contract shall be deemed unqualified persons unless they are working under the immediate supervision of a licensed electrician or master electrician.

C. **All electrical work will be accomplished de-energized and in the Electrically Safe Work Condition** ( refer to NFPA 70E for *Work Involving Electrical Hazards, including Exemptions to Work Permit*). Any Contractor, subcontractor or temporary worker who fails to fully comply with this requirement is subject to immediate termination in accordance with FAR clause 52.236-5(c). Only in rare circumstance where achieving an electrically safe work condition prior to beginning work would increase or cause additional hazards, or is infeasible due to equipment design or operational limitations is energized work permitted. The COR with approval of the Medical Center Director will make the determination if the circumstances would meet the exception outlined above. An AHA specific to energized work activities will be developed, reviewed, and accepted prior to the start of that work.

1. Development of a Hazardous Electrical Energy Control Procedure is required prior to de-energization. A single Simple Lockout/Tagout Procedure for multiple work operations can only be used for work involving qualified person(s) de-energizing one set of conductors or circuit part source. Task specific Complex Lockout/Tagout Procedures are required at all other times.

2. Verification of the absence of voltage after de-energization and lockout/tagout is considered "energized electrical work" (live work) under NFPA 70E, and shall only be performed by qualified persons wearing appropriate shock protective (voltage rated) gloves and arc rate personal protective clothing and equipment, using Underwriters Laboratories (UL) tested and appropriately

rated contact electrical testing instruments or equipment appropriate for the environment in which they will be used.

3. Personal Protective Equipment (PPE) and electrical testing instruments will be readily available for inspection by the COR.
  - D. Before beginning any electrical work, an Activity Hazard Analysis (AHA) will be conducted to include Shock Hazard and Arc Flash Hazard analyses (NFPA Tables can be used only as a last alternative and it is strongly suggested a full Arc Flash Hazard Analyses be conducted). Work shall not begin until the AHA for the work activity has been accepted by the COR and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.
  - E. Ground-fault circuit interrupters. All 120-volt, single-phase 15- and 20-ampere receptacle outlets on construction sites shall have approved ground-fault circuit interrupters for personnel protection. "Assured Equipment Grounding Conductor Program" only is not allowed.
- 1.16 FALL PROTECTION
- A. The **fall protection (FP) threshold height requirement is 6 ft (1.8 m) for ALL WORK, unless specified differently or the OSHA 29 CFR 1926 requirements are more stringent**, to include steel erection activities, systems-engineered activities (prefabricated) metal buildings, residential (wood) construction and scaffolding work.
    1. The use of a Safety Monitoring System (SMS) as a fall protection method is prohibited.
    2. The use of Controlled Access Zone (CAZ) as a fall protection method is prohibited.
    3. A Warning Line System (WLS) may ONLY be used on floors or flat or low-sloped roofs (between 0 - 18.4 degrees or 4:12 slope) and shall be erected around all sides of the work area (See 29 CFR 1926.502(f) for construction of WLS requirements). Working within the WLS does not require FP. No worker shall be allowed in the area between the roof or floor edge and the WLS without FP. FP is required when working outside the WLS.
    4. Fall protection while using a ladder will be governed by the OSHA requirements.
- 1.17 SCAFFOLDS AND OTHER WORK PLATFORMS
- A. All scaffolds and other work platforms construction activities shall comply with 29 CFR 1926 Subpart L.

- B. The **fall protection (FP) threshold height requirement is 6 ft (1.8 m) as stated in Section 1.16.**
- C. The following hierarchy and prohibitions shall be followed in selecting appropriate work platforms.
1. Scaffolds, platforms, or temporary floors shall be provided for all work except that can be performed safely from the ground or similar footing.
  2. Ladders less than 20 feet may be used as work platforms only when use of small hand tools or handling of light material is involved.
  3. Ladder jacks, lean-to, and prop-scaffolds are prohibited.
  4. Emergency descent devices shall not be used as working platforms.
- D. Contractors shall use a scaffold tagging system in which all scaffolds are tagged by the Competent Person. Tags shall be color-coded: green indicates the scaffold has been inspected and is safe to use; red indicates the scaffold is unsafe to use. Tags shall be readily visible, made of materials that will withstand the environment in which they are used, be legible and shall include:
1. The Competent Person's name and signature;
  2. Dates of initial and last inspections.
- E. Mast Climbing work platforms: When access ladders, including masts designed as ladders, exceed 20 ft (6 m) in height, positive fall protection shall be used.
- 1.18 EXCAVATION AND TRENCHES
- A. All excavation and trenching work shall comply with 29 CFR 1926 Subpart P.
- B. All excavations and trenches 5 feet in depth or greater shall require a written trenching and excavation permit (NOTE - some States and other local jurisdictions require separate state/jurisdiction-issued excavation permits). The permit shall be completed and provided to the COR and/or other Government Designated Authority prior to commencing work for the day. At the end of the day, the permit shall be closed out and provided to the COR. The permit shall be maintained onsite and include the following:
1. Determination of soil classification

2. Indication that utilities have been located and identified. If utilities could not be located after all reasonable attempt, then excavating operations will proceed cautiously.
  3. Indication of selected excavation protective system.
  4. Indication that the spoil pile will be stored at least 2 feet from the edge of the excavation and safe access provided within 25 feet of the workers.
  5. Indication of assessment for a potential toxic, explosive, or oxygen deficient atmosphere.
- C. If not using an engineered protective system such as a trench box, shielding, shoring, or other Professional Engineer designed system and using a sloping or benching system, soil classification cannot be Solid Rock or Type A. All soil will be classified as Type B or Type C and sloped or benched in accordance with Appendix B of 29 CFR 1926.

#### 1.19 CRANES

- A. All crane work shall comply with 29 CFR 1926 Subpart CC.
- B. Prior to operating a crane, the operator must be licensed, qualified or certified to operate the crane. Thus, all the provisions contained with Subpart CC are effective and there is no "Phase In" date of November 10, 2014.
- C. A detailed lift permit shall be submitted 14 days prior to the scheduled lift complete with route for truck carrying load, crane load analysis, siting of crane and path of swing. The lift will not be allowed without approval of this document.
- D. Crane operators shall not carry loads
  1. over the general public or VAMC personnel
  2. over any occupied building unless
    - i. the top two floors are vacated
    - ii. or overhead protection with a design live load of 300 psf is provided

#### 1.20 CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT)

- A. All installation, maintenance, and servicing of equipment or machinery shall comply with 29 CFR 1910.147 except for specifically referenced operations in 29 CFR 1926 such as concrete & masonry equipment [1926.702(j)], heavy machinery & equipment [1926.600(a)(3)(i)], and process safety management of highly hazardous chemicals (1926.64). Control of hazardous electrical energy during the installation, maintenance, or servicing of electrical equipment shall comply with

Section 1.15 to include NFPA 70E and other VA specific requirements discussed in the section.

1.21 CONFINED SPACE ENTRY

- A. All confined space entry shall comply with 29 CFR 1910.146 except for specifically referenced operations in 29 CFR 1926 such as excavations/trenches [1926.651(g)].
- B. A site-specific Confined Space Entry Plan (including permitting process) shall be developed and submitted to the COR.

1.22 WELDING AND CUTTING

- A. As specified in section 1.14, Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with at least 48 hours in advance. Designate contractor's responsible project-site fire prevention program manager to permit hot work.

1.23 LADDERS

- A. All Ladder use shall comply with 29 CFR 1926 Subpart X.
- B. All portable ladders shall be of sufficient length and shall be placed so that workers will not stretch or assume a hazardous position.
- C. Manufacturer safety labels shall be in place on ladders
- D. Step Ladders shall not be used in the closed position
- E. Top steps or cap of step ladders shall not be used as a step
- F. Portable ladders, used as temporary access, shall extend at least 3 ft (0.9 m) above the upper landing surface.
  - 1. When a 3 ft (0.9-m) extension is not possible, a grasping device (such as a grab rail) shall be provided to assist workers in mounting and dismounting the ladder.
  - 2. In no case shall the length of the ladder be such that ladder deflection under a load would, by itself, cause the ladder to slip from its support.
- G. Ladders shall be inspected for visible defects on a daily basis and after any occurrence that could affect their safe use. Broken or damaged ladders shall be immediately tagged "**DO NOT USE**," or with similar wording, and withdrawn from service until restored to a condition meeting their original design.

1.24 FLOOR & WALL OPENINGS

- A. All floor and wall openings shall comply with 29 CFR 1926 Subpart M.
- B. Floor and roof holes/openings are any that measure over 2 in (51 mm) in any direction of a walking/working surface which persons may trip or fall into or where objects may fall to the level below. See 21.F for



covering and labeling requirements. ***Skylights located in floors or roofs are considered floor or roof hole/openings.***

- C. All floor, roof openings or hole into which a person can accidentally walk or fall through shall be guarded either by a railing system with toeboards along all exposed sides or a load-bearing cover. When the cover is not in place, the opening or hole shall be protected by a removable guardrail system or shall be attended when the guarding system has been removed, or other fall protection system.
1. Covers shall be capable of supporting, without failure, at least twice the weight of the worker, equipment and material combined.
  2. Covers shall be secured when installed, clearly marked with the word "HOLE", "COVER" or "Danger, Roof Opening-Do Not Remove" or color-coded or equivalent methods (e.g., red or orange "X"). Workers must be made aware of the meaning for color coding and equivalent methods.
  3. Roofing material, such as roofing membrane, insulation or felts, covering or partly covering openings or holes, shall be immediately cut out. No hole or opening shall be left unattended unless covered.
  4. Non-load-bearing skylights shall be guarded by a load-bearing skylight screen, cover, or railing system along all exposed sides.
  5. Workers are prohibited from standing/walking on skylights.

- - - E N D - - -

**SECTION 01 42 19**  
**REFERENCE STANDARDS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

**1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)**

- A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to - GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.
- B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

**1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)**

- A. The specifications and standards cited in this solicitation can be examined at the following location:  
DEPARTMENT OF VETERANS AFFAIRS  
Office of Construction & Facilities Management  
Facilities Quality Service (00CFM1A)  
425 Eye Street N.W, (sixth floor)  
Washington, DC 20001  
Telephone Numbers: (202) 632-5249 or (202) 632-5178  
Between 9:00 AM - 3:00 PM

**1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)**

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

- AA Aluminum Association Inc.; <http://www.aluminum.org>  
AABC Associated Air Balance Council; <http://www.aabchq.com>  
AAMA American Architectural Manufacturer's Association;  
<http://www.aamanet.org>  
AAN American Nursery and Landscape Association; <http://www.anla.org>  
AASHTO American Association of State Highway and Transportation Officials;  
<http://www.aashto.org>  
AATCC American Association of Textile Chemists and Colorists;  
<http://www.aatcc.org>  
ACGIH American Conference of Governmental Industrial Hygienists;  
<http://www.acgih.org>  
ACI American Concrete Institute; <http://www.aci-int.net>  
ACPA American Concrete Pipe Association; <http://www.concrete-pipe.org>  
ACPPA American Concrete Pressure Pipe Association; <http://www.acppa.org>  
ADC Air Diffusion Council; <http://flexibleduct.org>

AGA American Gas Association; <http://www.aga.org>  
AGC Associated General Contractors of America; <http://www.agc.org>  
AGMA American Gear Manufacturers Association, Inc.; <http://www.agma.org>  
AHAM Association of Home Appliance Manufacturers; <http://www.aham.org>  
AISC American Institute of Steel Construction; <http://www.aisc.org>  
AISI American Iron and Steel Institute; <http://www.steel.org>  
AITC American Institute of Timber Construction;  
<http://www.aitc-glulam.org>  
AMCA Air Movement and Control Association, Inc.; <http://www.amca.org>  
ANLA American Nursery & Landscape Association; <http://www.anla.org>  
ANSI American National Standards Institute, Inc.; <http://www.ansi.org>  
APA The Engineered Wood Association; <http://www.apawood.org>  
ARI Air-Conditioning and Refrigeration Institute; <http://www.ari.org>  
ASAE American Society of Agricultural Engineers; <http://www.asae.org>  
ASCE American Society of Civil Engineers; <http://www.asce.org>  
ASHRAE American Society of Heating, Refrigerating, and  
Air-Conditioning Engineers; <http://www.ashrae.org>  
ASME American Society of Mechanical Engineers; <http://www.asme.org>  
ASSE American Society of Sanitary Engineering;  
<http://www.asse-plumbing.org>  
ASTM American Society for Testing and Materials; <http://www.astm.org>  
AWI Architectural Woodwork Institute; <http://www.awinet.org>  
AWS American Welding Society; <http://www.aws.org>  
AWWA American Water Works Association; <http://www.awwa.org>  
BHMA Builders Hardware Manufacturers Association;  
<http://www.buildershardware.com>  
BIA Brick Institute of America; <http://www.bia.org>  
CAGI Compressed Air and Gas Institute; <http://www.cagi.org>  
CGA Compressed Gas Association, Inc.; <http://www.cganet.com>  
CI The Chlorine Institute, Inc.; <http://www.chlorineinstitute.org>  
CISCA Ceilings and Interior Systems Construction Association;  
<http://www.cisca.org>  
CISPI Cast Iron Soil Pipe Institute; <http://www.cispi.org>  
CLFMI Chain Link Fence Manufacturers Institute;  
<http://www.chainlinkinfo.org>  
CPMB Concrete Plant Manufacturers Bureau; <http://www.cpmc.org>  
CRA California Redwood Association; <http://www.calredwood.org>  
CRSI Concrete Reinforcing Steel Institute; <http://www.crsi.org>  
CTI Cooling Technology Institute; <http://www.cti.org>  
DHI Door and Hardware Institute; <http://www.dhi.org>  
EGSA Electrical Generating Systems Association; <http://www.egsa.org>  
EEI Edison Electric Institute; <http://www.eei.org>  
EPA Environmental Protection Agency; <http://www.epa.gov>  
ETL ETL Testing Laboratories, Inc.; <http://www.etl.com>  
FAA Federal Aviation Administration; <http://www.faa.gov>  
FCC Federal Communications Commission; <http://www.fcc.gov>  
FPS The Forest Products Society; <http://www.forestprod.org>  
GANNA Glass Association of North America;  
<http://www.cssinfo.com/info/ganna.html/>  
FM Factory Mutual Insurance; <http://www.fmglobal.com>  
GA Gypsum Association; <http://www.gypsum.org>  
GSA General Services Administration; <http://www.gsa.gov>  
HI Hydraulic Institute; <http://www.pumps.org>  
HPVA Hardwood Plywood & Veneer Association; <http://www.hpva.org>  
ICBO International Conference of Building Officials; <http://www.icbo.org>  
ICEA Insulated Cable Engineers Association Inc.; <http://www.icea.net>  
\ICAC Institute of Clean Air Companies; <http://www.icac.com>  
IEEE Institute of Electrical and Electronics Engineers;  
<http://www.ieee.org/>  
IMSA International Municipal Signal Association; <http://www.imsasafety.org>  
IPCEA Insulated Power Cable Engineers Association

NBMA Metal Buildings Manufacturers Association; <http://www.mbma.com>  
MSS Manufacturers Standardization Society of the Valve and Fittings Industry Inc.; <http://www.mss-hq.com>  
NAAMM National Association of Architectural Metal Manufacturers; <http://www.naamm.org>  
NAPHCC Plumbing-Heating-Cooling Contractors Association; <http://www.phccweb.org.org>  
NBS National Bureau of Standards; See - NIST  
NBBPVI National Board of Boiler and Pressure Vessel Inspectors; <http://www.nationboard.org>  
NEC National Electric Code; See - NFPA National Fire Protection Association  
NEMA National Electrical Manufacturers Association; <http://www.nema.org>  
NFPA National Fire Protection Association; <http://www.nfpa.org>  
NHLA National Hardwood Lumber Association; <http://www.natllhardwood.org>  
NIH National Institute of Health; <http://www.nih.gov>  
NIST National Institute of Standards and Technology; <http://www.nist.gov>  
NLMA Northeastern Lumber Manufacturers Association, Inc.; <http://www.nelma.org>  
NPA National Particleboard Association, 18928 Premiere Court, Gaithersburg, MD 20879. (301) 670-0604  
NSF National Sanitation Foundation; <http://www.nsf.org>  
NWWDA Window and Door Manufacturers Association; <http://www.nwwda.org>  
OSHA Occupational Safety and Health Administration Department of Labor <http://www.osha.gov>  
PCA Portland Cement Association; <http://www.portcement.org>  
PCI Precast Prestressed Concrete Institute; <http://www.pci.org>  
PPI The Plastic Pipe Institute; <http://www.plasticpipe.org>  
PEI Porcelain Enamel Institute, Inc.; <http://www.porcelainenamel.com>  
PTI Post-Tensioning Institute; <http://www.post-tensioning.org>  
RFCI The Resilient Floor Covering Institute; <http://www.rfci.com>  
RIS Redwood Inspection Service; See - CRA  
RMA Rubber Manufacturers Association, Inc.; <http://www.rma.org>  
SCMA Southern Cypress Manufacturers Association; <http://www.cypressinfo.org>  
SDI Steel Door Institute; <http://www.steeldoor.org>  
IGMA Insulating Glass Manufacturers Alliance; <http://www.igmaonline.org>  
SJI Steel Joist Institute; <http://www.steeljoist.org>  
SMACNA Sheet Metal and Air-Conditioning Contractors National Association, Inc.; <http://www.smacna.org>  
SSPC The Society for Protective Coatings; <http://www.sspc.org>  
STI Steel Tank Institute; <http://www.steeltank.com>  
SWI Steel Window Institute; <http://www.steelwindows.com>  
TCA Tile Council of America, Inc.; <http://www.tileusa.com>  
TEMA Tubular Exchange Manufacturers Association; <http://www.tema.org>  
TPI Truss Plate Institute, Inc.; 583 D'Onofrio Drive; Suite 200, Madison, WI 53719, (608) 833-5900  
UBC The Uniform Building Code; See ICBO  
UL Underwriters' Laboratories Incorporated; <http://www.ul.com>  
ULC Underwriters' Laboratories of Canada; <http://www.ulc.ca>  
WCLIB West Coast Lumber Inspection Bureau, 6980 SW Varns Road, P.O. Box 23145, Portland, OR 97223, (503) 639-0651  
WRCLA Western Red Cedar Lumber Association, P.O. Box 120786, New Brighton, MN 55112, (612) 633-4334  
WWPA Western Wood Products Association; <http://www.wwpa.org>

- - - E N D - - -

**SECTION 01 45 29**  
**TESTING LABORATORY SERVICES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained by the Contractor.

**1.2 APPLICABLE PUBLICATIONS:**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.
- B. American Association of State Highway and Transportation Officials (AASHTO):
  - T27-11.....Standard Method of Test for Sieve Analysis of Fine and Coarse Aggregates
  - T96-02 (R2006).....Standard Method of Test for Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
  - T99-10.....Standard Method of Test for Moisture-Density Relations of Soils Using a 2.5 Kg (5.5 lb.) Rammer and a 305 mm (12 in.) Drop
  - T104-99 (R2007).....Standard Method of Test for Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate
  - T180-10.....Standard Method of Test for Moisture-Density Relations of Soils using a 4.54 kg (10 lb.) Rammer and a 457 mm (18 in.) Drop
  - T191-02(R2006).....Standard Method of Test for Density of Soil In-Place by the Sand-Cone Method
- C. American Concrete Institute (ACI):
  - 506.4R-94 (R2004).....Guide for the Evaluation of Shotcrete
- D. American Society for Testing and Materials (ASTM):
  - A325-10.....Standard Specification for Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength
  - A370-12.....Standard Test Methods and Definitions for Mechanical Testing of Steel Products
  - A416/A416M-10.....Standard Specification for Steel Strand, Uncoated Seven-Wire for Prestressed Concrete
  - A490-12.....Standard Specification for Heat Treated Steel Structural Bolts, 150 ksi Minimum Tensile Strength
  - C31/C31M-10.....Standard Practice for Making and Curing Concrete Test Specimens in the Field
  - C33/C33M-11a.....Standard Specification for Concrete Aggregates
  - C39/C39M-12.....Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens
  - C109/C109M-11b.....Standard Test Method for Compressive Strength of Hydraulic Cement Mortars
  - C136-06.....Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates
  - C138/C138M-10b.....Standard Test Method for Density (Unit Weight), Yield, and Air Content (Gravimetric) of Concrete

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 07-01-13

- C140-12.....Standard Test Methods for Sampling and Testing  
Concrete Masonry Units and Related Units
- C143/C143M-10a.....Standard Test Method for Slump of Hydraulic  
Cement Concrete
- C172/C172M-10.....Standard Practice for Sampling Freshly Mixed  
Concrete
- C173/C173M-10b.....Standard Test Method for Air Content of freshly  
Mixed Concrete by the Volumetric Method
  
- C780-11.....Standard Test Method for Pre-construction and  
Construction Evaluation of Mortars for Plain and  
Reinforced Unit Masonry
- C1019-11.....Standard Test Method for Sampling and Testing  
Grout
- C1064/C1064M-11.....Standard Test Method for Temperature of Freshly  
Mixed Portland Cement Concrete
- C1077-11c.....Standard Practice for Agencies Testing Concrete  
and Concrete Aggregates for Use in Construction  
and Criteria for Testing Agency Evaluation
- C1314-11a.....Standard Test Method for Compressive Strength of  
Masonry Prisms
- D422-63(2007).....Standard Test Method for Particle-Size Analysis  
of Soils
- D698-07e1.....Standard Test Methods for Laboratory Compaction  
Characteristics of Soil Using Standard Effort
- D1140-00(2006).....Standard Test Methods for Amount of Material in  
Soils Finer than No. 200 Sieve
- D1143/D1143M-07e1.....Standard Test Methods for Deep Foundations Under  
Static Axial Compressive Load
- D1188-07e1.....Standard Test Method for Bulk Specific Gravity  
and Density of Compacted Bituminous Mixtures  
Using Coated Samples
- D1556-07.....Standard Test Method for Density and Unit Weight  
of Soil in Place by the Sand-Cone Method
- D1557-09.....Standard Test Methods for Laboratory Compaction  
Characteristics of Soil Using Modified Effort  
(56,000ft lbf/ft<sup>3</sup> (2,700 KNm/m<sup>3</sup>))
- D2166-06.....Standard Test Method for Unconfined Compressive  
Strength of Cohesive Soil
- D2167-08).....Standard Test Method for Density and Unit Weight  
of Soil in Place by the Rubber Balloon Method
- D2216-10.....Standard Test Methods for Laboratory  
Determination of Water (Moisture) Content of  
Soil and Rock by Mass
- D2974-07a.....Standard Test Methods for Moisture, Ash, and  
Organic Matter of Peat and Other Organic Soils
- D3666-11.....Standard Specification for Minimum Requirements  
for Agencies Testing and Inspecting Road and  
Paving Materials
- D3740-11.....Standard Practice for Minimum Requirements for  
Agencies Engaged in Testing and/or Inspection  
of Soil and Rock as used in Engineering Design  
and Construction
- D6938-10.....Standard Test Method for In-Place Density and  
Water Content of Soil and Soil-Aggregate by  
Nuclear Methods (Shallow Depth)
- E94-04(2010).....Standard Guide for Radiographic Examination

- E164-08.....Standard Practice for Contact Ultrasonic Testing of Weldments
- E329-11c.....Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection
- E543-09.....Standard Specification for Agencies Performing Non-Destructive Testing
- E605-93(R2011).....Standard Test Methods for Thickness and Density of Sprayed Fire Resistive Material (SFRM) Applied to Structural Members
- E709-08.....Standard Guide for Magnetic Particle Examination
- E1155-96(R2008).....Determining FF Floor Flatness and FL Floor Levelness Numbers

- E. American Welding Society (AWS):
  - D1.D1.1M-10.....Structural Welding Code-Steel

**1.3 REQUIREMENTS:**

- A. Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority and will be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory's scope of accreditation must include the appropriate ASTM standards (i.e.; E329, C1077, D3666, D3740, A880, E543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the "Corporate Office."
- B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by COR. When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of COR to such failure.
- C. Written Reports: Testing laboratory shall submit test reports to COR, Contractor, unless other arrangements are agreed to in writing by the COR. Submit reports of tests that fail to meet construction contract requirements on colored paper.
- D. Verbal Reports: Give verbal notification to COR immediately of any irregularity.

**PART 2 - PRODUCTS (NOT USED)**

**PART 3 - EXECUTION**

**3.1 EARTHWORK:**

- A. General: The Testing Laboratory shall provide qualified personnel, materials, equipment, and transportation as required to perform the services identified/required herein, within the agreed to schedule and/or time frame. The work to be performed shall be as identified herein and shall include but not be limited to the following:
  - 1. Observe fill and subgrades during proof-rolling to evaluate suitability of surface material to receive fill or base course. Provide recommendations to the COR regarding suitability or unsuitability of areas where proof-rolling was observed. Where unsuitable results are observed, witness excavation of unsuitable material and recommend to COR extent of removal and replacement of unsuitable materials and observe proof-rolling of replaced areas until satisfactory results are obtained.

2. Provide full time observation of fill placement and compaction and field density testing in pavement areas to verify that earthwork compaction obtained is in accordance with contract documents.
  3. Provide supervised geotechnical technician to inspect excavation, subsurface preparation, and backfill for structural fill.
- B. Testing Compaction:
1. Determine maximum density and optimum moisture content for each type of fill, backfill and subgrade material used, in compliance with ASTM D698.
  2. Make field density tests in accordance with the primary testing method following ASTM D6938. Field density tests utilizing ASTM D1556 or ASTM D2167 shall be utilized on a case by case basis only if there are problems with the validity of the results from the primary method due to specific site field conditions. Should the testing laboratory propose these alternative methods, they should provide satisfactory explanation to the COR before the tests are conducted.
    - a. Pavement Subgrade: One test for each 335 m<sup>2</sup> (400 square yards), but in no case fewer than two tests.
    - b. Curb, Gutter, and Sidewalk: One test for each 90 m (300 feet), but in no case fewer than two tests.
    - c. Trenches: One test at maximum 30 m (100 foot) intervals per 1200 mm (4 foot) of vertical lift and at changes in required density, but in no case fewer than two tests.
    - d. Footing Subgrade: At least one test for each layer of soil on which footings will be placed. Subsequent verification and approval of each footing subgrade may be based on a visual comparison of each subgrade with related tested subgrade when acceptable to COR. In each compacted fill layer below wall footings, perform one field density test for every 30 m (100 feet) of wall. Verify subgrade is level, all loose or disturbed soils have been removed, and correlate actual soil conditions observed with those indicated by test borings.
- C. Fill and Backfill Material Gradation: One test per 120 cubic yards stockpiled or in-place source material. Gradation of fill and backfill material shall be determined in accordance with ASTM C136.
- D. Testing for Footing Bearing Capacity: Evaluate if suitable bearing capacity material is encountered in footing subgrade.
- E. Testing Materials: Test suitability of on-site and off-site borrow as directed by COR.

### **3.2 FOUNDATION CAISSONS:**

- A. Concrete Testing: Test concrete including materials for concrete as required in Article, CONCRETE of this section, except make two test cylinders for each day's placement of concrete.
- B. Maintain a record of concrete used in each caisson. Compare records with calculated volumes.
- C. Inspect sides and bottom of each caisson for compliance with contract documents.
- D. Submit a certified "Caisson Field Record" for each caisson, recording actual elevation at bottom of shaft; final center line location of top; variation of shaft from plumb; results of all tests performed; actual allowable bearing capacity of bottom; ; levelness of bottom; seepage of water; still water level (if allowed to flood); variation of shaft (from dimensions shown); location and size of reinforcement, and evidence of seams, voids, or channels below the bottom.

### **3.3 LANDSCAPING:**

- A. Test topsoil for organic materials, pH, phosphate, potash content, and gradation of particles.



1. Test for organic material by using ASTM D2974.
  2. Determine percent of silt, sand, clay, and foreign materials such as rock, roots, and vegetation.
- B. Submit laboratory test report of topsoil to COR.

**3.4 ASPHALT CONCRETE PAVING:**

- A. Aggregate Base Course:
1. Determine maximum density and optimum moisture content for aggregate base material in accordance with AASHTO T180, Method D
  2. Make a minimum of three field density tests on each day's final compaction on each aggregate course in accordance with AASHTO T191.
  3. Sample and test aggregate as necessary to insure compliance with specification requirements for gradation, wear, and soundness as specified in the applicable state highway standards and specifications.
- B. Asphalt Concrete:
1. Aggregate: Sample and test aggregates in stock pile and hot-bins as necessary to insure compliance with specification requirements for gradation (AASHTO T27), wear (AASHTO T96), and soundness (AASHTO T104).
  2. Temperature: Check temperature of each load of asphalt concrete at mixing plant and at site of paving operation.
  3. Density: Make a minimum of two field density tests in accordance with ASTM D1188 of asphalt base and surface course for each day's paving operation.

**3.5 SITE WORK CONCRETE:**

- A. Test site work concrete including materials for concrete as required in Article CONCRETE of this section.

**3.6 CONCRETE:**

- A. Field Inspection and Materials Testing:
1. Provide a technician at site of placement at all times to perform concrete sampling and testing.
  2. Review the delivery tickets of the ready-mix concrete trucks arriving on-site. Notify the Contractor if the concrete cannot be placed within the specified time limits or if the type of concrete delivered is incorrect. Reject any loads that do not comply with the Specification requirements. Rejected loads are to be removed from the site at the Contractor's expense. Any rejected concrete that is placed will be subject to removal.
  3. Take concrete samples at point of placement in accordance with ASTM C172. Mold and cure compression test cylinders in accordance with ASTM C31. Make at least three cylinders for each 40 m<sup>3</sup> (50 cubic yards) or less of each concrete type, and at least three cylinders for any one day's pour for each concrete type. Label each cylinder with an identification number. COR may require additional cylinders to be molded and cured under job conditions.
  4. Perform slump tests in accordance with ASTM C143. Test the first truck each day, and every time test cylinders are made. Test pumped concrete at the hopper and at the discharge end of the hose at the beginning of each day's pumping operations to determine change in slump.
  5. Determine the air content of concrete per ASTM C173. For concrete required to be air-entrained, test the first truck and every 20 m<sup>3</sup> (25 cubic yards) thereafter each day. For concrete not required to be air-entrained, test every 80 m<sup>3</sup> (100 cubic yards) at random. For pumped concrete, initially test concrete at both the hopper and the discharge end of the hose to determine change in air content.

6. If slump or air content fall outside specified limits, make another test immediately from another portion of same batch.
  7. Perform unit weight tests in compliance with ASTM C138 for normal weight concrete. Test the first truck and each time cylinders are made.
  8. Notify laboratory technician at batch plant of mix irregularities and request materials and proportioning check.
  9. Verify that specified mixing has been accomplished.
  10. Environmental Conditions: Determine the temperature per ASTM C1064 for each truckload of concrete during hot weather and cold weather concreting operations:
    - a. When ambient air temperature falls below 4.4 degrees C (40 degrees F), record maximum and minimum air temperatures in each 24 hour period; record air temperature inside protective enclosure; record minimum temperature of surface of hardened concrete.
    - b. When ambient air temperature rises above 29.4 degrees C (85 degrees F), record maximum and minimum air temperature in each 24 hour period; record minimum relative humidity; record maximum wind velocity; record maximum temperature of surface of hardened concrete.
  11. Inspect the reinforcing steel placement, including bar size, bar spacing, top and bottom concrete cover, proper tie into the chairs, and grade of steel prior to concrete placement. Submit detailed report of observations.
  12. Observe conveying, placement, and consolidation of concrete for conformance to specifications.
  13. Observe condition of formed surfaces upon removal of formwork prior to repair of surface defects and observe repair of surface defects.
  14. Observe curing procedures for conformance with specifications, record dates of concrete placement, start of preliminary curing, start of final curing, end of curing period.
  15. Observe preparations for placement of concrete:
    - a. Inspect handling, conveying, and placing equipment, inspect vibrating and compaction equipment.
    - b. Inspect preparation of construction, expansion, and isolation joints.
  16. Observe preparations for protection from hot weather, cold weather, sun, and rain, and preparations for curing.
  17. Observe concrete mixing:
    - a. Monitor and record amount of water added at project site.
    - b. Observe minimum and maximum mixing times.
  18. Measure concrete flatwork for levelness and flatness as follows:
    - a. Perform Floor Tolerance Measurements  $F_F$  and  $F_L$  in accordance with ASTM E1155. Calculate the actual overall F- numbers using the inferior/superior area method.
    - b. Perform all floor tolerance measurements within 48 hours after slab installation and prior to removal of shoring and formwork.
    - c. Provide the Contractor and the COR with the results of all profile tests, including a running tabulation of the overall  $F_F$  and  $F_L$  values for all slabs installed to date, within 72 hours after each slab installation.
  19. Other inspections:
    - a. Grouting under base plates.
    - b. Grouting anchor bolts and reinforcing steel in hardened concrete.
- B. Laboratory Tests of Field Samples:
1. Test compression test cylinders for strength in accordance with ASTM C39. For each test series, test one cylinder at 7 days and one cylinder at 28 days. Use remaining cylinder as a spare tested as directed by COR. Compile laboratory test reports as follows:

Compressive strength test shall be result of one cylinder, except when one cylinder shows evidence of improper sampling, molding or testing, in which case it shall be discarded and strength of spare cylinder shall be used.

2. Furnish certified compression test reports (duplicate) to COR. In test report, indicate the following information:
  - a. Cylinder identification number and date cast.
  - b. Specific location at which test samples were taken.
  - c. Type of concrete, slump, and percent air.
  - d. Compressive strength of concrete in MPa (psi).
  - e. Weather conditions during placing.
  - f. Temperature of concrete in each test cylinder when test cylinder was molded.
  - g. Maximum and minimum ambient temperature during placing.
  - h. Ambient temperature when concrete sample in test cylinder was taken.
  - i. Date delivered to laboratory and date tested.

### **3.7 PRESTRESSED CONCRETE:**

- A. Inspection at Plant: Forms, placement and concrete cover of reinforcing steel and tendons, placement and finishing of concrete, and tensioning of tendons.
- B. Concrete Testing: Test concrete including materials for concrete required in Article, CONCRETE of this section, except make two test cylinders for each day's production of each strength of concrete produced.
- C. Inspect members to insure that specification requirements for curing and finishes have been met.

### **3.8 STRUCTURAL STEEL:**

- A. General: Provide shop and field inspection and testing services to certify structural steel work is done in accordance with contract documents. Welding shall conform to AWS D1.1 Structural Welding Code.
- B. Prefabrication Inspection:
  1. Review design and shop detail drawings for size, length, type and location of all welds to be made.
  2. Approve welding procedure qualifications either by pre-qualification or by witnessing qualifications tests.
  3. Approve welder qualifications by certification or retesting.
  4. Approve procedure for control of distortion and shrinkage stresses.
  5. Approve procedures for welding in accordance with applicable sections of AWS D1.1.
- C. Fabrication and Erection:
  1. Weld Inspection:
    - a. Inspect welding equipment for capacity, maintenance and working condition.
    - b. Verify specified electrodes and handling and storage of electrodes in accordance with AWS D1.1.
    - c. Inspect preparation and assembly of materials to be welded for conformance with AWS D1.1.
    - d. Inspect preheating and interpass temperatures for conformance with AWS D1.1.
    - e. Measure 25 percent of fillet welds.
    - f. Welding Magnetic Particle Testing: Test in accordance with ASTM E709 for a minimum of:
      - 1) 20 percent of all shear plate fillet welds at random, final pass only.
      - 2) 20 percent of all continuity plate and bracing gusset plate fillet welds, at random, final pass only.

- 3) 100 percent of tension member fillet welds (i.e., hanger connection plates and other similar connections) for root and final passes.
  - 4) 20 percent of length of built-up column member partial penetration and fillet welds at random for root and final passes.
  - 5) 100 percent of length of built-up girder member partial penetration and fillet welds for root and final passes.
  - g. Welding Ultrasonic Testing: Test in accordance with ASTM E164 and AWS D1.1 for 100 percent of all full penetration welds.
  - i. Verify that correction of rejected welds are made in accordance with AWS D1.1.
  - j. Testing and inspection do not relieve the Contractor of the responsibility for providing materials and fabrication procedures in compliance with the specified requirements.
2. Bolt Inspection:
- a. Inspect high-strength bolted connections in accordance AISC Specifications for Structural Joints Using ASTM A325 or A490 Bolts.
  - c. Fully Pre-tensioned Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in 25 percent of connections in accordance with AISC Specification for Structural Joints Using ASTM A325 or A490 Bolts. Inspect all bolts in connection when one or more are rejected.
  - d. Bolts installed by turn-of-nut tightening may be inspected with calibrated wrench when visual inspection was not performed during tightening.
  - e. Snug Tight Connections: Inspect 10 percent of connections verifying that plies of connected elements have been brought into snug contact.
  - f. Inspect field erected assemblies; verify locations of structural steel for plumbness, level, and alignment.
- D. Submit inspection reports, record of welders and their certification, and identification, and instances of noncompliance to COR.

### **3.9 STEEL DECKING:**

- A. Provide field inspection of welds of metal deck to the supporting steel, and testing services to insure steel decking has been installed in accordance with contract documents and manufacturer's requirements.
- B. Qualification of Field Welding: Qualify welding processes and welding operators in accordance with "Welder Qualification" procedures of AWS D1.1. Refer to the "Plug Weld Qualification Procedure" in Part 3 "Field Quality Control."
- C. Submit inspection reports, certification, and instances of noncompliance to COR.

### **3.10 SHEAR CONNECTOR STUDS:**

- A. Provide field inspection and testing services required by AWS D.1 to insure shear connector studs have been installed in accordance with contract documents.
- B. Tests: Test 20 percent of headed studs for fastening strength in accordance with AWS D1.1.
- C. Submit inspection reports, certification, and instances of noncompliance to COR.

### **3.11 TYPE OF TEST:**

- Approximate Number of Tests Required
- A. Earthwork:  
Laboratory Compaction Test, Soils:

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
Sam Rayburn Memorial Veterans Center, Bonham, Texas  
100% ISSUED FOR CONSTRUCTION

07-01-13

(AASHTO T180)	20
Field Density, Soils (AASHTO T191)	20
Penetration Test, Soils	20
B. Aggregate Base:	
Laboratory Compaction (AASHTO T180)	20
Field Density (AASHTO T191)	20
Aggregate, Base Course Gradation (AASHTO T27)	20
Wear (AASHTO T96)	2
Soundness (AASHTO T104)	2
C. Asphalt Concrete:	
Field Density (AASHTO T230)	20
Aggregate, Asphalt Concrete Gradation (AASHTO T27)	20
Wear (AASHTO T96)	2
Soundness (AASHTO T104)	2
D. Concrete:	
Making and Curing Concrete Test Cylinders (ASTM C31): 30	
Compressive Strength, Test Cylinders (ASTM C39): 30	
Concrete Slump Test (ASTM C143): 10	
Concrete Air Content Test (ASTM C173): 10	
Aggregate, Normal Weight: Gradation (ASTM C33): 2	
Deleterious Substances (ASTM C33): 2	
Soundness (ASTM C33): 2	
Abrasion (ASTM C33): 2	
Flatness and Levelness Readings (ASTM E1155): 2	
E. Structural Steel: Ultrasonic Testing of Welds (ASTM E164): 16	

- - - E N D - - -

**SECTION 015000**

**TEMPORARY FACILITIES AND CONTROLS**

**PART 1 - GENERAL**

**1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

**1.2 SUMMARY**

- A. Section includes requirements for temporary utilities, support facilities, and security and protection facilities.
- B. Related Requirements:
  - 1. Section 321216 "Asphalt Paving" for construction and maintenance of asphalt pavement for temporary roads and paved areas.

**1.3 USE CHARGES**

- A. General: Installation and removal of and use charges for temporary facilities shall be included in the Contract Sum unless otherwise indicated. Allow other entities to use temporary services and facilities without cost, including, but not limited to, COR, Architect, Architect's consultants, testing agencies, and authorities having jurisdiction.
- B. Water and Sewer Service from Existing System: Water from Owner's existing water system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.
- C. Electric Power Service from Existing System: Electric power from Owner's existing system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.

**1.4 INFORMATIONAL SUBMITTALS**

- A. Site Plan: Show temporary facilities, utility hookups, staging areas, and parking areas for construction personnel.
- B. Erosion- and Sedimentation-Control Plan: Show compliance with requirements of EPA Construction General Permit or authorities having jurisdiction, whichever is more stringent.
- C. Fire-Safety Program: Show compliance with requirements of NFPA 241 and authorities having jurisdiction. Indicate Contractor personnel responsible for management of fire-prevention program.
- D. Moisture-Protection Plan: Describe procedures and controls for protecting materials and construction from water absorption and damage.
  - 1. Describe delivery, handling, and storage provisions for materials subject to water absorption or water damage.
  - 2. Indicate procedures for discarding water-damaged materials, protocols for mitigating water intrusion into completed Work, and replacing water-damaged Work.
  - 3. Indicate sequencing of work that requires water, such as sprayed fire-resistive materials, plastering, and terrazzo grinding, and describe plans for dealing with water from these operations. Show procedures for verifying that wet construction has dried sufficiently to permit installation of finish materials.
- E. Dust- and HVAC-Control Plan: Submit coordination drawing and narrative that indicates the dust- and HVAC-control measures proposed for use, proposed locations, and proposed time frame for their operation. Identify

further options if proposed measures are later determined to be inadequate.

Include the following:

1. Locations of dust-control partitions at each phase of work.
2. HVAC system isolation schematic drawing.
3. Location of proposed air-filtration system discharge.
4. Waste handling procedures.
5. Other dust-control measures.

#### **1.5 QUALITY ASSURANCE**

- A. Electric Service: Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.
- B. Tests and Inspections: Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.
- C. Accessible Temporary Egress: Comply with applicable provisions in the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines and ICC/ANSI A117.1.

#### **1.6 PROJECT CONDITIONS**

- A. Temporary Use of Permanent Facilities: Engage Installer of each permanent service to assume responsibility for operation, maintenance, and protection of each permanent service during its use as a construction facility before Owner's acceptance, regardless of previously assigned responsibilities.

### **PART 2 - PRODUCTS**

#### **2.1 MATERIALS**

- A. Chain-Link Fencing: Minimum 2-inch (50-mm), 0.148-inch (3.8-mm-) thick, galvanized-steel, chain-link fabric fencing; minimum 6 feet (1.8 m) high with galvanized-steel pipe posts; minimum 2-3/8-inch- (60-mm-) OD line posts and 2-7/8-inch- (73-mm-) OD corner and pull posts, with 1-5/8-inch- (42-mm-) OD top rails.
- B. Portable Chain-Link Fencing: Minimum 2-inch (50-mm), 0.148-inch- (3.8-mm-) thick, galvanized-steel, chain-link fabric fencing; minimum 6 feet (1.8 m) high with galvanized-steel pipe posts; minimum 2-3/8-inch- (60-mm-) OD line posts and 2-7/8-inch- (73-mm-) OD corner and pull posts, with 1-5/8-inch- (42-mm-) OD top and bottom rails. Provide concrete or galvanized-steel bases for supporting posts.
- C. Wood Enclosure Fence: Plywood, min. 6 feet (1.8 m) high, framed with four 2-by-4-inch (50-by-100-mm) rails, with preservative-treated wood posts spaced not more than 8 feet (2.4 m) apart.
- D. Polyethylene Sheet: Reinforced, fire-resistive sheet, 10-mil (0.25-mm) minimum thickness, with flame-spread rating of 15 or less per ASTM E 84 and passing NFPA 701 Test Method 2.
- E. Dust-Control Adhesive-Surface Walk-off Mats: Provide mats minimum 36 by 60 inches (914 by 1624 mm).
- F. Insulation: Unfaced mineral-fiber blanket, manufactured from glass, slag wool, or rock wool; with maximum flame-spread and smoke-developed indexes of 25 and 50, respectively.

#### **2.2 TEMPORARY FACILITIES**

- A. Field Offices, General: Prefabricated or mobile units with serviceable finishes, temperature controls, and foundations adequate for normal loading.
- B. Common-Use Field Office: Of sufficient size to accommodate needs of Owner, Architect, COR and construction personnel office activities and to accommodate Project meetings specified in other Division 01 Sections. Keep

office clean and orderly. Furnish and equip offices as per minimum following requirements:

1. Furniture required for Project-site documents including file cabinets, plan tables, plan racks, and bookcases.
  2. Conference room of sufficient size to accommodate meetings of 10 individuals. Provide electrical power service and 120-V ac duplex receptacles, with no fewer than one receptacle on each wall. Furnish room with conference table, chairs, tack and marker boards.
  3. Drinking water and private toilet.
  4. Coffee machine and supplies.
  5. Heating and cooling equipment necessary to maintain a uniform indoor temperature of 68 to 72 deg F (20 to 22 deg C).
  6. Lighting fixtures capable of maintaining average illumination of 20 fc (215 lx) at desk height.
- C. Storage and Fabrication Sheds: Provide sheds sized, furnished, and equipped to accommodate materials and equipment for construction operations.
1. Store combustible materials apart from building.

### **2.3 EQUIPMENT**

- A. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.
- B. HVAC Equipment: Unless Owner authorizes use of permanent HVAC system, provide vented, self-contained, liquid-propane-gas or fuel-oil heaters with individual space thermostatic control.
1. Use of gasoline-burning space heaters, open-flame heaters, or salamander-type heating units is prohibited.
  2. Heating Units: Listed and labeled for type of fuel being consumed, by a qualified testing agency acceptable to authorities having jurisdiction, and marked for intended location and application.
  3. Permanent HVAC System: If Owner authorizes use of permanent HVAC system for temporary use during construction, provide filter with MERV of 8 at each return-air grille in system and remove at end of construction and clean HVAC system.
- C. Air-Filtration Units: Primary and secondary HEPA-filter-equipped portable units with four-stage filtration. Provide single switch for emergency shutoff. Configure to run continuously.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION, GENERAL**

- A. Locate facilities where they will serve Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.
1. Locate facilities to limit site disturbance. Obtain COR approval of facility locations prior to delivery and installation.
- B. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.

### **3.2 TEMPORARY UTILITY INSTALLATION**

- A. General: Install temporary service or connect to existing service.
1. Arrange with utility company, Owner, and existing users for time when service can be interrupted, if necessary, to make connections for temporary services.
- B. Sewers and Drainage: Provide temporary utilities to remove effluent lawfully.
1. Connect temporary sewers to existing system.



- C. Water Service: Install water service and distribution piping in sizes and pressures adequate for construction.
- D. Water Service: Connect to Owner's existing water service facilities. Clean and maintain water service facilities in a condition acceptable to Owner. At Substantial Completion, restore these facilities to condition existing before initial use.
- E. Sanitary Facilities: Provide temporary toilets, wash facilities, and drinking water for use of construction personnel.
  - 1. Toilets: Use of Owner's existing toilet facilities will be permitted, as long as facilities are cleaned and maintained in a condition acceptable to Owner and use by Contractor personnel does not interfere with Owner's operations. At Substantial Completion, restore these facilities to condition existing before initial use.
- F. Heating and Cooling: Provide temporary heating and cooling required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of low temperatures or high humidity. Select equipment that will not have a harmful effect on completed installations or elements being installed.
- G. Isolation of Work Areas in Occupied Facilities: Prevent dust, fumes, and odors from entering occupied areas.
  - 1. Prior to commencing work, isolate the HVAC system in area where work is to be performed according to coordination drawings.
    - a. Disconnect supply and return ductwork in work area from HVAC systems servicing occupied areas.
    - b. Maintain negative air pressure within work area using HEPA-equipped air-filtration units, starting with commencement of temporary partition construction, and continuing until removal of temporary partitions is complete.
  - 2. Maintain dust partitions during the Work. Use vacuum collection attachments on dust-producing equipment. Isolate limited work within occupied areas using portable dust-containment devices.
  - 3. Perform daily construction cleanup and final cleanup using approved, HEPA-filter-equipped vacuum equipment.
- H. Ventilation and Humidity Control: Provide temporary ventilation required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of high humidity. Select equipment that will not have a harmful effect on completed installations or elements being installed. Coordinate ventilation requirements to produce ambient condition required and minimize energy consumption.
  - 1. Provide dehumidification systems when required to reduce substrate moisture levels to level required to allow installation or application of finishes.
- I. Electric Power Service: Connect to Owner's existing electric power service. Maintain equipment in a condition acceptable to Owner.
- J. Electric Power Service: Provide electric power service and distribution system of sufficient size, capacity, and power characteristics required for construction operations.
  - 1. Install electric power service overhead, unless otherwise indicated.
  - 2. Connect temporary service to Owner's existing power source, as directed by Owner.
- K. Lighting: Provide temporary lighting with local switching that provides adequate illumination for construction operations, observations, inspections, and traffic conditions.
  - 1. Install and operate temporary lighting that fulfills security and protection requirements without operating entire system.
  - 2. Install lighting for Project identification sign.
- L. Telephone Service: Provide temporary telephone service in common-use facilities for use by all construction personnel.

1. Provide additional telephone lines for the following:
    - a. Provide a dedicated telephone line for each facsimile machine in each field office.
  2. At each telephone, post a list of important telephone numbers.
    - a. Police and fire departments.
    - b. Ambulance service.
    - c. Contractor's home office.
    - d. Contractor's emergency after-hours telephone number.
    - e. Architect's office.
    - f. COR's office.
    - g. Principal subcontractors' field and home offices.
  3. Provide superintendent with cellular telephone or portable two-way radio for use when away from field office.
- 3.3 SUPPORT FACILITIES INSTALLATION
- A. General: Comply with the following:
    1. Provide construction for temporary offices, shops, and sheds located within construction area or within 30 feet (9 m) of building lines that is noncombustible according to ASTM E 136. Comply with NFPA 241.
    2. Maintain support facilities until COR schedules Substantial Completion inspection. Remove before Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under conditions acceptable to Owner.
  - B. Temporary Roads and Paved Areas: Construct and maintain temporary roads and paved areas adequate for construction operations. Locate temporary roads and paved areas as indicated and within construction limits indicated on Drawings.
    1. Provide dust-control treatment that is nonpolluting and nontracking. Reapply treatment as required to minimize dust.
  - C. Temporary Use of Permanent Roads and Paved Areas: Locate temporary roads and paved areas in same location as permanent roads and paved areas. Construct and maintain temporary roads and paved areas adequate for construction operations. Extend temporary roads and paved areas, within construction limits indicated, as necessary for construction operations.
    1. Coordinate elevations of temporary roads and paved areas with permanent roads and paved areas.
    2. Prepare subgrade and install subbase and base for temporary roads and paved areas according to Section 312000 "Earth Moving."
    3. Recondition base after temporary use, including removing contaminated material, regrading, proofrolling, compacting, and testing.
    4. Delay installation of final course of permanent hot-mix asphalt pavement until immediately before Substantial Completion. Repair hot-mix asphalt base-course pavement before installation of final course according to Section 321216 "Asphalt Paving."
  - D. Traffic Controls: Comply with requirements of authorities having jurisdiction.
    1. Protect existing site improvements to remain including curbs, pavement, and utilities.
    2. Maintain access for fire-fighting equipment and access to fire hydrants.
  - E. Parking
    - a. Provide temporary parking areas for construction personnel.
    - b. Provide temporary parking lot for patients as shown on drawing at end of this section.
    - c. Remove all temporary parking lots and roads at end of construction. Restore grounds to original condition, including new sod as needed.
  - F. Dewatering Facilities and Drains: Comply with requirements of authorities having jurisdiction. Maintain Project site, excavations, and construction free of water.

1. Dispose of rainwater in a lawful manner that will not result in flooding Project or adjoining properties or endanger permanent Work or temporary facilities.
2. Remove snow and ice as required to minimize accumulations.
- G. Project Signs: Provide Project signs as indicated. Unauthorized signs are not permitted.
  1. Identification Signs: Provide Project identification signs as indicated on Drawings.
  2. Temporary Signs: Provide other signs as indicated and as required to inform public and individuals seeking entrance to Project.
    - a. Provide temporary, directional signs for construction personnel and visitors.
  3. Maintain and touchup signs so they are legible at all times.
- H. Waste Disposal Facilities: Comply with requirements specified in Section 017419 "Construction Waste Management and Disposal."
- I. Waste Disposal Facilities: Provide waste-collection containers in sizes adequate to handle waste from construction operations. Comply with requirements of authorities having jurisdiction. Comply with progress cleaning requirements in Section 017300 "Execution."
- J. Lifts and Hoists: Provide facilities necessary for hoisting materials and personnel.
  1. Truck cranes and similar devices used for hoisting materials are considered "tools and equipment" and not temporary facilities.
- K. Existing Elevator Use: Use of Owner's existing elevators will be permitted, provided use is scheduled with COR and elevators are cleaned and maintained in a condition acceptable to COR. At Substantial Completion, restore elevators to condition existing before initial use, including replacing worn cables, guide shoes, and similar items of limited life.
  1. Do not load elevators beyond their rated weight capacity.
  2. Provide protective coverings, barriers, devices, signs, or other procedures to protect elevator car and entrance doors and frame. If, despite such protection, elevators become damaged, engage elevator Installer to restore damaged work so no evidence remains of correction work. Return items that cannot be refinished in field to the shop, make required repairs and refinish entire unit, or provide new units as required.
- L. Existing Stair Usage: Use of Owner's existing stairs will be permitted, provided stairs are cleaned and maintained in a condition acceptable to Owner. At Substantial Completion, restore stairs to condition existing before initial use.
  1. Provide protective coverings, barriers, devices, signs, or other procedures to protect stairs and to maintain means of egress. If stairs become damaged, restore damaged areas so no evidence remains of correction work.

#### **3.4 SECURITY AND PROTECTION FACILITIES INSTALLATION**

- A. Protection of Existing Facilities: Protect existing vegetation, equipment, structures, utilities, and other improvements at Project site and on adjacent properties, except those indicated to be removed or altered. Repair damage to existing facilities.
- B. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction as required to comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.
  1. Comply with work restrictions specified in Section 011000 "Summary."
- C. Temporary Erosion and Sedimentation Control: Comply with requirements of 2003 EPA Construction General Permit or authorities having jurisdiction, whichever is more stringent.

- D. Temporary Erosion and Sedimentation Control: Provide measures to prevent soil erosion and discharge of soil-bearing water runoff and airborne dust to undisturbed areas and to adjacent properties and walkways, according to requirements of 2003 EPA Construction General Permit or authorities having jurisdiction, whichever is more stringent.
  - 1. Verify that flows of water redirected from construction areas or generated by construction activity do not enter or cross tree- or plant-protection zones.
  - 2. Inspect, repair, and maintain erosion- and sedimentation-control measures during construction until permanent vegetation has been established.
  - 3. Clean, repair, and restore adjoining properties and roads affected by erosion and sedimentation from Project site during the course of Project.
  - 4. Remove erosion and sedimentation controls and restore and stabilize areas disturbed during removal.
- E. Stormwater Control: Comply with requirements of authorities having jurisdiction. Provide barriers in and around excavations and subgrade construction to prevent flooding by runoff of stormwater from heavy rains.
- F. Tree and Plant Protection: Protect existing trees and shrubs in prepared landscape areas from damage due to construction activities, including preventing exposing roots, dislodging root ball and damage or injury to branches. Install temporary fencing located as required outside the drip line of trees to protect vegetation from damage from construction operations. Protect tree root systems from damage, flooding, and erosion.
- G. Pest Control: Engage pest-control service to recommend practices to minimize attraction and harboring of rodents, roaches, and other pests and to perform extermination and control procedures at regular intervals so Project will be free of pests and their residues at Substantial Completion. Perform control operations lawfully, using environmentally safe materials.
- H. Site Enclosure Fence: Before construction operations begin, furnish and install site enclosure fence in a manner that will prevent people and animals from easily entering site except by entrance gates.
  - 1. Extent of Fence: As required to enclose entire Project site or portion determined sufficient to accommodate construction operations.
  - 2. Maintain security by limiting number of keys and restricting distribution to authorized personnel. Furnish one set of keys to COR.
- I. Security Enclosure and Lockup: Install temporary enclosure around partially completed areas of construction. Provide lockable entrances to prevent unauthorized entrance, vandalism, theft, and similar violations of security. Lock entrances at end of each work day.
- J. Barricades, Warning Signs, and Lights: Comply with requirements of authorities having jurisdiction for erecting structurally adequate barricades, including warning signs and lighting.
- K. Temporary Egress: Maintain temporary egress from existing occupied facilities as indicated and as required by authorities having jurisdiction.
- L. Temporary Enclosures: Provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities. Provide temporary weathertight enclosure for building exterior.
  - 1. Where heating or cooling is needed and permanent enclosure is incomplete, insulate temporary enclosures.
- M. Temporary Partitions: Provide floor-to-ceiling dustproof partitions to limit dust and dirt migration and to separate areas occupied by Owner from fumes and noise.
  - 1. Construct dustproof partitions with gypsum wallboard with joints taped on occupied side, and fire-retardant-treated plywood on construction operations side.

2. Construct dustproof partitions with two layers of 6-mil (0.14-mm) polyethylene sheet on each side. Cover floor with two layers of 6-mil (0.14-mm) polyethylene sheet, extending sheets 18 inches (460 mm) up the sidewalls. Overlap and tape full length of joints. Cover floor with fire-retardant-treated plywood.
    - a. Construct vestibule and airlock at each entrance through temporary partition with not less than 48 inches (1219 mm) between doors. Maintain water-dampened foot mats in vestibule.
  3. Where fire-resistance-rated temporary partitions are indicated or are required by authorities having jurisdiction, construct partitions according to the rated assemblies.
  4. Insulate partitions to control noise transmission to occupied areas.
  5. Seal joints and perimeter. Equip partitions with gasketed dustproof doors and security locks where openings are required.
  6. Protect air-handling equipment.
  7. Provide walk-off mats at each entrance through temporary partition.
- N. Temporary Fire Protection: Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241; manage fire-prevention program.
1. Prohibit smoking in construction areas.
  2. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition according to requirements of authorities having jurisdiction.
  3. Develop and supervise an overall fire-prevention and -protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
  4. Provide temporary standpipes and hoses for fire protection. Hang hoses with a warning sign stating that hoses are for fire-protection purposes only and are not to be removed. Match hose size with outlet size and equip with suitable nozzles.

### 3.5 MOISTURE AND MOLD CONTROL

- A. Contractor's Moisture-Protection Plan: Avoid trapping water in finished work. Document visible signs of mold that may appear during construction.
- B. Exposed Construction Phase: Before installation of weather barriers, when materials are subject to wetting and exposure and to airborne mold spores, protect as follows:
  1. Protect porous materials from water damage.
  2. Protect stored and installed material from flowing or standing water.
  3. Keep porous and organic materials from coming into prolonged contact with concrete.
  4. Remove standing water from decks.
  5. Keep deck openings covered or dammed.
- C. Partially Enclosed Construction Phase: After installation of weather barriers but before full enclosure and conditioning of building, when installed materials are still subject to infiltration of moisture and ambient mold spores, protect as follows:
  1. Do not load or install drywall or other porous materials or components, or items with high organic content, into partially enclosed building.
  2. Keep interior spaces reasonably clean and protected from water damage.
  3. Periodically collect and remove waste containing cellulose or other organic matter.
  4. Discard or replace water-damaged material.
  5. Do not install material that is wet.
  6. Discard, replace, or clean stored or installed material that begins to grow mold.

7. Perform work in a sequence that allows any wet materials adequate time to dry before enclosing the material in drywall or other interior finishes.
  - D. Controlled Construction Phase of Construction: After completing and sealing of the building enclosure but prior to the full operation of permanent HVAC systems, maintain as follows:
    1. Control moisture and humidity inside building by maintaining effective dry-in conditions.
    2. Use permanent HVAC system to control humidity.
    3. Comply with manufacturer's written instructions for temperature, relative humidity, and exposure to water limits.
      - a. Hygroscopic materials that may support mold growth, including wood and gypsum-based products, that become wet during the course of construction and remain wet for 48 hours are considered defective.
      - b. Measure moisture content of materials that have been exposed to moisture during construction operations or after installation. Record readings beginning at time of exposure and continuing daily for 48 hours. Identify materials containing moisture levels higher than allowed. Report findings in writing to COR.
      - c. Remove materials that cannot be completely restored to their manufactured moisture level within 48 hours.
- 3.6 OPERATION, TERMINATION, AND REMOVAL
- A. Supervision: Enforce strict discipline in use of temporary facilities. To minimize waste and abuse, limit availability of temporary facilities to essential and intended uses.
  - B. Maintenance: Maintain facilities in good operating condition until removal.
    1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.
  - C. Operate Project-identification-sign lighting daily from dusk until 12:00 midnight.
  - D. Temporary Facility Changeover: Do not change over from using temporary security and protection facilities to permanent facilities until Substantial Completion.
  - E. Termination and Removal: Remove each temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.
    1. Materials and facilities that constitute temporary facilities are property of Contractor. Owner reserves right to take possession of Project identification signs.
    2. Remove temporary roads and paved areas not intended for or acceptable for integration into permanent construction. Where area is intended for landscape development, remove soil and aggregate fill that do not comply with requirements for fill or subsoil. Remove materials contaminated with road oil, asphalt and other petrochemical compounds, and other substances that might impair growth of plant materials or lawns. Repair or replace street paving, curbs, and sidewalks at temporary entrances, as required by authorities having jurisdiction.
    3. At Substantial Completion, repair, renovate, and clean permanent facilities used during construction period. Comply with final cleaning requirements specified in Section 017700 "Closeout Procedures."

- - - E N D - - -

**SECTION 01 57 19**  
**TEMPORARY ENVIRONMENTAL CONTROLS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the control of environmental pollution and damage that the Contractor must consider for air, water, and land resources. It includes management of visual aesthetics, noise, solid waste, radiant energy, and radioactive materials, as well as other pollutants and resources encountered or generated by the Contractor. The Contractor is obligated to consider specified control measures with the costs included within the various contract items of work.
- B. Environmental pollution and damage is defined as the presence of chemical, physical, or biological elements or agents which:
  - 1. Adversely effect human health or welfare,
  - 2. Unfavorably alter ecological balances of importance to human life,
  - 3. Effect other species of importance to humankind, or;
  - 4. Degrade the utility of the environment for aesthetic, cultural, and historical purposes.
- C. Definitions of Pollutants:
  - 1. Chemical Waste: Petroleum products, bituminous materials, salts, acids, alkalis, herbicides, pesticides, organic chemicals, and inorganic wastes.
  - 2. Debris: Combustible and noncombustible wastes, such as leaves, tree trimmings, ashes, and waste materials resulting from construction or maintenance and repair work.
  - 3. Sediment: Soil and other debris that has been eroded and transported by runoff water.
  - 4. Solid Waste: Rubbish, debris, garbage, and other discarded solid materials resulting from industrial, commercial, and agricultural operations and from community activities.
  - 5. Surface Discharge: The term "Surface Discharge" implies that the water is discharged with possible sheeting action and subsequent soil erosion may occur. Waters that are surface discharged may terminate in drainage ditches, storm sewers, creeks, and/or "water of the United States" and would require a permit to discharge water from the governing agency.
  - 6. Rubbish: Combustible and noncombustible wastes such as paper, boxes, glass and crockery, metal and lumber scrap, tin cans, and bones.
  - 7. Sanitary Wastes:
    - a. Sewage: Domestic sanitary sewage and human and animal waste.
    - b. Garbage: Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

**1.2 QUALITY CONTROL**

- A. Establish and maintain quality control for the environmental protection of all items set forth herein.
- B. Record on daily reports any problems in complying with laws, regulations, and ordinances. Note any corrective action taken.

**1.3 REFERENCES**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.
- B. U.S. National Archives and Records Administration (NARA):  
33 CFR 328.....Definitions

#### 1.4 SUBMITTALS

- A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
1. Environmental Protection Plan: After the contract is awarded and prior to the commencement of the work, the Contractor shall meet with the COR to discuss the proposed Environmental Protection Plan and to develop mutual understanding relative to details of environmental protection. Not more than 20 days after the meeting, the Contractor shall prepare and submit to the COR for approval, a written and/or graphic Environmental Protection Plan including, but not limited to, the following:
    - a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.
    - b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site.
    - c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.
    - d. Description of the Contractor's environmental protection personnel training program.
    - e. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control, noise control and abatement that are applicable to the Contractor's proposed operations and the requirements imposed by those laws, regulations, and permits.
    - f. Methods for protection of features to be preserved within authorized work areas including trees, shrubs, vines, grasses, ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, and archeological and cultural resources.
    - g. Procedures to provide the environmental protection that comply with the applicable laws and regulations. Describe the procedures to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures as described in the Environmental Protection Plan.
    - h. Permits, licenses, and the location of the solid waste disposal area.
    - i. Drawings showing locations of any proposed temporary excavations or embankments for haul roads, material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials. Include as part of an Erosion Control Plan approved by the District Office of the U.S. Soil Conservation Service and the Department of Veterans Affairs.
    - j. Environmental Monitoring Plans for the job site including land, water, air, and noise.
    - k. Work Area Plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas. This plan may be incorporated within the Erosion Control Plan.
- B. Approval of the Contractor's Environmental Protection Plan will not relieve the Contractor of responsibility for adequate and continued control of pollutants and other environmental protection measures.

#### 1.5 PROTECTION OF ENVIRONMENTAL RESOURCES

- A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.
- B. Protection of Land Resources: Prior to construction, identify all land resources to be preserved within the work area. Do not remove, cut, deface,



injure, or destroy land resources including trees, shrubs, vines, grasses, top soil, and land forms without permission from the COR. Do not fasten or attach ropes, cables, or guys to trees for anchorage unless specifically authorized, or where special emergency use is permitted.

1. Work Area Limits: Prior to any construction, mark the areas that require work to be performed under this contract. Mark or fence isolated areas within the general work area that are to be saved and protected. Protect monuments, works of art, and markers before construction operations begin. Convey to all personnel the purpose of marking and protecting all necessary objects.
2. Protection of Landscape: Protect trees, shrubs, vines, grasses, land forms, and other landscape features shown on the drawings to be preserved by marking, fencing, or using any other approved techniques.
  - a. Box and protect from damage existing trees and shrubs to remain on the construction site.
  - b. Immediately repair all damage to existing trees and shrubs by trimming, cleaning, and painting with antiseptic tree paint.
  - c. Do not store building materials or perform construction activities closer to existing trees or shrubs than the farthest extension of their limbs.
3. Reduction of Exposure of Unprotected Erodible Soils: Plan and conduct earthwork to minimize the duration of exposure of unprotected soils. Clear areas in reasonably sized increments only as needed to use. Form earthwork to final grade as shown. Immediately protect side slopes and back slopes upon completion of rough grading.
4. Temporary Protection of Disturbed Areas: Construct diversion ditches, benches, and berms to retard and divert runoff from the construction site to protected drainage areas approved under paragraph 208 of the Clean Water Act.
  - a. Sediment Basins: Trap sediment from construction areas in temporary sediment basins that accommodate the runoff of a local 50 year (design year) storm. After each storm, pump the basins dry and remove the accumulated sediment. Control overflow/drainage with paved weirs or by vertical overflow pipes, draining from the surface.
  - b. Reuse or conserve the collected topsoil sediment as directed by the COR. Topsoil use and requirements are specified in Section 31 20 00, EARTH MOVING.
  - c. Institute effluent quality monitoring programs as required by Federal, State, and local environmental agencies.
5. Erosion and Sedimentation Control Devices: The erosion and sediment controls selected and maintained by the Contractor shall be such that water quality standards are not violated as a result of the Contractor's activities. Construct or install all temporary and permanent erosion and sedimentation control features called for in the Environmental Protection Plan. Maintain temporary erosion and sediment control measures such as berms, dikes, drains, sedimentation basins, grassing, and mulching, until permanent drainage and erosion control facilities are completed and operative.
6. Manage borrow areas on Government property to minimize erosion and to prevent sediment from entering nearby water courses or lakes.
7. Manage and control spoil areas on Government property to limit spoil to areas called for in the Environmental Protection Plan and prevent erosion of soil or sediment from entering nearby water courses.
8. Protect adjacent areas from despoilment by temporary excavations and embankments.
9. Handle and dispose of solid wastes in such a manner that will prevent contamination of the environment. Place solid wastes (excluding clearing debris) in containers that are emptied on a regular schedule. Transport

- all solid waste off Government property and dispose of waste in compliance with Federal, State, and local requirements.
10. Store chemical waste away from the work areas in corrosion resistant containers and dispose of waste in accordance with Federal, State, and local regulations.
  11. Handle discarded materials other than those included in the solid waste category as directed by the COR.
- C. Protection of Water Resources: Keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters and sewer systems. Implement management techniques to control water pollution by the listed construction activities that are included in this contract.
1. Washing and Curing Water: Do not allow wastewater directly derived from construction activities to enter water areas. Collect and place wastewater in retention ponds allowing the suspended material to settle, the pollutants to separate, or the water to evaporate.
  2. Control movement of materials and equipment at stream crossings during construction to prevent violation of water pollution control standards of the Federal, State, or local government.
  3. Monitor water areas affected by construction.
- D. Protection of Fish and Wildlife Resources: Keep construction activities under surveillance, management, and control to minimize interference with, disturbance of, or damage to fish and wildlife. Prior to beginning construction operations, list species that require specific attention along with measures for their protection.
- E. Protection of Air Resources: Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Burning is not permitted on the job site. Keep activities, equipment, processes, and work operated or performed, in strict accordance with the State of Texas Department of Natural Resources and Federal emission and performance laws and standards. Maintain ambient air quality standards set by the Environmental Protection Agency, for those construction operations and activities specified.
1. Particulates: Control dust particles, aerosols, and gaseous by-products from all construction activities, processing, and preparation of materials (such as from asphaltic batch plants) at all times, including weekends, holidays, and hours when work is not in progress.
  2. Particulates Control: Maintain all excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and all other work areas within or outside the project boundaries free from particulates which would cause a hazard or a nuisance. Sprinklering, chemical treatment of an approved type, light bituminous treatment, baghouse, scrubbers, electrostatic precipitators, or other methods are permitted to control particulates in the work area.
  3. Hydrocarbons and Carbon Monoxide: Control monoxide emissions from equipment to Federal and State allowable limits.
  4. Odors: Control odors of construction activities and prevent obnoxious odors from occurring.
- F. Reduction of Noise: Minimize noise using every action possible. Perform noise-producing work in less sensitive hours of the day or week as directed by the COR. Maintain noise-produced work at or below the decibel levels and within the time periods specified.
1. Perform construction activities involving repetitive, high-level impact noise only between 8:00 a.m. and 6:00 p.m. unless otherwise permitted by local ordinance or the COR. Repetitive impact noise on the property shall not exceed the following dB limitations:

Time Duration of Impact Noise	Sound Level in dB
More than 12 minutes in any hour	70

Less than 30 seconds of any hour	85
Less than three minutes of any hour	80
Less than 12 minutes of any hour	75

2. Provide sound-deadening devices on equipment and take noise abatement measures that are necessary to comply with the requirements of this contract, consisting of, but not limited to, the following:
- a. Maintain maximum permissible construction equipment noise levels at 15 m (50 feet) (dBA):

EARTHMOVING		MATERIALS HANDLING	
FRONT LOADERS	75	CONCRETE MIXERS	75
BACKHOES	75	CONCRETE PUMPS	75
DOZERS	75	CRANES	75
TRACTORS	75	DERRICKS IMPACT	75
SCAPERS	80	PILE DRIVERS	95
GRADERS	75	JACK HAMMERS	75
TRUCKS	75	ROCK DRILLS	80
PAVERS, STATIONARY	80	PNEUMATIC TOOLS	80
PUMPS	75	BLASTING	Not allowed
GENERATORS	75	SAWS	75
COMPRESSORS	75	VIBRATORS	75

- b. Use shields or other physical barriers to restrict noise transmission.
- c. Provide soundproof housings or enclosures for noise-producing machinery.
- d. Use efficient silencers on equipment air intakes.
- e. Use efficient intake and exhaust mufflers on internal combustion engines that are maintained so equipment performs below noise levels specified.
- f. Line hoppers and storage bins with sound deadening material.
- g. Conduct truck loading, unloading, and hauling operations so that noise is kept to a minimum.
3. Measure sound level for noise exposure due to the construction at least once every five successive working days while work is being performed above 55 dB(A) noise level. Measure noise exposure at the property line or 15 m (50 feet) from the noise source, whichever is greater. Measure the sound levels on the A weighing network of a General Purpose sound level meter at slow response. To minimize the effect of reflective sound waves at buildings, take measurements at 900 to 1800 mm (three to six feet) in front of any building face. Submit the recorded information to the COR noting any problems and the alternatives for mitigating actions.
- G. Restoration of Damaged Property: If any direct or indirect damage is done to public or private property resulting from any act, omission, neglect, or misconduct, the Contractor shall restore the damaged property to a condition equal to that existing before the damage at no additional cost to the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.

- H. Final Clean-up: On completion of project and after removal of all debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the COR. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

- - - E N D - - -

**SECTION 01 58 16**  
**TEMPORARY INTERIOR SIGNAGE**

**PART 1 GENERAL**

**DESCRIPTION**

- A. This section specifies temporary interior signs.

**PART 2 PRODUCTS**

**2.1 TEMPORARY SIGNS**

- A. Fabricate from 50 Kg (110 pound) mat finish white paper.  
B. Cut to 100 mm (4-inch) wide by 300 mm (12 inch) long size tag.  
C. Punch 3 mm (1/8-inch) diameter hole centered on 100 mm (4-inch) dimension of tag. Edge of Hole spaced approximately 13 mm (1/2-inch) from one end on tag.  
D. Reinforce hole on both sides with gummed cloth washer or other suitable material capable of preventing tie pulling through paper edge.  
E. Ties: Steel wire 0.3 mm (0.0120-inch) thick, attach to tag with twist tie, leaving 150 mm (6-inch) long free ends.

**PART 3 EXECUTION**

**3.1 INSTALLATION**

- A. Install temporary signs attached to room door frame or room door knob, lever, or pull for doors on corridor openings.  
B. Mark on signs with felt tip marker having approximately 3 mm (1/8-inch) wide stroke for clearly legible numbers or letters.  
C. Identify room with numbers as designated on floor plans.

**3.2 LOCATION**

- A. Install on doors that have room, corridor, and space numbers shown.  
B. Doors that do not require signs are as follows:  
1. Corridor barrier doors (cross-corridor) in corridor with same number.  
2. Folding doors or partitions.  
3. Toilet or bathroom doors within and between rooms.  
4. Communicating doors in partitions between rooms with corridor entrance doors.  
5. Closet doors within rooms.  
C. Replace missing, damaged, or illegible signs.

- - - E N D - - -

**SECTION 01 74 19**  
**CONSTRUCTION WASTE MANAGEMENT**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.
- B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.
- C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:
  - 1. Waste Management Plan development and implementation.
  - 2. Techniques to minimize waste generation.
  - 3. Sorting and separating of waste materials.
  - 4. Salvage of existing materials and items for reuse or resale.
  - 5. Recycling of materials that cannot be reused or sold.
- D. At a minimum the following waste categories shall be diverted from landfills:
  - 1. Soil.
  - 2. Inerts (eg, concrete, masonry and asphalt).
  - 3. Clean dimensional wood and palette wood.
  - 4. Green waste (biodegradable landscaping materials).
  - 5. Engineered wood products (plywood, particle board and I-joists, etc).
  - 6. Metal products (eg, steel, wire, beverage containers, copper, etc).
  - 7. Cardboard, paper and packaging.
  - 8. Bitumen roofing materials.
  - 9. Plastics (eg, ABS, PVC).
  - 10. Carpet and/or pad.
  - 11. Gypsum board.
  - 12. Insulation.
  - 13. Paint.
  - 14. Fluorescent lamps.

**1.2 RELATED WORK**

- A. Section 02 41 00, DEMOLITION.
- B. Section 01 00 00, GENERAL REQUIREMENTS.

**1.3 QUALITY ASSURANCE**

- A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction /Demolition waste includes products of the following:
  - 1. Excess or unusable construction materials.
  - 2. Packaging used for construction products.
  - 3. Poor planning and/or layout.
  - 4. Construction error.
  - 5. Over ordering.
  - 6. Weather damage.
  - 7. Contamination.
  - 8. Mishandling.

9. Breakage.
- B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.
  - C. Contractor shall develop and implement procedures to recycle construction and demolition waste to a minimum of 50 percent.
  - D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.
  - E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations. The Whole Building Design Guide website <http://www.wbdg.org/tools/cwm.php> provides a Construction Waste Management Database that contains information on companies that haul, collect, and process recyclable debris from construction projects.
  - F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.
  - G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.
  - H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

#### **1.4 TERMINOLOGY**

- A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.
- B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.
- C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.
- D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.
- E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).
- F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.
- G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.
- H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.
- I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.

- J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.
- K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.
- L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.
  - 1. On-site Recycling - Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
  - 2. Off-site Recycling - Materials hauled to a location and used in an altered form in the manufacture of new products.
- M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.
- N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.
- O. Return: To give back reusable items or unused products to vendors for credit.
- P. Salvage: To remove waste materials from the site for resale or re-use by a third party.
- Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.
- R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.
- S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

#### 1.5 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:
- B. Prepare and submit to the COR a written demolition debris management plan. The plan shall include, but not be limited to, the following information:
  - 1. Procedures to be used for debris management.
  - 2. Techniques to be used to minimize waste generation.
  - 3. Analysis of the estimated job site waste to be generated:
    - a. List of each material and quantity to be salvaged, reused, recycled.
    - b. List of each material and quantity proposed to be taken to a landfill.
  - 4. Detailed description of the Means/Methods to be used for material handling.
    - a. On site: Material separation, storage, protection where applicable.
    - b. Off site: Transportation means and destination. Include list of materials.



- 1) Description of materials to be site-separated and self-hauled to designated facilities.
  - 2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
  - c. The names and locations of mixed debris reuse and recycling facilities or sites.
  - d. The names and locations of trash disposal landfill facilities or sites.
  - e. Documentation that the facilities or sites are approved to receive the materials.
- C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.
- D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.

#### **1.6 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.
- B. U.S. Green Building Council (USGBC):  
LEED Green Building Rating System for New Construction

#### **1.7 RECORDS**

- A. Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the LEED Reference Guide and LEED Template.

### **PART 2 - PRODUCTS**

#### **2.1 MATERIALS**

- A. List of each material and quantity to be salvaged, recycled, reused.
- B. List of each material and quantity proposed to be taken to a landfill.
- C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

### **PART 3 - EXECUTION**

#### **3.1 COLLECTION**

- A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.
- B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.
- C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

#### **3.2 DISPOSAL**

- A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility

that can accept the materials in accordance with state and federal regulations.

- B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

### 3.3 REPORT

- A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.
- B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.
- C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

**SECTION 01 81 11**  
**SUSTAINABLE DESIGN REQUIREMENTS**

**PART 1 - GENERAL**

**1.1 SUMMARY**

- A. This Section describes general requirements and procedures to comply with the Guiding Principles for Leadership in High Performance and Sustainable Buildings Memorandum of Understanding incorporated in the Executive Orders 13423 and 13514; Energy Policy Act of 2005 (EPA 2005) and the Energy Independence and Security Act of 2007 (EISA 2007).

**1.2 OBJECTIVES**

- A. To maximize resource efficiency and reduce the environmental impacts of construction and operation, the Contractor during the construction phase of this project shall implement the following procedures:
1. Select products that minimize consumption of energy, water and non-renewable resources, while minimizing the amounts of pollution resulting from the production and employment of building technologies. It is the intent of this project to conform with EPA's Five Guiding Principles on environmentally preferable purchasing. The five principles are:
    - a. Include environmental considerations as part of the normal purchasing process.
    - b. Emphasize pollution prevention early in the purchasing process.
    - c. Examine multiple environmental attributes throughout a product's or service's life cycle.
    - d. Compare relevant environmental impacts when selecting products and services.
    - e. Collect and base purchasing decisions on accurate and meaningful information about environmental performance.
  2. Control sources for potential Indoor Air Quality (IAQ) pollutants by controlled selection of materials and processes used in project construction in order to attain superior IAQ.
  3. Products and processes that achieve the above objectives to the extent currently possible and practical have been selected and included in these Construction Documents. The Contractor is responsible to maintain and support these objectives in developing means and methods for performing the work of this Contract and in proposing product substitutions and/or changes to specified processes.
  4. Use building practices that insure construction debris and particulates do not contaminate or enter ductwork prior to system startup and turn over.

**1.3 RELATED DOCUMENTS**

- A. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT
- B. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS

#### 1.4 DEFINITIONS

- A. Agrifiber Products: Composite panel products derived from agricultural fiber
- B. Biobased Product: As defined in the 2002 Farm Bill, a product determined by the Secretary to be a commercial or industrial product (other than food or feed) that is composed, in whole or in significant part, of biological products or renewable domestic agricultural materials (including plant, animal, and marine materials) or forestry materials
- C. Biobased Content: The weight of the biobased material divided by the total weight of the product and expressed as a percentage by weight
- D. Certificates of Chain-of-Custody: Certificates signed by manufacturers certifying that wood used to make products has been tracked through its extraction and fabrication to ensure that it was obtained from forests certified by a specified certification program
- E. Composite Wood: A product consisting of wood fiber or other plant particles bonded together by a resin or binder
- F. Construction and Demolition Waste: Includes solid wastes, such as building materials, packaging, rubbish, debris, and rubble resulting from construction, remodeling, repair and demolition operations. A construction waste management plan is to be provided by the Contractor as defined in Section 01 74 19.
- G. Third Party Certification: Certification of levels of environmental achievement by nationally recognized sustainability rating system.
- H. Light Pollution: Light that extends beyond its source such that the additional light is wasted in an unwanted area or in an area where it inhibits view of the night sky
- I. Recycled Content Materials: Products that contain pre-consumer or post-consumer materials as all or part of their feedstock
- J. Post-Consumer Recycled Content: The percentage by weight of constituent materials that have been recovered or otherwise diverted from the solid-waste stream after consumer use
- K. Pre-Consumer Recycled Content: Materials that have been recovered or otherwise diverted from the solid-waste stream during the manufacturing process. Pre-consumer content must be material that would not have otherwise entered the waste stream as per Section 5 of the FTC Act, Part 260 "Guidelines for the Use of Environmental Marketing Claims":  
[www.ftc.gov/bcp/grnrule/guides980427](http://www.ftc.gov/bcp/grnrule/guides980427)
- L. Regional Materials: Materials that are extracted, harvested, recovered, and manufactured within a radius of 250 miles (400 km) from the Project site
- M. Salvaged or Reused Materials: Materials extracted from existing buildings in order to be reused in other buildings without being manufactured
- N. Sealant: Any material that fills and seals gaps between other materials

- O. Type 1 Finishes: Materials and finishes which have a potential for short-term levels of off gassing from chemicals inherent in their manufacturing process, or which are applied in a form requiring vehicles or carriers for spreading which release a high level of particulate matter in the process of installation and/or curing.
- P. Type 2 Finishes: "Fuzzy" materials and finishes which are woven, fibrous, or porous in nature and tend to adsorb chemicals offgas
- Q. Volatile Organic Compounds (VOCs): Any compound of carbon, excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate, which participates in atmospheric photochemical reactions. Compounds that have negligible photochemical reactivity, listed in EPA 40 CFR 51.100(s), are also excluded from this regulatory definition.

### 1.5 SUBMITTALS

- A. Sustainable Design Submittals:
  - 1. Alternative Transportation: Provide manufacturer's cut sheets for all bike racks installed on site, including the total number of bicycle storage slots provided. Also, provide manufacturer's cut sheets for any alternative-fuel refueling stations installed on site, including fueling capacity information for an 8-hour period.
  - 2. Heat Island Effect:
    - a. Site Paving: Provide manufacturer's cut sheets for all impervious paving materials, highlighting the Solar Reflectance Index (SRI) of the material. Also, provide cut sheets for all pervious paving materials.
    - b. Roofing Materials: Submittals for roofing materials must include manufacturer's cut sheets or product data highlighting the Solar Reflectance Index (SRI) of the material.
  - 3. Exterior Lighting Fixtures: Submittals must include cut sheets with manufacturer's data on initial fixture lumens above 90° from nadir for all exterior lighting fixtures, and, for parking lot lighting, verification that the fixtures are classified by the IESNA as "full cutoff" (FCO); OR provide documentation that exterior luminaires are IDA-Approved as Dark-Sky Friendly by the International Dark Sky Association (IDA) Fixture Seal of Approval Program.
  - 4. Irrigation Systems: Provide manufacturer's cut sheets for all permanent landscape irrigation system components and for any rainwater harvesting system components, such as cisterns.
  - 5. Water Conserving Fixtures: Submittals must include manufacturer's cut sheets for all water-consuming plumbing fixtures and fittings (toilets, urinals, faucets, showerheads, etc.) highlighting maximum flow rates and/or flush rates. Include cut sheets for any automatic faucet-control devices.
  - 6. Process Water Use: Provide manufacturer's cut sheets for all water-consuming commercial equipment (clothes washers, dishwashers, ice machines, etc.), highlighting water

- consumption performance. Include manufacturer's cut sheets or product data for any cooling towers, highlighting water consumption estimates, water use reduction measures, and corrosion inhibitors.
7. Elimination of CFCs AND HCFCs: Provide manufacturer's cut sheets for all cooling equipment with manufacturer's product data, highlighting refrigerants; provide manufacturer's cut sheets for all fire-suppression equipment, highlighting fire-suppression agents; provide manufacturer's cut-sheets for all polystyrene insulation (XPS) and closed-cell spray foam polyurethane insulation, highlighting the blowing agent(s).
  8. Appliances and Equipment: Provide copies of manufacturer's product data for all Energy Star eligible equipment and appliances, including office equipment, computers and printers, electronics, and commercial food service equipment (excluding HVAC and lighting components), verifying compliance with EPA's Energy Star program.
  9. On-Site Renewable Energy Systems: Provide cut sheets and manufacturer's product data for all on-site renewable energy generating components and equipment, including documentation of output capacity.
  10. Measurement and Verification Systems: Provide cut sheets and manufacturer's product data for all controls systems, highlighting electrical metering and trending capability components.
  11. Salvaged or Reused Materials: Provide documentation that lists each salvaged or reused material, the source or vendor of the material, the purchase price, and the replacement cost if greater than the purchase price.
  12. Recycled Content: Submittals for all materials with recycled content (excluding MEP systems equipment and components) must include the following documentation: Manufacturer's product data, product literature, or a letter from the manufacturer verifying the percentage of post-consumer and pre-consumer recycled content (by weight) of each material or product
    - a. An electronic spreadsheet that tabulates the Project's total materials cost and combined recycled content value (defined as the sum of the post-consumer recycled content value plus one-half of the pre-consumer recycled content value) expressed as a percentage of total materials cost. This spreadsheet shall be submitted every third month with the Contractor's Certificate and Application for Payment. It should indicate, on an ongoing basis, line items for each material, including cost, pre-consumer recycled content, post-consumer recycled content, and combined recycled content value.
  13. Regional Materials: Submittals for all products or materials expected to contribute to the regional calculation (excluding MEP systems equipment and components) must include the following documentation:

- a. Cost of each material or product, excluding cost of labor and equipment for installation
  - b. Location of product manufacture and distance from point of manufacture to the Project Site
  - c. Location of point of extraction, harvest, or recovery for each raw material in each product and distance from the point of extraction, harvest, or recovery to the Project Site
  - d. Manufacturer's product data, product literature, or a letter from the manufacturer verifying the location and distance from the Project Site to the point of manufacture for each regional material
  - e. Manufacturer's product data, product literature, or a letter from the manufacturer verifying the location and distance from the Project Site to the point of extraction, harvest, or recovery for each regional material or product, including, at a minimum, gravel and fill, planting materials, concrete, masonry, and GWB
  - f. An electronic spreadsheet that tabulates the Project's total materials cost and regional materials value, expressed as a percentage of total materials cost. This spreadsheet shall be submitted every third month with the Contractor's Certificate and Application for Payment. It should indicate on an ongoing basis, line items for each material, including cost, location of manufacture, distance from manufacturing plant to the Project Site, location of raw material extraction, and distance from extraction point to the Project Site.
14. Outdoor Air Delivery Monitoring: Provide manufacturer's cut sheets highlighting the installed carbon dioxide monitoring system components and sequence of controls shop drawing documentation, including CO2 differential set-points and alarm capabilities.
15. Interior Adhesives and Sealants: Submittals for all field-applied adhesives and sealants, which have a potential impact on indoor air, must include manufacturer's MSDSs or other Product Data highlighting VOC content.
- a. Provide manufacturers' documentation verifying all adhesives used to apply laminates, whether shop-applied or field-applied, contain no urea-formaldehyde.
16. Interior Paints and Coatings: Submittals for all field-applied paints and coatings, which have a potential impact on indoor air, must include manufacturer's MSDSs or other Product Data highlighting VOC content
17. Exterior Paints and Coatings: Submittals for all field-applied paints and coatings, which have a potential impact on ambient air quality, must include manufacturer's MSDSs or other manufacturer's Product Data highlighting VOC content.
18. Floorcoverings:
- a. Carpet Systems: Submittals for all carpet must include the following:

- 1) A copy of an assessment from the Building for Environmental and Economic Sustainability (BEES) software model, either Version 3.0 or 4.0, with parameters of the model set as described by this specification section.
  - 2) Manufacturer's product data verifying that all carpet systems meet or exceed the testing and product requirements of the Carpet and Rug Institute Green Label Plus program.
  - b. Engineered Wood Flooring: Submittals for all engineered wood flooring must include manufacturer's product data verifying certification under either the Greenguard or FloorScore indoor emissions testing program.
19. Composite Wood and Agrifiber Binders: Submittals for all composite wood and agrifiber products (including but not limited to particleboard, wheatboard, strawboard, agriboard products, engineered wood components, solid-core wood doors, OSB, MDF, and plywood products) must include manufacturer's product data verifying that these products contain no urea-formaldehyde resins.
20. Systems Furniture and Seating: Provide manufacturer's product data verifying that all systems furniture and seating products meet the requirements of one of the following:
- a. Greenguard certification
  - b. SCS Indoor Advantage certification
  - c. SCS Indoor Advantage Gold certification
  - d. BIFMA Standard X7.1-2005, as tested to BIFMA method M7.1-2005 and as verified by an independent laboratory
  - d. Calculated indoor air concentration limits for furniture systems and seating determined by the U.S. EPA's Environmental Technology Verification Large Chamber Test Protocol for Measuring Emissions of VOCs and Aldehydes (September 1999) testing protocol as conducted in an independent air quality testing laboratory
21. Entryway Systems: Provide manufacturer's cut sheets for all walk-off systems installed to capture particulates, including permanently installed grates, grilles, slotted systems, direct glue-down walk-off mats, and non-permanent roll-out mats.
22. Air Filtration: Provide manufacturer's cut sheets and product data highlighting the following:
- a. Minimum Efficiency Reporting Value (MERV) for filtration media in all air handling units (AHUs) per ASHRAE HVAC Design Manual for Hospitals and Clinics.
  - b. Minimum Efficiency Reporting Value (MERV) for filtration media installed at return air grilles during construction if permanently installed AHUs are used during construction. See above for requirements
23. Mercury in Lighting: Provide manufacturer's cut sheets or product data for all fluorescent or HID lamps highlighting mercury content.



24. Lighting Controls: Provide manufacturer's cut sheets and shop drawing documentation highlighting all lighting controls systems components.
  25. Thermal Comfort Controls: Provide manufacturer's cut sheets and shop drawing documentation highlighting all thermal comfort-control systems components.
  26. Blended Cement: It is the intent of this specification to reduce CO<sub>2</sub> emissions and other environmentally detrimental effects resulting from the production of portland cement by requiring that all concrete mixes, in aggregate, utilize blended cement mixes to displace portland cement as specified in Section 03 30 00, CONCRETE typically included in conventional construction. Provide the following submittals:
    - a. Copies of concrete design mixes for all installed concrete
    - b. Copies of typical regional baseline concrete design mixes for all compressive strengths used on the Project
    - c. Quantities in cubic yards of each installed concrete mix
  27. Gypsum Wall Board: Provide manufacturer's cut sheets or product data verifying that all gypsum wallboard products are moisture and mold-resistant.
  28. Fiberglass Insulation: Provide manufacturer's cut sheets or product data verifying that fiberglass batt insulation contains no urea-formaldehyde.
  29. Duct Acoustical Insulation: Provide manufacturer's cut sheets or product data verifying that mechanical sound insulation materials in air distribution ducts consists of an impervious, non-porous coatings that prevent dust from accumulating in the insulating materials.
  30. Green Housekeeping: Provide documentation that all cleaning products and janitorial paper products meet the VOC limits and content requirements of this specification section.
- B. Project Materials Cost Data: Provide a spreadsheet in an electronic file indicating the total cost for the Project and the total cost of building materials used for the Project, as follows:
1. Not more than 60 days after the Preconstruction Meeting, the General Contractor shall provide to the Owner and Architect a preliminary schedule of materials costs for all materials used for the Project organized by specification section. Exclude labor costs and all mechanical, electrical, and plumbing (MEP) systems materials and labor costs. Include the following:
    - a. Identify each reused or salvaged material, its cost, and its replacement value.
    - b. Identify each recycled-content material, its post-consumer and pre-consumer recycled content as a percentage the product's weight, its cost, its combined recycled content value (defined as the sum of the post-consumer recycled content value plus one-half of the pre-consumer recycled content value), and the total combined recycled content value for all materials as a percentage of total materials costs.

- c. Identify each regional material, its cost, its manufacturing location, the distance of this location from the Project site, the source location for each raw material component of the material, the distance of these extraction locations from the Project site, and the total value of regional materials as a percentage of total materials costs.
  - d. Identify each biobased material, its source, its cost, and the total value of biobased materials as a percentage of total materials costs. Also provide the total value of rapidly renewable materials (materials made from plants that are harvested in less than a 10-year cycle) as a percentage of total materials costs.
  - e. Identify each wood-based material, its cost, the total wood-based materials cost, each FSC Certified wood material, its cost, and the total value of Certified wood as a percentage of total wood-based materials costs.
2. Provide final versions of the above spreadsheets to the COR not more than 14 days after Substantial Completion.
- C. Construction Waste Management: See Section 01 74 19 "Construction Waste Management" for submittal requirements.
- D. Construction Indoor Air Quality (IAQ) Management: Submittals must include the following:
1. Not more than 30 days after the Preconstruction Meeting, prepare and submit for the Architect and Owner's approval, an electronic copy of the draft Construction IAQ Management Plan in an electronic file including, but not limited to, descriptions of the following:
    2. Instruction procedures for meeting or exceeding the minimum requirements of the Sheet Metal and Air Conditioning National Contractors Association (SMACNA) IAQ Guidelines for Occupied Buildings Under Construction, 1995, Chapter 3, including procedures for HVAC Protection, Source Control, Pathway Interruption, Housekeeping, and Scheduling
      - a. Instruction procedures for protecting absorptive materials stored on-site or installed from moisture damage
      - b. Schedule of submission to Architect of photographs of on-site construction IAQ management measures such as protection of ducts and on-site stored oil installed absorptive materials
      - c. Instruction procedures if air handlers must be used during construction, including a description of filtration media to be used at each return air grille
      - d. Instruction procedure for replacing all air-filtration media immediately prior to occupancy after completion of construction, including a description of filtration media to be used at each air handling or air supply unit
  3. Not more than 30 days following receipt of the approved draft CIAQMP, submit an electronic copy of the approved CIAQMP in an electronic file, along with the following:

- a. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for all filtration media to be installed at return air grilles during construction if permanently installed AHUs are used during construction.
  - b. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for filtration media in all air handling units (AHUs).
4. Not more than 14 days after Substantial Completion provide the following:
- a. Documentation verifying required replacement of air filtration media in all air handling units (AHUs) after the completion of construction and prior to occupancy and, if applicable, required installation of filtration during construction.
  - b. Minimum of 18 Construction photographs: Six photographs taken on three different occasions during construction of the SMACNA approaches employed, along with a brief description of each approach, documenting implementation of the IAQ management measures, such as protection of ducts and on-site stored or installed absorptive materials.
- E. Commissioning: See Section 01 91 00 "General Commissioning Requirements" for submittal requirements.
- F. Sustainable Design Progress Reports: Concurrent with each Application for Payment, submit reports for the following:
1. Construction Waste Management: Waste reduction progress reports and logs complying with the requirements of Section 01 74 19 "Construction Waste Management."

#### **1.6 QUALITY ASSURANCE**

- A. Preconstruction Meeting: After award of Contract and prior to the commencement of the Work, schedule and conduct meeting with Owner, Architect, and all Subcontractors to discuss the Construction Waste Management Plan, the required Construction Indoor Air Quality (IAQ) Management Plan, and all other Sustainable Design Requirements. The purpose of this meeting is to develop a mutual understanding of the Project's Sustainable Design Requirements and coordination of the Contractor's management of these requirements with the Contracting Officer and the Construction Quality Manager.
- B. Construction Job Conferences: The status of compliance with the Sustainable Design Requirements of these specifications will be an agenda item at all regular job meetings conducted during the course of work at the site.

### **PART 2 - PRODUCTS**

#### **2.1 PRODUCT ENVIRONMENTAL REQUIREMENTS**

- A. Site Clearing: Topsoil shall be provided by the Contractor from on-site material which has been stockpiled for reuse. Off-site borrow should only be used when on-site sources are exhausted.

- Chip and/or compost on site all vegetated material identified for removal.
- B. Do not burn rubbish, organic matter, etc. or any material on the site. Dispose of legally in accordance with Specifications Sections 01 74 19.
  - C. Roofing Materials: All roofing systems, other than vegetated roof systems, must comply with the following requirements:
    - 1. Low-Sloped roofing less than or equal to 2:12 slope must have an SRI of at least 78.
    - 2. Steep-Sloped roofing greater than 2:12 slope must have an SRI of at least 29.
    - 3. Roofing Materials: Light-colored, reflective, and high-emissivity roofing helps to reduce localized heat build-up from roof surfaces that contribute to the urban heat island effect.
  - D. Exterior Lighting Fixtures:
    - 1. All exterior luminaires must emit 0% of the total initial designed fixture lumens at an angle above 90° from nadir and/or meet the requirements of the Dark Sky certification program.
    - 2. Exterior lighting cannot exceed 80% of the lighting power densities defined by ASHRAE/IESNA Standard 90.1-2004, Exterior Lighting Section, without amendments.
    - 3. No lighting of building facades or landscape features is permitted.
  - E. Herbicides and Pest Control: Herbicides shall not be permitted, and pest control measures shall utilize EPA-registered biopesticides only.
  - F. Landscape Irrigation: Use water-efficient landscape and irrigation strategies, including water reuse and recycling, to reduce outdoor potable water consumption by a minimum of 50 percent over that consumed by conventional means (plant species and plant densities).
  - G. Water-Conserving Fixtures: Plumbing fixtures and fittings shall use in aggregate at least 20% less water than the water use baseline calculated for the building after meeting the Energy Policy Act of 1992 fixture performance requirements. Flow and flush rates shall not exceed the following:
    - 1. Toilets: no more than 1.3 gallons per flush, otherwise be dual flush 1.6/0.8 gallons per flush, and have documented bowl evacuation capability per MaP testing of at least 400 grams
    - 2. Urinals: Waterless or Water sense rated with no more than 0.5 gallons per flush.
    - 3. Lavatory Faucets: 0.5 gpm with automatic faucet controls
    - 4. Kitchen Sink Lavatories: 2.2 gpm
    - 5. Showerheads: no more than 1.5gpm
  - H. Process Water Use: Employ strategies that in aggregate result in 20% less water use than the process water use baseline for the building after meeting the commercial equipment and HVAC performance requirements as listed in the Table below. For equipment not addressed by EPACT 2005 or the list below,

additional equipment performance requirements may be proposed provided documentation supporting the proposed benchmark or industry standard is submitted.

1. Clothes Washer: 7.5 gallons/cubic foot/cycle
2. Dishwasher with Racks: 1.0 gallons/rack
3. Ice Machine: 20 gallons/100 pounds ice for machines making over 175 pounds of ice per day; 30 gallons/100 pounds ice for machines making less than 175 ice per day. Avoid water-cooled machines.
4. Food Steamer: 2 gallons/hour. Use only boilerless steamers.
5. Pre-Rinse Spray Valves: 1.4 gallons/minute
6. Kitchen Pot-Washing Sinks: 2.2 gallons/minute
7. Cooling Towers: 2.3 gallons/ton-hr. water loss

I. Elimination of CFCs AND HCFCs:

1. Ozone Protection and Greenhouse Gas Reduction: Base building cooling equipment shall contain no refrigerants other than the following: HCFC-123, HFC-134a, HFC-245fa, HFC-407c, or HFC 410a.
2. Fire suppression systems may not contain ozone-depleting substances such as halon 1301 and 1211.
3. Extruded polystyrene insulation (XPS) and closed-cell spray foam polyurethane insulation shall not be manufactured with hydrochlorofluorocarbon (HCFC) blowing agents.

J. Appliances and Equipment: All materials and equipment being installed that falls under the Energy Star or FEMP programs must be Energy Star or FEMP-rated. Eligible equipment includes refrigerators, motors, laundry equipment, office equipment and more. Refer to each program's website for a complete list.

K. HVAC Distribution Efficiency:

1. All duct systems shall be constructed of aluminum, stainless steel or galvanized sheet metal, as deemed appropriate based on the application requirements. No fiberglass duct board shall be permitted.
2. All medium- and high-pressure ductwork systems shall be pressure-tested in accordance with the current SMACNA standards.
3. All ductwork shall be externally insulated. No interior duct liner shall be permitted.
4. Where possible, all air terminal connections shall be hard-connected with sheet metal ductwork. If flexible ductwork is used, no flexible duct extension shall be more than six feet in length.
5. All HVAC equipment shall be isolated from the ductwork system with flexible duct connectors to minimize the transmittance of vibration.
6. All supply and return air branch ducts shall include the appropriate style of volume damper. Air terminal devices such as grilles, registers, and diffusers shall be balanced at duct branch dampers, not at terminal face.

L. Measurement and Verification: Install controls and monitoring devices as required by MEP divisions order to comply with

International Performance Measurement & Verification Protocol (IPMVP), Volume III: Concepts and Options for Determining Energy Savings in New Construction, April 2003, Option D.

1. The IPMVP provides guidance on situation-appropriate application of measurement and verification strategies.
- M. Salvaged or Reused materials: There shall be no substitutions for specified salvaged and reused materials and products.
1. Salvaged materials: Use of salvaged materials reduces impacts of disposal and manufacturing of replacements.
- N. Recycled Content of Materials:
1. Provide building materials with recycled content such that post-consumer recycled content value plus half the pre-consumer recycled content value constitutes a minimum of 30% of the cost of materials used for the Project, exclusive of all MEP equipment, labor, and delivery costs. The Contractor shall make all attempts to maximize the procurement of materials with recycled content.
    - a. e post-consumer recycled content value of a material shall be determined by dividing the weight of post-consumer recycled content by the total weight of the material and multiplying by the cost of the material.
    - b. Do not include mechanical and electrical components in the calculations.
    - c. Do not include labor and delivery costs in the calculations.
    - d. Recycled content of materials shall be defined according to the Federal Trade Commission's "Guide for the Use of Environmental Marketing Claims," 16 CFR 260.7 (e).
    - e. Utilize all on-site existing paving materials that are scheduled for demolition as granulated fill, and include the cost of this material had it been purchased in the calculations for recycled content value.
    - f. The materials in the following list must contain the minimum recycled content indicated:

Category	Minimum Recycled Content
Compost/mulch	100% post-consumer
Asphaltic Concrete Paving	25% post-consumer
Cast-in-Place Concrete	6% pre-consumer
CMU: Gray Block	20% pre-consumer
Steel Reinforcing Bars	90% combined
Structural Steel Shapes	90% combined
Steel Joists	75% combined

Steel Deck	75% combined
Steel Fabrications	60% combined
Steel Studs	30% combined
Steel Roofing	30% post-consumer
Aluminum Fabrications	35% combined
Rigid Insulation	20% pre-consumer
Batt insulation	30% combined

O. Biobased Content:

1. For products designated by the USDA's BioPreferred program, provide products that meet or exceed USDA recommendations for biobased content, so long as products meet all other performance requirements in VA master specifications. For more information regarding the product categories covered by the BioPreferred program, visit <http://www.biopreferred.gov>

- - - E N D - - -

**SECTION 01 91 00**

**GENERAL COMMISSIONING REQUIREMENTS**

**PART 1 - GENERAL**

**1.1 COMMISSIONING DESCRIPTION**

- A. This Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS shall form the basis of the construction phase commissioning process and procedures. The Commissioning Agent shall add, modify, and refine the commissioning procedures, as approved by the Department of Veterans Affairs (VA), to suit field conditions and actual manufacturer's equipment, incorporate test data and procedure results, and provide detailed scheduling for all commissioning tasks.
- B. Various sections of the project specifications require equipment startup, testing, and adjusting services. Requirements for startup, testing, and adjusting services specified in the Division 7, Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of these specifications are intended to be provided in coordination with the commissioning services and are not intended to duplicate services. The Contractor shall coordinate the work required by individual specification sections with the commissioning services requirements specified herein.
- C. Where individual testing, adjusting, or related services are required in the project specifications and not specifically required by this commissioning requirements specification, the specified services shall be provided and copies of documentation, as required by those specifications shall be submitted to the VA and the Commissioning Agent to be indexed for future reference.
- D. Where training or educational services for VA are required and specified in other sections of the specifications, including but not limited to Division 7, Division 8, Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of the specification, these services are intended to be provided in addition to the training and educational services specified herein.
- E. Commissioning is a systematic process of verifying that the building systems perform interactively according to the construction documents and the VA's operational needs. The commissioning process shall encompass and coordinate the system documentation, equipment startup, control system calibration, testing and balancing, performance testing and training. Commissioning during the construction and post-occupancy phases is intended to achieve the following specific objectives according to the contract documents:
  - 1. Verify that the applicable equipment and systems are installed in accordance with the contract documents and according to the manufacturer's recommendations.
  - 2. Verify and document proper integrated performance of equipment and systems.
  - 3. Verify that Operations & Maintenance documentation is complete.
  - 4. Verify that all components requiring servicing can be accessed, serviced and removed without disturbing nearby components including ducts, piping, cabling or wiring.
  - 5. Verify that the VA's operating personnel are adequately trained to enable them to operate, monitor, adjust, maintain, and repair building systems in an effective and energy-efficient manner.



6. Document the successful achievement of the commissioning objectives listed above.
- F. The commissioning process does not take away from or reduce the responsibility of the Contractor to provide a finished and fully functioning product.

## **1.2 CONTRACTUAL RELATIONSHIPS**

- A. For this construction project, the Department of Veterans Affairs contracts with a Contractor to provide construction services. The contracts are administered by the VA Contracting Officer and the COR as the designated representative of the Contracting Officer. On this project, the authority to modify the contract in any way is strictly limited to the authority of the Contracting Officer.
- B. In this project, only two contract parties are recognized and communications on contractual issues are strictly limited to VA COR and the Contractor. It is the practice of the VA to require that communications between other parties to the contracts (Subcontractors and Vendors) be conducted through the COR and Contractor. It is also the practice of the VA that communications between other parties of the project (Commissioning Agent and Architect/Engineer) be conducted through the COR.
- C. Whole Building Commissioning is a process that relies upon frequent and direct communications, as well as collaboration between all parties to the construction process. By its nature, a high level of communication and cooperation between the Commissioning Agent and all other parties (Architects, Engineers, Subcontractors, Vendors, third party testing agencies, etc.) is essential to the success of the Commissioning effort.
- D. With these fundamental practices in mind, the commissioning process described herein has been developed to recognize that, in the execution of the Commissioning Process, the Commissioning Agent must develop effective methods to communicate with every member of the construction team involved in delivering commissioned systems while simultaneously respecting the exclusive contract authority of the Contracting Officer and COR. Thus, the procedures outlined in this specification must be executed within the following limitations:
  1. No communications (verbal or written) from the Commissioning Agent shall be deemed to constitute direction that modifies the terms of any contract between the Department of Veterans Affairs and the Contractor.
  2. Commissioning Issues identified by the Commissioning Agent will be delivered to the COR and copied to the designated Commissioning Representatives for the Contractor and subcontractors on the Commissioning Team for information only in order to expedite the communication process. These issues must be understood as the professional opinion of the Commissioning Agent and as suggestions for resolution.
  3. In the event that any Commissioning Issues and suggested resolutions are deemed by the COR to require either an official interpretation of the construction documents or require a modification of the contract documents, the Contracting Officer or COR will issue an official directive to this effect.
  4. All parties to the Commissioning Process shall be individually responsible for alerting the COR of any issues that they deem to constitute a potential contract change prior to acting on these issues.

5. Authority for resolution or modification of design and construction issues rests solely with the Contracting Officer or COR, with appropriate technical guidance from the Architect/Engineer and/or Commissioning Agent.

**1.3 RELATED WORK**

- A. Section 01 00 00 GENERAL REQUIREMENTS.
- B. Section 01 32.16.15 PROJECT SCHEDULES
- C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES
- D. Section 01 81 11 SUSTAINABLE DESIGN REQUIREMENTS
- E. Section 21 08 00 COMMISSIONING OF FIRE PROTECTION SYSTEMS.
- F. Section 22 08 00 COMMISSIONING OF PLUMBING SYSTEMS.
- G. Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.
- H. Section 27 08 00 COMMISSIONING OF COMMUNICATIONS SYSTEMS.
- I. Section 28 08 00 COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.
- J. Section 33 08 00 COMMISSIONING OF SITE UTILITIES.

**1.4 SUMMARY**

- A. This Section includes general requirements that apply to implementation of commissioning without regard to systems, subsystems, and equipment being commissioned.
- B. The commissioning activities have been developed to support the VA requirements to meet guidelines for Federal Leadership in Environmental, Energy, and Economic Performance.

**1.5 ACRONYMS**

List of Acronyms	
Acronym	Meaning
A/E	Architect / Engineer Design Team
AHJ	Authority Having Jurisdiction
ASHRAE	Association Society for Heating Air Condition and Refrigeration Engineers
BOD	Basis of Design
BSC	Building Systems Commissioning
CCTV	Closed Circuit Television
CD	Construction Documents
CMMS	Computerized Maintenance Management System
CO	Contracting Officer (VA)
COR	Contracting Officer's Representative (see also VA-RE)
COBie	Construction Operations Building Information Exchange
CPC	Construction Phase Commissioning
Cx	Commissioning
CxA	Commissioning Agent
CxM	Commissioning Manager

List of Acronyms	
Acronym	Meaning
CxR	Commissioning Representative
DPC	Design Phase Commissioning
FPT	Functional Performance Test
GBI-GG	Green Building Initiative - Green Globes
HVAC	Heating, Ventilation, and Air Conditioning
LEED	Leadership in Energy and Environmental Design
NC	Department of Veterans Affairs National Cemetery
NCA	Department of Veterans Affairs National Cemetery Administration
NEBB	National Environmental Balancing Bureau
O&M	Operations & Maintenance
OPR	Owner's Project Requirements
PFC	Pre-Functional Checklist
PFT	Pre-Functional Test
SD	Schematic Design
SO	Site Observation
TAB	Test Adjust and Balance
VA	Department of Veterans Affairs
VAMC	VA Medical Center
VA CFM	VA Office of Construction and Facilities Management
VACO	VA Central Office
VA PM	VA Project Manager
VA-COR	VA Contracting Officers Representative
USGBC	United States Green Building Council

## 1.6 DEFINITIONS

**Acceptance Phase Commissioning:** Commissioning tasks executed after most construction has been completed, most Site Observations and Static Tests have been completed and Pre-Functional Testing has been completed and accepted. The main commissioning activities performed during this phase are verification that the installed systems are functional by conducting Systems Functional Performance tests and Owner Training.

**Accuracy:** The capability of an instrument to indicate the true value of a measured quantity.

**Back Check:** A back check is a verification that an agreed upon solution to a design comment has been adequately addressed in a subsequent design review

**Basis of Design (BOD):** The Engineer's Basis of Design is comprised of two components: the Design Criteria and the Design Narrative, these documents record the concepts, calculations, decisions, and product selections used to meet the Owner's Project Requirements (OPR) and to satisfy applicable regulatory requirements, standards, and guidelines.

**Benchmarks:** Benchmarks are the comparison of a building's energy usage to other similar buildings and to the building itself.. For example, ENERGY STAR Portfolio Manager is a frequently used and nationally recognized building energy benchmarking tool.

**Building Information Modeling (BIM):** Building Information Modeling is a parametric database which allows a building to be designed and constructed virtually in 3D, and provides reports both in 2D views and as schedules. This electronic information can be extracted and reused for pre-populating facility management CMMS systems. Building Systems Commissioning (BSC): NEBB acronym used to designate its commissioning program.

**Calibrate:** The act of comparing an instrument of unknown accuracy with a standard of known accuracy to detect, correlate, report, or eliminate by adjustment any variation in the accuracy of the tested instrument.

**CCTV:** Closed circuit Television. Normally used for security surveillance and alarm detections as part of a special electrical security system.

**COBie:** Construction Operations Building Information Exchange (COBie) is an electronic industry data format used to transfer information developed during design, construction, and commissioning into the Computer Maintenance Management Systems (CMMS) used to operate facilities. See the Whole Building Design Guide website for further information (<http://www.wbdg.org/resources/cobie.php>)

**Commissionability:** Defines a design component or construction process that has the necessary elements that will allow a system or component to be effectively measured, tested, operated and commissioned

**Commissioning Agent (CxA):** The qualified Commissioning Professional who administers the Cx process by managing the Cx team and overseeing the Commissioning Process. Where CxA is used in this specification it means the Commissioning Agent, members of his staff or appointed members of the commissioning team. Note that LEED uses the term Commissioning Authority in lieu of Commissioning Agent.

**Commissioning Checklists:** Lists of data or inspections to be verified to ensure proper system or component installation, operation, and function. Verification checklists are developed and used during all phases of the commissioning process to verify that the Owner's Project Requirements (OPR) is being achieved.

**Commissioning Design Review:** The commissioning design review is a collaborative review of the design professionals design documents for items pertaining to the following: owner's project requirements; basis of design; operability and maintainability (O&M) including documentation; functionality; training; energy efficiency, control systems' sequence of operations including building automation system features; commissioning specifications and the ability to functionally test the systems.

**Commissioning Issue:** A condition identified by the Commissioning Agent or other member of the Commissioning Team that adversely affects the commissionability, operability, maintainability, or functionality of a system, equipment, or component. A condition that is in conflict with the Contract Documents and/or performance requirements of the installed systems and components. (See also - Commissioning Observation).

**Commissioning Manager (CxM):** A qualified individual appointed by the Contractor to manage the commissioning process on behalf of the Contractor.

**Commissioning Observation:** An issue identified by the Commissioning Agent or other member of the Commissioning Team that does not conform to the project OPR, contract documents or standard industry best practices. (See also Commissioning Issue)

**Commissioning Plan:** A document that outlines the commissioning process, commissioning scope and defines responsibilities, processes, schedules, and the documentation requirements of the Commissioning Process.

**Commissioning Process:** A quality focused process for enhancing the delivery of a project. The process focuses upon verifying and documenting that the facility and all of its systems, components, and assemblies are planned, designed, installed, tested, can be operated, and maintained to meet the Owner's Project Requirements.

**Commissioning Report:** The final commissioning document which presents the commissioning process results for the project. Cx reports include an executive summary, the commissioning plan, issue log, correspondence, and all appropriate check sheets and test forms.

**Commissioning Representative (CxR):** An individual appointed by a sub-contractor to manage the commissioning process on behalf of the sub-contractor.

**Commissioning Specifications:** The contract documents that detail the objective, scope and implementation of the commissioning process as developed in the Commissioning Plan.

**Commissioning Team:** Individual team members whose coordinated actions are responsible for implementing the Commissioning Process.

**Construction Phase Commissioning:** All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

**Contract Documents (CD):** Contract documents include design and construction contracts, price agreements and procedure agreements. Contract Documents also include all final and complete drawings, specifications and all applicable contract modifications or supplements.

**Construction Phase Commissioning (CPC):** All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

**Coordination Drawings:** Drawings showing the work of all trades that are used to illustrate that equipment can be installed in the space allocated without compromising equipment function or access for maintenance and replacement. These drawings graphically illustrate and dimension manufacturers' recommended maintenance clearances. On mechanical projects, coordination drawings include structural steel, ductwork, major piping and electrical conduit and show the elevations and locations of the above components.

**Data Logging:** The monitoring and recording of temperature, flow, current, status, pressure, etc. of equipment using stand-alone data recorders.

**Deferred System Test:** Tests that cannot be completed at the end of the acceptance phase due to ambient conditions, schedule issues or other conditions preventing testing during the normal acceptance testing period.

**Deficiency:** See "Commissioning Issue".

**Design Criteria:** A listing of the VA Design Criteria outlining the project design requirements, including its source. These are used during the design process to show the design elements meet the OPR.

**Design Intent:** The overall term that includes the OPR and the BOD. It is a detailed explanation of the ideas, concepts, and criteria that are defined by the owner to be important. The design intent documents are utilized to provide a written record of these ideas, concepts and criteria.

**Design Narrative:** A written description of the proposed design solutions that satisfy the requirements of the OPR.

**Design Phase Commissioning (DPC):** All commissioning tasks executed during the design phase of the project.

**Environmental Systems:** Systems that use a combination of mechanical equipment, airflow, water flow and electrical energy to provide heating, ventilating, air conditioning, humidification, and dehumidification for the purpose of human comfort or process control of temperature and humidity.

**Executive Summary:** A section of the Commissioning report that reviews the general outcome of the project. It also includes any unresolved issues, recommendations for the resolution of unresolved issues and all deferred testing requirements.

**Functionality:** This defines a design component or construction process which will allow a system or component to operate or be constructed in a manner that will produce the required outcome of the OPR.

**Functional Test Procedure (FTP):** A written protocol that defines methods, steps, personnel, and acceptance criteria for tests conducted on components, equipment, assemblies, systems, and interfaces among systems.

**Industry Accepted Best Practice:** A design component or construction process that has achieved industry consensus for quality performance and functionality. Refer to the current edition of the NEBB Design Phase Commissioning Handbook for examples.

**Installation Verification:** Observations or inspections that confirm the system or component has been installed in accordance with the contract documents and to industry accepted best practices.

**Integrated System Testing:** Integrated Systems Testing procedures entail testing of multiple integrated systems performance to verify proper functional interface between systems. Typical Integrated Systems Testing includes verifying that building systems respond properly to loss of utility, transfer to emergency power sources, re-transfer from emergency power source to normal utility source; interface between HVAC controls and Fire Alarm systems for equipment shutdown, interface between Fire Alarm system and elevator control systems for elevator recall and shutdown; interface between Fire Alarm System and Security Access Control Systems to control access to spaces during fire alarm conditions; and other similar tests as determined for each specific project.

**Issues Log:** A formal and ongoing record of problems or concerns - and their resolution - that have been raised by members of the Commissioning Team during the course of the Commissioning Process.

**Lessons Learned Workshop:** A workshop conducted to discuss and document project successes and identify opportunities for improvements for future projects.

**Maintainability:** A design component or construction process that will allow a system or component to be effectively maintained. This includes adequate room for access to adjust and repair the equipment. Maintainability also includes components that have readily obtainable repair parts or service.

**Manual Test:** Testing using hand-held instruments, immediate control system readouts or direct observation to verify performance (contrasted to analyzing monitored data taken over time to make the 'observation').

**Owner's Project Requirements (OPR):** A written document that details the project requirements and the expectations of how the building and its systems will be used and operated. These include project goals, measurable performance criteria, cost considerations, benchmarks, success criteria, and supporting information.

**Peer Review:** A formal in-depth review separate from the commissioning review processes. The level of effort and intensity is much greater than a typical commissioning facilitation or extended commissioning review. The VA usually hires an independent third-party (called the IDIQ A/E) to conduct peer reviews.

**Precision:** The ability of an instrument to produce repeatable readings of the same quantity under the same conditions. The precision of an instrument refers to its ability to produce a tightly grouped set of values around the mean value of the measured quantity.

**Pre-Design Phase Commissioning:** Commissioning tasks performed prior to the commencement of design activities that includes project programming and the development of the commissioning process for the project

**Pre-Functional Checklist (PFC):** A form used by the contractor to verify that appropriate components are onsite, correctly installed, set up, calibrated, functional and ready for functional testing.

**Pre-Functional Test (PFT):** An inspection or test that is done before functional testing. PFT's include installation verification and system and component start up tests.

**Procedure or Protocol:** A defined approach that outlines the execution of a sequence of work or operations. Procedures are used to produce repeatable and defined results.

**Range:** The upper and lower limits of an instrument's ability to measure the value of a quantity for which the instrument is calibrated.

**Resolution:** This word has two meanings in the Cx Process. The first refers to the smallest change in a measured variable that an instrument can detect. The second refers to the implementation of actions that correct a tested or observed deficiency.

**Site Observation Visit:** On-site inspections and observations made by the Commissioning Agent for the purpose of verifying component, equipment, and system installation, to observe contractor testing, equipment start-up procedures, or other purposes.

**Site Observation Reports (SO):** Reports of site inspections and observations made by the Commissioning Agent. Observation reports are intended to provide early indication of an installation issue which will need correction or analysis.

**Special System Inspections:** Inspections required by a local code authority prior to occupancy and are not normally a part of the commissioning process.

**Static Tests:** Tests or inspections that validate a specified static condition such as pressure testing. Static tests may be specification or code initiated.

**Start Up Tests:** Tests that validate the component or system is ready for automatic operation in accordance with the manufactures requirements.

**Systems Manual:** A system-focused composite document that includes all information required for the owners operators to operate the systems.

**Test Procedure:** A written protocol that defines methods, personnel, and expectations for tests conducted on components, equipment, assemblies, systems, and interfaces among systems.

**Testing:** The use of specialized and calibrated instruments to measure parameters such as: temperature, pressure, vapor flow, air flow, fluid flow, rotational speed, electrical characteristics, velocity, and other data in order to determine performance, operation, or function.

**Testing, Adjusting, and Balancing (TAB):** A systematic process or service applied to heating, ventilating and air-conditioning (HVAC) systems and other environmental systems to achieve and document air and hydronic flow rates. The standards and procedures for providing these services are

referred to as "Testing, Adjusting, and Balancing" and are described in the Procedural Standards for the Testing, Adjusting and Balancing of Environmental Systems, published by NEBB or AABC.

**Thermal Scans:** Thermographic pictures taken with an Infrared Thermographic Camera. Thermographic pictures show the relative temperatures of objects and surfaces and are used to identify leaks, thermal bridging, thermal intrusion, electrical overload conditions, moisture containment, and insulation failure.

**Training Plan:** A written document that details, in outline form the expectations of the operator training. Training agendas should include instruction on how to obtain service, operate, startup, shutdown and maintain all systems and components of the project.

**Trending:** Monitoring over a period of time with the building automation system.

**Unresolved Commissioning Issue:** Any Commissioning Issue that, at the time that the Final Report or the Amended Final Report is issued that has not been either resolved by the construction team or accepted by the VA.

**Validation:** The process by which work is verified as complete and operating correctly:

1. First party validation occurs when a firm or individual verifying the task is the same firm or individual performing the task.
2. Second party validation occurs when the firm or individual verifying the task is under the control of the firm performing the task or has other possibilities of financial conflicts of interest in the resolution (Architects, Designers, General Contractors and Third Tier Subcontractors or Vendors).
3. Third party validation occurs when the firm verifying the task is not associated with or under control of the firm performing or designing the task.

**Verification:** The process by which specific documents, components, equipment, assemblies, systems, and interfaces among systems are confirmed to comply with the criteria described in the Owner's Project Requirements.

**Warranty Phase Commissioning:** Commissioning efforts executed after a project has been completed and accepted by the Owner. Warranty Phase Commissioning includes follow-up on verification of system performance, measurement and verification tasks and assistance in identifying warranty issues and enforcing warranty provisions of the construction contract.

**Warranty Visit:** A commissioning meeting and site review where all outstanding warranty issues and deferred testing is reviewed and discussed.

**Whole Building Commissioning:** Commissioning of building systems such as Building Envelope, HVAC, Electrical, Special Electrical (Fire Alarm, Security & Communications), Plumbing and Fire Protection as described in this specification.

**1.7 SYSTEMS TO BE COMMISSIONED**

- A. Commissioning of a system or systems specified for this project is part of the construction process. Documentation and testing of these systems, as well as training of the VA's Operation and Maintenance personnel, is required in cooperation with the VA and the Commissioning Agent.
- B. The following systems will be commissioned as part of this project:

Systems To Be Commissioned	
System	Description



<b>Systems To Be Commissioned</b>	
<b>System</b>	<b>Description</b>
<b>Fire Suppression</b>	
Fire Sprinkler Systems	Wet pipe system
<b>Plumbing</b>	
Domestic Water Distribution	Water softeners
Domestic Hot Water Systems	Circulation pumps
Medical Air Systems	Outlet certification
Medical Vacuum Systems	Outlet certification
<b>HVAC</b>	
Direct Digital Control System**	Operator Interface Computer, Network Communications Modules and Wiring, Integration Panels. [DDC Control panels will be commissioned with the systems controlled by the panel]
Chilled Water System**	Chillers (air-cooled), pumps (primary), DDC Control Panels (including integration with Building Control System)
Steam/Heating Hot Water System**	Water treatment, controls, interface with facility DDC system.
HVAC Air Handling Systems**	Air handling Units, humidifiers, DDC control panels
HVAC Ventilation/Exhaust Systems	General exhaust, toilet exhaust, laboratory exhaust
HVAC Terminal Unit Systems**	VAV Terminal Units, fan coil units, unit heaters
Humidity Control Systems	Humidifiers, controls, interface with facility DDC
<b>Electrical</b>	
Low-Voltage Distribution System	Normal power distribution system, Life-safety power distribution system, critical power distribution system, equipment power distribution system, panelboards, verify breaker testing results (injection current, etc)
Lighting & Lighting Control** Systems	Emergency lighting, occupancy sensors, lighting control systems, architectural dimming systems, theatrical dimming systems, exterior lighting and controls
Lightning Protection System	Witness 3rd party testing, review reports
<b>Communications</b>	
Grounding & Bonding System	Witness 3rd party testing, review reports
Structured Cabling System	Witness 3rd party testing, review reports
Master Antenna Television System	Witness 3rd party testing, review reports

<b>Systems To Be Commissioned</b>	
<b>System</b>	<b>Description</b>
Public Address & Mass Notification Systems	Witness 3rd party testing, review reports
Nurse Call & Code Blue Systems	Witness 3rd party testing, review reports
<b>Electronic Safety and Security</b>	
Grounding & Bonding	Witness 3rd party testing, review reports
Access Control Systems	Witness 3rd party testing, review reports
Video Surveillance System	Witness 3rd party testing, review reports
Fire Detection and Alarm System	100% device acceptance testing, battery draw-down test, verify system monitoring, verify interface with other systems.
<b>Site Utilities</b>	
Water Utilities	Water Service Entrance, Backflow Prevention, Pressure Control, Booster Pumps, Irrigation Systems
Sanitary Sewerage Utilities	Sanitary Connection, Waste Treatment Systems
Storm Drainage Utilities	Storm Water Connection, Site Storm Water Distribution
<b>Integrated Systems Tests</b>	
Loss of Power Response	Loss of power to building, loss of power to campus, restoration of power to building, restoration of power to campus.
Fire Alarm Response	Integrated System Response to Fire Alarm Condition and Return to Normal

**1.8 COMMISSIONING TEAM**

- A. The commissioning team shall consist of, but not be limited to, representatives of Contractor, including Project Superintendent and subcontractors, installers, schedulers, suppliers, and specialists deemed appropriate by the Department of Veterans Affairs (VA) and Commissioning Agent.
- B. Members Appointed by Contractor:
  - 1. Contractor' Commissioning Manager: The designated person, company, or entity that plans, schedules and coordinates the commissioning activities for the construction team.
  - 2. Contractor's Commissioning Representative(s): Individual(s), each having authority to act on behalf of the entity he or she represents, explicitly organized to implement the commissioning process through coordinated actions.
- C. Members Appointed by VA:
  - 1. Commissioning Agent: The designated person, company, or entity that plans, schedules, and coordinates the commissioning team to implement the commissioning process. The VA will engage the CxA under a separate contract.
  - 2. User: Representatives of the facility user and operation and maintenance personnel.
  - 3. A/E: Representative of the Architect and engineering design professionals.

#### **1.9 VA'S COMMISSIONING RESPONSIBILITIES**

- A. Appoint an individual, company or firm to act as the Commissioning Agent.
- B. Assign operation and maintenance personnel and schedule them to participate in commissioning team activities including, but not limited to, the following:
  - 1. Coordination meetings.
  - 2. Training in operation and maintenance of systems, subsystems, and equipment.
  - 3. Testing meetings.
  - 4. Witness and assist in Systems Functional Performance Testing.
  - 5. Demonstration of operation of systems, subsystems, and equipment.
- C. Provide the Construction Documents, prepared by Architect and approved by VA, to the Commissioning Agent and for use in managing the commissioning process, developing the commissioning plan, systems manuals, and reviewing the operation and maintenance training plan.

#### **1.10 CONTRACTOR'S COMMISSIONING RESPONSIBILITIES**

- A. The Contractor shall assign a Commissioning Manager to manage commissioning activities of the Contractor, and subcontractors.
- B. The Contractor shall ensure that the commissioning responsibilities outlined in these specifications are included in all subcontracts and that subcontractors comply with the requirements of these specifications.
- C. The Contractor shall ensure that each installing subcontractor shall assign representatives with expertise and authority to act on behalf of the subcontractor and schedule them to participate in and perform commissioning team activities including, but not limited to, the following:
  - 1. Participate in commissioning coordination meetings.
  - 2. Conduct operation and maintenance training sessions in accordance with approved training plans.
  - 3. Verify that Work is complete and systems are operational according to the Contract Documents, including calibration of instrumentation and controls.
  - 4. Evaluate commissioning issues and commissioning observations identified in the Commissioning Issues Log, field reports, test reports or other commissioning documents. In collaboration with entity responsible for system and equipment installation, recommend corrective action.
  - 5. Review and comment on commissioning documentation.
  - 6. Participate in meetings to coordinate Systems Functional Performance Testing.
  - 7. Provide schedule for operation and maintenance data submittals, equipment startup, and testing to Commissioning Agent for incorporation into the commissioning plan.
  - 8. Provide information to the Commissioning Agent for developing commissioning plan.
  - 9. Participate in training sessions for VA's operation and maintenance personnel.
  - 10. Provide technicians who are familiar with the construction and operation of installed systems and who shall develop specific test procedures to conduct Systems Functional Performance Testing of installed systems.

#### **1.11 COMMISSIONING AGENT'S RESPONSIBILITIES**

- A. Organize and lead the commissioning team.

- B. Prepare the commissioning plan. See Paragraph 1.11-A of this specification Section for further information.
- C. Review and comment on selected submittals from the Contractor for general conformance with the Construction Documents. Review and comment on the ability to test and operate the system and/or equipment, including providing gages, controls and other components required to operate, maintain, and test the system. Review and comment on performance expectations of systems and equipment and interfaces between systems relating to the Construction Documents.
- D. At the beginning of the construction phase, conduct an initial construction phase coordination meeting for the purpose of reviewing the commissioning activities and establishing tentative schedules for operation and maintenance submittals; operation and maintenance training sessions; TAB Work; Pre-Functional Checklists, Systems Functional Performance Testing; and project completion.
- E. Convene commissioning team meetings for the purpose of coordination, communication, and conflict resolution; discuss status of the commissioning processes. Responsibilities include arranging for facilities, preparing agenda and attendance lists, and notifying participants. The Commissioning Agent shall prepare and distribute minutes to commissioning team members and attendees within five workdays of the commissioning meeting.
- F. Observe construction and report progress, observations and issues. Observe systems and equipment installation for adequate accessibility for maintenance and component replacement or repair, and for general conformance with the Construction Documents.
- G. Prepare Project specific Pre-Functional Checklists and Systems Functional Performance Test procedures.
- H. Coordinate Systems Functional Performance Testing schedule with the Contractor.
- I. Witness selected systems startups.
- J. Verify selected Pre-Functional Checklists completed and submitted by the Contractor.
- K. Witness and document Systems Functional Performance Testing.
- L. Compile test data, inspection reports, and certificates and include them in the systems manual and commissioning report.
- M. Review and comment on operation and maintenance (O&M) documentation and systems manual outline for compliance with the Contract Documents. Operation and maintenance documentation requirements are specified in Paragraph 1.25, Section 01 00 00 GENERAL REQUIREMENTS.
- N. Review operation and maintenance training program developed by the Contractor. Verify training plans provide qualified instructors to conduct operation and maintenance training.
- O. Prepare commissioning Field Observation Reports.
- P. Prepare the Final Commissioning Report.
- Q. Return to the site at 10 months into the 12 month warranty period and review with facility staff the current building operation and the condition of outstanding issues related to the original and seasonal Systems Functional Performance Testing. Also interview facility staff and identify problems or concerns they have operating the building as originally intended. Make suggestions for improvements and for recording these changes in the O&M manuals. Identify areas that may come under warranty or under the original construction contract. Assist facility staff in developing reports, documents and requests for services to remedy outstanding problems.

- R. Assemble the final commissioning documentation, including the Final Commissioning Report and Addendum to the Final Commissioning Report.

#### **1.12 COMMISSIONING DOCUMENTATION**

- A. Commissioning Plan: A document, prepared by Commissioning Agent, that outlines the schedule, allocation of resources, and documentation requirements of the commissioning process, and shall include, but is not limited, to the following:
1. Plan for delivery and review of submittals, systems manuals, and other documents and reports. Identification of the relationship of these documents to other functions and a detailed description of submittals that are required to support the commissioning processes. Submittal dates shall include the latest date approved submittals must be received without adversely affecting commissioning plan.
  2. Description of the organization, layout, and content of commissioning documentation (including systems manual) and a detailed description of documents to be provided along with identification of responsible parties.
  3. Identification of systems and equipment to be commissioned.
  4. Schedule of Commissioning Coordination meetings.
  5. Identification of items that must be completed before the next operation can proceed.
  6. Description of responsibilities of commissioning team members.
  7. Description of observations to be made.
  8. Description of requirements for operation and maintenance training.
  9. Schedule for commissioning activities with dates coordinated with overall construction schedule.
  10. Process and schedule for documenting changes on a continuous basis to appear in Project Record Documents.
  11. Process and schedule for completing prestart and startup checklists for systems, subsystems, and equipment to be verified and tested.
  12. Preliminary Systems Functional Performance Test procedures.
- B. Systems Functional Performance Test Procedures: The Commissioning Agent will develop Systems Functional Performance Test Procedures for each system to be commissioned, including subsystems, or equipment and interfaces or interlocks with other systems. Systems Functional Performance Test Procedures will include a separate entry, with space for comments, for each item to be tested. Preliminary Systems Functional Performance Test Procedures will be provided to the VA, Architect/Engineer, and Contractor for review and comment. The Systems Functional Performance Test Procedure will include test procedures for each mode of operation and provide space to indicate whether the mode under test responded as required. Each System Functional Performance Test procedure, regardless of system, subsystem, or equipment being tested, shall include, but not be limited to, the following:
1. Name and identification code of tested system.
  2. Test number.
  3. Time and date of test.
  4. Indication of whether the record is for a first test or retest following correction of a problem or issue.
  5. Dated signatures of the person performing test and of the witness, if applicable.
  6. Individuals present for test.
  7. Observations and Issues.
  8. Issue number, if any, generated as the result of test.

- C. Pre-Functional Checklists: The Commissioning Agent will prepare Pre-Functional Checklists. Pre-Functional Checklists shall be completed and signed by the Contractor, verifying that systems, subsystems, equipment, and associated controls are ready for testing. The Commissioning Agent will spot check Pre-Functional Checklists to verify accuracy and readiness for testing. Inaccurate or incomplete Pre-Functional Checklists shall be returned to the Contractor for correction and resubmission.
- D. Test and Inspection Reports: The Commissioning Agent will record test data, observations, and measurements on Systems Functional Performance Test Procedure. The report will also include recommendation for system acceptance or non-acceptance. Photographs, forms, and other means appropriate for the application shall be included with data. Commissioning Agent Will compile test and inspection reports and test and inspection certificates and include them in systems manual and commissioning report.
- E. Corrective Action Documents: The Commissioning Agent will document corrective action taken for systems and equipment that fail tests. The documentation will include any required modifications to systems and equipment and/or revisions to test procedures, if any. The Commissioning Agent will witness and document any retesting of systems and/or equipment requiring corrective action and document retest results.
- F. Commissioning Issues Log: The Commissioning Agent will prepare and maintain Commissioning Issues Log that describes Commissioning Issues and Commissioning Observations that are identified during the Commissioning process. These observations and issues include, but are not limited to, those that are at variance with the Contract Documents. The Commissioning Issues Log will identify and track issues as they are encountered, the party responsible for resolution, progress toward resolution, and document how the issue was resolved. The Master Commissioning Issues Log will also track the status of unresolved issues.
  - 1. Creating an Commissioning Issues Log Entry:
    - a. Identify the issue with unique numeric or alphanumeric identifier by which the issue may be tracked.
    - b. Assign a descriptive title for the issue.
    - c. Identify date and time of the issue.
    - d. Identify test number of test being performed at the time of the observation, if applicable, for cross reference.
    - e. Identify system, subsystem, and equipment to which the issue applies.
    - f. Identify location of system, subsystem, and equipment.
    - g. Include information that may be helpful in diagnosing or evaluating the issue.
    - h. Note recommended corrective action.
    - i. Identify commissioning team member responsible for corrective action.
    - j. Identify expected date of correction.
    - k. Identify person that identified the issue.
  - 2. Documenting Issue Resolution:
    - a. Log date correction is completed or the issue is resolved.
    - b. Describe corrective action or resolution taken. Include description of diagnostic steps taken to determine root cause of the issue, if any.
    - c. Identify changes to the Contract Documents that may require action.
    - d. State that correction was completed and system, subsystem, and equipment are ready for retest, if applicable.

- e. Identify person(s) who corrected or resolved the issue.
  - f. Identify person(s) verifying the issue resolution.
- G. Final Commissioning Report: The Commissioning Agent will document results of the commissioning process, including unresolved issues, and performance of systems, subsystems, and equipment. The Commissioning Report will indicate whether systems, subsystems, and equipment have been properly installed and are performing according to the Contract Documents. This report will be used by the Department of Veterans Affairs when determining that systems will be accepted. This report will be used to evaluate systems, subsystems, and equipment and will serve as a future reference document during VA occupancy and operation. It shall describe components and performance that exceed requirements of the Contract Documents and those that do not meet requirements of the Contract Documents. The commissioning report will include, but is not limited to, the following:
- 1. Lists and explanations of substitutions; compromises; variances with the Contract Documents; record of conditions; and, if appropriate, recommendations for resolution. Design Narrative documentation maintained by the Commissioning Agent.
  - 2. Commissioning plan.
  - 3. Pre-Functional Checklists completed by the Contractor, with annotation of the Commissioning Agent review and spot check.
  - 4. Systems Functional Performance Test Procedures, with annotation of test results and test completion.
  - 5. Commissioning Issues Log.
  - 6. Listing of deferred and off season test(s) not performed, including the schedule for their completion.
- H. Addendum to Final Commissioning Report: The Commissioning Agent will prepare an Addendum to the Final Commissioning Report near the end of the Warranty Period. The Addendum will indicate whether systems, subsystems, and equipment are complete and continue to perform according to the Contract Documents. The Addendum to the Final Commissioning Report shall include, but is not limited to, the following:
- 1. Documentation of deferred and off season test(s) results.
  - 2. Completed Systems Functional Performance Test Procedures for off season test(s).
  - 3. Documentation that unresolved system performance issues have been resolved.
  - 4. Updated Commissioning Issues Log, including status of unresolved issues.
  - 5. Identification of potential Warranty Claims to be corrected by the Contractor.
- I. Systems Manual: The Commissioning Agent will gather required information and compile the Systems Manual. The Systems Manual will include, but is not limited to, the following:
- 1. Design Narrative, including system narratives, schematics, single-line diagrams, flow diagrams, equipment schedules, and changes made throughout the Project.
  - 2. Reference to Final Commissioning Plan.
  - 3. Reference to Final Commissioning Report.
  - 4. Approved Operation and Maintenance Data as submitted by the Contractor.

### **1.13 SUBMITTALS**

- A. Preliminary Commissioning Plan Submittal: The Commissioning Agent has prepared a Preliminary Commissioning Plan based on the final Construction Documents. The Preliminary Commissioning Plan is included as an Appendix

to this specification section. The Preliminary Commissioning Plan is provided for information only. It contains preliminary information about the following commissioning activities:

1. The Commissioning Team: A list of commissioning team members by organization.
  2. Systems to be commissioned. A detailed list of systems to be commissioned for the project. This list also provides preliminary information on systems/equipment submittals to be reviewed by the Commissioning Agent; preliminary information on Pre-Functional Checklists that are to be completed; preliminary information on Systems Performance Testing, including information on testing sample size (where authorized by the VA).
  3. Commissioning Team Roles and Responsibilities: Preliminary roles and responsibilities for each Commissioning Team member.
  4. Commissioning Documents: A preliminary list of commissioning-related documents, include identification of the parties responsible for preparation, review, approval, and action on each document.
  5. Commissioning Activities Schedule: Identification of Commissioning Activities, including Systems Functional Testing, the expected duration and predecessors for the activity.
  6. Pre-Functional Checklists: Preliminary Pre-Functional Checklists for equipment, components, subsystems, and systems to be commissioned. These Preliminary Pre-Functional Checklists provide guidance on the level of detailed information the Contractor shall include on the final submission.
  7. Systems Functional Performance Test Procedures: Preliminary step-by-step System Functional Performance Test Procedures to be used during Systems Functional Performance Testing. These Preliminary Systems Functional Performance procedures provide information on the level of testing rigor, and the level of Contractor support required during performance of system's testing.
- B. Final Commissioning Plan Submittal: Based on the Final Construction Documents and the Contractor's project team, the Commissioning Agent will prepare the Final Commissioning Plan as described in this section. The Commissioning Agent will submit three hard copies and three sets of electronic files of Final Commissioning Plan. The Contractor shall review the Commissioning Plan and provide any comments to the VA. The Commissioning Agent will incorporate review comments into the Final Commissioning Plan as directed by the VA.
- C. Systems Functional Performance Test Procedure: The Commissioning Agent will submit preliminary Systems Functional Performance Test Procedures to the Contractor, and the VA for review and comment. The Contractor shall return review comments to the VA and the Commissioning Agent. The VA will also return review comments to the Commissioning Agent. The Commissioning Agent will incorporate review comments into the Final Systems Functional Test Procedures to be used in Systems Functional Performance Testing.
- D. Pre-Functional Checklists: The Commissioning Agent will submit Pre-Functional Checklists to be completed by the Contractor.
- E. Test and Inspection Reports: The Commissioning Agent will submit test and inspection reports to the VA with copies to the Contractor and the Architect/Engineer.
- F. Corrective Action Documents: The Commissioning Agent will submit corrective action documents to the VA COR with copies to the Contractor and Architect.
- G. Preliminary Commissioning Report Submittal: The Commissioning Agent will submit three electronic copies of the preliminary commissioning report.



One electronic copy, with review comments, will be returned to the Commissioning Agent for preparation of the final submittal.

- H. Final Commissioning Report Submittal: The Commissioning Agent will submit four sets of electronically formatted information of the final commissioning report to the VA. The final submittal will incorporate comments as directed by the VA.
- I. Data for Commissioning:
  - 1. The Commissioning Agent will request in writing from the Contractor specific information needed about each piece of commissioned equipment or system to fulfill requirements of the Commissioning Plan.
  - 2. The Commissioning Agent may request further documentation as is necessary for the commissioning process or to support other VA data collection requirements, including Construction Operations Building Information Exchange (COBIE), Building Information Modeling (BIM), etc.

#### **1.14 COMMISSIONING PROCESS**

- A. The Commissioning Agent will be responsible for the overall management of the commissioning process as well as coordinating scheduling of commissioning tasks with the VA and the Contractor. As directed by the VA, the Contractor shall incorporate Commissioning tasks, including, but not limited to, Systems Functional Performance Testing (including predecessors) with the Master Construction Schedule.
- B. Within 90 days of contract award, the Contractor shall designate a specific individual as the Commissioning Manager (CxM) to manage and lead the commissioning effort on behalf of the Contractor. The Commissioning Manager shall be the single point of contact and communications for all commissioning related services by the Contractor.
- C. Within 120 days of contract award, the Contractor shall ensure that each subcontractor designates specific individuals as Commissioning Representatives (CXR) to be responsible for commissioning related tasks. The Contractor shall ensure the designated Commissioning Representatives participate in the commissioning process as team members providing commissioning testing services, equipment operation, adjustments, and corrections if necessary. The Contractor shall ensure that all Commissioning Representatives shall have sufficient authority to direct their respective staff to provide the services required, and to speak on behalf of their organizations in all commissioning related contractual matters.

#### **1.15 QUALITY ASSURANCE**

- A. Instructor Qualifications: Factory authorized service representatives shall be experienced in training, operation, and maintenance procedures for installed systems, subsystems, and equipment.
- B. Test Equipment Calibration: The Contractor shall comply with test equipment manufacturer's calibration procedures and intervals. Recalibrate test instruments immediately whenever instruments have been repaired following damage or dropping. Affix calibration tags to test instruments. Instruments shall have been calibrated within six months prior to use.

#### **1.16 COORDINATION**

- A. Management: The Commissioning Agent will coordinate the commissioning activities with the VA and Contractor. The Commissioning Agent will submit commissioning documents and information to the VA. All

commissioning team members shall work together to fulfill their contracted responsibilities and meet the objectives of the contract documents.

- B. Scheduling: The Contractor shall work with the Commissioning Agent and the VA to incorporate the commissioning activities into the construction schedule. The Commissioning Agent will provide sufficient information (including, but not limited to, tasks, durations and predecessors) on commissioning activities to allow the Contractor and the VA to schedule commissioning activities. All parties shall address scheduling issues and make necessary notifications in a timely manner in order to expedite the project and the commissioning process. The Contractor shall update the Master Construction as directed by the VA.
- C. Initial Schedule of Commissioning Events: The Commissioning Agent will provide the initial schedule of primary commissioning events in the Commissioning Plan and at the commissioning coordination meetings. The Commissioning Plan will provide a format for this schedule. As construction progresses, more detailed schedules will be developed by the Contractor with information from the Commissioning Agent.
- D. Commissioning Coordinating Meetings: The Commissioning Agent will conduct periodic Commissioning Coordination Meetings of the commissioning team to review status of commissioning activities, to discuss scheduling conflicts, and to discuss upcoming commissioning process activities.
- E. Pretesting Meetings: The Commissioning Agent will conduct pretest meetings of the commissioning team to review startup reports, Pre-Functional Checklist results, Systems Functional Performance Testing procedures, testing personnel and instrumentation requirements.
- F. Systems Functional Performance Testing Coordination: The Contractor shall coordinate testing activities to accommodate required quality assurance and control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting. The Contractor shall coordinate the schedule times for tests, inspections, obtaining samples, and similar activities.

## **PART 2 - PRODUCTS**

### **2.1 TEST EQUIPMENT**

- A. The Contractor shall provide all standard and specialized testing equipment required to perform Systems Functional Performance Testing. Test equipment required for Systems Functional Performance Testing will be identified in the detailed System Functional Performance Test Procedure prepared by the Commissioning Agent.
- B. Data logging equipment and software required to test equipment shall be provided by the Contractor.
- C. All testing equipment shall be of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified in the Specifications. If not otherwise noted, the following minimum requirements apply: Temperature sensors and digital thermometers shall have a certified calibration within the past year to an accuracy of 0.5 °C (1.0 °F) and a resolution of + or - 0.1 °C (0.2 °F). Pressure sensors shall have an accuracy of + or - 2.0% of the value range being measured (not full range of meter) and have been calibrated within the last year. All equipment shall be calibrated according to the manufacturer's recommended intervals and following any repairs to the equipment. Calibration tags shall be affixed or certificates readily available.

**PART 3 - EXECUTION**

**3.1 COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES**

A. The following table outlines the roles and responsibilities for the Commissioning Team members during the Construction Phase:

Construction Phase		CxA = Commissioning Agent RE = COR A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Meetings	Construction Commissioning Kick Off meeting	L	A	P	P	O	
	Commissioning Meetings	L	A	P	P	O	
	Project Progress Meetings	P	A	P	L	O	
	Controls Meeting	L	A	P	P	O	
Coordination	Coordinate with [OGC's, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support the OPR and BOD.	L	A	P	P	N/A	
Cx Plan & Spec	Final Commissioning Plan	L	A	R	R	O	
Schedules	Duration Schedule for Commissioning Activities	L	A	R	R	N/A	
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	O	

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Construction Phase		CxA = Commissioning Agent RE = COR A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
	Maintain BOD/DID on behalf of Owner	L	A	R	R	O	
Document Reviews	TAB Plan Review	L	A	R	R	O	
	Submittal and Shop Drawing Review	R	A	R	L	O	
	Review Contractor Equipment Startup Checklists	L	A	R	R	N/A	
	Review Change Orders, ASI, and RFI	L	A	R	R	N/A	
Site Observations	Witness Factory Testing	P	A	P	L	O	
	Construction Observation Site Visits	L	A	R	R	O	
Functional Test Protocols	Final Pre-Functional Checklists	L	A	R	R	O	
	Final Functional Performance Test Protocols	L	A	R	R	O	
Technical Activities	Issues Resolution Meetings	P	A	P	L	O	
Reports and Logs	Status Reports	L	A	R	R	O	
	Maintain Commissioning Issues Log	L	A	R	R	O	

<b>Construction Phase</b>		CxA = Commissioning Agent					L = Lead
Commissioning Roles & Responsibilities		RE = COR					P = Participate
		A/E = Design Arch/Engineer					A = Approve
		PC = Prime Contractor					R = Review
		O&M = Gov't Facility O&M					O = Optional
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes

B. The following table outlines the roles and responsibilities for the Commissioning Team members during the Acceptance Phase:

<b>Acceptance Phase</b>		CxA = Commissioning Agent					L = Lead
Commissioning Roles & Responsibilities		RE = COR					P = Participate
		A/E = Design Arch/Engineer					A = Approve
		PC = Prime Contractor					R = Review
		O&M = Gov't Facility O&M					O = Optional
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Meetings	Commissioning Meetings	L	A	P	P	O	
	Project Progress Meetings	P	A	P	L	O	
	Pre-Test Coordination Meeting	L	A	P	P	O	
	Lessons Learned and Commissioning Report Review Meeting	L	A	P	P	O	
Coordination	Coordinate with [OGC's, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support OPR and BOD	L	P	P	P	O	
Cx Plan & Spec	Maintain/Update Commissioning Plan	L	A	R	R	O	

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Acceptance Phase		CxA = Commissioning Agent					L = Lead
Commissioning Roles & Responsibilities		RE = COR					P = Participate
		A/E = Design Arch/Engineer					A = Approve
		PC = Prime Contractor					R = Review
		O&M = Gov't Facility O&M					O = Optional
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Schedules	Prepare Functional Test Schedule	L	A	R	R	O	
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	O	
	Maintain BOD/DID on behalf of Owner	L	A	R	R	O	
Document Reviews	Review Completed Pre-Functional Checklists	L	A	R	R	O	
	Pre-Functional Checklist Verification	L	A	R	R	O	
	Review Operations & Maintenance Manuals	L	A	R	R	R	
	Training Plan Review	L	A	R	R	R	
	Warranty Review	L	A	R	R	O	
	Review TAB Report	L	A	R	R	O	
Site Observations	Construction Observation Site Visits	L	A	R	R	O	
	Witness Selected Equipment Startup	L	A	R	R	O	
Functional Test Protocols	TAB Verification	L	A	R	R	O	
	Systems Functional Performance Testing	L	A	P	P	P	
	Retesting	L	A	P	P	P	
Technical	Issues Resolution Meetings	P	A	P	L	O	

<b>Acceptance Phase</b>		CxA = Commissioning Agent					L = Lead
Commissioning Roles & Responsibilities		RE = COR					P = Participate
		A/E = Design Arch/Engineer					A = Approve
		PC = Prime Contractor					R = Review
		O&M = Gov't Facility O&M					O = Optional
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Activities	Systems Training	L	S	R	P	P	
Reports and Logs	Status Reports	L	A	R	R	O	
	Maintain Commissioning Issues Log	L	A	R	R	O	
	Final Commissioning Report	L	A	R	R	R	
	Prepare Systems Manuals	L	A	R	R	R	

C. The following table outlines the roles and responsibilities for the Commissioning Team members during the Warranty Phase:

Warranty Phase	CxA = Commissioning Agent	L = Lead
----------------	---------------------------	----------

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Meetings	Post-Occupancy User Review Meeting	L	A	O	P	P	
Site Observations	Periodic Site Visits	L	A	O	O	P	
Functional Test Protocols	Deferred and/or seasonal Testing	L	A	O	P	P	
Technical Activities	Issues Resolution Meetings	L	S	O	O	P	
	Post-Occupancy Warranty Checkup and review of Significant Outstanding Issues	L	A		R	P	
Reports and Logs	Final Commissioning Report Amendment	L	A		R	R	
	Status Reports	L	A		R	R	



### 3.2 STARTUP, INITIAL CHECKOUT, AND PRE-FUNCTIONAL CHECKLISTS

- A. The following procedures shall apply to all equipment and systems to be commissioned, according to Part 1, Systems to Be Commissioned.
1. Pre-Functional Checklists are important to ensure that the equipment and systems are hooked up and operational. These ensure that Systems Functional Performance Testing may proceed without unnecessary delays. Each system to be commissioned shall have a full Pre-Functional Checklist completed by the Contractor prior to Systems Functional Performance Testing. No sampling strategies are used.
    - a. The Pre-Functional Checklist will identify the trades responsible for completing the checklist. The Contractor shall ensure the appropriate trades complete the checklists.
    - b. The Commissioning Agent will review completed Pre-Functional Checklists and field-verify the accuracy of the completed checklist using sampling techniques.
  2. Startup and Initial Checkout Plan: The Contractor shall develop detailed startup plans for all equipment. The primary role of the Contractor in this process is to ensure that there is written documentation that each of the manufacturer recommended procedures have been completed. Parties responsible for startup shall be identified in the Startup Plan and in the checklist forms.
    - a. The Contractor shall develop the full startup plan by combining (or adding to) the checklists with the manufacturer's detailed startup and checkout procedures from the O&M manual data and the field checkout sheets normally used by the Contractor. The plan shall include checklists and procedures with specific boxes or lines for recording and documenting the checking and inspections of each procedure and a summary statement with a signature block at the end of the plan.
    - b. The full startup plan shall at a minimum consist of the following items:
      - 1) The Pre-Functional Checklists.
      - 2) The manufacturer's standard written startup procedures copied from the installation manuals with check boxes by each procedure and a signature block added by hand at the end.
      - 3) The manufacturer's normally used field checkout sheets.
    - c. The Commissioning Agent will submit the full startup plan to the VA and Contractor for review. Final approval will be by the VA.
    - d. The Contractor shall review and evaluate the procedures and the format for documenting them, noting any procedures that need to be revised or added.
  3. Sensor and Actuator Calibration
    - a. All field installed temperature, relative humidity, CO2 and pressure sensors and gages, and all actuators (dampers and valves) on all equipment shall be calibrated using the methods described in Division 21, Division 22, Division 23, Division 26, Division 27, and Division 28 specifications.
    - b. All procedures used shall be fully documented on the Pre-Functional Checklists or other suitable forms, clearly referencing the procedures followed and written documentation of initial, intermediate and final results.
  4. Execution of Equipment Startup

- a. Four weeks prior to equipment startup, the Contractor shall schedule startup and checkout with the VA and Commissioning Agent. The performance of the startup and checkout shall be directed and executed by the Contractor.
- b. The Commissioning Agent will observe the startup procedures for selected pieces of primary equipment.
- c. The Contractor shall execute startup and provide the VA and Commissioning Agent with a signed and dated copy of the completed startup checklists, and contractor tests.
- d. Only individuals that have direct knowledge and witnessed that a line item task on the Startup Checklist was actually performed shall initial or check that item off. It is not acceptable for witnessing supervisors to fill out these forms.

### **3.3 DEFICIENCIES, NONCONFORMANCE, AND APPROVAL IN CHECKLISTS AND STARTUP**

- A. The Contractor shall clearly list any outstanding items of the initial startup and Pre-Functional Checklist procedures that were not completed successfully, at the bottom of the procedures form or on an attached sheet. The procedures form and any outstanding deficiencies shall be provided to the VA and the Commissioning Agent within two days of completion.
- B. The Commissioning Agent will review the report and submit comments to the VA. The Commissioning Agent will work with the Contractor to correct and verify deficiencies or uncompleted items. The Commissioning Agent will involve the VA and others as necessary. The Contractor shall correct all areas that are noncompliant or incomplete in the checklists in a timely manner, and shall notify the VA and Commissioning Agent as soon as outstanding items have been corrected. The Contractor shall submit an updated startup report and a Statement of Correction on the original noncompliance report. When satisfactorily completed, the Commissioning Agent will recommend approval of the checklists and startup of each system to the VA.
- C. The Contractor shall be responsible for resolution of deficiencies as directed the VA.

### **3.4 PHASED COMMISSIONING**

- A. The project may require startup and initial checkout to be executed in phases. This phasing shall be planned and scheduled in a coordination meeting of the VA, Commissioning Agent, and the Contractor. Results will be added to the master construction schedule and the commissioning schedule.

### **3.5 DDC SYSTEM TRENDING FOR COMMISSIONING**

- A. Trending is a method of testing as a standalone method or to augment manual testing. The Contractor shall trend any and all points of the system or systems at intervals specified below.
- B. Alarms are a means to notify the system operator that abnormal conditions are present in the system. Alarms shall be structured into three tiers - Critical, Priority, and Maintenance.
  1. Critical alarms are intended to be alarms that require the immediate attention of and action by the Operator. These alarms shall be displayed on the Operator Workstation in a popup style window that is graphically linked to the associated unit's graphical display. The popup style window shall be displayed on top of any active window within the screen, including non DDC system software.

2. Priority level alarms are to be printed to a printer which is connected to the Operator's Work Station located within the engineer's office. Additionally Priority level alarms shall be able to be monitored and viewed through an active alarm application. Priority level alarms are alarms which shall require reaction from the operator or maintenance personnel within a normal work shift, and not immediate action.
  3. Maintenance alarms are intended to be minor issues which would require examination by maintenance personnel within the following shift. These alarms shall be generated in a scheduled report automatically by the DDC system at the start of each shift. The generated maintenance report will be printed to a printer located within the engineer's office.
- C. The Contractor shall provide a wireless internet network in the building for use during controls programming, checkout, and commissioning. This network will allow project team members to more effectively program, view, manipulate and test control devices while being in the same room as the controlled device.
- D. The Contractor shall provide graphical trending through the DDC control system of systems being commissioned. Trending requirements are indicated below and included with the Systems Functional Performance Test Procedures. Trending shall occur before, during and after Systems Functional Performance Testing. The Contractor shall be responsible for producing graphical representations of the trended DDC points that show each system operating properly during steady state conditions as well as during the System Functional Testing. These graphical reports shall be submitted to the COR and Commissioning Agent for review and analysis before, during dynamic operation, and after Systems Functional Performance Testing. The Contractor shall provide, but not limited to, the following trend requirements and trend submissions:
1. Pre-testing, Testing, and Post-testing - Trend reports of trend logs and graphical trend plots are required as defined by the Commissioning Agent. The trend log points, sampling rate, graphical plot configuration, and duration will be dictated by the Commissioning Agent. At any time during the Commissioning Process the Commissioning Agent may recommend changes to aspects of trending as deemed necessary for proper system analysis. The Contractor shall implement any changes as directed by the COR. Any pre-test trend analysis comments generated by the Commissioning Team should be addressed and resolved by the Contractor, as directed by the COR, prior to the execution of Systems Functional Performance Testing.
  2. Dynamic plotting - The Contractor shall also provide dynamic plotting during Systems Functional Performance testing at frequent intervals for points determined by the Systems Functional Performance Test Procedure. The graphical plots will be formatted and plotted at durations listed in the Systems Functional Performance Test Procedure.
  3. Graphical plotting - The graphical plots shall be provided with a dual y-axis allowing 15 or more trend points (series) plotted simultaneously on the graph with each series in distinct color. The plots will further require title, axis naming, legend etc. all described by the Systems Functional Performance Test Procedure. If this cannot be sufficiently accomplished directly in the Direct Digital Control System then it is the responsibility of the Contractor to plot these trend logs in Microsoft Excel.

4. The following tables indicate the points to be trended and alarmed by system. The Operational Trend Duration column indicates the trend duration for normal operations. The Testing Trend Duration column indicates the trend duration prior to Systems Functional Performance Testing and again after Systems Functional Performance Testing. The Type column indicates point type: AI = Analog Input, AO = Analog Output, DI = Digital Input, DO = Digital Output, Calc = Calculated Point. In the Trend Interval Column, COV = Change of Value. The Alarm Type indicates the alarm priority; C = Critical, P = Priority, and M = Maintenance. The Alarm Range column indicates when the point is considered in the alarm state. The Alarm Delay column indicates the length of time the point must remain in an alarm state before the alarm is recorded in the DDC. The intent is to allow minor, short-duration events to be corrected by the DDC system prior to recording an alarm.

Dual-Path Air Handling Unit Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
OA Temperature	AI	15 Min	24 hours	3 days	N/A		
RA Temperature	AI	15 Min	24 hours	3 days	N/A		
RA Humidity	AI	15 Min	24 hours	3 days	P	>60% RH	10 min
Mixed Air Temp	AI	None	None	None	N/A		
SA Temp	AI	15 Min	24 hours	3 days	C	±5°F from SP	10 min
Supply Fan Speed	AI	15 Min	24 hours	3 days	N/A		
Return Fan Speed	AI	15 Min	24 hours	3 days	N/A		
RA Pre-Filter Status	AI	None	None	None	N/A		
OA Pre-Filter Status	AI	None	None	None	N/A		
After Filter Status	AI	None	None	None	N/A		
SA Flow	AI	15 Min	24 hours	3 days	C	±10% from SP	10 min
OA Supply Temp	AI	15 Min	24 hours	3 days	P	±5°F from SP	10 min
RA Supply Temp	AI	15 Min	24 hours	3 days	N/A		
RA CHW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA CHW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA HW Valve Position	AI	15 Min	24 hours	3 days	N/A		

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Dual-Path Air Handling Unit Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
OA Flow	AI	15 Min	24 hours	3 days	P	±10% from SP	5 min
RA Flow	AI	15 Min	24 hours	3 days	P	±10% from SP	5 min
Initial UVC Intensity (%)	AI	None	None	None	N/A		
Duct Pressure	AI	15 Min	24 hours	3 days	C	±25% from SP	6 min
CO2 Level	AI	15 Min	24 hours	3 days	P	±10% from SP	10 min
Supply Fan Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Return Fan Status	DI	COV	24 hours	3 days	C	Status <> Command	10 Min
High Static Status	DI	COV	24 hours	3 days	P	True	1 min
Fire Alarm Status	DI	COV	24 hours	3 days	C	True	5 min
Freeze Stat Level 1	DI	COV	24 hours	3 days	C	True	10 min
Freeze Stat Level 2	DI	COV	24 hours	3 days	C	True	5 min
Freeze Stat Level 3	DI	COV	24 hours	3 days	P	True	1 min
Fire/Smoke Damper Status	DI	COV	24 hours	3 days	P	Closed	1 min
Emergency AHU Shutdown	DI	COV	24 hours	3 days	P	True	1 min
Exhaust Fan #1 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Exhaust Fan #2 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Exhaust Fan #3 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
OA Alarm	DI	COV	24 hours	3 days	C	True	10 min
High Static Alarm	DI	COV	24 hours	3 days	C	True	10 min
UVC Emitter Alarm	DI	COV	24 hours	3 days	P	True	10 min
CO2 Alarm	DI	COV	24 hours	3 days	P	True	10 min

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Dual-Path Air Handling Unit Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Power Failure	DI	COV	24 hours	3 days	P	True	1 min
Supply Fan Speed	AO	15 Min	24 hours	3 days	N/A		
Return Fan Speed	AO	15 Min	24 hours	3 days	N/A		
RA CHW Valve Position	AO	15 Min	24 hours	3 days	N/A		
OA CHW Valve Position	AO	15 Min	24 hours	3 days	N/A		
OA HW Valve Position	AO	15 Min	24 hours	3 days	N/A		
Supply Fan S/S	DO	COV	24 hours	3 days	N/A		
Return Fan S/S	DO	COV	24 hours	3 days	N/A		
Fire/Smoke Dampers	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
AHU Energy	Calc	1 Hour	30 day	N/A	N/A		

Terminal Unit (VAV, CAV, etc.) Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Space Temperature	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Air Flow	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Local Setpoint	AI	15 Min	12 hours	3 days	M	±10°F from SP	60 min
Space Humidity	AI	15 Min	12 hours	3 days	P	> 60% RH	5 min

Terminal Unit (VAV, CAV, etc.) Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Unoccupied Override	DI	COV	12 hours	3 days	M	N/A	12 Hours
Refrigerator Alarm	DI	COV	12 hours	3 days	C	N/A	10 min
Damper Position	AO	15 Minutes	12 hours	3 days	N/A		
Heating coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		

4-Pipe Fan Coil Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Pre-Filter Status	AI	None	None	None	M	> SP	1 hour
Water Sensor	DI	COV	12 hours	3 days	M	N/A	30 Min
Cooling Coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Heating coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Fan Coil ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

2-Pipe Fan Coil Unit Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay

<b>2-Pipe Fan Coil Unit Trending and Alarms</b>							
<b>Point</b>	<b>Type</b>	<b>Trend Interval</b>	<b>Operational Trend Duration</b>	<b>Testing Trend Duration</b>	<b>Alarm Type</b>	<b>Alarm Range</b>	<b>Alarm Delay</b>
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Pre-Filter Status	AI	None	None	None	M	> SP	1 hour
Water Sensor	DI	COV	12 hours	3 days	M	N/A	30 Min
Cooling Coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Fan Coil ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

<b>Unit Heater Trending and Alarms</b>							
<b>Point</b>	<b>Type</b>	<b>Trend Interval</b>	<b>Operational Trend Duration</b>	<b>Testing Trend Duration</b>	<b>Alarm Type</b>	<b>Alarm Range</b>	<b>Alarm Delay</b>
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Heating Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Unit Heater ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

<b>Steam and Condensate Pumps Trending and Alarms</b>							
<b>Point</b>	<b>Type</b>	<b>Trend Interval</b>	<b>Operational Trend Duration</b>	<b>Testing Trend Duration</b>	<b>Alarm Type</b>	<b>Alarm Range</b>	<b>Alarm Delay</b>
Steam Flow (LB/HR)	AI	15 Minutes	12 hours	3 days	N/A		
Condensate Pump Run Hours	AI	15 Minutes	12 hours	3 days	N/A		
Water Meter (GPM)	AI	15 Minutes	12 hours	3 days	N/A		



VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Steam and Condensate Pumps Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Electric Meter (KW/H)	AI	15 Minutes	12 hours	3 days	N/A		
Irrigation Meter (GPM)	AI	15 Minutes	12 hours	3 days	N/A		
Chilled Water Flow (TONS)	AI	15 Minutes	12 hours	3 days	N/A		
Condensate Flow (GPM)	AI	15 Minutes	12 hours	3 days	N/A		
High Water Level Alarm	DI	COV	12 hours	3 days	C	True	5 Min
Condensate Pump Start/Stop	DO	COV	12 hours	3 days	P	Status <> Command	10 min

Domestic Hot Water Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Domestic HW Setpoint WH-1	AI	15 Minute	12 Hours	3 days	N/A		
Domestic HW Setpoint WH-2	AI	15 Minute	12 Hours	3 days	N/A		
Domestic HW Temperature	AI	15 Minute	12 Hours	3 days	C	> 135 °F	10 Min
Domestic HW Temperature	AI	15 Minute	12 Hours	3 days	P	±5°F from SP	10 Min
Dom. Circ. Pump #1 Status	DI	COV	12 Hours	3 days	M	Status <> Command	30 min
Dom. Circ. Pump #2 Status	DI	COV	12 Hours	3 days	M	Status <> Command	30 min
Dom. Circ. Pump #1 Start/Stop	DO	COV	12 Hours	3 days	N/A		
Dom. Circ. Pump #2 Start/Stop	DO	COV	12 Hours	3 days	N/A		
Domestic HW Start/Stop	DO	COV	12 Hours	3 days	N/A		

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Hydronic Hot Water Trending and Alarms							
Point	Type	Trend Interval	Operationa l Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
System HWS Temperature	AI	15 min	12 hours	3 days	C	±5°F from SP	10 Min
System HWR Temperature	AI	15 min	12 hours	3 days	M	±15°F from SP	300 Min
HX-1 Entering Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
HX-2 Entering Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
HX-2 Leaving Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
System Flow (GPM)	AI	15 min	12 hours	3 days	N/A		
System Differential Pressure	AI	15 min	12 hours	3 days	P	±10% from SP	8 Min
				3 days			
HW Pump 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
HW Pump 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
HW Pump 1 VFD Speed	AO	15 Min	12 Hours	3 days	N/A		
HW Pump 2 VFD Speed	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #1 1/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #1 2/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #2 1/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #2 2/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station Bypass Valve Position	AO	15 Min	12 Hours	3 days	N/A		

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Hydronic Hot Water Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
HW Pump 1 Start/Stop	DO	COV	12 Hours	3 days	N/A		
HW Pump 2 Start/Stop	DO	COV	12 Hours	3 days	N/A		
HWR #1 Valve	DO	COV	12 Hours	3 days	N/A		
HWR #2 Valve	DO	COV	12 Hours	3 days	N/A		

Chilled Water System Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Chiller 1 Entering Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Leaving Temperature	AI	15 Minutes	12 Hours	3 days	P	±5°F from SP	10 Min
Chiller 1 Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Percent Load	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 KW Consumption	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Tonnage	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Entering Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Leaving Temperature	AI	15 Minutes	12 Hours	3 days	P	±5°F from SP	10 Min
Chiller 2 Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Percent Load	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 KW Consumption	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Tonnage	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Decoupler Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Flow	AI	15 Minutes	12 Hours	3 days	N/A		

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Chilled Water System Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Primary Loop Supply Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Differential Pressure	AI	15 Minutes	12 Hours	3 days	P	±5% from SP	10 Min
Secondary Loop Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Supply Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Return Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Tonnage	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Pump 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Primary Loop Pump 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Secondary Loop Pump 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Secondary Loop Pump 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Chiller 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Chiller 1 Evaporator Iso-Valve	DI	COV	12 Hours	3 days	N/A		
Chiller 1 Evaporator Flow Switch	DI	COV	12 Hours	3 days	N/A		
Chiller 1 Unit Alarm	DI	COV	12 Hours	3 days	C	True	10 Min
Chiller 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Chiller 2 Evaporator Iso-Valve	DI	COV	12 Hours	3 days	N/A		

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Chilled Water System Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Chiller 2 Evaporator Flow Switch	DI	COV	12 Hours	3 days	N/A		
Chiller 2 Unit Alarm	DI	COV	12 Hours	3 days	C	True	10 Min
Refrigerant Detector	DI	COV	12 Hours	3 days	C	True	10 Min
Refrigerant Exhaust Fan Status	DI	COV	12 Hours	3 days	M	Status <> Command	30 min
Emergency Shutdown	DI	COV	12 Hours	3 days	P	True	1 Min
Primary Loop Pump 1 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Pump 2 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Pump 1 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Pump 2 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Primary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Primary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Chiller 1 Enable	DO	COV	12 Hours	3 days	N/A		
Chiller 1 Iso-Valve Command	DO	COV	12 Hours	3 days	N/A		
Chiller 2 Enable	DO	COV	12 Hours	3 days	N/A		
Chiller 2 Iso-Valve Command	DO	COV	12 Hours	3 days	N/A		

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Chilled Water System Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Refrigerant Exhaust Fan Start / Stop	DO	COV	12 Hours	3 days	N/A		

Condenser Water System Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Chiller 1 Condenser Entering Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Condenser Leaving Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Condenser Entering Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Condenser Leaving Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Supply Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Return Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Basin Temp	AI	15 Minutes	12 Hours	3 days	P	< 45 oF	10 Min
Cooling Tower 2 Supply Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Return Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Basin Temp	AI	15 Minutes	12 Hours	3 days	P	< 45 oF	10 Min
Condenser Water Supply Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Condenser Water Return Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Outdoor Air Wet Bulb	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Fan Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Cooling Tower 1 Basin Heat	DI	COV	12 Hours	3 days	N/A		

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Condenser Water System Trending and Alarms							
Point	Type	Trend Interval	Operationa 1 Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Cooling Tower 1 Heat Trace	DI	COV	12 Hours	3 days	N/A		
Cooling Tower 2 Fan Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Cooling Tower 2 Basin Heat	DI	COV	12 Hours	3 days	N/A		
Cooling Tower 2 Heat Trace	DI	COV	12 Hours	3 days	N/A		
Chiller 1 Isolation Valve	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Chiller 2 Isolation Valve	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Condenser Water Pump 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Condenser Water Pump 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Chiller 1 Condenser Bypass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Condenser By- Pass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Bypass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Fan Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Bypass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Fan Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Fan Start / Stop	DO	COV	12 Hours	3 days	N/A		
Cooling Tower 2 Fan Start / Stop	DO	COV	12 Hours	3 days	N/A		
Condenser Water Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Condenser Water System Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Condenser Water Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		

Steam Boiler System Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Boiler 1 Steam Pressure	AI	15 Minutes	12 Hours	3 days	P	±5% from SP	10 Min
Boiler 1 Steam Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Fire Signal	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Steam Pressure	AI	15 Minutes	12 Hours	3 days	P	±5% from SP	10 Min
Boiler 2 Steam Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Fire Signal	AI	15 Minutes	12 Hours	3 days	N/A		
System Steam Pressure	AI	15 Minutes	12 Hours	3 days	P	±5% from SP	10 Min
Boiler 1 Enable	DI	COV	12 Hours	3 days	N/A		
Boiler 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Boiler 1 Alarm	DI	COV	12 Hours	3 days	C	True	1 Min
Boiler 1 on Fuel Oil	DI	COV	12 Hours	3 days	N/A		
Boiler 1 Low Water Alarm	DI	COV	12 Hours	3 days	C	True	5 Min
Boiler 1 High Water Alarm	DI	COV	12 Hours	3 days	C	True	5 Min
Boiler 1 Feed Pump	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Enable	DI	COV	12 Hours	3 days	N/A		



VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Steam Boiler System Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Boiler 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Boiler 2 Alarm	DI	COV	12 Hours	3 days	C	True	1 Min
Boiler 2 on Fuel Oil	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Low Water Alarm	DI	COV	12 Hours	3 days	C	True	5 Min
Boiler 2 High Water Alarm	DI	COV	12 Hours	3 days	C	True	5 Min
Boiler 2 Feed Pump	DI	COV	12 Hours	3 days	N/A		
Combustion Damper Status	DI	COV	12 Hours	3 days	P	Status <> Command	5 min
Condensate Recovery Pump Status	DI	COV	12 Hours	3 days	P	Status <> Command	5 min
Boiler 1 Feed Pump Start / Stop	DO	COV	12 Hours	3 days	N/A		
Boiler 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Combustion Damper Command	DO	COV	12 Hours	3 days	N/A		
Condensate Recovery Pump Start / Stop	DO	COV	12 Hours	3 days	N/A		

Hot Water Boiler System Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Outside Air Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Fire Signal	AI	15 Minutes	12 Hours	3 days	N/A		

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Hot Water Boiler System Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Boiler 1 Entering Water Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Leaving Water Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Fire Signal	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Entering Water Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Leaving Water Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Hot Water Supply Temperature	AI	15 Minutes	12 Hours	3 days	P	±5 oF from SP	10 Min
Hot Water Return Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Differential Pressure	AI	15 Minutes	12 Hours	3 days	C	±5% from SP	10 Min
Lead Boiler	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Enable	DI	COV	12 Hours	3 days	N/A		
Boiler 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Boiler 1 Isolation Valve	DI	COV	12 Hours	3 days	N/A		
Boiler 1 on Fuel Oil	DI	COV	12 Hours	3 days	N/A		
Boiler 1 Alarm	DI	COV	12 Hours	3 days	C	True	1 Min
Boiler 2 Enable	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Boiler 2 Isolation Valve	DI	COV	12 Hours	3 days	N/A		

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION  
 06-01-13

Hot Water Boiler System Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Boiler 2 on Fuel Oil	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Alarm	DI	COV	12 Hours	3 days	C	True	1 Min
Combustion Dampers Open	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Primary Pump 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Primary Pump 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Secondary Pump 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Secondary Pump 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Primary Pump 1 VFD Speed	AO	COV	12 Hours	3 days	N/A		
Primary Pump 2 VFD Speed	AO	COV	12 Hours	3 days	N/A		
Secondary Pump 1 VFD Speed	AO	COV	12 Hours	3 days	N/A		
Secondary Pump 2 VFD Speed	AO	COV	12 Hours	3 days	N/A		
Hot Water System Enable	DO	COV	12 Hours	3 days	N/A		
Combustion Dampers Command	DO	COV	12 Hours	3 days	N/A		
Primary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Primary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		

- E. The Contractor shall provide the following information prior to Systems Functional Performance Testing. Any documentation that is modified after submission shall be recorded and resubmitted to the COR and Commissioning Agent.
1. Point-to-Point checkout documentation;
  2. Sensor field calibration documentation including system name, sensor/point name, measured value, DDC value, and Correction Factor.
  3. A sensor calibration table listing the referencing the location of procedures to following in the O&M manuals, and the frequency at which calibration should be performed for all sensors, separated by system, subsystem, and type. The calibration requirements shall be submitted both in the O&M manuals and separately in a standalone document containing all sensors for inclusion in the commissioning documentation. The following table is a sample that can be used as a template for submission.

<b>SYSTEM</b>		
<b>Sensor</b>	<b>Calibration Frequency</b>	<b>O&amp;M Calibration Procedure Reference</b>
Discharge air temperature	Once a year	Volume I Section D.3.aa
Discharge static pressure	Every 6 months	Volume II Section A.1.c

4. Loop tuning documentation and constants for each loop of the building systems. The documentation shall be submitted in outline or table separated by system, control type (e.g. heating valve temperature control); proportional, integral and derivative constants, interval (and bias if used) for each loop. The following table is a sample that can be used as a template for submission.

<b>AIR HANDLING UNIT AHU-1</b>				
<b>Control Reference</b>	<b>Proportional Constant</b>	<b>Integral Constant</b>	<b>Derivative Constant</b>	<b>Interval</b>
Heating Valve Output	1000	20	10	2 sec.

**3.6 SYSTEMS FUNCTIONAL PERFORMANCE TESTING**

- A. This paragraph applies to Systems Functional Performance Testing of systems for all referenced specification Divisions.
- B. Objectives and Scope: The objective of Systems Functional Performance Testing is to demonstrate that each system is operating according to the Contract Documents. Systems Functional Performance Testing facilitates bringing the systems from a state of substantial completion to full dynamic operation. Additionally, during the testing process, areas of noncompliant performance are identified and corrected, thereby improving the operation and functioning of the systems. In general, each system shall be operated through all modes of operation (seasonal, occupied, unoccupied, warm-up, cool-down, part- and full-load, fire alarm and

emergency power) where there is a specified system response. The Contractor shall verify each sequence in the sequences of operation. Proper responses to such modes and conditions as power failure, freeze condition, low oil pressure, no flow, equipment failure, etc. shall also be tested.

- C. Development of Systems Functional Performance Test Procedures: Before Systems Functional Performance Test procedures are written, the Contractor shall submit all requested documentation and a current list of change orders affecting equipment or systems, including an updated points list, program code, control sequences and parameters. Using the testing parameters and requirements found in the Contract Documents and approved submittals and shop drawings, the Commissioning Agent will develop specific Systems Functional Test Procedures to verify and document proper operation of each piece of equipment and system to be commissioned. The Contractor shall assist the Commissioning Agent in developing the Systems Functional Performance Test procedures as requested by the Commissioning Agent i.e. by answering questions about equipment, operation, sequences, etc. Prior to execution, the Commissioning Agent will provide a copy of the Systems Functional Performance Test procedures to the VA, the Architect/Engineer, and the Contractor, who shall review the tests for feasibility, safety, equipment and warranty protection.
- D. Purpose of Test Procedures: The purpose of each specific Systems Functional Performance Test is to verify and document compliance with the stated criteria of acceptance given on the test form. Representative test formats and examples are found in the Commissioning Plan for this project. (The Commissioning Plan is issued as a separate document and is available for review.) The test procedure forms developed by the Commissioning Agent will include, but not be limited to, the following information:
1. System and equipment or component name(s)
  2. Equipment location and ID number
  3. Unique test ID number, and reference to unique Pre-Functional Checklists and startup documentation, and ID numbers for the piece of equipment
  4. Date
  5. Project name
  6. Participating parties
  7. A copy of the specification section describing the test requirements
  8. A copy of the specific sequence of operations or other specified parameters being verified
  9. Formulas used in any calculations
  10. Required pretest field measurements
  11. Instructions for setting up the test.
  12. Special cautions, alarm limits, etc.
  13. Specific step-by-step procedures to execute the test, in a clear, sequential and repeatable format
  14. Acceptance criteria of proper performance with a Yes / No check box to allow for clearly marking whether or not proper performance of each part of the test was achieved.
  15. A section for comments.
  16. Signatures and date block for the Commissioning Agent. A place for the Contractor to initial to signify attendance at the test.
- E. Test Methods: Systems Functional Performance Testing shall be achieved by manual testing (i.e. persons manipulate the equipment and observe performance) and/or by monitoring the performance and analyzing the results using the control system's trend log capabilities or by standalone

data loggers. The Contractor and Commissioning Agent shall determine which method is most appropriate for tests that do not have a method specified.

1. Simulated Conditions: Simulating conditions (not by an overwritten value) shall be allowed, although timing the testing to experience actual conditions is encouraged wherever practical.
  2. Overwritten Values: Overwriting sensor values to simulate a condition, such as overwriting the outside air temperature reading in a control system to be something other than it really is, shall be allowed, but shall be used with caution and avoided when possible. Such testing methods often can only test a part of a system, as the interactions and responses of other systems will be erroneous or not applicable. Simulating a condition is preferable. e.g., for the above case, by heating the outside air sensor with a hair blower rather than overwriting the value or by altering the appropriate setpoint to see the desired response. Before simulating conditions or overwriting values, sensors, transducers and devices shall have been calibrated.
  3. Simulated Signals: Using a signal generator which creates a simulated signal to test and calibrate transducers and DDC constants is generally recommended over using the sensor to act as the signal generator via simulated conditions or overwritten values.
  4. Altering Setpoints: Rather than overwriting sensor values, and when simulating conditions is difficult, altering setpoints to test a sequence is acceptable. For example, to see the Air Conditioning compressor lockout initiate at an outside air temperature below 12 C (54 F), when the outside air temperature is above 12 C (54 F), temporarily change the lockout setpoint to be 2 C (4 F) above the current outside air temperature.
  5. Indirect Indicators: Relying on indirect indicators for responses or performance shall be allowed only after visually and directly verifying and documenting, over the range of the tested parameters, that the indirect readings through the control system represent actual conditions and responses. Much of this verification shall be completed during systems startup and initial checkout.
- F. Setup: Each function and test shall be performed under conditions that simulate actual conditions as closely as is practically possible. The Contractor shall provide all necessary materials, system modifications, etc. to produce the necessary flows, pressures, temperatures, etc. necessary to execute the test according to the specified conditions. At completion of the test, the Contractor shall return all affected building equipment and systems, due to these temporary modifications, to their pretest condition.
- G. Sampling: No sampling is allowed in completing Pre-Functional Checklists. Sampling is allowed for Systems Functional Performance Test Procedures execution. The Commissioning Agent will determine the sampling rate. If at any point, frequent failures are occurring and testing is becoming more troubleshooting than verification, the Commissioning Agent may stop the testing and require the Contractor to perform and document a checkout of the remaining units, prior to continuing with Systems Functional Performance Testing of the remaining units.
- H. Cost of Retesting: The cost associated with expanded sample System Functional Performance Tests shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.

- I. Coordination and Scheduling: The Contractor shall provide a minimum of 7 days' notice to the Commissioning Agent and the VA regarding the completion schedule for the Pre-Functional Checklists and startup of all equipment and systems. The Commissioning Agent will schedule Systems Functional Performance Tests with the Contractor and VA. The Commissioning Agent will witness and document the Systems Functional Performance Testing of systems. The Contractor shall execute the tests in accordance with the Systems Functional Performance Test Procedure.
- J. Testing Prerequisites: In general, Systems Functional Performance Testing will be conducted only after Pre-Functional Checklists have been satisfactorily completed. The control system shall be sufficiently tested and approved by the Commissioning Agent and the VA before it is used to verify performance of other components or systems. The air balancing and water balancing shall be completed before Systems Functional Performance Testing of air-related or water-related equipment or systems are scheduled. Systems Functional Performance Testing will proceed from components to subsystems to systems. When the proper performance of all interacting individual systems has been achieved, the interface or coordinated responses between systems will be checked.
- K. Problem Solving: The Commissioning Agent will recommend solutions to problems found, however the burden of responsibility to solve, correct and retest problems is with the Contractor.

### **3.7 DOCUMENTATION, NONCONFORMANCE AND APPROVAL OF TESTS**

- A. Documentation: The Commissioning Agent will witness, and document the results of all Systems Functional Performance Tests using the specific procedural forms developed by the Commissioning Agent for that purpose. Prior to testing, the Commissioning Agent will provide these forms to the VA and the Contractor for review and approval. The Contractor shall include the filled out forms with the O&M manual data.
- B. Nonconformance: The Commissioning Agent will record the results of the Systems Functional Performance Tests on the procedure or test form. All items of nonconformance issues will be noted and reported to the VA on Commissioning Field Reports and/or the Commissioning Master Issues Log.
  - 1. Corrections of minor items of noncompliance identified may be made during the tests. In such cases, the item of noncompliance and resolution shall be documented on the Systems Functional Test Procedure.
  - 2. Every effort shall be made to expedite the systems functional Performance Testing process and minimize unnecessary delays, while not compromising the integrity of the procedures. However, the Commissioning Agent shall not be pressured into overlooking noncompliant work or loosening acceptance criteria to satisfy scheduling or cost issues, unless there is an overriding reason to do so by direction from the VA.
  - 3. As the Systems Functional Performance Tests progresses and an item of noncompliance is identified, the Commissioning Agent shall discuss the issue with the Contractor and the VA.
  - 4. When there is no dispute on an item of noncompliance, and the Contractor accepts responsibility to correct it:
    - a. The Commissioning Agent will document the item of noncompliance and the Contractor's response and/or intentions. The Systems Functional Performance Test then continues or proceeds to another test or sequence. After the day's work is complete, the Commissioning Agent will submit a Commissioning Field Report to the VA. The Commissioning Agent will also note items of

- noncompliance and the Contractor's response in the Master Commissioning Issues Log. The Contractor shall correct the item of noncompliance and report completion to the VA and the Commissioning Agent.
- b. The need for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test and the test shall be repeated.
5. If there is a dispute about item of noncompliance, regarding whether it is an item of noncompliance, or who is responsible:
- a. The item of noncompliance shall be documented on the test form with the Contractor's response. The item of noncompliance with the Contractor's response shall also be reported on a Commissioning Field Report and on the Master Commissioning Issues Log.
  - b. Resolutions shall be made at the lowest management level possible. Other parties are brought into the discussions as needed. Final interpretive and acceptance authority is with the Department of Veterans Affairs.
  - c. The Commissioning Agent will document the resolution process.
  - d. Once the interpretation and resolution have been decided, the Contractor shall correct the item of noncompliance, report it to the Commissioning Agent. The requirement for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test. Retesting shall be repeated until satisfactory performance is achieved.
- C. Cost of Retesting: The cost to retest a System Functional Performance Test shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.
- D. Failure Due to Manufacturer Defect: If 10%, or three, whichever is greater, of identical pieces (size alone does not constitute a difference) of equipment fail to perform in compliance with the Contract Documents (mechanically or substantively) due to manufacturing defect, not allowing it to meet its submitted performance specifications, all identical units may be considered unacceptable by the VA. In such case, the Contractor shall provide the VA with the following:
1. Within one week of notification from the VA, the Contractor shall examine all other identical units making a record of the findings. The findings shall be provided to the VA within two weeks of the original notice.
  2. Within two weeks of the original notification, the Contractor shall provide a signed and dated, written explanation of the problem, cause of failures, etc. and all proposed solutions which shall include full equipment submittals. The proposed solutions shall not significantly exceed the specification requirements of the original installation.
  3. The VA shall determine whether a replacement of all identical units or a repair is acceptable.
  4. Two examples of the proposed solution shall be installed by the Contractor and the VA shall be allowed to test the installations for up to one week, upon which the VA will decide whether to accept the solution.
  5. Upon acceptance, the Contractor shall replace or repair all identical items, at their expense and extend the warranty



- accordingly, if the original equipment warranty had begun. The replacement/repair work shall proceed with reasonable speed beginning within one week from when parts can be obtained.
- E. Approval: The Commissioning Agent will note each satisfactorily demonstrated function on the test form. Formal approval of the Systems Functional Performance Test shall be made later after review by the Commissioning Agent and by the VA. The Commissioning Agent will evaluate each test and report to the VA using a standard form. The VA will give final approval on each test using the same form, and provide signed copies to the Commissioning Agent and the Contractor.

### **3.8 DEFERRED TESTING**

- A. Unforeseen Deferred Systems Functional Performance Tests: If any Systems Functional Performance Test cannot be completed due to the building structure, required occupancy condition or other conditions, execution of the Systems Functional Performance Testing may be delayed upon approval of the VA. These Systems Functional Performance Tests shall be conducted in the same manner as the seasonal tests as soon as possible. Services of the Contractor to conduct these unforeseen Deferred Systems Functional Performance Tests shall be negotiated between the VA and the Contractor.
- B. Deferred Seasonal Testing: Deferred Seasonal Systems Functional Performance Tests are those that must be deferred until weather conditions are closer to the systems design parameters. The Commissioning Agent will review systems parameters and recommend which Systems Functional Performance Tests should be deferred until weather conditions more closely match systems parameters. The Contractor shall review and comment on the proposed schedule for Deferred Seasonal Testing. The VA will review and approve the schedule for Deferred Seasonal Testing. Deferred Seasonal Systems Functional Performances Tests shall be witnessed and documented by the Commissioning Agent. Deferred Seasonal Systems Functional Performance Tests shall be executed by the Contractor in accordance with these specifications.

### **3.9 OPERATION AND MAINTENANCE TRAINING REQUIREMENTS**

- A. Training Preparation Conference: Before operation and maintenance training, the Commissioning Agent will convene a training preparation conference to include VA's COR, VA's Operations and Maintenance personnel, and the Contractor. The purpose of this conference will be to discuss and plan for Training and Demonstration of VA Operations and Maintenance personnel.
- B. The Contractor shall provide training and demonstration as required by other Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 sections. The Training and Demonstration shall include, but is not limited to, the following:
1. Review the Contract Documents.
  2. Review installed systems, subsystems, and equipment.
  3. Review instructor qualifications.
  4. Review instructional methods and procedures.
  5. Review training module outlines and contents.
  6. Review course materials (including operation and maintenance manuals).
  7. Review and discuss locations and other facilities required for instruction.
  8. Review and finalize training schedule and verify availability of educational materials, instructors, audiovisual equipment, and facilities needed to avoid delays.

9. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.
- C. Training Module Submittals: The Contractor shall submit the following information to the VA and the Commissioning Agent:
1. Instruction Program: Submit two copies of outline of instructional program for demonstration and training, including a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module. At completion of training, submit two complete training manuals for VA's use.
  2. Qualification Data: Submit qualifications for facilitator and/or instructor.
  3. Attendance Record: For each training module, submit list of participants and length of instruction time.
  4. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.
  5. Demonstration and Training Recording:
    - a. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.
    - b. Video Format: Provide high quality color DVD color on standard size DVD disks.
    - c. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
    - d. Narration: Describe scenes on video recording by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.
    - e. Submit two copies within seven days of end of each training module.
  6. Transcript: Prepared on 8-1/2-by-11-inch paper, punched and bound in heavy-duty, 3-ring, vinyl-covered binders. Mark appropriate identification on front and spine of each binder. Include a cover sheet with same label information as the corresponding videotape. Include name of Project and date of videotape on each page.
- D. Quality Assurance:
1. Facilitator Qualifications: A firm or individual experienced in training or educating maintenance personnel in a training program similar in content and extent to that indicated for this Project, and whose work has resulted in training or education with a record of successful learning performance.
  2. Instructor Qualifications: A factory authorized service representative, complying with requirements in Division 01 Section "Quality Requirements," experienced in operation and maintenance procedures and training.
  3. Photographer Qualifications: A professional photographer who is experienced photographing construction projects.
- E. Training Coordination:
1. Coordinate instruction schedule with VA's operations. Adjust schedule as required to minimize disrupting VA's operations.

2. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.
3. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by the VA.

F. Instruction Program:

1. Program Structure: Develop an instruction program that includes individual training modules for each system and equipment not part of a system, as required by individual Specification Sections, and as follows:
  - a. Fire protection systems, including fire alarm, fire pumps, and fire suppression systems.
  - b. Intrusion detection systems.
  - c. Conveying systems, including elevators, wheelchair lifts, escalators, and automated materials handling systems.
  - d. Medical equipment, including medical gas equipment and piping.
  - e. Laboratory equipment, including laboratory air and vacuum equipment and piping.
  - f. Heat generation, including boilers, feedwater equipment, pumps, steam distribution piping, condensate return systems, heating hot water heat exchangers, and heating hot water distribution piping.
  - g. Refrigeration systems, including chillers, cooling towers, condensers, pumps, and distribution piping.
  - h. HVAC systems, including air handling equipment, air distribution systems, and terminal equipment and devices.
  - i. HVAC instrumentation and controls.
  - j. Electrical service and distribution, including switchgear, transformers, switchboards, panelboards, uninterruptible power supplies, and motor controls.
  - k. Packaged engine generators, including synchronizing switchgear/switchboards, and transfer switches.
  - l. Lighting equipment and controls.
  - m. Communication systems, including intercommunication, surveillance, nurse call systems, public address, mass evacuation, voice and data, and entertainment television equipment.
  - n. Site utilities including lift stations, condensate pumping and return systems, and storm water pumping systems.
- G. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participants are expected to master. For each module, include instruction for the following:
  1. Basis of System Design, Operational Requirements, and Criteria: Include the following:
    - a. System, subsystem, and equipment descriptions.
    - b. Performance and design criteria if Contractor is delegated design responsibility.
    - c. Operating standards.
    - d. Regulatory requirements.
    - e. Equipment function.
    - f. Operating characteristics.
    - g. Limiting conditions.
    - H, Performance curves.
  2. Documentation: Review the following items in detail:
    - a. Emergency manuals.

- b. Operations manuals.
  - c. Maintenance manuals.
  - d. Project Record Documents.
  - e. Identification systems.
  - f. Warranties and bonds.
  - g. Maintenance service agreements and similar continuing commitments.
3. Emergencies: Include the following, as applicable:
- a. Instructions on meaning of warnings, trouble indications, and error messages.
  - b. Instructions on stopping.
  - c. Shutdown instructions for each type of emergency.
  - d. Operating instructions for conditions outside of normal operating limits.
  - e. Sequences for electric or electronic systems.
  - f. Special operating instructions and procedures.
4. Operations: Include the following, as applicable:
- a. Startup procedures.
  - b. Equipment or system break-in procedures.
  - c. Routine and normal operating instructions.
  - d. Regulation and control procedures.
  - e. Control sequences.
  - f. Safety procedures.
  - g. Instructions on stopping.
  - h. Normal shutdown instructions.
  - i. Operating procedures for emergencies.
  - j. Operating procedures for system, subsystem, or equipment failure.
  - k. Seasonal and weekend operating instructions.
  - l. Required sequences for electric or electronic systems.
  - m. Special operating instructions and procedures.
5. Adjustments: Include the following:
- a. Alignments.
  - b. Checking adjustments.
  - c. Noise and vibration adjustments.
  - d. Economy and efficiency adjustments.
6. Troubleshooting: Include the following:
- a. Diagnostic instructions.
  - b. Test and inspection procedures.
7. Maintenance: Include the following:
- a. Inspection procedures.
  - b. Types of cleaning agents to be used and methods of cleaning.
  - c. List of cleaning agents and methods of cleaning detrimental to product.
  - d. Procedures for routine cleaning
  - e. Procedures for preventive maintenance.
  - f. Procedures for routine maintenance.
  - g. Instruction on use of special tools.
8. Repairs: Include the following:
- a. Diagnosis instructions.
  - b. Repair instructions.
  - c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
  - d. Instructions for identifying parts and components.
  - e. Review of spare parts needed for operation and maintenance.
- H. Training Execution:

1. Preparation: Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a combined training manual. Set up instructional equipment at instruction location.
  2. Instruction:
    - a. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and Department of Veterans Affairs for number of participants, instruction times, and location.
    - b. Instructor: Engage qualified instructors to instruct VA's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.
      - 1) The Commissioning Agent will furnish an instructor to describe basis of system design, operational requirements, criteria, and regulatory requirements.
      - 2) The VA will furnish an instructor to describe VA's operational philosophy.
      - 3) The VA will furnish the Contractor with names and positions of participants.
  3. Scheduling: Provide instruction at mutually agreed times. For equipment that requires seasonal operation, provide similar instruction at start of each season. Schedule training with the VA and the Commissioning Agent with at least seven days' advance notice.
  4. Evaluation: At conclusion of each training module, assess and document each participant's mastery of module by use of an oral, or a written, performance-based test.
  5. Cleanup: Collect used and leftover educational materials and remove from Project site. Remove instructional equipment. Restore systems and equipment to condition existing before initial training use.
- I. Demonstration and Training Recording:
1. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.
  2. Video Format: Provide high quality color DVD color on standard size DVD disks.
  3. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
  4. Narration: Describe scenes on videotape by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.

----- END -----

**SECTION 02 41 00**  
**DEMOLITION**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. This section specifies demolition and removal of portions of buildings, utilities, other structures and debris.

**1.2 RELATED WORK:**

- A. Demolition and removal of roads, walks, curbs, and on-grade slabs outside buildings to be demolished: Section 31 20 00, EARTHWORK.
- B. Safety Requirements: GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- C. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.
- D. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.
- E. Asbestos Removal: Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.
- F. Lead Paint: Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
- G. Environmental Protection: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- H. Construction Waste Management: Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT.
- I. Infectious Control: Section 01 00 00, GENERAL REQUIREMENTS, Article 1.8, INFECTION PREVENTION MEASURES.

**1.3 PROTECTION:**

- A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations. Comply with requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article 1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES AND IMPROVEMENTS.
- C. Maintain fences, barricades, lights, and other similar items around exposed excavations until such excavations have been completely filled.
- D. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in hazardous or objectionable condition such as, but not limited to; ice, flooding, or pollution. Vacuum and dust the work area daily.
- E. In addition to previously listed fire and safety rules to be observed in performance of work, include following:
1. No wall or part of wall shall be permitted to fall outwardly from structures.
  2. Maintain at least one stairway in each structure in usable condition to highest remaining floor. Keep stairway free of obstructions and debris until that level of structure has been removed.
  3. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for immediate use. Instruct all possible users in use of fire extinguishers.
  4. Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4500 mm (15 feet) of fire hydrants.

- F. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the COR. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have COR's approval.
- G. The work shall comply with the requirements of Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- H. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article 1.8 INFECTION PREVENTION MEASURES.

#### **1.4 UTILITY SERVICES:**

- A. Demolish and remove outside utility service lines shown to be removed.
- B. Remove abandoned outside utility lines that would interfere with installation of new utility lines and new construction.

#### **PART 2 - PRODUCTS (NOT USED)**

#### **PART 3 - EXECUTION**

##### **3.1 DEMOLITION:**

- A. Completely demolish and remove buildings and structures, including all appurtenances related or connected thereto, as noted below:
  - 1. As required for installation of new utility service lines.
  - 2. To full depth within an area defined by hypothetical lines located 1500 mm (5 feet) outside building lines of new structures.
- B. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Medical Center to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by the COR. Break up concrete slabs below grade that do not require removal from present location into pieces not exceeding 600 mm (24 inches) square to permit drainage. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.
- C. Remove and legally dispose of all materials, other than earth to remain as part of project work. Materials removed shall become property of contractor and shall be disposed of in compliance with applicable federal, state or local permits, rules and/or regulations. Materials that are located beneath the surface of the surrounding ground more than 1500 mm (5 feet), or materials that are discovered to be hazardous, shall be handled as unforeseen. The removal of hazardous material shall be referred to Hazardous Materials specifications.
- D. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the COR. When Utility lines are encountered that are not indicated on the drawings, the COR shall be notified prior to further work in that area.

**3.2 CLEAN-UP:**

On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to COR. Clean-up shall include off the Medical Center disposal of all items and materials not required to remain property of the Government as well as all debris and rubbish resulting from demolition operations.

- - - E N D - - -



**SECTION 02 82 11**  
**TRADITIONAL ASBESTOS ABATEMENT**

PART 1 - GENERAL

**1.1 SUMMARY OF THE WORK**

**1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS**

Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

**1.1.2 EXTENT OF WORK**

- A. Below is a brief description of the estimated quantities of asbestos containing materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.
- B. Removal, clean-up and disposal of asbestos containing materials (ACM) and asbestos/waste contaminated elements in an appropriate regulated area for the following approximate quantities;

**Crawlspaces/Mechanical Area**

1,800 linear feet of asbestos containing pipe insulation, asbestos pipe seam sealant on fiberglass pipe insulation and mold contaminated fiberglass pipe insulation which includes all fittings, valves, tees, etc.

1,800 linear feet of pipe re-insulation.

5,000 square feet of asbestos contaminated soil (a minimum depth 3").

2,000 square feet of floor cleaning.

**Basement**

1,000 linear feet of asbestos containing and mold contaminated pipe insulation which includes all fittings, valves, tees, etc.

1,000 linear feet of pipe re-insulation.

120 areas of asbestos pipe seam sealant on fiberglass pipe insulation.

120 linear feet of pipe re-insulation.

50 areas of pipe insulation (tie-in work in Mechanical Rooms 34 & 35).

50 linear feet of pipe re-insulation.  
1,270 square feet of asbestos floor tile and associated mastic (Rooms 16 & 16A have a raised platform that will need to be removed).

**Phase 1**

730 square feet of carpet squares, vinyl flooring, asbestos floor tile and associated mastic.  
20 areas of asbestos pipe seam sealant on fiberglass pipe insulation.  
20 linear feet of pipe re-insulation.  
900 square feet of asbestos drywall and drywall joint compound.

**Phase 2**

500 square feet of asbestos roofing tar on exterior overhang.  
500 square feet of asbestos exterior waterproofing.

**Phase 3**

670 square feet of carpet squares, vinyl flooring, asbestos floor tile and associated mastic.  
24 square feet of asbestos recessed radiator insulation.

**Phase 4**

2,700 square feet of carpet squares, vinyl flooring, asbestos floor tile and associated mastic.  
40 square feet of ceramic tile, asbestos floor tile and associated mastic.  
80 areas of asbestos pipe seam sealant on fiberglass pipe insulation.  
80 linear feet of pipe re-insulation.  
160 square feet of asbestos recessed radiator insulation.

**Phase 5**

1,775 square feet of carpet squares, vinyl flooring, asbestos floor tile and associated mastic.  
600 linear feet of asbestos containing pipe insulation which includes all fittings, valves, tees, etc.  
600 linear feet of pipe re-insulation.  
150 square feet of asbestos recessed radiator insulation.

- C. The sump pump in the crawlspace needs to be cleaned and sealed prior to abatement. If the sump pump has to operate due to water leak or flooding, the water shall be properly filtered prior to discharge.
- D. Surface clean wood retaining boards in the crawlspace that have water damage and suspect mold growth using an EPA-registered antimicrobial solution and encapsulate with an EPA-registered long term antimicrobial coating inside the gross removal containment constructed for the crawlspace soil and pipe insulation removal.
- E. Abatement contractor shall be responsible for blocking off basement elevator doors with plywood or drywall to prevent unauthorized persons from exiting the elevator and entering the containment during basement removal operations.
- F. Abatement contractor shall construct framing on the north and south sides of the southwest portico to enclose the portico for attachment of poly enclosure during Phase 5 work.
- G. All active pipes that are to be abated shall be properly re-insulated with similar or greater insulating properties in accordance with VA Specification section 23 07 11, HVAC ABD BOILER PLANT INSULATION.

- H. All mechanical systems, including but not limited to, HVAC systems, steam pipes, etc., shall be de-energized or shut down during all abatement activities.

#### **1.1.3 RELATED WORK**

- A. Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
- B. Section 02 82 13.21, ASBESTOS ROOFING ABATEMENT.
- C. Section 233 07 11, HVAC AND BOILER PLANT INSULATION.

#### **1.1.4 TASKS**

The work tasks are summarized briefly as follows:

- A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, regulated area preparations, emergency procedures arrangements, and standard operating procedures for asbestos abatement work.
- B. Abatement activities including removal, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.
- C. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

#### **1.1.5 CONTRACTORS USE OF PREMISES**

- A. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.
- B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design and Construction Procedures. VA Design and Construction Procedures drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action. The following limitations of use shall apply to existing facilities shown on drawings:

#### **1.2 VARIATIONS IN QUANTITY**

The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated which are limited by the physical constraints imposed by occupancy of the buildings and accessibility to ACM. **These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. Contractor shall satisfy himself as the actual quantities to be abated.**

#### **1.3 STOP ASBESTOS REMOVAL**

If the Contracting Officer; their field representative; (the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/Certified Industrial Hygienist (VPIH/CIH) presents

07-11

a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered negative pressure air flow in the containment and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA shall follow-up with a written order to the Contractor as soon as it is practicable. The Contractor shall not resume any asbestos removal activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following events shall be reported immediately by the Contractor's competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:

- A. Airborne PCM analysis results equal to or greater than 0.01 f/cc outside a regulated area or >0.05 f/cc inside a regulated area;
- B. breach or break in regulated area containment barrier(s);
- C. less than -0.02" WCG pressure in the regulated area;
- D. serious injury/death at the site;
- E. fire/safety emergency at the site;
- F. respiratory protection system failure;
- G. power failure or loss of wetting agent; or
- H. any visible emissions observed outside the regulated area.

#### 1.4 DEFINITIONS

##### 1.4.1 GENERAL

Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

##### 1.4.2 GLOSSARY

**Abatement** - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

**Aerosol** - Solid or liquid particulate suspended in air.

**Adequately wet** - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

**Aggressive method** - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

**Aggressive sampling** - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

**AHERA** - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

**Aircell** - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

**Air monitoring** - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air. For personal samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis. NIOSH Method 7402 can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

**Air sample filter** - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

**Amended water** - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

**Asbestos** - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

**Asbestos Hazard Abatement Plan (AHAP)** - Asbestos work procedures required to be submitted by the contractor before work begins.

**Asbestos-containing material (ACM)** - Any material containing more than one percent of asbestos.

**Asbestos contaminated elements (ACE)** - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

**Asbestos-contaminated soil (ACS)** - Soil found in the work area or in adjacent areas such as crawlspaces or pipe tunnels which is contaminated with asbestos-containing material debris and cannot be easily separated from the material.

**Asbestos-containing waste (ACW) material** - Asbestos-containing material or asbestos contaminated objects requiring disposal.

**Asbestos Project Monitor** - Some states require that any person conducting asbestos abatement clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

**Asbestos waste decontamination facility** - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

**Authorized person** - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

**Authorized visitor** - Any person approved by the VA; the contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA).

**Barrier** - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

**Containment Barrier** - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

**Critical Barrier** - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting

secured in place at openings such as doors, windows, or any other opening into the regulated area.

**Primary Barrier** - Plastic barriers placed over critical barriers and exposed directly to abatement work.

**Secondary Barrier** - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

**Breathing zone** - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

**Bridging encapsulant** - An encapsulant that forms a layer on the surface of the ACM.

**Building/facility owner** - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

**Bulk testing** - The collection and analysis of suspect asbestos containing materials.

**Certified Industrial Hygienist (CIH)** - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

**Class I asbestos work** - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

**Class II asbestos work** - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

**Clean room/Changing room** - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

**Clearance sample** - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's professional industrial hygiene consultant/Certified Industrial Hygienist (VPIH/CIH).

**Closely resemble** - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

**Competent person** - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

**Contractor's Professional Industrial Hygienist (CPIH/CIH)** - The asbestos abatement contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of a PIH and may be a certified industrial hygienist (CIH).

**Count** - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.

**Crawlpace** - An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials and/or asbestos contaminated soil.

**Decontamination area/unit** - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room,

and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

**Demolition** - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

**VA Total** - means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

**Disposal bag** - Typically 6 mil thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

**Disturbance** - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag which shall not exceed 60 inches in length or width.

**Drum** - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

**Employee exposure** - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

**Encapsulant** - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

**Encapsulation** - Treating ACM with an encapsulant.

**Enclosure** - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

**Equipment room** - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

**Fiber** - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

**Fibers per cubic centimeter (f/cc)** - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

**Filter** - Media used in respirators, vacuums, or other machines to remove particulate from air.

**Firestopping** - Material used to close the open parts of a structure in order to prevent a fire from spreading.

**Friable asbestos containing material** - Any material containing more than one (1) percent or asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

**Glovebag** - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

**High efficiency particulate air (HEPA) filter** - An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

**HEPA vacuum** - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

**Homogeneous area** - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

**HVAC** - Heating, Ventilation and Air Conditioning

**Industrial hygienist (IH)** - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

**Industrial hygienist technician (IH Technician)** - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned. Some states require that an industrial hygienist technician conducting asbestos abatement clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

**Intact** - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

**Lockdown** - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

**National Emission Standards for Hazardous Air Pollutants (NESHAP)** - EPA's rule to control emissions of asbestos to the environment (40 CFR part 61, Subpart M).

**Negative initial exposure assessment** - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL.

**Negative pressure** - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

**Negative pressure respirator** - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

**Non-friable ACM** - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

**Organic vapor cartridge** - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

**Outside air** - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

**Owner/operator** - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

**Penetrating encapsulant** - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

**Personal sampling/monitoring** - Representative air samples obtained in the breathing zone for one or workers within the regulated area using a filter cassette and a calibrated air sampling pump to determine asbestos exposure.

**Permissible exposure limit (PEL)** - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the eight (8) hour time weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit is 1.0 fibers per cubic centimeter (1 f/cc).



**Personal protective equipment (PPE)** - equipment designed to protect user from injury and/or specific job hazard. Such equipment may include protective clothing, hard hats, safety glasses, and respirators.

**Pipe tunnel** - An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings, or asbestos-contaminated soil.

**Polarized light microscopy (PLM)** - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

**Polyethylene sheeting** - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, flame retardant per NFPA 241.

**Positive/negative fit check** - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing in (inhaling) and then temporarily occluding the exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator respectively.

**Presumed ACM (PACM)** - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (b).

**Professional IH** - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH. The PIH may be either the VA's PIH (VPIH) or Contractor's PIH (CPIH/CIH).

**Project designer** - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B)(5).

**Assigned protection factor** - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

**Qualitative fit test (QLFT)** - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

**Quantitative fit test (QNFT)** - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

**Regulated area** - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

**Regulated ACM (RACM)** - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to

act on the material in the course of the demolition or renovation operation.

**Removal** - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

**Renovation** - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

**Repair** - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

**Shower room** - The portion of the PDF where personnel shower before leaving the regulated area.

**Supplied air respirator (SAR)** - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-1989.

**Surfacing ACM** - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

**Surfactant** - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

**Thermal system ACM** - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

**Transmission electron microscopy (TEM)** - A microscopy method that can identify and count asbestos fibers.

**VA Professional Industrial Hygienist (VPIH/CIH)** - The Department of Veterans Affairs Professional Industrial Hygienist must meet the qualifications of a PIH, and may be a Certified Industrial Hygienist (CIH).

**VA Representative** - The VA official responsible for on-going project work.

**Visible emissions** - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

**Waste/Equipment decontamination facility (W/EDF)** - The area in which equipment is decontaminated before removal from the regulated area.

**Waste generator** - Any owner or operator whose act or process produces asbestos-containing waste material.

**Waste shipment record** - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

**Wet cleaning** - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

#### 1.4.3 REFERENCED STANDARDS ORGANIZATIONS

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses may be subject to change.

- A. VA Department of Veterans Affairs  
810 Vermont Avenue, NW  
Washington, DC 20420

- B. AIHA American Industrial Hygiene Association  
2700 Prosperity Avenue, Suite 250  
Fairfax, VA 22031  
703-849-8888
- C. ANSI American National Standards Institute  
1430 Broadway  
New York, NY 10018  
212-354-3300
- D. ASTM American Society for Testing and Materials  
1916 Race St.  
Philadelphia, PA 19103  
215-299-5400
- E. CFR Code of Federal Regulations  
Government Printing Office  
Washington, DC 20420
- F. CGA Compressed Gas Association  
1235 Jefferson Davis Highway  
Arlington, VA 22202  
703-979-0900
- G. CS Commercial Standard of the National Institute of Standards and  
Technology (NIST)  
U. S. Department of Commerce  
Government Printing Office  
Washington, DC 20420
- H. EPA Environmental Protection Agency  
401 M St., SW  
Washington, DC 20460  
202-382-3949
- I. MIL-STD Military Standards/Standardization Division  
Office of the Assistant Secretary of Defense  
Washington, DC 20420
- J. NIST National Institute for Standards and Technology  
U. S. Department of Commerce  
Gaithersburg, MD 20234  
301-921-1000
- K. NEC National Electrical Code (by NFPA)
- L. NEMA National Electrical Manufacturer's Association  
2101 L Street, N.W.  
Washington, DC 20037
- M. NFPA National Fire Protection Association  
1 Batterymarch Park  
P.O. Box 9101  
Quincy, MA 02269-9101  
800-344-3555

- N. NIOSH National Institutes for Occupational Safety and Health  
4676 Columbia Parkway  
Cincinnati, OH 45226  
513-533-8236
- O. OSHA Occupational Safety and Health Administration  
U.S. Department of Labor  
Government Printing Office  
Washington, DC 20402
- P. UL Underwriters Laboratory  
333 Pfingsten Rd.  
Northbrook, IL 60062  
312-272-8800

## **1.5 APPLICABLE CODES AND REGULATIONS**

### **1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS**

- A. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.
- B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.
- C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

### **1.5.2 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITY**

The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The contractor is responsible for providing and maintaining Texas Department of Health licensed workers and supervisors, as well as current training, accreditations, medical exams, medical records, respirator fit testing, personal protective equipment as required by all applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH/CIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

### **1.5.3 FEDERAL REQUIREMENTS**

Federal requirements which govern of asbestos abatement include, but are not limited to, the following regulations.

- A. Occupational Safety and Health Administration (OSHA)

1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
  2. Title 29 CFR 1910 Subpart I - Personal Protective Equipment
  3. Title 29 CFR 1910.134 - Respiratory Protection
  4. Title 29 CFR 1926 - Construction Industry Standards
  5. Title 29 CFR 1910.1020 - Access to Employee Exposure and Medical Records
  6. Title 29 CFR 1910.1200 - Hazard Communication
  7. Title 29 CFR 1910 Subpart K - Medical and First Aid
- B. Environmental Protection Agency (**EPA**):
1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
  2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)
- C. Department of Transportation (**DOT**)
- Title 49 CFR 100 - 185 - Transportation

#### **1.5.4 STATE REQUIREMENTS**

State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following:

- 1) Texas Asbestos Health Protection Rules (TAHPA)

#### **1.5.5 LOCAL REQUIREMENTS**

If local requirements are more stringent than federal or state standards, the local standards are to be followed.

#### **1.5.6 STANDARDS**

- A. Standards which govern asbestos abatement activities include, but are not limited to, the following:
1. American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems and ANSI Z88.2 - Practices for Respiratory Protection.
  2. Underwriters Laboratories (UL) 586-90 - UL Standard for Safety of HEPA Filter Units, 7th Edition.
- B. Standards which govern encapsulation work include, but are not limited to the following:
1. American Society for Testing and Materials (ASTM)
- C. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
  2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
  3. NFPA 101 - Life Safety Code

#### **1.5.7 EPA GUIDANCE DOCUMENTS**

- A. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.
- B. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
- C. Asbestos Waste Management Guidance EPA 530-SW-85-007
- D. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
- E. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

#### 1.5.8 NOTICES

- A. State and Local agencies: The Abatement Contractor will send a written 10 day demolition/renovation notification to the Texas Department of Health (TDH) notifying them that an asbestos abatement project will be occurring at this facility. Send written notification to the local fire department prior to beginning any work on ACM.
- B. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification are given to EPA, State, and Local authorities.

#### 1.5.9 PERMITS/LICENSES

- A. The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

#### 1.5.10 POSTING AND FILING OF REGULATIONS

- A. Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each in the clean room at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

#### 1.5.11 VA RESPONSIBILITIES

Prior to commencement of work:

- A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**
- B. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized, calibration data and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

#### 1.5.12 EMERGENCY ACTION PLAN AND ARRANGEMENTS

- A. An Emergency Action Plan shall be developed prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a);(b).
- B. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.
- C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
- D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls,

confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.

- E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
  - 1. For non life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
  - 2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.
- F. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
- G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
- H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the standard operating procedures during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

#### **1.5.13 PRE-CONSTRUCTION MEETING**

Prior to commencing the work, the Contractor shall meet with the VA Certified Industrial Hygienist (VPCIH) to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

- A. Proof of Contractor licensing.
- B. Proof the Competent Person(s) is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person(s) shall also be presented.
- C. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
- D. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
- E. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).
- F. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
- G. A copy of the Contractor's Asbestos Hazard Abatement Plan. In these procedures, the following information must be detailed, specific for this project.

1. Regulated area preparation procedures;
2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
3. Decontamination area set-up/layout and decontamination procedures for employees;
4. Abatement methods/procedures and equipment to be used;
5. Personal protective equipment to be used;
- H. At this meeting the Contractor shall provide all submittals as required.
- I. Procedures for handling, packaging and disposal of asbestos waste.
- J. Emergency Action Plan and Contingency Plan Procedures.

## **1.6 PROJECT COORDINATION**

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

### **1.6.1 PERSONNEL**

- A. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.
- B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with color picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.
- C. Minimum qualifications for Contractor and assigned personnel are:
  1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of federal (and state as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the state of Texas; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive standard operating procedures for asbestos work; has adequate materials, equipment and supplies to perform the work.
  2. The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
  3. The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on



five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete standard operating procedure for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation. **THE VPIH WILL PROVIDE THE CPIH SERVICES RELATED TO THIS PROJECT.**

4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the standard operating procedures of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State of Texas accreditation/license.

All personnel should be in compliance with OSHA construction safety training as applicable and submit certification.

## **1.7 RESPIRATORY PROTECTION**

### **1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM**

The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.Subpart I;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c)(1)(i - ix) - Respiratory Protection Program.

### **1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR**

The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

### **1.7.3 SELECTION AND USE OF RESPIRATORS**

The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

### **1.7.4 MINIMUM RESPIRATORY PROTECTION**

Minimum respiratory protection shall be a full face powered air purifying respirator when fiber levels are maintained consistently at or below 0.5 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as

indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

#### **1.7.5 MEDICAL WRITTEN OPINION**

No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically qualified to wear the class of respirator to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress.

#### **1.7.6 RESPIRATOR FIT TEST**

All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Quantitative fit tests shall be done for PAPRs which have been put into a motor/blower failure mode.

#### **1.7.7 RESPIRATOR FIT CHECK**

The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective face piece to face seal as evidenced by failure of a user seal check shall preclude that person from wearing a respirator inside the regulated area until resolution of the problem.

#### **1.7.8 MAINTENANCE AND CARE OF RESPIRATORS**

The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and Care of Respirators.

#### **1.7.9 SUPPLIED AIR SYSTEMS**

If a supplied air system is used, the system shall meet all requirements of 29 CFR 1910.134 and the ANSI/Compressed Gas Association (CGA) Commodity Specification for Air current requirements for Type 1 - Grade D breathing air. Low pressure systems are not allowed to be used on asbestos abatement projects. Supplied Air respirator use shall be in accordance with EPA/NIOSH publication EPA-560-OPTS-86-001 "A Guide to Respiratory Protection for the Asbestos Abatement Industry". The competent person on site will be responsible for the supplied air system to ensure the safety of the worker.

### **1.8 WORKER PROTECTION**

#### **1.8.1 TRAINING OF ABATEMENT PERSONNEL**

Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

#### 1.8.2 MEDICAL EXAMINATIONS

Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the medical opinion the person has been evaluated for working in a heat and cold stress environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

#### 1.8.3 REGULATED AREA ENTRY PROCEDURE

The Competent Person shall ensure that each time workers enter the regulated area; they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

#### 1.8.4 DECONTAMINATION PROCEDURE

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

- A. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.
- B. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care must be taken to follow reasonable procedures in removing the respirator to avoid inhaling asbestos fibers while showering. The following procedure is required as a minimum:
  1. Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.
  2. With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay particular attention to cleaning the seal between the face and respirator face piece and under the respirator straps.
  3. Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.
- C. Carefully decontaminate the face piece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting water in the battery pack thus preventing destruction. **(THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!)**
- D. Shower and wash body completely with soap and water. Rinse thoroughly.
- E. Rinse shower room walls and floor to drain prior to exiting.
- F. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

#### **1.8.5 REGULATED AREA REQUIREMENTS**

The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for regulated areas at 29 CFR 1926.1101 (e) are met. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

#### **1.9 DECONTAMINATION FACILITIES**

##### **1.9.1 DESCRIPTION**

Provide each regulated area with separate personnel decontamination facilities (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

##### **1.9.2 GENERAL REQUIREMENTS**

All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j)(1) and these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

##### **1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF**

The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141(d)(3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel equipped with GFCI protection for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.

##### **1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)**


The Competent Person shall provide a PDF consisting of shower room which is contiguous to a clean room and equipment room which is connected to the regulated area. The PDF must be sized to accommodate the number of personnel scheduled for the project. The shower room, located in the center of the PDF, shall be fitted with as many portable showers as necessary to insure all employees can complete the entire decontamination procedure within 15 minutes. The PDF shall be

constructed of opaque poly for privacy. The PDF shall be constructed to eliminate any parallel routes of egress without showering.

1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3 layers of 6 mil opaque fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6 mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, minimum 10 pounds capacity, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.
2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6 mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be changed a minimum of daily or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.
3. Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made with 2 layers of 6 mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by air tight walls and ceiling constructed of a minimum of 3 layers of 6 mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change.

Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.

4. The PDF shall be as follows: Clean room at the entrance followed by a shower room followed by an equipment room leading to the regulated area. Each doorway in the PDF shall be a minimum of 2 layers of 6 mil opaque fire retardant poly.

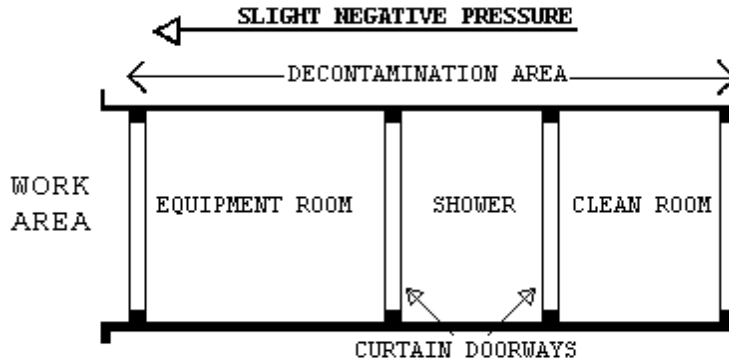


#### 1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF)

The Competent Person shall provide an W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:

1. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
2. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6 mil fire retardant poly.
3. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6 mil fire retardant poly.
4. Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 2 x 4 wood framing and 2 layers of 6 mil fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be

constructed of 2 layers of 6 mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.

5. The W/EDF shall be as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

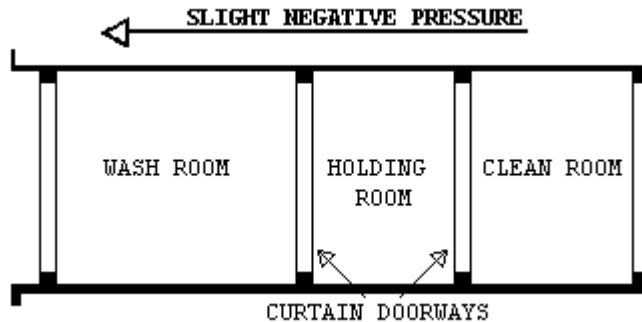

#### 1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES

At the washdown station in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. These personnel will not be required to wear PPE. At no time shall personnel from the clean side be allowed to enter the Wash Room.

## PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT

### 2.1 MATERIALS AND EQUIPMENT

#### 2.1.1 GENERAL REQUIREMENTS

Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's representative.

- A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
- B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable and combustible materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.
- C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.

- D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
- E. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mil shall be used in widths selected to minimize the frequency of joints. **Fire retardant** poly shall be used throughout.
- F. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
- G. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6 mil fire retardant poly.
- H. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
- I. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
- J. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).
- K. Disposal bags - 2 layers of 6 mil poly for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
- L. The VA shall be provided an advance copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-start meeting submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.
- M. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
- N. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).



## **2.2 MONITORING, INSPECTION AND TESTING**

### **2.2.1 GENERAL**

- A. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. OSHA requires that the employee exposure to asbestos must not exceed 0.1 fiber per cubic centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.
- B. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.
- C. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH with review and approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

### **2.2.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT**

- A. The purpose of the work of the VPIH/CIH is to: assure quality; adherence to the specification; resolve problems; prevent the spread of

contamination beyond the regulated area; and assure clearance at the end of the project. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:

1. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
  2. Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
  3. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
  4. Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of conflicts, interpret data, etc.
  5. Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area at the conclusion of the abatement to certify compliance with all regulations and VA requirements/specifications.
  6. Task 6: Issue certificate of decontamination for each regulated area and project report.
- B. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
- C. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

### **2.2.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH/CIH (THESE SERVICES WILL BE PROVIDED BY THE VPIH)**

The Contractor's CPIH/CIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State

Contractor/Supervisor or Abatement Worker and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation on substantially similar projects in size and scope. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for air personal monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

### 2.3 ASBESTOS HAZARD ABATEMENT PLAN

The Contractor shall have established an Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of this project and the specifications. The AHAP shall be submitted for review and approval to the VA prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAPs are:

- A. Minimum Personnel Qualifications
- B. Emergency Action Plan/Contingency Plans and Arrangements
- C. Security and Safety Procedures
- D. Respiratory Protection/Personal Protective Equipment Program and Training
- E. Medical Surveillance Program and Recordkeeping
- F. Regulated Area Requirements - Containment Barriers/Isolation of Regulated Area
- G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
- H. Negative Pressure Systems Requirements
- I. Monitoring, Inspections, and Testing
- J. Removal Procedures for ACM
- K. Removal of Contaminated Soil (if applicable)
- L. Encapsulation Procedures for ACM
- M. Disposal of ACM waste/equipment
- N. Regulated Area Decontamination/Clean-up
- O. Regulated Area Visual and Air Clearance
- P. Project Completion/Closeout

## 2.4 SUBMITTALS

### 2.4.1 PRE-START MEETING SUBMITTALS

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:

- A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
- B. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
- C. Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
- D. Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
  1. Supplied air system, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
  2. Waste water filtration system, shower system, containment barriers.
  3. Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, and fire extinguishers.
  4. Respirators, protective clothing, personal protective equipment.
  5. Fire safety equipment to be used in the regulated area.
- E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
- F. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.
- G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A. Area or clearance air monitoring shall be conducted in accordance with EPA AHERA protocols.
- H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
  1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; Completion Date

2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution
  3. List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal and state EPA), penalties, and legal actions taken against the company including and of the company's officers (including damages paid) in the last 3 years. Provide copies and all information needed for verification.
- I. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH/CIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.
1. CPIH/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of AHAPs developed; medical opinion; and current respirator fit test.
  2. Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
  3. Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
- J. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of AHAPs incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and standard operating procedures; and copies of monitoring results of the five referenced projects listed and analytical method(s) used.
- K. Rented equipment must be decontaminated prior to returning to the rental agency.
- L. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all MSDS and application instructions.

#### **2.4.2 SUBMITTALS DURING ABATEMENT**

- A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following:

purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breeching, equipment failures, emergencies, and any cause for stopping work; and representative air monitoring and results/TWA's/EL's. Submit this information daily to the VPIH/CIH.

- B. The CPIH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.
  - 1. Removal of any poly barriers.
  - 2. Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant.
  - 3. Packaging and removal of ACM waste from regulated area.
  - 4. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

#### **2.4.3 SUBMITTALS AT COMPLETION OF ABATEMENT**

The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in accordance with Attachment #1. All clearance and perimeter area samples must be submitted. The VA Representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

### **2.5 ENCAPSULANTS**

#### **2.5.1 TYPES OF ENCAPSULANTS**

- A. The following four types of encapsulants, if used, must comply with comply with performance requirements as stated in paragraph 2.6.2:
  - 1. Removal encapsulant - used as a wetting agent to remove ACM.
  - 2. Bridging encapsulant - provides a tough, durable coating on ACM.
  - 3. Penetrating encapsulant - penetrates/encapsulates ACM at least 13 mm (1/2").
  - 4. Lockdown encapsulant - seals microscopic fibers on surfaces after ACM removal.

#### **2.5.2 PERFORMANCE REQUIREMENTS**

Encapsulants shall meet the latest requirements of EPA; shall not contain toxic or hazardous substances; or solvents; and shall comply with the following performance requirements:

- A. General Requirements for all Encapsulants:
  - 1. ASTM E84: Flame spread of 25; smoke emission of 50.
  - 2. University of Pittsburgh Protocol: Combustion Toxicity; zero mortality.
  - 3. ASTM C732: Accelerated Aging Test; Life Expectancy - 20 years.
  - 4. ASTM E96: Permeability - minimum of 0.4 perms.
- B. Bridging/Penetrating Encapsulants:
  - 1. ASTM E736: Cohesion/Adhesion Test - 24 kPa (50 lbs/ft<sup>2</sup>).

2. ASTM E119: Fire Resistance - 3 hours (Classified by UL for use on fibrous/cementitious fireproofing).
  3. ASTM D2794: Gardner Impact Test; Impact Resistance - minimum 11.5 kg-mm (43 in/lb).
  4. ASTM D522: Mandrel Bend Test; Flexibility - no rupture or cracking.
- C. Lockdown Encapsulants:
1. ASTM E119: Fire resistance - 3 hours (tested with fireproofing over encapsulant applied directly to steel member).
  2. ASTM E736: Bond Strength - 48 kPa (100 lbs/ft<sup>2</sup>) (test compatibility with cementitious and fibrous fireproofing).
  3. In certain situations, encapsulants may have to be applied to hot pipes/equipment. The encapsulant must be able to withstand high temperatures without cracking or off-gassing any noxious vapors during application.

### 2.5.3 CERTIFICATES OF COMPLIANCE

The Contractor shall submit to the VA representative certification from the manufacturer indicating compliance with performance requirements for encapsulants when applied according to manufacturer recommendations.

## PART 3 - EXECUTION

### 3.1 REGULATED AREA PREPARATIONS

#### 3.1.1 SITE SECURITY

- A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.
- B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent Person shall immediately require any unauthorized person to leave the regulated area and then notify the VA Contracting Officer or VA Representative using the most expeditious means.
- C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.
- D. Access to the regulated area shall be through a single decontamination unit. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside; however, they shall be sealed with poly sheeting and taped until needed. In any situation where exposure to high temperatures which may result in a flame hazard, fire retardant poly sheeting must be used.
- E. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress

and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.

- F. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
- G. The regulated area shall be locked during non-working hours and secured by VA Representative or Competent Person. The VA Police should be informed of asbestos abatement regulated areas to provide security checks during facility rounds and emergency response.

### **3.1.2. SIGNAGE AND POWER MANAGEMENT**

- A. Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed the PEL. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.
- B. Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.
- C. Shut down and lock out/tag out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area. Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil polyethylene disposal bags for staging and eventual disposal as asbestos waste.

### **3.1.3 NEGATIVE PRESSURE FILTRATION SYSTEM**

The Contractor shall provide enough HEPA negative air machines to effect > - 0.02" WCG pressure. The Competent Person shall determine the number of units needed for the regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the cubic feet per minute (CFM) for each unit to determine the number of units needed to effect > - 0.02" WCG pressure. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area. NIOSH has done extensive studies and has determined that negative air machines typically operate at ~50% efficiency. The contractor shall consider this in their determination of number of units needed to provide > - 0.02" WCG pressure. The contractor shall use double the number of machines, based on their calculations, or submit proof their



machines operate at stated capacities, at a 2" pressure drop across the filters.

#### **3.1.3.1 DESIGN AND LAYOUT**

- A. Before start of work submit the design and layout of the regulated area and the negative air machines. The submittal shall indicate the number of, location of and size of negative air machines. The point(s) of exhaust, air flow within the regulated area, anticipated negative pressure differential, and supporting calculations for sizing shall be provided. In addition, submit the following:
1. Method of supplying power to the units and designation/location of the panels.
  2. Description of testing method(s) for correct air volume and pressure differential.
  3. If auxiliary power supply is to be provided for the negative air machines, provide a schematic diagram of the power supply and manufacturer's data on the generator and switch.

#### **3.1.3.2 NEGATIVE AIR MACHINES (HEPA UNITS)**

- A. Negative Air Machine Cabinet: The cabinet shall be constructed of steel or other durable material capable of withstanding potential damage from rough handling and transportation. The width of the cabinet shall be less than 30" in order to fit in standard doorways. The cabinet must be factory sealed to prevent asbestos fibers from being released during use, transport, or maintenance. Any access to and replacement of filters shall be from the inlet end. The unit must be on casters or wheels.
- B. Negative Air Machine Fan: The rating capacity of the fan must indicate the CFM under actual operating conditions. Manufacturer's typically use "free-air" (no resistance) conditions when rating fans. The fan must be a centrifugal type fan.
- C. Negative Air Machine Final Filter: The final filter shall be a HEPA filter. The filter media must be completely sealed on all edges within a structurally rigid frame. The filter shall align with a continuous flexible gasket material in the negative air machine housing to form an air tight seal. Each HEPA filter shall be certified by the manufacturer to have an efficiency of not less than 99.97%. Testing shall have been done in accordance with Military Standard MIL-STD-282 and Army Instruction Manual 136-300-175A. Each filter must bear a UL586 label to indicate ability to perform under specified conditions. Each filter shall be marked with the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.
- D. Negative Air Machine Pre-filters: The pre-filters, which protect the final HEPA filter by removing larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-filtration are required. A first stage pre-filter shall be a low efficiency type for particles 10  $\mu\text{m}$  or larger. A second stage pre-filter shall have a medium efficiency effective for particles down to 5  $\mu\text{m}$  or larger.

Pre-filters shall be installed either on or in the intake opening of the NAM and the second stage filter must be held in place with a special housing or clamps.

- E. Negative Air Machine Instrumentation: Each unit must be equipped with a gauge to measure the pressure drop across the filters and to indicate when filters have become loaded and need to be changed. A table indicating the cfm for various pressure readings on the gauge shall be affixed near the gauge for reference or the reading shall indicate at what point the filters shall be changed, noting cfm delivery. The unit must have an elapsed time meter to show total hours of operation.
- F. Negative Air Machine Safety and Warning Devices: An electrical/ mechanical lockout must be provided to prevent the fan from being operated without a HEPA filter. Units must be equipped with an automatic shutdown device to stop the fan in the event of a rupture in the HEPA filter or blockage in the discharge of the fan. Warning lights are required to indicate normal operation; too high a pressure drop across filters; or too low of a pressure drop across filters.
- G. Negative Air Machine Electrical: All electrical components shall be approved by the National Electrical Manufacturer's Association (NEMA) and Underwriters Laboratories (UL). Each unit must be provided with overload protection and the motor, fan, fan housing, and cabinet must be grounded.
- H. It is essential that replacement HEPA filters be tested using an "in-line" testing method, to ensure the seal around the periphery was not damaged during replacement. Damage to the outer HEPA filter seal could allow contaminated air to bypass the HEPA filter and be discharged to an inappropriate location. Contractor will provide written documentation of test results for negative air machine units with HEPA filters changed by the contractor or documentation when changed and tested by the contractor filters

#### **3.1.3.3 PRESSURE DIFFERENTIAL**

The fully operational negative air system within the regulated area shall continuously maintain a pressure differential of - 0.02" water column gauge. Before any disturbance of any asbestos material, this shall be demonstrated to the VA by use of a pressure differential meter/manometer as required by OSHA 29 CFR 1926.1101(e)(5)(i). The Competent Person shall be responsible for providing, maintaining, and documenting the negative pressure and air changes as required by OSHA and this specification.

#### **3.1.3.4 MONITORING**

The pressure differential shall be continuously monitored and recorded between the regulated area and the area outside the regulated area with a monitoring device that incorporates a strip chart recorder. The strip chart recorder shall become part of the project log and shall indicate at least -0.02" water column gauge for the duration of the project.

#### **3.1.3.5 AUXILIARY GENERATOR**

If the building is occupied during abatement, provide an auxiliary gasoline/diesel generator located outside the building in an area protected from the weather. In the event of a power failure of the general power grid and the VAMC emergency power grid, the generator must automatically start and supply power to a minimum of 50% of the negative air machines in operation.

#### **3.1.3.6 SUPPLEMENTAL MAKE-UP AIR INLETS**

Provide, as needed for proper air flow in the regulated area, in a location approved by the VA, openings in the plastic sheeting to allow outside air to flow into the regulated area. Auxiliary makeup air inlets must be located as far from the negative air machines as possible, off the floor near the ceiling, and away from the barriers that separate the regulated area from the occupied clean areas. Cover the inlets with weighted flaps which will seal in the event of failure of the negative pressure system.

#### **3.1.3.7 TESTING THE SYSTEM**

The negative pressure system must be tested before any ACM is disturbed in any way. After the regulated area has been completely prepared, the decontamination units set up, and the negative air machines installed, start the units up one at a time. Demonstrate and document the operation and testing of the negative pressure system to the VA using smoke tubes and a negative pressure gauge. Verification and documentation of adequate negative pressure differential across each barrier must be done at the start of each work shift.

#### **3.1.3.8 DEMONSTRATION OF THE NEGATIVE PRESSURE FILTRATION SYSTEM**

The demonstration of the operation of the negative pressure system to the VA shall include, but not be limited to, the following:

- A. Plastic barriers and sheeting move lightly in toward the regulated area.
- B. Curtains of the decontamination units move in toward regulated area.
- C. There is a noticeable movement of air through the decontamination units. Use the smoke tube to demonstrate air movement from the clean room to the shower room to the equipment room to the regulated area.
- D. Use smoke tubes to demonstrate air is moving across all areas in which work is to be done. Use a differential pressure gauge to indicate a negative pressure of at least -0.02" across every barrier separating the regulated area from the rest of the building. Modify the system as necessary to meet the above requirements.

**3.1.3.9 USE OF THE NEGATIVE PRESSURE FILTRATION SYSTEM  
DURING ABATEMENT OPERATIONS**

A. Start units before beginning any disturbance of ACM occurs. After work begins, the units shall run continuously, maintaining 4 actual air changes per hour at a negative pressure differential of -0.02" water column gauge, for the duration of the work until a final visual clearance and final air clearance has been successfully completed.

No negative air units shall be shut down at any time unless authorized by the VA Contracting Officer, verbally and in writing.

B. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.

C. Abatement work shall begin at a location farthest from the units and proceed towards them. If an electric failure occurs, the Competent Person shall stop all abatement work and immediately begin wetting all exposed asbestos materials for the duration of the power outage. Abatement work shall not resume until power is restored and all units are operating properly again.

D. The negative air machines shall continue to run after all work is completed and until a final visual clearance and a final air clearance has been successfully completed for that regulated area.

**3.1.3.10 DISMANTLING THE SYSTEM**

After completion of the final visual and final air clearance has been obtained by the VPIH/CIH, the units may be shut down. The unit exterior surfaces shall have been completely decontaminated; pre-filters are not to be removed and the units inlet/outlet sealed with 2 layers of 6 mil poly immediately after shut down. No filter removal shall occur at the VA site following successful completion of site clearance. OSHA/EPA/DOT asbestos shall be attached to the units.

**3.1.4 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA**

**3.1.4.1 GENERAL**

Seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All surfaces in the regulated area must be covered to prevent contamination and to facilitate clean-up. **Should adjacent areas become contaminated as a result of the work, the contractor shall immediately stop work and clean up the contamination at no additional cost to the VA.** Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 3.1.4.8; FIRESTOPPING.

#### **3.1.4.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA**

Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. All uncontaminated removable furniture, equipment and/or supplies shall be removed by the VA from the regulated area before commencing work. Any objects remaining in the regulated area shall be completely covered with 2 layers of 6-mil fire retardant poly sheeting and secured with duct tape. Lock out and tag out any HVAC/electrical systems in the regulated area.

#### **3.1.4.3 CONTROLLING ACCESS TO THE REGULATED AREA**

Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to, or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid and capable of withstanding the negative pressure.

#### **3.1.4.4 CRITICAL BARRIERS**

Completely separate any operations in the regulated area from adjacent areas using 2 layers of 6 mil fire retardant poly and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects/openings in the regulated area. Heat must be shut off any objects covered with poly.

#### **3.1.4.5 PRIMARY BARRIERS**

A. Cover the regulated area with two layers of 6 mil fire retardant poly on the floors and two layers of 4 mil, fire retardant poly on the walls, unless otherwise directed in writing by the VA representative. Floor layers must form a right angle with the wall and turn up the wall at least 300 mm (12"). Seams must overlap at least 1800 mm (6') and must be spray glued and taped. Install sheeting so that layers can be removed independently from each other. Carpeting shall be covered with three layers of 6 mil poly. Corrugated cardboard sheets must be placed between the bottom and middle layers of poly. Mechanically support and seal with duct tape and glue all wall layers.

B. If stairs and ramps are covered with 6 mil plastic, two layers must be used. Provide 19 mm (3/4") exterior grade plywood treads held in place with duct tape/glue on the plastic. Do not cover rungs or rails with any isolation materials.

**3.1.4.6 SECONDARY BARRIERS**

A loose layer of 6 mil shall be used as a drop cloth to protect the primary layers from debris generated during the abatement. This layer shall be replaced as needed during the work and at a minimum once per work day.

**3.1.4.7 EXTENSION OF THE REGULATED AREA**

If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. Decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

**3.1.4.8 FIRESTOPPING**

- A. Through penetrations caused by cables, cable trays, pipes, sleeves, conduits, etc. must be firestopped with a fire-rated firestop system providing an air tight seal.
- B. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.
- C. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

**3.1.5 SANITARY FACILITIES**

The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

**3.1.6 PERSONAL PROTECTIVE EQUIPMENT**

Provide whole body clothing, head coverings, gloves and foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

**3.1.7 PRE-CLEANING**

The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. All workers performing pre-cleaning activities must don appropriate personal protective equipment (PPE), as specified throughout this document and as approved in the Contractor's work plan. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.

Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location. Drapes, clothing, upholstered furniture and other fabric items should be disposed of as asbestos contaminated waste. Cleaning these asbestos contaminated items utilizing HEPA vacuum techniques and off-premises steam cleaning is very difficult and cannot guarantee decontamination. Carpeting will be disposed of prior to abatement if in the regulated area. If ACM floor tile is attached to the carpet while the Contractor is removing the carpet that section of the carpet will be disposed of as asbestos waste.

Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.

Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

### **3.1.8 PRE-ABATEMENT ACTIVITIES**

#### **3.1.8.1 PRE-ABATEMENT MEETING**

The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH/CIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting

is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

#### **3.1.8.2 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS**

- A. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
- B. Upon completion of all preparatory work, the CPIH/CIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved AHAP(s), especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation. The operational systems for respiratory protection and the negative pressure system shall be demonstrated for proper performance.
- C. The CPIH/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.
- D. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification and all applicable regulations.

#### **3.1.8.3 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS**

Before any work begins on the construction of the regulated area, the Contractor will:

- A. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.
- B. The VA Representative, the Contractor, and the VPIH/CIH must be aware of VA A/E Quality Alert 07/09 indicating the failure to identify asbestos in the areas listed as well as common issues when preparing specifications and contract documents. This is especially critical when demolition is planned, because AHERA surveys are non-destructive, and ACM may remain undetected. A NESHAPS (destructive) ACM inspection should be conducted on all building structures that will be demolished. Ensure the following areas are



inspected on the project: lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility chases/walls; transite piping/ductwork/sheets; behind radiators; lab fume hoods; transite lab countertops; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawlspaces (previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; and steam line trench coverings.

- C. Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned and removed or properly protected from contamination.
- D. If present and required, remove and dispose of carpeting from floors in the regulated area.
- E. Inspect existing firestopping in the regulated area. Correct as needed.

### **3.2 REMOVAL OF ACM**

#### **3.2.1 WETTING ACM**

- A. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP regulation and OSHA's "wet methods" for the duration of the project. A removal encapsulant may be used instead of amended water with written approval of the VA's representative.
- B. Amended Water: Provide water to which a surfactant has been added shall be used to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture must be equal to or greater than the wetting provided by water amended by a surfactant consisting one ounce of 50% polyoxyethylene ester and 50% polyoxyethylene ether mixed with 5 gallons (19L) of water.
- C. Removal Encapsulant: When authorized by VA, provide a penetrating encapsulant designed specifically for the removal of ACM. The material must, when used, result in adequate wetting of the ACM and retard fiber release during removal.

#### **3.2.2 SECONDARY BARRIER AND WALKWAYS**

- A. Install as a drop cloth a 6 mil poly sheet at the beginning of each work shift where removal is to be done during that shift. Completely cover floors and any walls within 10 feet (3 meters) of the area where work is to be done. Secure the secondary barrier with duct tape to prevent it from moving or debris from getting behind it. Remove the secondary barrier at the end of the shift or as work in the area is completed. Keep residue on the secondary barrier wetted. When removing, fold inward to prevent spillage and place in a disposal bag.
- B. Install walkways using 6 mil black poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the primary layers from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

### 3.2.3 WET REMOVAL OF ACM

- A. Adequately and thoroughly wet the ACM to be removed prior to removal with amended water or when authorized by VA, removal encapsulant to reduce/prevent fiber release to the air. Adequate time (at a minimum two hours) must be allowed for the amended water or removal encapsulant to saturate the ACM. Abatement personnel must not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping. The material must be sprayed repeatedly/continuously during the removal process in order to maintain adequately wet conditions. Removal encapsulants must be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. **In no event shall dry removal occur except when authorized in writing by the VPIH/CIH and VA when a greater safety hazard (e.g., electricity) is present.**
- B. If ACM does not wet well with amended water due to composition, coating or jacketing, remove as follows:
1. Mist work area continuously with amended water whenever necessary to reduce airborne fiber levels.
  2. Remove saturated ACM in small sections. Do not allow material to dry out. As material is removed, bag material, while still wet into disposal bags. Twist the bag neck tightly, bend over (gooseneck) and seal with a minimum of three tight wraps of duct tape. Clean /decontaminate the outside of the bag of any residue and move to washdown station adjacent to W/EDF.
  3. Fireproofing or Architectural Finish on Scratch Coat: Spray with a fine mist of amended water or removal encapsulant. Allow time for saturation to the substrate. Do not over saturate causing excess dripping. Scrape material from substrate. Remove material in manageable quantities and control falling to staging or floor. If the falling distance is over 20 feet (6M), use a drop chute to contain material through descent. Remove residue remaining on the scratch coat after scraping is done using a stiff bristle hand brush. If a removal encapsulant is used, remove residue completely before the encapsulant dries. Periodically re-wet the substrate with amended water as needed to prevent drying of the material before the residue is removed from the substrate.
  4. Fireproofing or Architectural Finish on Wire Lath: Spray with a fine mist of amended water or removal encapsulant. Allow time to completely saturate the material. Do not over saturate causing excess dripping. If the surface has been painted or otherwise coated, cut small holes as needed and apply amended water or removal encapsulant from above. Cut saturated wire lath into 2' x 6' (50mm x 150mm) sections and cut hanger wires. Roll up complete with ACM, cover in burlap and hand place in disposal bag. Do not drop to floor. After removal of lath/ACM, remove any overspray on decking and structure using stiff bristle nylon brushes. Depending on hardness of overspray, scrapers may be needed for removal.
  5. Pipe/Tank/Vessel/Boiler Insulation: Remove the outer layer of wrap while spraying with amended water in order to saturate the ACM. Spray ACM with a fine mist of amended water or removal encapsulant.

Allow time to saturate the material to the substrate. Cut bands holding pre-formed pipe insulation sections. Slit jacketing at the seams, remove and hand place in a disposal bag. Do not allow dropping to the floor. Remove molded fitting insulation/mud in large pieces and hand place in a disposal bag. Remove any residue on pipe or fitting with a stiff bristle nylon brush. In locations where pipe fitting insulation is removed from fibrous glass or other non-asbestos insulated straight runs of pipe, remove fibrous material at least 6" from the point it contacts the ACM.

#### **3.2.4 WET REMOVAL OF AMOSITE**

- A. The following areas shown on drawings indicate locations of amosite ACM which will require local exhaust ventilation and collection as described below, in addition to wet removal. Provide specific description /locations/ drawings.
- B. Provide local exhaust ventilation and collection systems to assure collection of amosite fibers at the point of generation. A 300 mm (12") flexible rigid non-collapsing duct shall be located no more than 600 mm (2') from any scraping/brushing activity. Primary filters must be replaced every 30 minutes on the negative air machines. Each scraping/brushing activity must have a negative air machine devoted to it. For pre-molded pipe insulation or cutting wire lathe attach a 1200 mm (4') square flared end piece on the intake of the duct. Support the duct horizontally at a point 600 mm (2') below the work to effect capture. One person in the crew shall be assigned to operate the duct collection system on a continual basis.
- C. Amosite does not wet well with amended water. Submit full information/documentation on the wetting agent proposed prior to start for review and approval by the VPIH/CIH and VA Contracting Officer. Insure that the material is worked on in small sections and is thoroughly and continuously wetted. Package as soon as possible while wet. Remove as required.

#### **3.2.5 REMOVAL OF ACM/DIRT FLOORS AND OTHER SPECIAL PROCEDURES**

- A. MAJOR ABATEMENT ON DIRT FLOORS:  
Crawlspaces/Pipe Tunnels:  
Set-up PDF, W/EDF and negative air systems as required. Remove top 3 inches of soil using a vacuum truck specific for asbestos soil removal. After soil removal, encapsulate the soil using a penetrating binding encapsulant such as Fiberlock Technologies ABC Sealant or similar product.
  - 1. Remove asbestos contaminated soil as shown on drawings to a minimum depth of 3 inches using wet methods. After wetting with amended water to minimize dust, use vacuum truck to vacuum out soil. The CPIH/CIH shall closely monitor work conditions and take appropriate action to protect workers from over exposure to asbestos and heat stress. The minimum number of air changes per hour shall be six using negative air machines. Use special vacuum truck equipped with HEPA filtration to remove soil.
  - 2. After 3 inches of soil has been removed, a visual inspection and soil sampling shall be performed by the VPIH to ensure the asbestos contaminated soil has been removed. If PLM samples show the presence of asbestos still in the soil, an additional 3 inches of soil shall be removed using the vacuum truck.

3. Once the visual inspection and PLM sampling reveal that the area is clean, the soil shall be encapsulated using a penetrating binding encapsulant.
- B. Clearance requirements include confirmation sampling of affected soil by Polarized Light Microscopy (PLM). Clearance sampling requirements are specified in Sections 3.6.4 and 3.6.5.

### **3.3 LOCKDOWN ENCAPSULATION**

#### **3.3.1 GENERAL**

Lockdown encapsulation is an integral part of the ACM removal. At the conclusion of ACM removal and before removal of the primary barriers, the contractor shall encapsulate all surfaces with a bridging encapsulant.

#### **3.3.2 DELIVERY AND STORAGE**

Deliver materials to the job site in original, new and unopened containers bearing the manufacturer's name and label as well as the following information: name of material, manufacturer's stock number, date of manufacture, thinning instructions, application instructions and the MSDS for the material.

#### **3.3.3 WORKER PROTECTION**

Before beginning work with any material for which an MSDS has been submitted, provide workers with any required personal protective equipment. The required personal protective equipment shall be used whenever exposure to the material might occur. In addition to OSHA/specification requirements for respiratory protection, a paint pre-filter and an organic vapor cartridge, at a minimum, shall be used in addition to the HEPA filter when an organic solvent based encapsulant is used. The CPHI/CIH shall be responsible for provision of adequate respiratory protection. Note: Flammable and combustible encapsulants shall not be used, unless authorized in writing by the VA.

#### **3.3.4 ENCAPSULATION OF SCRATCH COAT PLASTER OR PIPING**

- A. Apply two coats of lockdown encapsulant to the scratch coat plaster or piping after all ACM has been removed. Apply in strict accordance with the manufacturer's instructions. Any deviation from the instructions must be approved by the VA's representative in writing prior to commencing the work.
- B. Apply the lockdown encapsulant with an airless sprayer at a pressure and using a nozzle orifice as recommended by the manufacturer. Apply the first coat while the scratch coat is still damp from the asbestos removal process, after passing the visual inspection. If the surface has been allowed to dry, wet wipe or HEPA vacuum prior to spraying with encapsulant. Apply a second coat over the first coat in strict conformance with the manufacturer's instructions. Color the lockdown encapsulant and contrast the color in the second coat so that visual confirmation of completeness and uniform coverage of each coat is possible. Adhere to the manufacturer's instructions for coloring. At the completion of the encapsulation, the surface must be a uniform third color produced by the mixture.

### **3.3.5 SEALING EXPOSED EDGES**

Seal edges of ACM exposed by removal work which is inaccessible, such as a sleeve, wall penetration, etc., with two coats of bridging encapsulant. Prior to sealing, permit the exposed edges to dry completely to permit penetration of the bridging encapsulant. Apply in accordance with 3.3.4 (B).

### **3.4 DISPOSAL OF ACM WASTE MATERIALS**

#### **3.4.1 GENERAL**

Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

#### **3.4.2 PROCEDURES**

- A. The VA must be notified at least 24 hours in advance of any waste removed from the containment.
- B. Asbestos waste shall be packaged and moved through the W/EDF into a covered transport container in accordance with procedures in this specification. Waste shall be double-bagged and wetted with amended water prior to disposal. Wetted waste can be very heavy. Bags shall not be overfilled. Bags shall be securely sealed to prevent accidental opening and/or leakage. The top shall be tightly twisted and goose necked prior to tightly sealing with at least three wraps of duct tape. Ensure that unauthorized persons do not have access to the waste material once it is outside the regulated area. All transport containers must be covered at all times when not in use. NESHAP signs must be on containers during loading and unloading. Material shall not be transported in open vehicles. If drums are used for packaging, the drums shall be labeled properly and shall not be re-used.
- C. Waste Load Out: Waste load out shall be done in accordance with the procedures in W/EDF Decontamination Procedures. Sealed waste bags shall be decontaminated on exterior surfaces by wet cleaning and/or HEPA vacuuming before being placed in the second waste bag and sealed, which then must also be wet wiped or HEPA vacuumed.
- D. Asbestos waste with sharp edged components, i.e., nails, screws, lath, strapping, tin sheeting, jacketing, metal mesh, etc., which might tear poly bags shall be wrapped securely in burlap before packaging and, if needed, use a poly lined fiber drum as the second container, prior to disposal.

### **3.5 PROJECT DECONTAMINATION**

#### **3.5.1 GENERAL**

- A. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
- B. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.

- C. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

### **3.5.2 REGULATED AREA CLEARANCE**

Clearance air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

### **3.5.3 WORK DESCRIPTION**

Decontamination includes the clearance air testing in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

### **3.5.4 PRE-DECONTAMINATION CONDITIONS**

- A. Before decontamination starts, all ACM waste from the regulated area shall be collected and removed, and the loose 6 mil layer of poly removed while being adequately wetted with amended water and disposed of along with any gross debris generated by the work.
- B. At the start of decontamination, the following shall be in place:
1. Primary barriers consisting of 2 layers of 6 mil poly on the floor and 4 mil poly on the walls.
  2. Critical barriers consisting of 2 layers of 6 mil poly which is the sole barrier between the regulated area and openings to the rest of the building or outside.
  4. Decontamination facilities for personnel and equipment in operating condition and the negative pressure system in operation.

### **3.5.5 FIRST CLEANING**

Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. Additional cleaning(s) may be needed as determined by the CPIH/VPIH/CIH.

### **3.5.6 PRE-CLEARANCE INSPECTION AND TESTING**

The CPIH/CIH and VPIH/CIH will perform a thorough and detailed visual inspection at the end of the cleaning to determine whether there is any visible residue in the regulated area. If the visual inspection is acceptable, the CPIH/CIH will perform pre-clearance sampling using aggressive clearance as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). If the sampling results show values below 0.01 f/cc, then the Contractor shall notify the VA's representative of the results with a brief report from the CPIH/CIH documenting the

inspection and sampling results and a statement verifying that the regulated area is ready for lockdown encapsulation. The VA reserves the right to utilize their own VPIH/CIH to perform a pre-clearance inspection and testing for verification.

### **3.5.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES**

With the express written permission of the VA's representative, perform lockdown encapsulation of all surfaces from which asbestos was abated in accordance with the procedures in this specification. Negative pressure shall be maintained in the regulated area during the lockdown application. **NOTE: Following encapsulation, all containments must set a minimum of 8 hours to allow the encapsulant to dry and for the air to be thoroughly cleaned by the HEPA filtration machines. Contractor should include this waiting period in their bid.**

## **3.6 FINAL VISUAL INSPECTION AND AIR CLEARANCE TESTING**

### **3.6.1 GENERAL**

Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH starting after the final cleaning.

### **3.6.2 FINAL VISUAL INSPECTION**

Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

### **3.6.3 FINAL AIR CLEARANCE TESTING**

- A. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final clearance testing. Air samples will be collected and analyzed in accordance with procedures for AHERA in this specification. If work is less than 260 lf/160 sf/35 cf, 5 PCM samples shall be collected for clearance and a minimum of one field blank. If work is equal to or more than 260 lf/160 sf/35 cf, AHERA TEM sampling shall be performed for clearance. TEM analysis shall be done in accordance with procedures for EPA AHERA in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved. **All Additional inspection and testing costs will be borne by the Contractor.**
- B. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

### **3.6.4 FINAL AIR CLEARANCE PROCEDURES**

- A. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured by the AHERA PCM

protocol, or 70 AHERA structures per square millimeter (s/mm<sup>2</sup>) by AHERA TEM.

- B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:
1. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method or asbestos fibers counted using the AHERA TEM method.
  2. Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques except where soil is not encapsulated or enclosed. Samples will be collected on 0.8 $\mu$  MCE filters for PCM analysis and 0.45 $\mu$  Polycarbonate filters for TEM. A minimum of 1200 Liters of using calibrated pumps shall be collected for clearance samples. Before pumps are started, initiate aggressive air mixing sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.
  3. Final clearance for soil that is not encapsulated, samples will be collected on 0.8 $\mu$  MCE filters for PCM analysis and 0.45 $\mu$  Polycarbonate filters for TEM. A minimum of 1200 Liters of using calibrated pumps shall be collected for clearance samples. Air clearance of work areas where contaminated soil has been removed is in addition to the requirement for clearance by bulk sample analysis discussed within these specifications. There will be no aggressive air sampling for the clearance of soil due to the fact that aggressive air sampling may overload the cassettes.
  4. Random samples shall be collected from areas of soil which have been abated to ensure that the soil has been properly decontaminated. The total number of samples to be collected from the soil areas shall be; <1000 SF of soil - 3 samples; >1000 to <5000 SF of soil - 5 samples; and >5000 SF of soil - 7 samples. The soil samples shall be collected in a statistically random manner and shall be analyzed by PLM method. The clearance level to determine the soil clean is <1% asbestos by weight as analyzed by PLM method. If this level is achieved, the soil areas shall be considered clear. If the levels are >1% asbestos, the areas shall be re-cleaned until the sample results are <1%.

#### **3.6.5 CLEARANCE SAMPLING USING PCM - LESS THAN 260LF/160SF:**

- A. The VPIH/CIH will perform clearance samples as indicated by the specification.
- B. The NIOSH 7400 PCM method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 5 PCM clearance samples shall be collected. All samples must be equal to or less than 0.01 f/cc to clear the regulated area.
- C. Random samples shall be collected from areas of soil which have been abated to ensure that the soil has been properly decontaminated. The total number of samples to be collected from the soil areas shall be; <1000 SF of soil - 3 samples; >1000 to <5000 SF of soil - 5 samples; and >5000 SF of soil - 7 samples. The soil samples shall be collected in a statistically random manner and shall be analyzed by PLM method.



The clearance level to determine the soil clean is <1% asbestos by weight as analyzed by PLM method. If this level is achieved, the soil areas shall be considered clear. If the levels are >1% asbestos, the areas shall be re-cleaned until the sample results are <1%.

**3.6.6 CLEARANCE SAMPLING USING TEM - EQUAL TO OR MORE THAN 260LF/160SF: TEM**

- A. Clearance requires 13 samples be collected; 5 inside the regulated area; 5 outside the regulated area; and 3 field blanks.
- B. The TEM method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 13 clearance samples shall be collected. All samples must be equal to or less than 70 AHERA structures per square millimeter (s/mm<sup>2</sup>) AHERA TEM.

**3.6.7 LABORATORY TESTING OF PCM CLEARANCE SAMPLES**

The services of an AIHA accredited laboratory will be employed by the VA to perform analysis for the PCM air samples. The accredited laboratory shall be successfully participating in the AIHA Proficiency Analytical Testing (PAT) program. Samples will be sent daily by the VPIH/CIH so that verbal/faxed reports can be received within 24 hours. A complete record, certified by the laboratory, of all air monitoring tests and results will be furnished to the VA's representative and the Contractor.

**3.6.8 LABORATORY TESTING OF TEM SAMPLES**

Samples shall be sent by the VPIH/CIH to a NIST accredited laboratory for analysis by TEM. The laboratory shall be successfully participating in the NIST Airborne Asbestos Analysis (TEM) program. Verbal/faxed results from the laboratory shall be available within 24 hours after receipt of the samples. A complete record, certified by the laboratory, of all TEM results shall be furnished to the VA's representative and the Contractor.

**3.6.9 LABORATORY TESTING OF BULK SAMPLES**

Samples shall be sent by the VPIH/CIH or CPIH/CIH to a NIST accredited laboratory for analysis by PLM. The laboratory shall be successfully participating in the NIST Bulk Asbestos Analysis (PLM) program. Verbal/faxed results from the laboratory shall be available within 24 hours after receipt of the samples. A complete record, certified by the laboratory, of all TEM results shall be furnished to the VA's representative and the Contractor.

**3.7 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE**

**3.7.1 COMPLETION OF ABATEMENT WORK**

After thorough decontamination, seal negative air machines with 2 layers of 6 mil poly and duct tape to form a tight seal at the intake/outlet ends before removal from the regulated area. Complete asbestos abatement work upon meeting the regulated area visual and air clearance criteria and fulfilling the following:

- A. Remove all equipment and materials from the project area.
- B. Dispose of all packaged ACM waste as required.
- C. Repair or replace all interior finishes damaged during the abatement work, as required.

D. Fulfill other project closeout requirements as required in this specification.

**3.7.2 CERTIFICATE OF COMPLETION BY CONTRACTOR**

The CPIH/CIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

**3.7.3 WORK SHIFTS**

All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday -Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

-----END-----

**ATTACHMENT #1**

**CERTIFICATE OF COMPLETION**

DATE: \_\_\_\_\_ VA Project #: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_ Abatement Contractor: \_\_\_\_\_

VAMC/ADDRESS: \_\_\_\_\_

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):  
which took place from        /        /        to        /        /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all abatement work was done in accordance with OSHA requirements and the manufacturer's recommendations.

CPIH/CIH Signature/Date: \_\_\_\_\_

CPIH/CIH Print Name: \_\_\_\_\_

Abatement Contractor Signature/Date: \_\_\_\_\_

Abatement Contractor Print Name: \_\_\_\_\_

ATTACHMENT #2

**CERTIFICATE OF WORKER'S ACKNOWLEDGMENT**

PROJECT NAME: \_\_\_\_\_ DATE: \_\_\_\_\_

PROJECT ADDRESS: \_\_\_\_\_

ABATEMENT CONTRACTOR'S NAME: \_\_\_\_\_

**WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.**

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature: \_\_\_\_\_

Printed Name: \_\_\_\_\_

Social Security Number: \_\_\_\_\_

Witness: \_\_\_\_\_

ATTACHMENT #3

**AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND  
TRAINING/ACCREDITATION**

VA PROJECT NAME AND NUMBER: \_\_\_\_\_

VA MEDICAL FACILITY: \_\_\_\_\_

ABATEMENT CONTRACTOR'S NAME AND ADDRESS: \_\_\_\_\_

1. I verify that the following individual

Name: \_\_\_\_\_ Social Security Number: \_\_\_\_\_

who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

Address: \_\_\_\_\_

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.
3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.
4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name of CPIH/CIH: \_\_\_\_\_

Signature of Contractor: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name of Contractor: \_\_\_\_\_

**ATTACHMENT #4**

**ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS**

VA Project Location: \_\_\_\_\_

VA Project #: \_\_\_\_\_

VA Project Description: \_\_\_\_\_

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature \_\_\_\_\_ Date \_\_\_\_\_

Abatement Contractor Competent Person(s) \_\_\_\_\_ Date \_\_\_\_\_

**SECTION 02 82 13.21  
ASBESTOS ROOFING ABATEMENT**

**PART 1 - GENERAL**

**1.1 SUMMARY OF THE WORK**

**1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS**

Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

**1.1.2 EXTENT OF WORK**

- A. Below is a brief description of the estimated quantities of asbestos roofing materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.

**PHASE 2**

500 square feet of asbestos roofing tar on exterior overhang as shown on the drawings.

- B. Any roofing material containing asbestos regardless of whether it's friable or not, cannot be recycled and must be disposed of appropriately.

**1.1.3 RELATED WORK**

- A. Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.  
B. Section 23 07 11, HVAC AND BOILER PLANT INSULATION.  
C. Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.

**1.1.4 TASKS**

The work tasks are summarized briefly as follows:

- A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, work-site preparations, emergency procedures arrangements, and standard operating procedures for Class II asbestos abatement work.

- B. Abatement activities including removal, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.
- C. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

#### 1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES

- A. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.
- B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design and Construction Procedure. VA Design and Construction Procedure drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action. For the limitations of use refer to the general requirements for the roof replacement work.

#### 1.2 VARIATIONS IN QUANTITY

The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimates which are limited by the physical constraints imposed by occupancy of the buildings. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the Contractor shall provide unit prices for additional work that is newly discovered materials and those prices will be used for additional work under the contract.

#### 1.3 STOP ASBESTOS REMOVAL

If the Contracting Officer; their field representative; (the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/Certified Industrial Hygienist (VPIH/CIH) presents a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered negative pressure air flow in the containment and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA shall follow-up with a written order to the Contractor as soon as practicable. The Contractor shall not resume any asbestos removal activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following



events shall be reported immediately by the Contractor's competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as it is practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:

- A. Airborne PCM analysis results equal to or greater than 0.01 f/cc outside a regulated area or >0.05 f/cc inside a regulated area;
- B. breach or break in regulated area containment barrier(s);
- C. less than -0.02" WCG pressure in the regulated area;
- D. serious injury/death at the site ;
- E. fire/safety emergency at the site ;
- F. respiratory protection system failure;
- G. power failure or loss of wetting agent; or
- H. any visible emissions observed outside the regulated area.

#### 1.4 DEFINITIONS

##### 1.4.1 GENERAL

Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

##### 1.4.2 GLOSSARY

**Abatement** - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

**Aerosol** - Solid or liquid particulate suspended in air.

**Adequately wet** - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

**Aggressive method** - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

**Aggressive sampling** - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

**AHERA** - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

**Aircell** - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

**Air monitoring** - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air. For personal samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis. NIOSH Method 7402 can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

**Air sample filter** - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

**Amended water** - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

**Asbestos** - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

**Asbestos Hazard Abatement Plan (AHAP)** - Asbestos work procedures required to be submitted by the contractor before work begins.

**Asbestos-containing material (ACM)** - Any material containing more than one percent of asbestos.

**Asbestos contaminated elements (ACE)** - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

**Asbestos-contaminated soil (ACS)** - Soil found in the work area or in adjacent areas such as crawlspaces or pipe tunnels which is contaminated with asbestos-containing material debris and cannot be easily separated from the material.

**Asbestos-containing waste (ACW) material** - Asbestos-containing material or asbestos contaminated objects requiring disposal.

**Asbestos Project Monitor** - Some states require that any person conducting asbestos abatement clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

**Asbestos waste decontamination facility** - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

**Authorized person** - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

**Authorized visitor** - Any person approved by the VA; the contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA0..

**Barrier** - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

**Containment Barrier** - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

**Critical Barrier** - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

**Primary Barrier** - Plastic barriers placed over critical barriers and exposed directly to abatement work.

**Secondary Barrier** - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

**Breathing zone** - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

**Bridging encapsulant** - An encapsulant that forms a layer on the surface of the ACM.

**Building/facility owner** - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

**Bulk testing** - The collection and analysis of suspect asbestos containing materials.

**Certified Industrial Hygienist (CIH)** - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

**Class I asbestos work** - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

**Class II asbestos work** - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

**Clean room/Changing room** - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

**Clearance sample** - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's professional industrial hygiene consultant/Certified Industrial Hygienist (VPIH/CIH).

**Closely resemble** - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

**Competent person** - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

**Contractor's Professional Industrial Hygienist (CPIH/CIH)** - The asbestos abatement contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of a PIH and may be a certified industrial hygienist (CIH).

**Count** - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.

**Crawlspace** - An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials and/or asbestos contaminated soil.

**Decontamination area/unit** - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

**Demolition** - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

**VA Total** - means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

**Disposal bag** - Typically 6 mil thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

07-11

**Disturbance** - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag which shall not exceed 60 inches in length or width.

**Drum** - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

**Employee exposure** - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

**Encapsulant** - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

**Encapsulation** - Treating ACM with an encapsulant.

**Enclosure** - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

**Equipment room** - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

**Fiber** - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

**Fibers per cubic centimeter (f/cc)** - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

**Filter** - Media used in respirators, vacuums, or other machines to remove particulate from air.

**Firestopping** - Material used to close the open parts of a structure in order to prevent a fire from spreading.

**Friable asbestos containing material** - Any material containing more than one (1) percent or asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

**Glovebag** - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

**High efficiency particulate air (HEPA) filter** - An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

**HEPA vacuum** - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

**Homogeneous area** - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

**HVAC** - Heating, Ventilation and Air Conditioning

**Industrial hygienist (IH)** - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

**Industrial hygienist technician (IH Technician)** - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned. Some states require that an industrial hygienist technician

conducting asbestos abatement clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

**Intact** - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

**Lockdown** - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

**National Emission Standards for Hazardous Air Pollutants (NESHAP)** - EPA's rule to control emissions of asbestos to the environment (40 CFR Part 61, Subpart M).

**Negative initial exposure assessment** - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL's.

**Negative pressure** - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

**Negative pressure respirator** - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

**Non-friable ACM** - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

**Organic vapor cartridge** - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

**Outside air** - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

**Owner/operator** - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

**Penetrating encapsulant** - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

**Personal protective equipment (PPE)** - equipment designed to protect user from injury and/or specific job hazard. Such equipment may include protective clothing, hard hats, safety glasses, and respirators.

**Personal sampling/monitoring** - Representative air samples obtained in the breathing zone for one or workers within the regulated area using a filter cassette and a calibrated air sampling pump to determine asbestos exposure.

**Permissible exposure limit (PEL)** - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the eight (8) hour time weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit is 1.0 fibers per cubic centimeter (1 f/cc).

**Pipe tunnel** - An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings, or asbestos-contaminated soil.

**Polarized light microscopy (PLM)** - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

07-11

**Polyethylene sheeting** - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, flame retardant per NFPA 241.

**Positive/negative fit check** - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing in (inhaling) and then temporarily occluding the exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator respectively.

**Presumed ACM (PACM)** - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (b).

**Professional IH** - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH. The PIH may be either the VA's PIH (VPIH) or Contractor's PIH (CPIH/CIH).

**Project designer** - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B)(5).

**Assigned Protection factor** - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

**Qualitative fit test (QLFT)** - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

**Quantitative fit test (QNFT)** - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

**Regulated area** - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

**Regulated ACM (RACM)** - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

**Removal** - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

**Renovation** - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

**Repair** - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

**Shower room** - The portion of the PDF where personnel shower before leaving the regulated area.

**Supplied air respirator (SAR)** - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-1989.

**Surfacing ACM** - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

**Surfactant** - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

**Thermal system ACM** - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

**Transmission electron microscopy (TEM)** - A microscopy method that can identify and count asbestos fibers.

**VA Professional Industrial Hygienist (VPIH/CIH)** - The Department of Veterans Affairs Professional Industrial Hygienist must meet the qualifications of a PIH, and may be a Certified Industrial Hygienist (CIH).

**VA Representative** - The VA official responsible for on-going project work.

**Visible emissions** - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

**Waste/Equipment decontamination facility (W/EDF)** - The area in which equipment is decontaminated before removal from the regulated area.

**Waste generator** - Any owner or operator whose act or process produces asbestos-containing waste material.

**Waste shipment record** - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

**Wet cleaning** - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

#### 1.4.3 REFERENCED STANDARDS ORGANIZATIONS

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses may be subject to change.

- A. VA Department of Veterans Affairs  
810 Vermont Avenue, NW  
Washington, DC 20420
- B. AIHA American Industrial Hygiene Association  
2700 Prosperity Avenue, Suite 250  
Fairfax, VA 22031  
703-849-8888
- C. ANSI American National Standards Institute  
1430 Broadway  
New York, NY 10018  
212-354-3300
- D. ASTM American Society for Testing and Materials  
1916 Race St.

Philadelphia, PA 19103  
215-299-5400

- E. CFR Code of Federal Regulations  
Government Printing Office  
Washington, DC 20420
  
- F. CGA Compressed Gas Association  
1235 Jefferson Davis Highway  
Arlington, VA 22202  
703-979-0900
  
- F. CS Commercial Standard of the National Institute of Standards and  
Technology (NIST)  
U. S. Department of Commerce  
Government Printing Office  
Washington, DC 20420
  
- G. EPA Environmental Protection Agency  
401 M St., SW  
Washington, DC 20460  
202-382-3949
  
- H. MIL-STD Military Standards/Standardization Division  
Office of the Assistant Secretary of Defense  
Washington, DC 20420
  
- J. NIST National Institute for Standards and Technology  
U. S. Department of Commerce  
Gaithersburg, MD 20234  
301-921-1000
  
- K. NEC National Electrical Code (by NFPA)
  
- L. NEMA National Electrical Manufacturer's Association  
2101 L Street, NW  
Washington, DC 20037
  
- M. NFPA National Fire Protection Association  
1 Batterymarch Park  
P.O. Box 9101  
Quincy, MA 02269-9101  
800-344-3555
  
- N. NIOSH National Institutes for Occupational Safety and Health  
4676 Columbia Parkway  
Cincinnati, OH 45226  
513-533-8236
  
- O. OSHA Occupational Safety and Health Administration  
U.S. Department of Labor  
Government Printing Office  
Washington, DC 20402



P. UL Underwriters Laboratory  
333 Pfingsten Rd.  
Northbrook, IL 60062  
312-272-8800

## **1.5 APPLICABLE CODES AND REGULATIONS**

### **1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS**

- A. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.
- B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.
- C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

### **1.5.2 CONTRACTOR RESPONSIBILITY**

The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE) including respiratory protection including respirator fit testing, as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH/CIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work

### **1.5.3 FEDERAL REQUIREMENTS**

Federal requirements which govern some aspect of asbestos abatement include, but are not limited to, the following regulations.

- A. Occupational Safety and Health Administration (**OSHA**)
  - 1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
  - 2. Title 29 CFR 1910.132 - Personal Protective Equipment
  - 3. Title 29 CFR 1910.134 - Respiratory Protection
  - 4. Title 29 CFR 1926 - Construction Industry Standards
  - 5. Title 29 CFR 1910.20 - Access to Employee Exposure and Medical Records
  - 6. Title 29 CFR 1910.1200 - Hazard Communication
  - 7. Title 29 CFR 1910.151 - Medical and First Aid
- B. Environmental Protection Agency (EPA)
  - 1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.

- 2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)
- C. Department of Transportation (DOT)  
Title 49 CFR 100 - 185 - Transportation

#### **1.5.4 STATE REQUIREMENTS**

State requirements that apply to the asbestos abatement work, disposal, clearance, etc., shall be followed.

#### **1.5.5 LOCAL REQUIREMENTS**

If local requirements are more stringent than federal or state standards, the local standards are to be followed

#### **1.5.6 STANDARDS**

- A. Standards which govern asbestos abatement activities include, but are not limited to, the following:
  - 1. American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems and ANSI Z88.2 - Practices for Respiratory Protection.
  - 2. Underwriters Laboratories (UL)586-90 - UL Standard for Safety of HEPA filter Units, 7th Edition.
- B. Standards which govern encapsulation work include, but are not limited to, the following:
  - 1. American Society for Testing and Materials (ASTM)
- C. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
  - 1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
  - 2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
  - 3. NFPA 101 - Life Safety Code

#### **1.5.7 EPA GUIDANCE DOCUMENTS**

- A. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.
- B. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
- C. Asbestos Waste Management Guidance EPA 530-SW-85-007
- D. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
- E. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

#### **1.5.8 NOTICES**

- A. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:
- B. Copies of notifications shall be submitted to the VA for the facility's records at the same time frame notification is given to EPA, State, and Local authorities.

#### 1.5.9 PERMITS/LICENSES

- A. The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

#### 1.5.10 POSTING AND FILING OF REGULATIONS

- A. Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

#### 1.5.11 VA RESPONSIBILITIES

Prior to commencement of work:

- A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment, and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**
- B. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized, calibration data and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

#### 1.5.12 SITE SECURITY

- A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.
- B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent person shall immediately notify the VA.
- C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.
- D. Access to the regulated area shall be through of a critical barrier doorway. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside; however, they shall be sealed with poly sheeting and taped until needed.
- E. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the

entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.

- F. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
- G. The regulated area shall be locked during non-working hours and secured by VA Representative or Competent Person. The VA Police should be informed of asbestos abatement regulated areas to provide security checks during facility rounds and emergency response.

#### **1.5.13 EMERGENCY ACTION PLAN AND ARRANGEMENTS**

- A. An Emergency Action Plan shall be developed by prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a);(b).
- B. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.
- C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
- D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
- E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
  - 1. For non life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
  - 2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.
- F. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
- G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
- H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the standard operating procedures during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

#### **1.5.14 PRE-CONSTRUCTION MEETING**

Prior to commencing the work, the Contractor shall meet with the VPCIH to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

- A. Proof of Contractor licensing.
- B. Proof the Competent Person is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person shall also be presented.
- C. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
- D. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
- E. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101(m).
- F. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101(h) and Appendix C.
- G. A copy of the Contractor's Asbestos Hazard Abatement Plan for Class II Asbestos Abatement. In these procedures, the following information must be detailed, specific for this project.
  1. Regulated area preparation procedures;
  2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101(d);
  3. If required, decontamination area set-up/layout and decontamination procedures for employees;
  4. Abatement methods/procedures and equipment to be used; and
  5. Personal protective equipment to be used.
- H. At this meeting the Contractor shall provide all submittals as required.
- I. Procedures for handling, packaging and disposal of asbestos waste.
- J. Emergency Action Plan and Contingency Plan Procedures.
- K. Any other submittals required by State and Local regulations shall also be submitted.

#### **1.6 PROJECT COORDINATION**

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

##### **1.6.1 PERSONNEL**

- A. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.
- B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-

site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with color picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.

C. Minimum qualifications for Contractor and assigned personnel are:

1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of federal (and state as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the state; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive standard operating procedures for asbestos work; and has adequate materials, equipment and supplies to perform the work.
2. The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
3. The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete standard operating procedure for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.
4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the standard operating procedures of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical and respiratory protection documentation; and has certificate of training/current refresher and State accreditation/license.

All personnel should be in compliance with OSHA construction safety training as applicable and submit certification

## **1.7 RESPIRATORY PROTECTION**

### **1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM**

The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.Subpart I;134. ANSI Standard Z88.2-1992 provides excellent

guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134(c)(1)(i-ix) - Respiratory Protection Program.

#### **1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR**

The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

#### **1.7.3 SELECTION AND USE OF RESPIRATORS**

The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

#### **1.7.4 MINIMUM RESPIRATORY PROTECTION**

Minimum respiratory protection shall be a half face, HEPA filtered, air purifying respirator when fiber levels are maintained consistently at or below 0.1 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

#### **1.7.5 MEDICAL WRITTEN OPINION**

No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically qualified to wear the class of respirator to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress

#### **1.7.6 RESPIRATOR FIT TEST**

All personnel wearing respirators shall have a current quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Fit tests shall be done for PAPRs which have been put into a failure mode.

#### **1.7.7 RESPIRATOR FIT CHECK**

The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a user seal check shall preclude that person from wearing a respirator inside the regulated area until resolution of the problem.

#### **1.7.8 MAINTENANCE AND CARE OF RESPIRATORS**

The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and care of respirators.

#### **1.8 WORKER PROTECTION**

##### **1.8.1 TRAINING OF ABATEMENT PERSONNEL**

Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

##### **1.8.2 MEDICAL EXAMINATIONS**

Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the medical opinion the person has been evaluated for working in a heat and cold stress environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

##### **1.8.3 PERSONAL PROTECTIVE EQUIPMENT**

Provide whole body clothing, head coverings, foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle. Worker protection shall meet the most stringent requirements.

##### **1.8.4 REGULATED AREA ENTRY PROCEDURE**

The Competent Person shall ensure that each time workers enter the regulated area, they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

##### **1.8.5 DECONTAMINATION PROCEDURE**

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

- A. When exiting the regulated area, remove all disposable PPE and dispose of in a disposal bag provided in the regulated area.
- B. Carefully decontaminate and clean the respirator. Put in a clean container/bag.



- C. Where containment is not required for ACM removal, an adequate washing station will be provided for the employees for removal of disposable PPE and to clean the respirator.

#### **1.8.6 REGULATED AREA REQUIREMENTS**

The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for Class I regulated areas at 29 CFR 1926.1101 (e) are met applicable to Class II work. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

#### **1.9 DECONTAMINATION FACILITIES**

##### **1.9.1 DESCRIPTION:**

Provide each regulated area with a fiber drum with a disposal bag in it for personnel waste materials. OSHA does not require a decontamination unit for Class II work.

- 1.9.2 WASTE/EQUIPMENT DECONTAMINATION AREA (W/EDA)** - The Competent Person shall provide a W/EDA for removal of all waste, equipment and contaminated material from the regulated area.

- 1.9.3 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES:** Contain all waste in 6 mil poly bags. Clean/decontaminate bags and pass through a double 6 mil flap doorway into another bag or fiber drum. Remove to disposal dumpster/gondola/vehicle. At no time shall unprotected personnel from the clean side be allowed to enter the regulated area.

#### **PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT**

##### **2.1 MATERIALS AND EQUIPMENT**

###### **2.1.1 GENERAL REQUIREMENTS (ALL ABATEMENT PROJECTS)**

Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's representative.

- A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
- B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable and combustible materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.
- C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.
- D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
- E. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least

- 6-mil shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
- F. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
  - G. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6 mil fire retardant poly.
  - H. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
  - I. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
  - J. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).
  - K. Disposal bags - 2 layers of 6 mil poly for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
  - L. The VA shall be provided an advance copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-project submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.
  - M. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
  - N. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).

## **2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA**

### **2.2.1 GENERAL**

Using critical barriers, seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All horizontal surfaces in the regulated area must be covered with 2 layers of 6 mil fire retardant poly to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated, immediately stop work and clean up the contamination at no additional cost to the Government. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 2.2.8; FIRESTOPPING.

**2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA**

Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Remove all uncontaminated removable furniture, equipment and/or supplies from the regulated area before commencing work, or completely cover with 2 layers of 6-mil fire retardant poly sheeting and secure with duct tape. Lock out and tag out any HVAC systems in the regulated area.

**2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA**

Access to the regulated area is allowed only through the personnel decontamination facility (PDF), if required. All other means of access shall be eliminated and OSHA Danger demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly sheeting to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid.

**2.2.4 CRITICAL BARRIERS**

Completely separate any openings into the regulated area from adjacent areas using fire retardant poly at least 6 mils thick and duct tape. Individually seal with two layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects in the regulated area. Heat must be shut off any objects covered with poly.

**2.2.5 SECONDARY BARRIERS:**

A loose layer of 6 mil fire retardant poly shall be used as a drop cloth to protect the floor/horizontal surfaces from debris generated during the Class II work, except for floor tile abatement. This layer shall be replaced as needed during the work.

**2.2.6 EXTENSION OF THE REGULATED AREA**

If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. If the affected area cannot be added to the regulated area, decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

**2.2.7 FIRESTOPPING:**

- A. Through penetrations caused by cables, cable trays, pipes, sleeves must be firestopped with a fire-rated firestop system providing an air tight seal.
- B. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The Contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA Representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.

- C. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

## **2.3 MONITORING, INSPECTION AND TESTING**

### **2.3.1 GENERAL**

- A. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. OSHA requires that the Employee exposure to asbestos must not exceed 0.1 fiber per cubic centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.
- B. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.
- C. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH/CIH with review and approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative..

### **2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT**

- A. The purpose of the work of the VPIH/CIH is to: assure quality; resolve problems; and prevent the spread of contamination beyond the regulated area. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:
1. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
  2. Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
  3. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
  4. Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of unforeseen developments, etc.
  5. Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area or building at the conclusion of the abatement and clean-up work to certify compliance with all regulations and the VA requirements/specifications.
  6. Task 6: Issue certificate of decontamination for each regulated area or building and project report.
- B. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
- C. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.
- D. All air sampling and analysis data will be recorded on VA Form 10-0018.

### **2.3.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH**

The Contractor's CPIH/CIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing

program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor, Abatement Worker and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation on substantially similar projects in size and scope. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log, shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for air personal monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

#### **2.4 ASBESTOS HAZARD ABATEMENT PLAN**

The Contractor shall have established Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the ways and procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of the project. The AHAP shall be submitted for review and approval prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAP(s) are:

- A. Minimum Personnel Qualifications
- B. Contingency Plans and Arrangements
- C. Security and Safety Procedures
- D. Respiratory Protection/Personal Protective Equipment Program and Training
- E. Medical Surveillance Program and Recordkeeping
- F. Regulated Area Requirements for Abatement
- G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
- H. Monitoring, Inspections, and Testing
- I. Disposal of ACM waste
- J. Regulated Area Decontamination/Clean-up
- K. Regulated Area Visual and Air Clearance
- L. Project Completion/Closeout

## 2.5 SUBMITTALS

### 2.5.1 PRE-START MEETING SUBMITTALS

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:

- A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
- B. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
- C. Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
- D. Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
  1. Supplied air system, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
  2. Waste water filtration system, shower system, containment barriers.
  3. Encapsulants, surfactants, hand held sprayers, airless sprayers, and fire extinguishers.
  4. Respirators, protective clothing, personal protective equipment.
  5. Fire safety equipment to be used in the regulated area.
- E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
- F. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.
- G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101 (f) and Appendix A. And area or clearance air monitoring in accordance with EPA AHERA protocols.
- H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
  1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; and Completion Date
  2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution

3. List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal and state EPA), penalties, and legal actions taken against the company including and of the company's officers (including damages paid) in the last 3 years. Provide copies and all information needed for verification.
- I. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH/CIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.
    1. CPIH/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of AHAP(s) developed; medical opinion; and current respirator fit test.
    2. Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
    3. Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
  - J. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of AHAP(s) incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and standard operating procedures; and copies of monitoring results of the five referenced projects listed and analytical method(s) used.
  - K. Rented equipment must be decontaminated prior to returning to the rental agency.
  - L. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all MSDS, and application instructions.

#### **2.5.2 SUBMITTALS DURING ABATEMENT**

- A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breeching, equipment



failures, emergencies, and any cause for stopping work; representative air monitoring and results/TWAs/ELs. Submit this information daily to the VPIH/CIH.

- B. The CPIH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.
  1. Removal of any poly barriers.
  2. Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant.
  3. Packaging and removal of ACM waste from regulated area.
  4. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

### **2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT**

The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in accordance with Attachment #1. All clearance and perimeter area samples must be submitted. The VA Representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

## **PART 3 - EXECUTION**

### **3.1 PRE-ABATEMENT ACTIVITIES**

#### **3.1.1 PRE-ABATEMENT MEETING**

The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH/CIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

#### **3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS**

Before any work begins on the construction of the regulated area, the Contractor will:

- A. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video

photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.

- B. The VA Representative, the Contractor, and the VPIH/CIH must be aware of VA 07/09 A/E Quality Alert indicating the failure to identify asbestos in the areas listed as well as common issues when preparing specifications and contract documents. This is especially critical when demolition is planned, because AHERA surveys are non-destructive, and ACM may remain undetected. A NESHAPS (destructive) ACM inspection should be conducted on all building structures that will be demolished. Ensure the following areas are inspected on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility chases/walls; transite piping/ductwork/sheets; behind radiators; lab fume hoods; transite lab countertops; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawl spaces( previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; steam line trench coverings.
- C. Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned and removed or properly protected from contamination.
- D. If present and required, remove and dispose of carpeting from floors in the regulated area.
- E. Inspect existing firestopping in the regulated area. Correct as needed.

### **3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS**

- A. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
- B. Upon completion of all preparatory work, the CPIH/CIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved SOP's, especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation.
- C. The CPIH/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.
- D. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification.

## **3.2 REGULATED AREA PREPARATIONS**

### **3.2.1 OSHA DANGER SIGNS**

Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed ambient background levels. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.

### **3.2.2 SHUT DOWN - LOCK OUT ELECTRICAL**

Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.

### **3.2.3 SHUT DOWN - LOCK OUT HVAC**

Shut down and lock out/tag out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area.

Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil poly disposal bags for disposal as asbestos waste.

### **3.2.4 SANITARY FACILITIES**

The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

### **3.2.5 WATER FOR ABATEMENT**

The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.

### **3.2.6 PRE-CLEANING MOVABLE OBJECTS**

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.

Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location.

### **3.2.7 PRE-CLEANING FIXED OBJECTS**

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area

Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2 layers of

6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.

**The abatement contractor** is responsible for the above pre-cleaning. Control panels, gauges etc., in the regulated area may require VA access during abatement. If necessary, these shall be designated and enclosures constructed with access flaps sealed with waterproof tape.

### **3.2.8 PRE-CLEANING SURFACES IN THE REGULATED AREA**

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. PPE must be donned during all pre-cleaning activities.

Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

## **3.3 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA**

### **3.3.1 GENERAL**

Using critical barriers, seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All horizontal surfaces in the regulated area must be covered with 2 layers of 6 mil fire retardant poly to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated, immediately stop work and clean up the contamination at no additional cost to the Government.

### **3.3.2 PREPARATION PRIOR TO SEALING OFF**

Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Remove all uncontaminated removable furniture, equipment and/or supplies from the regulated area before commencing work, or completely cover with 2 layers of 6-mil fire retardant poly sheeting and secure with duct tape. Lock out and tag out any HVAC systems in the regulated area.

### **3.3.3 CONTROLLING ACCESS TO THE REGULATED AREA**

Access to the regulated area is allowed only through the personnel decontamination facility (PDF), if required. All other means of access shall be eliminated and OSHA Danger demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly sheeting to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid.

#### **3.3.4 CRITICAL BARRIERS**

Completely separate any openings into the regulated area from adjacent areas using fire retardant poly at least 6 mils thick and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects in the regulated area. Heat must be shut off any objects covered with poly.

#### **3.3.5 EXTENSION OF THE REGULATED AREA**

If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. If the affected area cannot be added to the regulated area, decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

#### **3.3.6 FLOOR BARRIERS**

If floor removal is not being done, all floors in the regulated area shall be covered with 2 layers of 6 mil fire retardant poly and brought up the wall 12 inches.

### **3.4 REMOVAL OF CLASS II ROOFING**

#### **3.4.1 GENERAL**

The VA must be notified at least 24 hours in advance of any waste removed from the containment. All applicable requirements of OSHA, EPA, and DOT shall be followed during Class II work. Keep materials intact; do not disturb; wet while working with it; wrap as soon as possible with 2 layers of 6 mil plastic for disposal.

#### **3.4.2 OUTDOOR WORK AREAS**

On some projects, work must be performed on exterior areas of the building. If outdoor work is to be performed, all applicable OSHA, state and local regulations must be followed to ensure that outdoor work areas are in compliance so that workers, the general public and the environment are protected.

#### **3.4.3 SCAFFOLD FALL PROTECTION**

Each employee more than 10 feet above a lower level shall be protected from falls by guardrails or a fall arrest system. Fall arrest system includes harnesses, components of the harness/belt such as Dee-rings, and snap hooks, lifelines, and anchorage points. Lifelines must be independent of supports lines and suspension ropes and not attached to the same anchorage point as the support or suspension rope. OSHA's scaffolding standard defines a competent person as "one who is capable of identifying existing and predictable hazards in the surroundings or working conditions, which are unsanitary, hazardous to employees, and who has authorization to take prompt corrective measures to eliminate them." The competent person will determine if it is safe for employees to work on or from a scaffold or roof during storms or high winds and to ensure that a personal fall arrest system will protect the

employees. The competent person will also inspect the scaffold and scaffold components for visible defects before each work shift and after any occurrence which could affect the structural integrity and to authorize prompt corrective measures.

#### **3.4.4 ROOF FALL PROTECTION**

The competent person shall determine if the walking/working surfaces on which the employees are to work have the strength and structural integrity to support the employees safely. Each employee on a walking/working surface (horizontal and vertical surface) with an unprotected side or edge which is 6 feet or more above a lower level shall be protected from falling by the use of guardrail systems, safety net systems, or personal fall arrest system.

#### **3.4.5 REMOVAL OF ROOFING**

- A. Roofing material shall be removed in an intact state to the extent that it is feasible.
- B. Wet methods shall be used to remove roofing materials that are not intact, or that will be rendered not intact during removal, unless such wet methods are not feasible or will create safety hazards
- C. Cutting machines shall be continuously misted during use, unless a competent person determines that misting substantially decreases worker safety.
- D. When removing built-up roofs with asbestos-containing roofing felts and an aggregate surface using a power roof cutter, all dust resulting from the cutting operation shall be collected by a HEPA dust collector, or shall be HEPA vacuumed by vacuuming along the cut line. When removing built-up roofs with asbestos-containing roofing felts and a smooth surface using a power roof cutter, the dust resulting from the cutting operation shall be collected either by a HEPA dust collector or HEPA vacuuming along the cut line, or by gently sweeping and then carefully and completely wiping up the still-wet dust and debris left along the cut line.
- E. Asbestos-containing material that has been removed from a roof shall not be dropped or thrown to the ground. Unless the material is carried or passed to the ground by hand, it shall be lowered to the ground via covered, dust-tight chute, crane or hoist.
- F. Any ACM that is not intact shall be lowered to the ground as soon as is practicable, but in any event no later than the end of the work shift. While the material remains on the roof it shall either be kept wet, placed in an impermeable waste bag, or wrapped in plastic sheeting
- G. Intact ACM shall be lowered to the ground as soon as is practicable, but in any event no later than the end of the work shift.
- H. Upon being lowered, unwrapped material shall be transferred to a closed receptacle in such manner so as to preclude the dispersion of dust
- I. Roof level heating and ventilation air intake sources shall be isolated or the ventilation system shall be shut down. The sealing of air intake sources shall be coordinated with VA Facility Engineering Personnel and occupant location to ensure acceptable IAQ is maintained within the facility as per ASHRAE Standard 1955.
- J. Notwithstanding any other provision of this section, removal or repair of sections of intact roofing less than 25 square feet in area does not require use of wet methods or HEPA vacuuming as long as manual methods which do not render the material non-intact are used to remove the material and no visible dust is created by the removal method used. In

determining whether a job involves less than 25 square feet, the employer shall include all removal and repair work performed on the same roof on the same day.

All waste must be wrapped in two layers of 6 mil poly and lowered carefully to the ground. Roofing may be lowered by way of a dust-tight chute.

### **3.5 DISPOSAL OF CLASS II WASTE MATERIAL**

#### **3.5.1 GENERAL**

Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

### **3.6 PROJECT DECONTAMINATION**

#### **3.6.1 GENERAL**

- A. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
- B. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
- C. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

#### **3.6.2 REGULATED AREA CLEARANCE**

Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

#### **3.6.3 WORK DESCRIPTION**

Decontamination includes the cleaning and clearance of the air in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities.

#### **3.6.4 PRE-DECONTAMINATION CONDITIONS**

- A. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the secondary barrier of poly removal and disposed of along with any gross debris generated by the work.
- B. At the start of decontamination, the following shall be in place:
  1. Critical barriers over all openings consisting of two layers of 6 mil poly which is the sole barrier between the regulated area and the rest of the building or outside.

2. Decontamination facilities, if required for personnel and equipment in operating condition.

### 3.6.5. CLEANING

Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. Additional cleaning(s) may be needed as determined by the CPIH/VPIH/CIH.

### 3.7 VISUAL INSPECTION AND AIR CLEARANCE TESTING

#### 3.7.1 GENERAL

Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH after the cleaning.

#### 3.7.2 VISUAL INSPECTION

Final visual inspection will include the entire regulated area, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the cleaning shall be repeated at no cost to the VA. Dust/ material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

#### 3.7.3 AIR CLEARANCE TESTING

- A. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final testing. Air samples will be collected and analyzed in accordance with procedures for PCM in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures. **ALL additional inspection and testing will be done at the expense of the Contractor.**
- B. If the results of the PCM are acceptable, remove the critical barriers. Any small quantities of residue material found upon removal of the poly shall be removed with a HEPA vacuum and localized isolation. If significant quantities are found as determined by the VPIH/CIH, then the entire area affected shall be cleaned as specified in the final cleaning.
- C. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.



#### **3.7.4 FINAL AIR CLEARANCE PROCEDURES**

- A. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc, as measured by PCM methods.
- B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:
  - 1. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method.
  - 2. All clearance air testing samples shall be collected on 0.8 $\mu$  MCE filters for PCM analysis. Air samples will be collected in areas subject to normal air circulation. A minimum of 5 PCM samples will be collected with at least 1200 Liters of air sampled. All results must be less than 0.01 f/cc for clearance.

#### **3.8 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE**

##### **3.8.1 COMPLETION OF ABATEMENT WORK**

- A. After thorough decontamination, complete asbestos abatement work upon meeting the regulated area clearance criteria and fulfilling the following:
  - 1. Remove all equipment, materials, and debris from the project area.
  - 2. Package and dispose of all asbestos waste as required.
  - 3. Repair or replace all interior finishes damaged during the abatement work.
  - 4. Fulfill other project closeout requirements as specified elsewhere in this specification.

##### **3.8.2 CERTIFICATE OF COMPLETION BY CONTRACTOR**

The CPIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

##### **3.8.3 WORK SHIFTS**

All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday - Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

- - -END- - -

**ATTACHMENT #1**

**CERTIFICATE OF COMPLETION**

DATE: \_\_\_\_\_ VA Project #: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_ Abatement Contractor: \_\_\_\_\_

VAMC/ADDRESS: \_\_\_\_\_

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):  
which took place from        /        /        to        /        /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all abatement work was done in accordance with OSHA requirements and the manufacturer's recommendations.

CPIH/CIH Signature/Date: \_\_\_\_\_

CPIH/CIH Print Name: \_\_\_\_\_

Abatement Contractor Signature/Date: \_\_\_\_\_

Abatement Contractor Print Name: \_\_\_\_\_

**ATTACHMENT #2**

**CERTIFICATE OF WORKER'S ACKNOWLEDGMENT**

PROJECT NAME: \_\_\_\_\_ DATE: \_\_\_\_\_

PROJECT ADDRESS: \_\_\_\_\_

ABATEMENT CONTRACTOR'S NAME: \_\_\_\_\_

**WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.**

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature: \_\_\_\_\_ Printed Name: \_\_\_\_\_

Social Security Number: \_\_\_\_\_

Witness: \_\_\_\_\_

ATTACHMENT #3

**AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION**

VA PROJECT NAME AND NUMBER: \_\_\_\_\_

VA MEDICAL FACILITY: \_\_\_\_\_

ABATEMENT CONTRACTOR'S NAME AND ADDRESS: \_\_\_\_\_

1. I verify that the following individual

Name: \_\_\_\_\_ Social Security Number: \_\_\_\_\_

who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101 (m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

Address: \_\_\_\_\_

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name of CPIH/CIH: \_\_\_\_\_

Signature of Contractor: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name of Contractor: \_\_\_\_\_

**ATTACHMENT #4**

**ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS**

VA Project Location: \_\_\_\_\_

VA Project #: \_\_\_\_\_

VA Project Description: \_\_\_\_\_

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature \_\_\_\_\_ Date \_\_\_\_\_

Abatement Contractor Competent Person(s) \_\_\_\_\_ Date \_\_\_\_\_

**SECTION 02 83 33.13**  
**LEAD-BASED PAINT REMOVAL AND DISPOSAL**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies abatement and disposal of lead-based paint (LBP) and controls needed to limit occupational and environmental exposure to lead hazards.

**1.2 RELATED WORK**

- A. Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.
- B. Section 02 82 13.21, ASBESTOS ROOFING ABATEMENT.
- C. Section 23 07 11, HVAC AND BOILER PLANT INSULATION.

**1.3 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.
- B. Code of Federal Regulations (CFR):
  - CFR 29 Part 1910.....Occupational Safety and Health Standards
  - CFR 29 Part 1926.....Safety and Health Regulations for Construction
  - CFR 40 Part 148.....Hazardous Waste Injection Restrictions
  - CFR 40 Part 260.....Hazardous Waste Management System: General
  - CFR 40 Part 261.....Identification and Listing of Hazardous Waste
  - CFR 40 Part 262.....Standards Applicable to Generators of Hazardous Waste
  - CFR 40 Part 263.....Standards Applicable to Transporters of Hazardous Waste
  - CFR 40 Part 264.....Standards for Owners and Operations of Hazardous Waste Treatment, Storage, and Disposal Facilities
  - CFR 40 Part 265.....Interim Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities
  - CFR 40 Part 268.....Land Disposal Restrictions
  - CFR 49 Part 172.....Hazardous Material Table, Special Provisions, Hazardous Material Communications, Emergency Response Information, and Training Requirements
  - CFR 49 Part 178.....Specifications for Packaging
- C. National Fire Protection Association (NFPA):
  - NFPA 701-2004.....Methods of Fire Test for Flame-Resistant Textiles and Films



particulate filter means 99.97 percent efficient against 0.3 micron size particles.

- J. Lead: Metallic lead, inorganic lead compounds, and organic lead soaps. Excluded from this definition are other organic lead compounds.
- K. Lead Control Area: An enclosed area or structure with full containment to prevent the spread of lead dust, paint chips, or debris of lead-containing paint removal operations. The lead control area is isolated by physical boundaries to prevent unauthorized entry of personnel.
- L. Lead Permissible Exposure Limit (PEL): Fifty micrograms per cubic meter of air as an 8-hour time weighted average as determined by 29 CFR 1910.1025. If an employee is exposed for more than 8 hours in a work day, the PEL shall be determined by the following formula. 
$$\text{PEL (micrograms/cubic meter of air)} = 400/\text{No. of hrs worked per day}$$
- M. Personnel Monitoring: Sampling of lead concentrations within the breathing zone of an employee to determine the 8-hour time weighted average concentration in accordance with 29 CFR 1910.1025. Samples shall be representative of the employee's work tasks. Breathing zone shall be considered an area within a hemisphere, forward of the shoulders, with a radius of 150 mm to 225 mm (6 to 9 inches) and the center at the nose or mouth of an employee.

#### **1.5 QUALITY ASSURANCE**

- A. Before exposure to lead-contaminated dust, provide workers with a comprehensive medical examination as required by 29 CFR 1926.62 (I) (1) (i) & (ii). The examination shall not be required if adequate records show that employees have been examined as required by 29 CFR 1926.62(I) without the last year.
- B. Medical Records: Maintain complete and accurate medical records of employees in accordance with 29 CFR 1910.20.
- C. CIH Responsibilities: The Contractor shall employ a certified Industrial Hygienist who will be responsible for the following:
  - 1. Certify Training.
  - 2. Review and approve lead-containing paint removal plan for conformance to the applicable referenced standards.
  - 3. Inspect lead-containing paint removal work for conformance with the approved plan.
  - 4. Direct monitoring.
  - 5. Ensure work is performed in strict accordance with specifications at all times.



6. Ensure hazardous exposure to personnel and to the environment are adequately controlled at all times.
- D. Training: Train each employee performing paint removal, disposal, and air sampling operations prior to the time of initial job assignment, in accordance with 29 CFR 1926.62.
- E. Training Certification: Submit certificates signed and dated by the CIH and by each employee stating that the employee has received training.
- F. Respiratory Protection Program:
1. Furnish each employee required to wear a negative pressure respirator or other appropriate type with a respirator fit test at the time of initial fitting and at least every 6 months thereafter as required by 29 CFR 1926.62.
  2. Establish and implement a respiratory protection program as required by 29 CFR 1910.134, 29 CFR 1910.1025, and 29 CFR 1926.62.
- G. Hazard Communication Program: Establish and implement a Hazard Communication Program as required by 29 CFR 1910.1200.
- H. Hazardous Waste Management: The Hazardous Waste Management plan shall comply with applicable requirements of Federal, State, and local hazardous waste regulations and address:
1. Identification of hazardous wastes associated with the work.
  2. Estimated quantities of wastes to be generated and disposed of.
  3. Names and qualifications of each contractor that will be transporting, storing, treating, and disposing of the wastes. Include the facility location and a 24-hour point of contact. Furnish two copies of EPA, state and local hazardous waste permits and EPA Identification numbers.
  4. Names and qualifications (experience and training) of personnel who will be working on-site with hazardous wastes.
  5. List of waste handling equipment to be used in performing the work, to include cleaning, volume reduction, and transport equipment.
  6. Spill prevention, containment, and cleanup contingency measures to be implemented.
  7. Work plan and schedule for waste containment, removal and disposal. Wastes shall be cleaned up and containerized daily.
  8. Cost for hazardous waste disposal according to this plan.
- I. Safety and Health Compliance:
1. In addition to the detailed requirements of this specification, comply with laws, ordinances, rules, and regulations of federal, state, and local authorities regarding removing, handling, storing, transporting, and disposing of lead waste materials. Comply with the

- applicable requirements of the current issue of 29 CFR 1910.1025.  
Submit matters regarding interpretation of standards to the Contracting Officer for resolution before starting work.
2. Where specification requirements and the referenced documents vary, the most stringent requirements shall apply.
  3. The following local laws, ordinances, criteria, rules and regulations regarding removing, handling, storing, transporting, and disposing of lead-contaminated materials apply:
    - a. 25 Texas Administrative Code - Texas Environmental Lead Reduction Rules, Section 295
- J. Pre-Construction Conference: Along with the CIH, meet with the Contracting Officer to discuss in detail the lead-containing paint removal work plan, including work procedures and precautions for the work plan.

#### **1.6 SUBMITTALS**

- A. Submit the following in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Catalog Data:
  - Vacuum filters
  - Respirators
- C. Instructions: Paint removal materials. Include applicable material safety data sheets.
- D. Statements Certifications and Statements:
  1. Qualifications of CIH: Submit name, address, and telephone number of the CIH selected to perform responsibilities in paragraph entitled "CIH Responsibilities." Provide previous experience of the CIH. Submit proper documentation that the Industrial Hygienist is certified by the American Board of Industrial Hygiene in comprehensive practice, including certification number and date of certification/recertification.
  2. Testing Laboratory: Submit the name, address, and telephone number of the testing laboratory selected to perform the monitoring, testing, and reporting of airborne concentrations of lead. Provide proper documentation that persons performing the analysis have been judged proficient by successful participation within the last year in the National Institute for Occupational Safety and Health (NIOSH) Proficiency Analytical Testing (PAT) Program. The laboratory shall be accredited by the American Industrial Hygiene Association (AIHA).

- Provide AIHA documentation along with date of accreditation/reaccreditation.
3. Lead-Containing Paint Removal Plan:
    - a. Submit a detailed job-specific plan of the work procedures to be used in the removal of lead-containing paint. The plan shall include a sketch showing the location, size, and details of lead control areas, location and details of decontamination rooms, change rooms, shower facilities, and mechanical ventilation system.
    - b. Include in the plan, eating, drinking, smoking and restroom procedures, interface of trades, sequencing of lead related work, collected wastewater and paint debris disposal plan, air sampling plan, respirators, protective equipment, and a detailed description of the method of containment of the operation to ensure that airborne lead concentrations of 30 micrograms per cubic meter of air are not exceeded outside of the lead control area.
    - c. Include air sampling, training and strategy, sampling methodology, frequency, duration of sampling, and qualifications of air monitoring personnel in the air sampling portion on the plan.
  4. Field Test Reports: Monitoring Results: Submit monitoring results to the Contracting Officer within 3 working days, signed by the testing laboratory employee performing the air monitoring, the employee that analyzed the sample, and the CIH.
  5. Records:
    - a. Completed and signed hazardous waste manifest from treatment or disposal facility.
    - b. Certification of Medical Examinations.
    - c. Employee training certification.

## **PART 2 PRODUCTS**

PAINT REMOVAL PRODUCTS: Submit applicable Material Safety Data Sheets for paint removal products used in paint removal work. Use the least toxic product, suitable for the job and acceptable to the Industrial Hygienist.

## **PART 3 EXECUTION**

### **3.1 PROTECTION**

- A. Notification: Notify the Contracting Officer 10 days prior to the start of any paint removal work.
- B. Lead Control Area Requirements.

1. Establish a lead control area by completely enclosing with 6-mil fire retardant poly the area or structure where lead-containing paint removal operations will be performed.
  2. Contain removal operations by the use of a negative pressure full containment system with at least one change room and with HEPA filtered exhaust.
- C. Protection of Existing Work to Remain: Perform paint removal work without damage or contamination of adjacent areas. Where existing work is damaged or contaminated, restore work to its original condition.
- D. Boundary Requirements: Provide physical boundaries around the lead control area using 6-mil fire retardant poly to ensure that airborne concentrations of lead will not reach 30 micrograms per cubic meter of air outside of the lead control area.
- E. Heating, Ventilating and Air Conditioning (HVAC) Systems: Shut down, lock out, and isolate HVAC systems that supply, exhaust, or pass through the lead control areas. Seal intake and exhaust vents in the lead control area with 6-mil plastic sheet and tape. Seal seams in HVAC components that pass through the lead control area.
- F. Change Room and Shower Facilities: Provide clean change rooms and shower facilities within the physical boundary around the designated lead control area in accordance with requirements of 29 CFR 1926.62.
- G. Mechanical Ventilation System:
1. Use adequate ventilation to control personnel exposure to lead in accordance with 29 CFR 1926.57.
  2. To the extent feasible, use fixed local exhaust ventilation connected to HEPA filters or other collection systems, approved by the industrial hygienist. Local exhaust ventilation systems shall be designed, constructed, installed, and maintained in accordance with ANSI Z9.2.
  3. If air from exhaust ventilation is recirculated into the work place, the system shall have a high efficiency filter with reliable back-up filter and controls to monitor the concentration of lead in the return air and to bypass the recirculation system automatically if it fails. Air may be recirculated only where exhaust to the outside is not feasible.
- H. Personnel Protection: Personnel shall wear and use protective clothing and equipment as specified herein. Eating, smoking, or drinking is not permitted in the lead control area. No one will be permitted in the lead control area unless they have been given appropriate training and protective equipment.

- I. Warning Signs: Provide warning signs at approaches to lead control areas. Locate signs at such a distance that personnel may read the sign and take the necessary precautions before entering the area. Signs shall comply with the requirements of 29 CFR 1926.62.

### **3.2 WORK PROCEDURES**

- A. Perform removal of lead-containing paint in accordance with approved lead-containing paint removal plan. Use procedures and equipment required to limit occupational and environmental exposure to lead when lead-containing paint is removed in accordance with 29 CFR 1926.62, except as specified herein. Dispose of removed paint chips and associated waste in compliance with Environmental Protection Agency (EPA), federal, state, and local requirements.
- B. Personnel Exiting Procedures:
1. Whenever personnel exist the lead-controlled area, they shall perform the following procedures and shall not leave the work place wearing any clothing or equipment worn during the work day:
    - a. Vacuum themselves off.
    - b. Remove protective clothing in the decontamination room, and place them in an approved impermeable disposal bag.
    - c. Shower.
    - d. Change to clean clothes prior to leaving the physical boundary designated around the lead-contaminated job site.
- C. Monitoring: Monitoring of airborne concentrations of lead shall be in accordance with 29 CFR 1910.1025 and as specified herein. Air monitoring, testing, and reporting shall be performed by a CIH or an Industrial Hygiene (IH) Technician who is under the direction of the CIH:
1. The CIH or the IH Technician under the direction of the CIH shall be on the job site directing the monitoring, and inspecting the lead-containing paint removal work to ensure that the requirements of the Contract have been satisfied during the entire lead-containing paint removal operation.
  2. Take personal air monitoring samples on employees who are anticipated to have the greatest risk of exposure as determined by the CIH. In addition, take air monitoring samples on at least 25 percent of the work crew or a minimum of two employees, whichever is greater, during each work shift.
  3. Submit results of air monitoring samples, signed by the CIH, within 24 hours after the air samples are taken. Notify the Contracting

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
Sam Rayburn Memorial Veterans Center, Bonham, Texas  
100% ISSUED FOR CONSTRUCTION  
08-11

Officer immediately of exposure to lead at or in excess of the action  
level of 30 micrograms per cubic meter of air outside of the lead  
control area.

D. Monitoring During Paint Removal Work:

1. Perform personal and area monitoring during the entire paint removal operation. Sufficient area monitoring shall be conducted at the physical boundary to ensure unprotected personnel are not exposed above 30 micrograms per cubic meter of air at all times. If the outside boundary lead levels are at or exceed 30 micrograms per cubic meter of air, work shall be stopped and the CIH shall immediately correct the condition(s) causing the increased levels and notify the Contracting Officer immediately.
2. The CIH shall review the sampling data collected on that day to determine if condition(s) requires any further change in work methods. Removal work shall resume when approval is given by the CIH. The Contractor shall control the lead level outside of the work boundary to less than 30 micrograms per cubic meter of air at all times. As a minimum, conduct area monitoring daily on each shift in which lead paint removal operations are performed in areas immediately adjacent to the lead control area.
3. For outdoor operations, at least one sample on each shift shall be taken on the downwind side of the lead control area. If adjacent areas are contaminated, clean and visually inspect contaminated areas. The CIH shall certify that the area has been cleaned of lead contamination.

**3.3 LEAD-CONTAINING PAINT REMOVAL**

- A. Indoor Lead Paint Removal: Lead removal will be conducted inside a negative pressure gross removal containment in conjunction with the asbestos abatement. The paint removal process should be described in the lead-containing paint removal plan.

**Phase 3**

Remove 700 sf of lead-based painted plaster walls inside a negative pressure gross removal containment.

**Phase 4**

Remove 1,080 sf of lead-based painted plaster walls inside a negative pressure gross removal containment.

**Phase 5**

Remove 1,035 sf of lead-based painted plaster walls inside a negative pressure gross removal containment.

- B. Outside Lead Paint Removal: Select removal processes to minimize contamination of work areas with lead-contaminated dust or other lead-contaminated debris/waste. This paint removal process should be

described in the lead-containing paint removal plan. Perform manual sanding and scraping to the maximum extent feasible.

**Phase 2**

Remove yellow colored lead-based paint from curbs and concrete.

**3.4 SURFACE PREPARATIONS**

Avoid flash rusting or other deterioration of the substrate. Provide surface preparations for painting in accordance with Section 09 91 00, PAINTING.

**3.5 CLEANUP AND DISPOSAL**

- A. Cleanup: Maintain surfaces of the lead control area free of accumulations of paint chips and dust. Restrict the spread of dust and debris; keep waste from being distributed over the work area. Do not dry sweep or use compressed air to clean up the area. At the end of each shift and when the paint removal operation has been completed, clean the area of visible lead paint contamination by vacuuming with a HEPA filtered vacuum cleaner and wet mopping the area.
- B. Certification: The CIH shall certify in writing that the **inside and outside the lead control area air monitoring samples are less than 30 micrograms per cubic meter of air, inside and outside the lead control area wipe samples are less than 40 micrograms per square foot**, the respiratory protection for the employees was adequate, the work procedures were performed in accordance with 29 CFR 1926.62, and that there were no visible accumulations of lead-contaminated paint and dust on the worksite. Do not remove the lead control area or roped-off boundary and warning signs prior to the Contracting Officer's receipt of the CIH's certification. Reclean areas showing dust or residual paint chips.
- C. Testing of Lead-Containing Paint Residue and Used Abrasive Where indicated or when directed by the Contracting Officer, test lead containing paint residue and used abrasive in accordance with 40 CFR 261 for hazardous waste.
- D. Disposal:
  - 1. Collect lead-contaminated waste, scrap, debris, bags, containers, equipment, and lead-contaminated clothing, which may produce airborne concentrations of lead particles.
  - 2. Store removed paint, lead-contaminated clothing and equipment, and lead-contaminated dust and cleaning debris into U.S. Department of Transportation (49 CFR 178) approved 55-gallon drums. Properly labels



each drum to identify the type of waste (49 CFR 172) and the date lead-contaminated wastes were first put into the drum. Obtain and complete the Uniform Hazardous Waste Manifest forms from the COR. Comply with land disposal restriction notification requirements as required by 40 CFR 268:

- a. At least 14 days prior to delivery, notify the COR who will arrange for job site inspection of the drums and manifests.
  - b. As necessary, make lot deliveries of hazardous wastes to the Hazardous Waste Storage Facility to ensure that drums do not remain on the jobsite longer than 90 calendar days from the date affixed to each drum.
  - a. Collect lead-contaminated waste, scrap, debris, bags, containers, equipment, and lead-contaminated clothing which may produce airborne concentrations of lead particles. Label the containers in accordance with 29 CFR 1926.62. Dispose of lead-contaminated waste material at a EPA or State of Texas approved hazardous waste treatment, storage, or disposal facility off Government property.
  - b. Store waste materials in U.S. Department of Transportation (49 CFR 178) approved 55-gallon drums. Properly label each drum to identify the type of waste (49 CFR 172) and the date the drum was filled. The COR or an authorized representative will assign an area for interim storage of waste-containing drums. Do not store hazardous waste drums in interim storage longer than 90 calendar days from the date affixed to each drum.
  - c. Handle, store, transport, and dispose lead or lead-contaminated waste in accordance with 40 CFR 260, 40 CFR 261, 40 CFR 262, 40 CFR 263, 40 CFR 264, and 40 CFR 265. Comply with land disposal restriction notification requirements as required by 40 CFR 268.
- E. Disposal Documentation Submit written evidence that the hazardous waste treatment, storage, or disposal facility (TSD) is approved for lead disposal by the EPA, State of Texas or local regulatory agencies. Submit one copy of the completed manifest, signed and dated by the initial transporter in accordance with 40 CFR 262.

- - - E N D - - -

**SECTION 03 30 00**  
**CAST-IN-PLACE CONCRETE**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. This section specifies cast-in-place structural concrete and materials and mixes for other concrete.

**1.2 RELATED WORK:**

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Concrete roads, walks, and similar exterior site work: Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS.

**1.3 TESTING AGENCY FOR CONCRETE MIX DESIGN:**

- A. Testing agency for the trial concrete mix design retained and reimbursed by the Contractor and approved by COR. For all other testing, refer to Section 01 45 29 Testing Laboratory Services.
- B. Testing agency maintaining active participation in Program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology.
- C. Testing agency shall furnish equipment and qualified technicians to establish proportions of ingredients for concrete mixes.

**1.4 TOLERANCES:**

- A. Formwork: ACI 117, except the elevation tolerance of formed surfaces before removal of shores is +0 mm (+0 inch) and -20 mm (-3/4 inch).
- B. Reinforcement Fabricating and Placing: ACI 117, except that fabrication tolerance for bar sizes Nos. 10, 13, and 16 (Nos. 3, 4, and 5) (Tolerance Symbol 1 in Fig. 2.1(a), ACI, 117) used as column ties or stirrups is +0 mm (+0 inch) and -13 mm (-1/2 inch) where gross bar length is less than 3600 mm (12 feet), or +0 mm (+0 inch) and -20 mm (-3/4 inch) where gross bar length is 3600 mm (12 feet) or more.
- C. Cross-Sectional Dimension: ACI 117, except tolerance for thickness of slabs 12 inches or less is +20 mm (+3/4 inch) and - 6 mm (-1/4 inch). Tolerance of thickness of beams more than 300 mm (12 inch) but less than 900 mm (3 feet) is +20 mm (+3/4 inch) and -10 mm (-3/8 inch).

- D. Slab Finishes: ACI 117, Section 4.5.6, F-number method in accordance with ASTM E1155, except as follows:
1. Test entire slab surface, including those areas within 600 mm (2 feet) of construction joints and vertical elements that project through slab surface.
  2. Maximum elevation change which may occur within 600 mm (2 feet) of any column or wall element is 6 mm (0.25 inches).
  3. Allow sample measurement lines that are perpendicular to construction joints to extend past joint into previous placement no further than 1500 mm (5 feet).

**1.5 REGULATORY REQUIREMENTS:**

- A. ACI SP-66 - ACI Detailing Manual.
- B. ACI 318 - Building Code Requirements for Reinforced Concrete.
- C. ACI 301 - Standard Specifications for Structural Concrete.

**1.6 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Shop Drawings: Reinforcing steel: Complete shop drawings
- C. Mill Test Reports:
  1. Reinforcing Steel.
  2. Cement.
- D. Manufacturer's Certificates:
  1. Abrasive aggregate.
  2. Air-entraining admixture.
  3. Chemical admixtures, including chloride ion content.
  4. Waterproof paper for curing concrete.
  5. Liquid membrane-forming compounds for curing concrete.
  6. Non-shrinking grout.
  7. Waterstops.
  8. Expansion joint filler.
  9. Adhesive binder.
- E. Void Form: Submit product data on void form material.
- F. Testing Agency for Concrete Mix Design: Approval request including qualifications of principals and technicians and evidence of active participation in program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology.
- G. Test Report for Concrete Mix Designs: Trial mixes including water-cement fly ash ratio curves, concrete mix ingredients, and admixtures.

**1.7 DELIVERY, STORAGE, AND HANDLING:**

- A. Conform to ACI 304. Store aggregate separately for each kind or grade, to prevent segregation of sizes and avoid inclusion of dirt and other materials.
- B. Deliver cement in original sealed containers bearing name of brand and manufacturer, and marked with net weight of contents. Store in suitable watertight building in which floor is raised at least 300 mm (1 foot) above ground. Store bulk cement and fly ash in separate suitable bins.
- C. Deliver other packaged materials for use in concrete in original sealed containers, plainly marked with manufacturer's name and brand, and protect from damage until used.

**1.8 PRE-CONCRETE CONFERENCE:**

- A. General: At least 15 days prior to submittal of design mixes, conduct a meeting to review proposed methods of concrete construction to achieve the required results.
- B. Agenda: Includes but is not limited to:
  - 1. Submittals.
  - 2. Coordination of work.
  - 3. Availability of material.
  - 4. Concrete mix design including admixtures.
  - 5. Methods of placing, finishing, and curing.
  - 6. Finish criteria required to obtain required flatness and levelness.
  - 7. Timing of floor finish measurements.
  - 8. Material inspection and testing.
- C. Attendees: Include but not limited to representatives of Contractor; subcontractors involved in supplying, conveying, placing, finishing, and curing concrete; admixture manufacturers; COR; Consulting Engineer; Department of Veterans Affairs retained testing laboratories for concrete testing and finish (F-number) verification.
- D. Minutes of the meeting: Contractor shall take minutes and type and distribute the minutes to attendees within five days of the meeting.

**1.9 APPLICABLE PUBLICATIONS:**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Concrete Institute (ACI):
  - 117-10.....Specifications for Tolerances for Concrete Construction and Materials and Commentary

- 211.1-91 (R2009).....Standard Practice for Selecting Proportions for Normal, Heavyweight, and Mass Concrete
- 214R-11.....Guide to Evaluation of Strength Test Results of Concrete
- 301-10.....Standard Practice for Structural Concrete
- 304R-00 (R2009).....Guide for Measuring, Mixing, Transporting, and Placing Concrete
- 305.1-06.....Specification for Hot Weather Concreting
- 306.1-90 (R2002).....Standard Specification for Cold Weather Concreting
- 308.1-11.....Specification for Curing Concrete
- 309R-05.....Guide for Consolidation of Concrete
- 318-11.....Building Code Requirements for Structural Concrete and Commentary
- 347-04.....Guide to Formwork for Concrete
- SP-66-04.....ACI Detailing Manual
- C. American National Standards Institute and American Hardboard Association (ANSI/AHA):
  - A135.4-2004.....Basic Hardboard
- D. American Society for Testing and Materials (ASTM):
  - A82/A82M-07.....Standard Specification for Steel Wire, Plain, for Concrete Reinforcement
  - A185/185M-07.....Standard Specification for Steel Welded Wire Reinforcement, Plain, for Concrete
  - A615/A615M-09.....Standard Specification for Deformed and Plain Carbon Steel Bars for Concrete Reinforcement
  - A706/A706M-09.....Standard Specification for Low Alloy Steel Deformed and Plain Bars for Concrete Reinforcement
  - A820-11.....Standard Specification for Steel Fibers for Fiber Reinforced Concrete
  - C31/C31M-10.....Standard Practice for Making and Curing Concrete Test Specimens in the field
  - C33/C33M-11A.....Standard Specification for Concrete Aggregates
  - C39/C39M-12.....Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens
  - C94/C94M-12.....Standard Specification for Ready Mixed Concrete
  - C143/C143M-10.....Standard Test Method for Slump of Hydraulic Cement Concrete
  - C150-11.....Standard Specification for Portland Cement

- C171-07.....Standard Specification for Sheet Materials for  
Curing Concrete
- C172-10.....Standard Practice for Sampling Freshly Mixed  
Concrete
- C173-10.....Standard Test Method for Air Content of Freshly  
Mixed Concrete by the Volumetric Method
- C192/C192M-07.....Standard Practice for Making and Curing Concrete  
Test Specimens in the Laboratory
- C231-10.....Standard Test Method for Air Content of Freshly  
Mixed Concrete by the Pressure Method
- C260-10.....Standard Specification for Air Entraining  
Admixtures for Concrete
- C309-11.....Standard Specification for Liquid Membrane  
Forming Compounds for Curing Concrete
- C494/C494M-11.....Standard Specification for Chemical Admixtures  
for Concrete
- C618-12.....Standard Specification for Coal Fly Ash and Raw  
or Calcined Natural Pozzolan for Use in Concrete
- C666/C666M-03 (R2008) ....Standard Test Method for Resistance of Concrete  
to Rapid Freezing and Thawing
- C881/C881M-10.....Standard Specification for Epoxy Resin Base  
Bonding Systems for Concrete
- C1107/1107M-11.....Standard Specification for Packaged Dry,  
Hydraulic-Cement Grout (Non-shrink)
- C1315-11.....Standard Specification for Liquid Membrane  
Forming Compounds Having Special Properties for  
Curing and Sealing Concrete
- D6-95 (R2011) .....Standard Test Method for Loss on Heating of Oil  
and Asphaltic Compounds
- D297-93 (R2006) .....Standard Methods for Rubber Products Chemical  
Analysis
- D412-06AE2.....Standard Test Methods for Vulcanized Rubber and  
Thermoplastic Elastomers - Tension
- D1751-04 (R2008) .....Standard Specification for Preformed Expansion  
Joint Filler for Concrete Paving and Structural  
Construction (Non-extruding and Resilient  
Bituminous Types)
- D4263-83 (2012) .....Standard Test Method for Indicating Moisture in  
Concrete by the Plastic Sheet Method.

- D4397-10.....Standard Specification for Polyethylene Sheeting  
for Construction, Industrial and Agricultural  
Applications
- E1155-96(R2008).....Standard Test Method for Determining  $F_F$  Floor  
Flatness and  $F_L$  Floor Levelness Numbers
- F1869-11.....Standard Test Method for Measuring Moisture  
Vapor Emission Rate of Concrete Subfloor Using  
Anhydrous Calcium Chloride.

E. American Welding Society (AWS):

- D1.4/D1.4M-11.....Structural Welding Code - Reinforcing Steel

F. Concrete Reinforcing Steel Institute (CRSI):

Handbook 2008

G. National Cooperative Highway Research Program (NCHRP):

- Report On.....Concrete Sealers for the Protection of Bridge  
Structures

H. U. S. Department of Commerce Product Standard (PS):

PS 1.....Construction and Industrial Plywood

PS 20.....American Softwood Lumber

I. U. S. Army Corps of Engineers Handbook for Concrete and Cement:

CRD C513.....Rubber Waterstops

CRD C572.....Polyvinyl Chloride Waterstops

**PART 2 - PRODUCTS:**

**2.1 FORMS:**

- A. Wood: PS 20 free from loose knots and suitable to facilitate finishing  
concrete surface specified; tongue and grooved.
- B. Plywood: PS-1 Exterior Grade B-B (concrete-form) 16 mm (5/8 inch), or 20  
mm (3/4 inch) thick for unlined contact form. B-B High Density Concrete  
Form Overlay optional.
- C. Corrugated Fiberboard Void Boxes: Double faced, completely impregnated  
with paraffin and laminated with moisture resistant adhesive, size as  
shown. Design forms to support not less than 48 KPa (1000 psf) and not  
lose more than 15 percent of their original strength after being  
completely submerged in water for 24 hours and then air dried.
- D. Form Lining:
  - 1. Hardboard: ANSI/AHA A135.4, Class 2 with one (S1S) smooth side)
  - 2. Plywood: Grade B-B Exterior (concrete-form) not less than 6 mm (1/4  
inch) thick.
  - 3. Plastic, fiberglass, or elastomeric capable of reproducing the  
desired pattern or texture.

- E. Form Ties: Develop a minimum working strength of 13.35 kN (3000 pounds) when fully assembled. Ties shall be adjustable in length to permit tightening of forms and not have any lugs, cones, washers to act as spreader within form, nor leave a hole larger than 20 mm (3/4 inch) diameter, or a depression in exposed concrete surface, or leave metal closer than 40 mm (1 1/2 inches) to concrete surface. Wire ties not permitted. Cutting ties back from concrete face not permitted.

**2.2 MATERIALS:**

- A. Portland Cement: ASTM C150 Type I or II.
- B. Fly Ash: ASTM C618, Class C or F including supplementary optional requirements relating to reactive aggregates and alkalis, and loss on ignition (LOI) not to exceed 5 percent.
- C. Coarse Aggregate: ASTM C33.
1. Size 67 or Size 467 may be used for footings and walls over 300 mm (12 inches) thick.
  2. Coarse aggregate for applied topping, encasement of steel columns, and metal pan stair fill shall be Size 7.
  3. Maximum size of coarse aggregates not more than one-fifth of narrowest dimension between sides of forms, one-third of depth of slabs, nor three-fourth of minimum clear spacing between reinforcing bars.
- D. Fine Aggregate: ASTM C33. Fine aggregate for applied concrete floor topping shall pass a 4.75 mm (No. 4) sieve, 10 percent maximum shall pass a 150 µm (No. 100) sieve.
- E. Mixing Water: Fresh, clean, and potable.
- F. Admixtures:
1. Water Reducing Admixture: ASTM C494, Type A and not contain more chloride ions than are present in municipal drinking water.
  2. Water Reducing, Retarding Admixture: ASTM C494, Type D and not contain more chloride ions than are present in municipal drinking water.
  3. High-Range Water-Reducing Admixture (Superplasticizer): ASTM C494, Type F or G, and not contain more chloride ions than are present in municipal drinking water.
  4. Non-Corrosive, Non-Chloride Accelerator: ASTM C494, Type C or E, and not contain more chloride ions than are present in municipal drinking water. Admixture manufacturer must have long-term non-corrosive test data from an independent testing laboratory of at least one year duration using an acceptable accelerated corrosion test method such as that using electrical potential measures.



5. Air Entraining Admixture: ASTM C260.
  6. Calcium Nitrite corrosion inhibitor: ASTM C494 Type C.
  7. Prohibited Admixtures: Calcium chloride, thiocyanate or admixtures containing more than 0.05 percent chloride ions are not permitted.
  8. Certification: Written conformance to the requirements above and the chloride ion content of the admixture prior to mix design review.
- G. Vapor Barrier: ASTM D4397, 0.38 mm (15 mil).
- H. Reinforcing Steel: ASTM A615, deformed, grade as shown.
- I. Welded Wire Fabric: ASTM A185.
- J. Reinforcing Bars to be Welded: ASTM A706.
- K. Cold Drawn Steel Wire: ASTM A82.
- L. Reinforcement for Metal Pan Stair Fill: 50 mm (2 inch) wire mesh, either hexagonal mesh at .8Kg/m<sup>2</sup> (1.5 pounds per square yard), or square mesh at .6Kg/m<sup>2</sup> (1.17 pounds per square yard).
- M. Supports, Spacers, and Chairs: Types which will hold reinforcement in position shown in accordance with requirements of ACI 318 except as specified.
- N. Expansion Joint Filler: ASTM D1751.
- O. Sheet Materials for Curing Concrete: ASTM C171.
- P. Liquid Membrane-forming Compounds for Curing Concrete: ASTM C309, Type I, with fugitive dye, and shall meet the requirements of ASTM C1315. Compound shall be compatible with scheduled surface treatment, such as paint and resilient tile, and shall not discolor concrete surface.
- Q. Abrasive Aggregate: Aluminum oxide grains or emery grits.
- R. Liquid Hardener and Dustproofer: Fluosilicate solution of magnesium fluosilicate or zinc fluosilicate. Magnesium and zinc may be used separately or in combination as recommended by manufacturer. Use only on exposed slab. Do not use where floor is covered with resilient flooring, paint or other finish coating.
- S. Moisture Vapor Emissions & Alkalinity Control Sealer: 100% active colorless aqueous silicate solution concrete surface.
1. ASTM C1315 Type 1 Class A, and ASTM C309 Type 1 Class A, penetrating product to have no less than 34% solid content, leaving no sheen, volatile organic compound (VOC) content rating as required to suite regulatory requirements. The product shall have at least a five (5) year documented history in controlling moisture vapor emission from damaging floor covering, compatible with all finish materials.
  2. MVE 15-Year Warranty:

- a. When a floor covering is installed on a below grade, on grade, or above grade concrete slab treated with Moisture Vapor Emissions & Alkalinity Control Sealer according to manufacturer's instruction, sealer manufacturer shall warrant the floor covering system against failure due to moisture vapor migration or moisture-born contaminates for a period of fifteen (15) years from the date of original installation. The warranty shall cover all labor and materials needed to replace all floor covering that fails due to moisture vapor emission & moisture born contaminates.

T. Non-Shrink Grout:

1. ASTM C1107, pre-mixed, produce a compressive strength of at least 18 MPa at three days and 35 MPa (5000 psi) at 28 days. Furnish test data from an independent laboratory indicating that the grout when placed at a fluid consistency shall achieve 95 percent bearing under a 1200 mm x 1200 mm (4 foot by 4 foot) base plate.
2. Where high fluidity or increased placing time is required, furnish test data from an independent laboratory indicating that the grout when placed at a fluid consistency shall achieve 95 percent under an 450 mm x 900 mm (18 inch by 36 inch) base plate.

U. Adhesive Binder: ASTM C881.

V. Waterstops:

1. Bentonite Waterstop: Flexible strip of bentonite 25 mm x 20 mm (1 inch by 3/4 inch), weighing 8.7 kg/m (5.85 lbs. per foot) composed of Butyl Rubber Hydrocarbon (ASTM D297), Bentonite (SS-S-210-A) and Volatile Matter (ASTM D6).

W. Porous Backfill: Crushed stone or gravel graded from 25 mm to 20 mm (1 inch to 3/4 inch).

X. Fibers:

1. Synthetic Fibers: Monofilament or fibrillated polypropylene fibers for secondary reinforcing of concrete members. Use appropriate length and 0.9 kg/m<sup>3</sup> (1.5 lb. per cubic yard). Product shall have a UL rating.

Y. Epoxy Joint Filler: Two component, 100 percent solids compound, with a minimum shore D hardness of 50.

Z. Bonding Admixture: Non-rewettable, polymer modified, bonding compound.

**2.3 CONCRETE MIXES:**

- A. Mix Designs: Proportioned in accordance with Section 5.3, "Proportioning on the Basis of Field Experience and/or Trial Mixtures" of ACI 318.

1. If trial mixes are used, make a set of at least 6 cylinders in accordance with ASTM C192 for test purposes from each trial mix; test three for compressive strength at 7 days and three at 28 days.
  2. Submit a report of results of each test series, include a detailed listing of the proportions of trial mix or mixes, including cement, fly ash, admixtures, weight of fine and coarse aggregate per m<sup>3</sup> (cubic yard) measured dry rodded and damp loose, specific gravity, fineness modulus, percentage of moisture, air content, water-cement-fly ash ratio, and consistency of each cylinder in terms of slump.
  3. Prepare a curve showing relationship between water-cement-fly ratio at 7-day and 28-day compressive strengths. Plot each curve using at least three specimens.
  4. If the field experience method is used, submit complete standard deviation analysis.
- B. Fly Ash Testing: Submit certificate verifying conformance with ASTM 618 initially with mix design and for each truck load of fly ash delivered from source. Submit test results performed within 6 months of submittal date. Notify COR immediately when change in source is anticipated.
1. Testing Laboratory used for fly ash certification/testing shall participate in the Cement and Concrete Reference Laboratory (CCRL) program. Submit most recent CCRL inspection report.
- C. After approval of mixes no substitution in material or change in proportions of approval mixes may be made without additional tests and approval of COR or as specified. Making and testing of preliminary test cylinders may be carried on pending approval of cement and fly ash, providing Contractor and manufacturer certify that ingredients used in making test cylinders are the same. COR may allow Contractor to proceed with depositing concrete for certain portions of work, pending final approval of cement and fly ash and approval of design mix.
- D. Cement Factor: Maintain minimum cement factors in Table I regardless of compressive strength developed above minimums. Use Fly Ash as an admixture with 20% replacement by weight in all structural work. Increase this replacement to 40% for mass concrete, and reduce it to 10% for drilled piers and caissons.

**TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE**

Concrete Strength	Non-Air-Entrained	Air-Entrained
-------------------	-------------------	---------------

Min. 28 Day Comp. Str. MPa (psi)	Min. Cement kg/m <sup>3</sup> (lbs/c. yd)	Max. Water Cement Ratio	Min. Cement kg/m <sup>3</sup> (lbs/c. yd)	Max. Water Cement Ratio
30 (4000) <sup>1</sup>	325 (550)	0.55	340 (570)	0.50
25 (3000) <sup>1</sup>	280 (470)	0.65	290 (490)	0.55

1. If trial mixes are used, the proposed mix design shall achieve a compressive strength 8.3 MPa (1200 psi) in excess of f'c. For concrete strengths above 35 Mpa (5000 psi), the proposed mix design shall achieve a compressive strength 9.7 MPa (1400 psi) in excess of f'c.

E. Maximum Slump: Maximum slump, as determined by ASTM C143 with tolerances as established by ASTM C94, for concrete to be vibrated shall be as shown in Table II.

**TABLE II - MAXIMUM SLUMP, MM (INCHES)\***

Type of Construction	Normal Weight Concrete	Lightweight Structural Concrete
Reinforced Footings and Substructure Walls	75mm (3 inches)	75 mm (3 inches)
Slabs, Beams, and Reinforced Walls	100 mm (4 inches)	100 mm (4 inches)

F. Slump may be increased by the use of the approved high-range water-reducing admixture (superplasticizer). Tolerances as established by ASTM C94. Concrete containing the high-range-water-reducing admixture may have a maximum slump of 225 mm (9 inches). The concrete shall arrive at the job site at a slump of 50 mm to 75 mm (2 inches to 3 inches). This should be verified, and then the high-range-water-reducing admixture added to increase the slump to the approved level.

G. Air-Entrainment: Air-entrainment of normal weight concrete shall conform with Table III. Determine air content by either ASTM C173 or ASTM C231.

**TABLE III - TOTAL AIR CONTENT  
 FOR VARIOUS SIZES OF COARSE AGGREGATES (NORMAL CONCRETE)**

Nominal Maximum Size of Total Air Content	Coarse Aggregate, mm (Inches) Percentage by Volume
10 mm (3/8 in).6 to 10	13 mm (1/2 in).5 to 9
20 mm (3/4 in).4 to 8	25 mm (1 in).3-1/2 to 6-1/2
40 mm (1 1/2 in).3 to 6	

- H. Concrete slabs placed at air temperatures below 10 degrees C (50 degrees Fahrenheit) use non-corrosive, non-chloride accelerator. Concrete required to be air entrained use approved air entraining admixture. Pumped concrete, synthetic fiber concrete, concrete required to be watertight, and concrete with a water/cement ratio below 0.50 use high-range water-reducing admixture (superplasticizer).
- I. Durability: Use air entrainment for exterior exposed concrete subjected to freezing and thawing and other concrete shown or specified. For air content requirements see Table III or Table IV.
- J. Enforcing Strength Requirements: Test as specified in Section 01 45 29, TESTING LABORATORY SERVICES, during the progress of the work. Seven-day tests may be used as indicators of 28-day strength. Average of any three 28-day consecutive strength tests of laboratory-cured specimens representing each type of concrete shall be equal to or greater than specified strength. No single test shall be more than 3.5 MPa (500 psi) below specified strength. Interpret field test results in accordance with ACI 214. Should strengths shown by test specimens fall below required values, COR may require any one or any combination of the following corrective actions, at no additional cost to the Government:
1. Require changes in mix proportions by selecting one of the other appropriate trial mixes or changing proportions, including cement content, of approved trial mix.
  2. Require additional curing and protection.
  3. If five consecutive tests fall below 95 percent of minimum values given in Table I or if test results are so low as to raise a question as to the safety of the structure, COR may direct Contractor to take cores from portions of the structure. Use results from cores tested by the Contractor retained testing agency to analyze structure.
  4. If strength of core drilled specimens falls below 85 percent of minimum value given in Table I, COR may order load tests, made by Contractor retained testing agency, on portions of building so

affected. Load tests in accordance with ACI 318 and criteria of acceptability of concrete under test as given therein.

5. Concrete work, judged inadequate by structural analysis, by results of load test, or for any reason, shall be reinforced with additional construction or replaced, if directed by the COR.

**2.4 BATCHING AND MIXING:**

- A. General: Concrete shall be "Ready-Mixed" and comply with ACI 318 and ASTM C94, except as specified. Batch mixing at the site is permitted. Mixing process and equipment must be approved by COR. With each batch of concrete, furnish certified delivery tickets listing information in Paragraph 16.1 and 16.2 of ASTM C94. Maximum delivery temperature of concrete is 38°C (100 degrees Fahrenheit). Minimum delivery temperature as follows:

Atmospheric Temperature	Minimum Concrete Temperature
-1. degrees to 4.4 degrees C (30 degrees to 40 degrees F)	15.6 degrees C (60 degrees F.)
-17 degrees C to -1.1 degrees C (0 degrees to 30 degrees F.)	21 degrees C (70 degrees F.)

1. Services of aggregate manufacturer's representative shall be furnished during the design of trial mixes and as requested by the COR for consultation during batching, mixing, and placing operations of structural concrete. Services will be required until field controls indicate that concrete of required quality is being furnished. Representative shall be thoroughly familiar with the structural aggregate, adjustment and control of mixes to produce concrete of required quality. Representative shall assist and advise COR.

**PART 3 - EXECUTION**

**3.1 FORMWORK:**

- A. General: Design in accordance with ACI 347 is the responsibility of the Contractor.
1. Form boards and plywood forms may be reused for contact surfaces of exposed concrete only if thoroughly cleaned, patched, and repaired and COR approves their reuse.
  2. Provide forms for concrete footings unless COR determines forms are not necessary.

3. Corrugated fiberboard forms: Place forms on a smooth firm bed, set tight, with no buckled cartons to prevent horizontal displacement, and in a dry condition when concrete is placed.
- B. Treating and Wetting: Treat or wet contact forms as follows:
1. Coat plywood and board forms with non-staining form sealer. In hot weather, cool forms by wetting with cool water just before concrete is placed.
  2. Clean and coat removable metal forms with light form oil before reinforcement is placed. In hot weather, cool metal forms by thoroughly wetting with water just before placing concrete.
  3. Use sealer on reused plywood forms as specified for new material.
- C. Size and Spacing of Studs: Size and space studs, wales and other framing members for wall forms so as not to exceed safe working stress of kind of lumber used nor to develop deflection greater than  $1/270$  of free span of member.
- D. Unlined Forms: Use plywood forms to obtain a smooth finish for concrete surfaces. Tightly butt edges of sheets to prevent leakage. Back up all vertical joints solidly and nail edges of adjacent sheets to same stud with 6d box nails spaced not over 150 mm (6 inches) apart.
- E. Lined Forms: May be used in lieu of unlined plywood forms. Back up form lining solidly with square edge board lumber securely nailed to studs with all edges in close contact to prevent bulging of lining. No joints in lining and backing may coincide. Nail abutted edges of sheets to same backing board. Nail lining at not over 200 mm (8 inches) on center along edges and with at least one nail to each square foot of surface area; nails to be 3d blue shingle or similar nails with thin flatheads.
- F. Wall Form Ties: Locate wall form ties in symmetrically level horizontal rows at each line of wales and in plumb vertical tiers. Space ties to maintain true, plumb surfaces. Provide one row of ties within 150 mm (6 inches) above each construction joint. Space through-ties adjacent to horizontal and vertical construction joints not over 450 mm (18 inches) on center.
1. Tighten row of ties at bottom of form just before placing concrete and, if necessary, during placing of concrete to prevent seepage of concrete and to obtain a clean line. Ties to be entirely removed shall be loosened 24 hours after concrete is placed and shall be pulled from least important face when removed.
  2. Coat surfaces of all metal that is to be removed with paraffin, cup grease or a suitable compound to facilitate removal.

G. Inserts, Sleeves, and Similar Items: Flashing reglets, steel strips, masonry ties, anchors, wood blocks, nailing strips, grounds, inserts, wire hangers, sleeves, drains, guard angles, forms for floor hinge boxes, inserts or bond blocks for elevator guide rails and supports, and other items specified as furnished under this and other sections of specifications and required to be in their final position at time concrete is placed shall be properly located, accurately positioned, and built into construction, and maintained securely in place.

1. Install sleeves, inserts and similar items for mechanical services in accordance with drawings prepared specially for mechanical services. Contractor is responsible for accuracy and completeness of drawings and shall coordinate requirements for mechanical services and equipment.
2. Do not install sleeves in beams, except where shown or permitted by COR. Install sleeves in beams that are not shown, but are permitted by the COR, and require no structural changes, at no additional cost to the Government.
3. Minimum clear distance of embedded items such as conduit and pipe is at least three times diameter of conduit or pipe, except at stub-ups and other similar locations.
4. Provide recesses and blockouts in floor slabs for door closers and other hardware as necessary in accordance with manufacturer's instructions.

H. Construction Tolerances:

1. Set and maintain concrete formwork to assure erection of completed work within tolerances specified and to accommodate installation of other rough and finish materials. Accomplish remedial work necessary for correcting excessive tolerances. Erected work that exceeds specified tolerance limits shall be remedied or removed and replaced, at no additional cost to the Government.
2. Permissible surface irregularities for various classes of materials are defined as "finishes" in specification sections covering individual materials. They are to be distinguished from tolerances specified which are applicable to surface irregularities of structural elements.

### **3.2 PLACING REINFORCEMENT:**

- A. General: Details of concrete reinforcement in accordance with ACI 318 unless otherwise shown.
- B. Placing: Place reinforcement conforming to CRSI DA4, unless otherwise shown.



1. Place reinforcing bars accurately and tie securely at intersections and splices with 1.6 mm (16 gauge) black annealed wire. Secure reinforcing bars against displacement during the placing of concrete by spacers, chairs, or other similar supports. Portions of supports, spacers, and chairs in contact with formwork shall be made of plastic in areas that will be exposed when building is occupied. Type, number, and spacing of supports conform to ACI 318. Where concrete slabs are placed on ground, use concrete blocks or other non-corrodible material of proper height, for support of reinforcement. Use of brick or stone supports will not be permitted.
  2. Lap welded wire fabric at least 1 1/2 mesh panels plus end extension of wires not less than 300 mm (12 inches) in structural slabs. Lap welded wire fabric at least 1/2 mesh panels plus end extension of wires not less than 150 mm (6 inches) in slabs on grade.
- C. Spacing: Minimum clear distances between parallel bars, except in columns and multiple layers of bars in beams shall be equal to nominal diameter of bars. Minimum clear spacing is 25 mm (1 inch) or 1-1/3 times maximum size of coarse aggregate.
- D. Splicing: Splices of reinforcement made only as required or shown or specified. Accomplish splicing as follows:
1. Lap splices: Do not use lap splices for bars larger than Number 36 (Number 11). Minimum lengths of lap as shown.
  2. Welded splices: Splicing by butt-welding of reinforcement permitted providing the weld develops in tension at least 125 percent of the yield strength (fy) for the bars. Welding conform to the requirements of AWS D1.4. Welded reinforcing steel conform to the chemical analysis requirements of AWS D1.4.
    - a. Submit test reports indicating the chemical analysis to establish weldability of reinforcing steel.
    - b. Submit a field quality control procedure to insure proper inspection, materials and welding procedure for welded splices.
    - c. Department of Veterans Affairs retained testing agency shall test a minimum of three splices, for compliance, locations selected by COR.
  3. Mechanical Splices: Develop in tension and compression at least 125 percent of the yield strength (fy) of the bars. Stresses of transition splices between two reinforcing bar sizes based on area of smaller bar. Provide mechanical splices at locations indicated. Use approved exothermic, tapered threaded coupling, or swaged and

- threaded sleeve. Exposed threads and swaging in the field not permitted.
- a. Initial qualification: In the presence of COR, make three test mechanical splices of each bar size proposed to be spliced. Department of Veterans Affairs retained testing laboratory will perform load test.
  - b. During installation: Furnish, at no additional cost to the Government, one companion (sister) splice for every 50 splices for load testing. Department of Veterans Affairs retained testing laboratory will perform the load test.
- E. Bending: Bend bars cold, unless otherwise approved. Do not field bend bars partially embedded in concrete, except when approved by COR.
- F. Cleaning: Metal reinforcement, at time concrete is placed, shall be free from loose flaky rust, mud, oil, or similar coatings that will reduce bond.
- G. Future Bonding: Protect exposed reinforcement bars intended for bonding with future work by wrapping with felt and coating felt with a bituminous compound unless otherwise shown.

### **3.3 VAPOR BARRIER:**

- A. Except where membrane waterproofing is required, interior concrete slab on grade shall be placed on a continuous vapor barrier.
  - 1. Place 100 mm (4 inches) of fine granular fill over the vapor barrier to act as a blotter for concrete slab.
  - 2. Vapor barrier joints lapped 150 mm (6 inches) and sealed with compatible waterproof pressure-sensitive tape.
  - 3. Patch punctures and tears.

### **3.4 SLABS RECEIVING RESILIENT COVERING**

- A. Slab shall be allowed to cure for 6 weeks minimum prior to placing resilient covering. After curing, slab shall be tested by the Contractor for moisture in accordance with ASTM D4263 or ASTM F1869. Moisture content shall be less than 3 pounds per 1000 sf prior to placing covering.
- B. In lieu of curing for 6 weeks, Contractor has the option, at his own cost, to utilize the Moisture Vapor Emissions & Alkalinity Control Sealer as follows:
  - 1. Sealer is applied on the day of the concrete pour or as soon as harsh weather permits, prior to any other chemical treatments for concrete slabs either on grade, below grade or above grade receiving resilient flooring, such as, sheet vinyl, vinyl composition tile, rubber, wood flooring, epoxy coatings and overlays.

2. Manufacturer's representative will be on the site the day of concrete pour to install or train its application and document. He shall return on every application thereafter to verify that proper procedures are followed.
  - a. Apply Sealer to concrete slabs as soon as final finishing operations are complete and the concrete has hardened sufficiently to sustain floor traffic without damage.
  - b. Spray apply Sealer at the rate of 20 m<sup>2</sup> (200 square feet) per gallon. Lightly broom product evenly over the substrate and product has completely penetrated the surface.
  - c. If within two (2) hours after initial application areas are subjected to heavy rainfall and puddling occurs, reapply Sealer product to these areas as soon as weather condition permits.

**3.5 CONSTRUCTION JOINTS:**

- A. Unless otherwise shown, location of construction joints to limit individual placement shall not exceed 24,000 mm (80 feet) in any horizontal direction, except slabs on grade which shall have construction joints shown. Allow 48 hours to elapse between pouring adjacent sections unless this requirement is waived by COR.

**3.6 EXPANSION JOINTS AND CONTRACTION JOINTS:**

- A. Clean expansion joint surfaces before installing premolded filler and placing adjacent concrete.
- B. Provide contraction (control) joints in floor slabs as indicated on the contract drawings. Joints shall be either formed or saw cut, to the indicated depth after the surface has been finished. Complete saw joints within 4 to 12 hours after concrete placement. Protect joints from intrusion of foreign matter.

**3.7 PLACING CONCRETE:**

- A. Preparation:
  1. Remove hardened concrete, wood chips, shavings and other debris from forms.
  2. Remove hardened concrete and foreign materials from interior surfaces of mixing and conveying equipment.
  3. Have forms and reinforcement inspected and approved by COR before depositing concrete.
  4. Provide runways for wheeling equipment to convey concrete to point of deposit. Keep equipment on runways which are not supported by or bear on reinforcement. Provide similar runways for protection of vapor barrier on coarse fill.

- B. Bonding: Before depositing new concrete on or against concrete which has been set, thoroughly roughen and clean existing surfaces of laitance, foreign matter, and loose particles.
1. Preparing surface for applied topping:
    - a. Remove laitance, mortar, oil, grease, paint, or other foreign material by sand blasting. Clean with vacuum type equipment to remove sand and other loose material.
    - b. Broom clean and keep base slab wet for at least four hours before topping is applied.
    - c. Use a thin coat of one part Portland cement, 1.5 parts fine sand, bonding admixture; and water at a 50: 50 ratio and mix to achieve the consistency of thick paint. Apply to a damp base slab by scrubbing with a stiff fiber brush. New concrete shall be placed while the bonding grout is still tacky.
- C. Conveying Concrete: Convey concrete from mixer to final place of deposit by a method which will prevent segregation. Method of conveying concrete is subject to approval of COR.
- D. Placing: For special requirements see Paragraphs, HOT WEATHER and COLD hours.
1. Deposit concrete in forms as near as practicable in its final position. Prevent splashing of forms or reinforcement with concrete in advance of placing concrete.
  2. Do not drop concrete freely more than 3000 mm (10 feet) for concrete containing the high-range water-reducing admixture (superplasticizer) WEATHER.
  3. Do not place concrete when weather conditions prevent proper placement and consolidation, or when concrete has attained its initial set, or has contained its water or cement content more than 1 1/2 or 1500 mm (5 feet) for conventional concrete. Where greater drops are required, use a tremie or flexible spout (canvas elephant trunk), attached to a suitable hopper.
  4. Discharge contents of tremies or flexible spouts in horizontal layers not exceeding 500 mm (20 inches) in thickness, and space tremies such as to provide a minimum of lateral movement of concrete.
  5. Continuously place concrete until an entire unit between construction joints is placed. Rate and method of placing concrete shall be such that no concrete between construction joints will be deposited upon or against partly set concrete, after its initial set has taken place, or after 45 minutes of elapsed time during concrete placement.

6. On bottom of members with severe congestion of reinforcement, deposit 25 mm (1 inch) layer of flowing concrete containing the specified high-range water-reducing admixture (superplasticizer). Successive concrete lifts may be a continuation of this concrete or concrete with a conventional slump.
7. Concrete on metal deck:
  - a. Concrete on metal deck shall be minimum thickness shown. Allow for deflection of steel beams and metal deck under the weight of wet concrete in calculating concrete quantities for slab.
    - 1) The Contractor shall become familiar with deflection characteristics of structural frame to include proper amount of additional concrete due to beam/deck deflection.
- E. Consolidation: Conform to ACI 309. Immediately after depositing, spade concrete next to forms, work around reinforcement and into angles of forms, tamp lightly by hand, and compact with mechanical vibrator applied directly into concrete at approximately 450 mm (18 inch) intervals. Mechanical vibrator shall be power driven, hand operated type with minimum frequency of 5000 cycles per minute having an intensity sufficient to cause flow or settlement of concrete into place. Vibrate concrete to produce thorough compaction, complete embedment of reinforcement and concrete of uniform and maximum density without segregation of mix. Do not transport concrete in forms by vibration.
  1. Use of form vibration shall be approved only when concrete sections are too thin or too inaccessible for use of internal vibration.
  2. Carry on vibration continuously with placing of concrete. Do not insert vibrator into concrete that has begun to set.

### **3.8 HOT WEATHER:**

- A. Follow the recommendations of ACI 305 or as specified to prevent problems in the manufacturing, placing, and curing of concrete that can adversely affect the properties and serviceability of the hardened concrete. Methods proposed for cooling materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by COR.

### **3.9 COLD WEATHER:**

- A. Follow the recommendations of ACI 306 or as specified to prevent freezing of concrete and to permit concrete to gain strength properly. Use only the specified non-corrosive, non-chloride accelerator. Do not use calcium chloride, thiocyanates or admixtures containing more than 0.05 percent chloride ions. Methods proposed for heating materials and

arrangements for protecting concrete shall be made in advance of concrete placement and approved by COR.

**3.10 PROTECTION AND CURING:**

- A. Conform to ACI 308: Initial curing shall immediately follow the finishing operation. Protect exposed surfaces of concrete from premature drying, wash by rain and running water, wind, mechanical injury, and excessively hot or cold temperatures. Keep concrete not covered with membrane or other curing material continuously wet for at least 7 days after placing, except wet curing period for high-early-strength concrete shall be not less than 3 days. Keep wood forms continuously wet to prevent moisture loss until forms are removed. Cure exposed concrete surfaces as described below. Other curing methods may be used if approved by COR.
  - 1. Liquid curing and sealing compounds: Apply by power-driven spray or roller in accordance with the manufacturer's instructions. Apply immediately after finishing. Maximum coverage 10m<sup>2</sup>/L (400 square feet per gallon) on steel troweled surfaces and 7.5m<sup>2</sup>/L (300 square feet per gallon) on floated or broomed surfaces for the curing/sealing compound.
  - 2. Plastic sheets: Apply as soon as concrete has hardened sufficiently to prevent surface damage. Utilize widest practical width sheet and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with tape.
  - 3. Paper: Utilize widest practical width paper and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with sand, wood planks, pressure-sensitive tape, mastic or glue.

**3.11 REMOVAL OF FORMS:**

- A. Remove in a manner to assure complete safety of structure after the following conditions have been met.
  - 1. Take particular care in removing forms of exposed concrete to insure surfaces are not marred or gouged, and that corners and arises are true, sharp and unbroken.
- B. Control Test: Use to determine if the concrete has attained sufficient strength and curing to permit removal of supporting forms. Cylinders required for control tests taken in accordance with ASTM C172, molded in accordance with ASTM C31, and tested in accordance with ASTM C39. Control cylinders cured and protected in the same manner as the structure they represent. Supporting forms not removed until strength of control test cylinders have attained at least 70 percent of minimum 28-day compressive strength specified. Exercise care to assure that

newly unsupported portions of structure are not subjected to heavy construction or material loading.

**3.12 CONCRETE SURFACE PREPARATION:**

- A. Metal Removal: Unnecessary metal items cut back flush with face of concrete members.
- B. Patching: Maintain curing and start patching as soon as forms are removed. Do not apply curing compounds to concrete surfaces requiring patching until patching is completed. Use cement mortar for patching of same composition as that used in concrete. Use white or gray Portland cement as necessary to obtain finish color matching surrounding concrete. Thoroughly clean areas to be patched. Cut out honeycombed or otherwise defective areas to solid concrete to a depth of not less than 25 mm (1 inch). Cut edge perpendicular to surface of concrete. Saturate with water area to be patched, and at least 150 mm (6 inches) surrounding before placing patching mortar. Give area to be patched a brush coat of cement grout followed immediately by patching mortar. Cement grout composed of one part Portland cement, 1.5 parts fine sand, bonding admixture, and water at a 50:50 ratio, mix to achieve consistency of thick paint. Mix patching mortar approximately 1 hour before placing and remix occasionally during this period without addition of water. Compact mortar into place and screed slightly higher than surrounding surface. After initial shrinkage has occurred, finish to match color and texture of adjoining surfaces. Cure patches as specified for other concrete. Fill form tie holes which extend entirely through walls from unexposed face by means of a pressure gun or other suitable device to force mortar through wall. Wipe excess mortar off exposed face with a cloth.
- C. Upon removal of forms, clean vertical concrete surface that is to receive bonded applied cementitious application with wire brushes or by sand blasting to remove unset material, laitance, and loose particles to expose aggregates to provide a clean, firm, granular surface for bond of applied finish.

**3.13 CONCRETE FINISHES:**

- A. Vertical and Overhead Surface Finishes:
  - 1. Unfinished areas: Vertical and overhead concrete surfaces exposed in pipe basements, elevator and dumbwaiter shafts, pipe spaces, pipe trenches, above suspended ceilings, manholes, and other unfinished areas will not require additional finishing.
  - 2. Interior and exterior exposed areas to be painted: Remove fins, burrs and similar projections on surfaces flush, and smooth by mechanical

- means approved by COR, and by rubbing lightly with a fine abrasive stone or hone. Use ample water during rubbing without working up a lather of mortar or changing texture of concrete.
3. Interior and exterior exposed areas finished: Give a grout finish of uniform color and smooth finish treated as follows:
    - a. After concrete has hardened and laitance, fins and burrs removed, scrub concrete with wire brushes. Clean stained concrete surfaces by use of a hone stone.
    - b. Apply grout composed of one part of Portland cement, one part fine sand, smaller than a 600  $\mu\text{m}$  (No. 30) sieve. Work grout into surface of concrete with cork floats or fiber brushes until all pits, and honeycombs are filled.
    - c. After grout has hardened slightly, but while still plastic, scrape grout off with a sponge rubber float and, about 1 hour later, rub concrete vigorously with burlap to remove any excess grout remaining on surfaces.
    - d. In hot, dry weather use a fog spray to keep grout wet during setting period. Complete finish of area in same day. Make limits of finished areas at natural breaks in wall surface. Leave no grout on concrete surface overnight.
  4. Textured: Finish as specified. Maximum quantity of patched area 0.2  $\text{m}^2$  (2 square feet) in each 93  $\text{m}^2$  (1000 square feet) of textured surface.
- B. Slab Finishes:
1. Monitoring and Adjustment: Provide continuous cycle of placement, measurement, evaluation and adjustment of procedures to produce slabs within specified tolerances. Monitor elevations of structural steel in key locations before and after concrete placement to establish typical deflection patterns for the structural steel. Determine elevations of cast-in-place slab soffits prior to removal of shores. Provide information to COR and floor consultant for evaluation and recommendations for subsequent placements.
  2. Set perimeter forms to serve as screed using either optical or laser instruments. For slabs on grade, wet screeds may be used to establish initial grade during strike-off, unless COR determines that the method is proving insufficient to meet required finish tolerances and directs use of rigid screed guides. Where wet screeds are allowed, they shall be placed using grade stakes set by optical or laser instruments. Use rigid screed guides, as opposed to wet screeds, to control strike-off elevation for all types of elevated (non slab-on-



- grade) slabs. Divide bays into halves or thirds by hard screeds. Adjust as necessary where monitoring of previous placements indicates unshored structural steel deflections to other than a level profile.
3. Place slabs monolithically. Once slab placement commences, complete finishing operations within same day. Slope finished slab to floor drains where they occur, whether shown or not.
  4. Use straightedges specifically made for screeding, such as hollow magnesium straightedges or power strike-offs. Do not use pieces of dimensioned lumber. Strike off and screed slab to a true surface at required elevations. Use optical or laser instruments to check concrete finished surface grade after strike-off. Repeat strike-off as necessary. Complete screeding before any excess moisture or bleeding water is present on surface. Do not sprinkle dry cement on the surface.
  5. Immediately following screeding, and before any bleed water appears, use a 3000 mm (10 foot) wide highway straightedge in a cutting and filling operation to achieve surface flatness. Do not use bull floats or darbys, except that darbying may be allowed for narrow slabs and restricted spaces.
  6. Wait until water sheen disappears and surface stiffens before proceeding further. Do not perform subsequent operations until concrete will sustain foot pressure with maximum of 6 mm (1/4 inch) indentation.
  7. Scratch Finish: Finish base slab to receive a bonded applied cementitious application as indicated above, except that bull floats and darbys may be used. Thoroughly coarse wire broom within two hours after placing to roughen slab surface to insure a permanent bond between base slab and applied materials.
  8. Float Finish: Slabs to receive unbonded toppings, steel trowel finish, fill, mortar setting beds, or a built-up roof, and ramps, stair treads, platforms (interior and exterior), and equipment pads shall be floated to a smooth, dense uniform, sandy textured finish. During floating, while surface is still soft, check surface for flatness using a 3000 mm (10 foot) highway straightedge. Correct high spots by cutting down and correct low spots by filling in with material of same composition as floor finish. Remove any surface projections and re-float to a uniform texture.
  9. Steel Trowel Finish: Concrete surfaces to receive resilient floor covering or carpet, monolithic floor slabs to be exposed to view in finished work, future floor roof slabs, applied toppings, and other

interior surfaces for which no other finish is indicated. Steel trowel immediately following floating. During final troweling, tilt steel trowel at a slight angle and exert heavy pressure to compact cement paste and form a dense, smooth surface. Finished surface shall be smooth, free of trowel marks, and uniform in texture and appearance.

10. Broom Finish: Finish exterior slabs, ramps, and stair treads with a bristle brush moistened with clear water after surfaces have been floated. Brush in a direction transverse to main traffic. Match texture approved by COR from sample panel.
11. Finished slab flatness (FF) and levelness (FL) values comply with the following minimum requirements:
  - a. Areas covered with carpeting, or not specified otherwise in b. below:
    - 1) Slab on Grade:
      - a) Specified overall value FF 25/FL 20
      - b) Minimum local value FF 17/FL 15
    - 2) Level suspended slabs (shored until after testing) and topping slabs:
      - a) Specified overall value FF 25/FL 20
      - b) Minimum local value FF 17/FL 15
    - 3) Unshored suspended slabs:
      - a) Specified overall value FF 25
      - b) Minimum local value FF 17
    - 4) Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.
  - b. Areas that will be exposed, receive thin-set tile or resilient flooring, or roof areas designed as future floors:
    - 1) Slab on grade:
      - a) Specified overall value FF 36/FL 20
      - b) Minimum local value FF 24/FL 15
    - 2) Level suspended slabs (shored until after testing) and topping slabs:
      - a) Specified overall value FF 30/FL 20
      - b) Minimum local value FF 24/FL 15

3) Unshored suspended slabs:

- a) Specified overall value FF 30
- b) Minimum local value FF 24

4) Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.

- c. "Specified overall value" is based on the composite of all measured values in a placement derived in accordance with ASTM E1155.
- d. "Minimum local value" (MLV) describes the flatness or levelness below which repair or replacement is required. MLV is based on the results of an individual placement and applies to a minimum local area. Minimum local area boundaries may not cross a construction joint or expansion joint. A minimum local area will be bounded by construction and/or control joints, or by column lines and/or half-column lines, whichever is smaller.

12. Measurements

- a. Department of Veterans Affairs retained testing laboratory will take measurements as directed by COR, to verify compliance with FF, FL, and other finish requirements. Measurements will occur within 72 hours after completion of concrete placement (weekends and holidays excluded). Make measurements before shores or forms are removed to insure the "as-built" levelness is accurately assessed. Profile data for above characteristics may be collected using a laser level or any Type II apparatus (ASTM E1155, "profileograph" or "dipstick"). Contractor's surveyor shall establish reference elevations to be used by Department of Veterans Affairs retained testing laboratory.
- b. Contractor not experienced in using FF and FL criteria is encouraged to retain the services of a floor consultant to assist with recommendations concerning adjustments to slab thicknesses, finishing techniques, and procedures on measurements of the finish as it progresses in order to achieve the specific flatness and levelness numbers.

13. Acceptance/ Rejection:

- a. If individual slab section measures less than either of specified minimum local  $F_F/F_L$  numbers, that section shall be rejected and remedial measures shall be required. Sectional boundaries may be set at construction and contraction (control) joints, and not smaller than one-half bay.

- b. If composite value of entire slab installation, combination of all local results, measures less than either of specified overall  $F_F/F_L$  numbers, then whole slab shall be rejected and remedial measures shall be required.
14. Remedial Measures for Rejected Slabs: Correct rejected slab areas by grinding, planing, surface repair with underlayment compound or repair topping, retopping, or removal and replacement of entire rejected slab areas, as directed by COR, until a slab finish constructed within specified tolerances is accepted.

### **3.14 SURFACE TREATMENTS:**

- A. Use on exposed concrete floors and concrete floors to receive carpeting except those specified to receive non-slip finish.
- B. Liquid Densifier/Sealer: Apply in accordance with manufacturer's directions just prior to completion of construction.
- C. Non-Slip Finish: Except where safety nosing and tread coverings are shown, apply non-slip abrasive aggregate to treads and platforms of concrete steps and stairs, and to surfaces of exterior concrete ramps and platforms. Broadcast aggregate uniformly over concrete surface at rate of application of 8% per 1/10th  $m^2$  (7.5 percent per square foot) of area. Trowel concrete surface to smooth dense finish. After curing, rub treated surface with abrasive brick and water to slightly expose abrasive aggregate.

### **3.15 APPLIED TOPPING:**

- A. Separate concrete topping on floor base slab of thickness and strength shown. Topping mix shall have a maximum slump of 200 mm (8 inches) for concrete containing a high-range water-reducing admixture (superplasticizer) and 100 mm (4 inches) for conventional mix. Neatly bevel or slope at door openings and at slabs adjoining spaces not receiving an applied finish.
- B. Placing: Place continuously until entire section is complete, struck off with straightedge, leveled with a highway straightedge or highway bull float, floated and troweled by machine to a hard dense finish. Slope to floor drains as required. Do not start floating until free water has disappeared and no water sheen is visible. Allow drying of surface moisture naturally. Do not hasten by "dusting" with cement or sand.

### **3.16 RESURFACING FLOORS:**

- A. Remove existing flooring areas to receive resurfacing to expose existing structural slab and extend not less than 25 mm (1 inch) below new finished floor level. Prepare exposed structural slab surface by

roughening, broom cleaning, and dampening. Apply specified bonding grout. Place topping while the bonding grout is still tacky.

**3.17 RETAINING WALLS:**

- A. Use air-entrained concrete.
- B. Expansion and contraction joints, waterstops, weep holes, reinforcement and railing sleeves installed and constructed as shown.
- C. Exposed surfaces finished to match adjacent concrete surfaces, new or existing.
- D. Place porous backfill as shown.

- - - E N D - - -

**SECTION 03 41 13**  
**PRECAST CONCRETE HOLLOW CORE PLANKS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

A. Section specifies precast concrete planks.

**1.2 MANUFACTURER'S QUALIFICATIONS**

Products of one manufacturer regularly engaged in making precast concrete planks of type specified.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES .
- B. Shop Drawings: Plank framing layout, anchorage, and installation details.
- C. Manufacturers Certificates: Stating plank conforms to specification requirements.
- D. Design calculations of products shall be performed by a registered professional engineer experienced in precast prestressed concrete design.

**1.4 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of specification to extent referenced. Publications are referred to in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A36/A36M-08.....Carbon Structural Steel
  - A185/A185M-07.....Steel Welded Wire, Reinforcement, Plain, for  
Concrete
  - A615/A615M-09.....Deformed and Plain Carbon-Steel Bars for  
Concrete Reinforcement
  
  - C150/C150M-09.....Portland Cement
  - C494/C494M-10.....Chemical Admixtures for Concrete
  - C881/C881M-02.....Epoxy-Resin-Base Bonding Systems for Concrete

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

A. Portland Cement: ASTM C150, Type I or III.

B. Reinforcing:

1. Welded wire Fabric: ASTM A185, size as required by plank manufacturers.

2. Bars: ASTM A615, deformed. Grade as required by plank manufacturer.

C. Chemical Admixtures: ASTM C494, Type as required by plank manufacturer.

D. Bonding Adhesive: ASTM C881.

E. Steel Clips:

1. Designed to anchor planks to embed steel.

F. Grout:

1. Cement Grout: One part portland cement and two parts fine sand.

2. Epoxy Grout: ASTM C881.

G. Steel Angles: ASTM A36.

**2.2 FABRICATION**

A. Planks:

1. Shapes: as shown.

2. Manufacture: Reinforced concrete, composed of regular weight mineral aggregate, portland cement and water, resulting in a unit having a minimum compressive strength of 24000 MPa (3500 psi) for structural (non-nailable) slabs.

B. Allowable Tolerances:

1. Thickness and depth 3 mm, (1/8 inch).

2. Length and width 6 mm (1/4 inch).

3. Camber or Sweep:

a. Plus or minus 6 mm (1/4-inch).

b. Variation in camber between adjacent and abutting members, 3 mm (1/8 inch).

4. Inserts, bolts and pipe sleeves: Deviation from location shown - not more than 10 mm (3/8 inch).

C. Exposed concrete surfaces natural cement color free of honeycomb, pit holes, or other defects.

D. Not acceptable: Warped, cracked or broken units.

E. Flat Plank:

1. Fabricate to thickness shown with tongue and groove edges at abutting edges, square edges at exposed roof ends and sides.

2. Reinforce with wire fabric in both top and bottom of slab.

F. Steel Clips:

1. Provide zinc-coated steel clips for plank to secure plank to framing.
2. For inclines exceeding 1 in 6 (2-inches per foot), provide an angle clip to support planks at lower purlin.

G. Structural Steel Headers:

1. ASTM A36.
2. Angle sizes as required by precast designer.

H. Finish on Top: Broom or rake top finish of precast concrete units for composite bonding with floor topping.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

- A. Install slabs in accordance with manufacturer's instructions.
- B. Before erection of slabs, clean bearing surfaces free from dirt, mortar particles, and trash.
- C. Erect slabs to prevent chipping and cracking and to provide a level deck surface.
  1. Stagger end joints
  2. Locate end joints on centerline of support.
  3. After erection, fill joints on upper side of slabs with portland cement grout.
  4. Finish grout joint flush.
- D. Do not make cutouts without approval of COR.
  1. Form openings or carefully saw cut; do not punch openings.
  2. Locate openings less than 150 mm (6-inches) wide in sections of plank between reinforcing bars.
  3. Frame openings larger than 150 mm (6-inches) wide with structural steel headers.

**3.2 REPLACEMENT AND REPAIR**

- A. Replace broken, cracked, and warped plank, and planks exceeding allowable tolerances.
- B. Plank having defects, not affecting serviceability of deck, may be repaired with epoxy grout if approved by COR.

- - - E N D - - -



**SECTION 03 41 33**  
**PRECAST STRUCTURAL PRETENSIONED CONCRETE**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. This section specifies precast prestressed concrete construction including design not shown, fabrication, erection, and other related items including bearing pads and anchorage.
- B. Precast prestressed concrete includes beams.

**1.2 RELATED WORK:**

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Concrete: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- C. Sealants and Caulking: Section 07 92 00, JOINT SEALANTS.
- D. Repair of abraded galvanized and painted surfaces: Section 09 91 00, PAINTING.

**1.3 QUALITY ASSURANCE:**

- A. Manufacturer Qualifications: Precast concrete manufacturing plant shall be certified by Prestressed Concrete Institute, Plant Certification Program, prior to start of production.
- B. In lieu of above qualification, contractor shall meet and pay for following requirements:
  - 1. Retain an independent testing or consulting firm approved by COR.
  - 2. This firm shall inspect precast plant at two-week intervals during production and issue a report, certified by a registered Professional Engineer verifying that materials, methods, products and quality control meet all requirements of specifications and drawings. When report indicates to the contrary, COR may reject any or all products produced during period of noncompliance with above requirements.
- C. Precast concrete work shall be performed by firms that have demonstrated capability, subject to approval, to produce and erect type of work specified.
- D. Precast concrete manufacturer shall have on staff or shall retain a qualified registered Professional Structural Engineer to certify precast concrete conforms in all aspects to requirements of ACI 318.
- E. Erector Qualifications: Regularly engaged for at least 5 years in erection of precast structural concrete similar to requirements of this project.
- F. Requirements of Regulatory Agencies: Local codes plus applicable specifications, standards and codes are a part of these specifications.

**1.4 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
  - 1. Erection Drawings:
    - a. Plans and/or elevations locating and defining material furnished by manufacturer.
    - b. Sections and details showing connections, cast-in items and their relation to structure.
    - c. Description of all loose, cast-in and field hardware.
    - d. Field installed anchor location drawings.
    - e. Erection sequences and handling requirements.
    - f. Dead, live and other applicable loads used in design.
  - 2. Production drawings:
    - a. Elevation view of each member.
    - b. Sections and details to indicate quantities and position of reinforcing steel, anchors, inserts, and essential embedded hardware.
    - c. Lifting and erection inserts.
    - d. Dimensions and finishes.
    - e. Prestress for strand and concrete strengths.
    - f. Estimated cambers.
    - g. Method of transportation.
- C. Product Design Criteria:
  - 1. Loadings for design:
    - a. Initial handling and erection stresses.
    - b. Dead and live loads as specified on contract drawings.
    - c. Other loads specified for member where they are applicable.
    - d. Deflection of precast members shall be limited as follows:
      - 1) Vertical Live Load -  $\text{Span}/360$
    - e. Design shall provide for thermal movements of completed structure.
  - 2. Design calculations of products shall be performed by a registered Professional Engineer experienced in precast prestressed concrete design.
  - 3. Design shall be in accordance with applicable codes, ACI 318 and the PCI Design Handbook.
  - 4. Details for waterproof joints between precast members.
- D. Mix Designs: Submit proposed concrete mix designs and appropriate test data as specified in Part 2 of this section.

E. Permissible Design Deviations:

1. Design connections according to the conceptual details shown in the contract documents.
2. Design deviations will be permitted only after COR's written approval of manufacturer's proposed design supported by complete design calculations and drawings.
3. Design deviations shall provide an installation equivalent to basic intent without incurring additional cost to the Government.

F. Test Reports: Concrete and other material.

**1.5 PRODUCT DELIVERY, STORAGE AND HANDLING:**

A. Delivery and Handling:

1. Lift and support precast concrete members during manufacturing, stockpiling, transporting and erection operations only at lifting or supporting points, or both, as shown on contract and shop drawings, and with approved lifting devices. Lifting devices shall have a minimum safety factor of 4. Exterior lifting hardware shall have a minimum safety factor of 5.
2. Transportation, site handling, and erection shall be performed with acceptable equipment and methods, and by qualified personnel.

B. Storage:

1. Store all units off ground.
2. Place stored units so that identification marks are discernible.
3. Separate stacked members by battens across full width of each bearing point.
4. Stack so that lifting devices are accessible and undamaged.
5. Do not use upper members of stacked tier as storage area for shorter member or heavy equipment.

**1.6 APPLICABLE PUBLICATIONS:**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Society for Testing and Materials (ASTM):

- A36/A36M-08.....Standard Specifications for Carbon Structural Steel
- A82-07.....Standard Specifications for Steel Wire, Plain, for Concrete Reinforcement
- A123/A123M-09.....Standard Specifications for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

- A153/A153M-09.....Standard Specifications for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
- A185-07.....Standard Specifications for Steel Welded Wire, Fabric, Plain, for Concrete Reinforcement
- A307-10.....Standard Specifications for Carbon Steel Bolts and Studs
- A325-10.....Standard Specifications for Structural Bolts, Steel, Heat Treated
- A416/A416M-10.....Standard Specifications for Steel Strand, Uncoated Seven-Wire for Prestressed Concrete
- A615/A615M-09.....Standard Specifications for Deformed and Plain Billet-Steel Bars for Concrete Reinforcement
- A706/A706M-09.....Standard Specifications for Low-Allow Steel Deformed and Plain Bars for Concrete Reinforcement
- A767/A767M-09.....Standard Specifications for Zinc-Coated (Galvanized) Steel Bars for Concrete Reinforcement
- A775/A775M-03 (R2008)....Standard Specifications for Epoxy-Coated Reinforcing Steel Bars
- C33-03.....Standard Specifications for Concrete Aggregates
- C88-05.....Standard Test Method for Soundness of Aggregates by Use of Sodium Sulfate or Magnesium Sulfate
- C150-07.....Standard Specifications for Portland Cement
- C260-10.....Standard Specifications for Air-Entraining Admixtures for Concrete
- C330-05.....Standard Specifications for Lightweight Aggregates for Structural Concrete
- C494/C494M-10.....Standard Specification for Chemical Admixtures for Concrete
- C. American Concrete Institute (ACI):
- 117-10.....Standard Specifications for Tolerances for Concrete Construction and Materials
- 318-08.....Building Code Requirements for Structural Concrete and Commentary
- D. Prestressed Concrete Institute (PCI):
- MNL-116-99.....Manual for Quality Control for Plants and Production of Precast Concrete Products Fourth Edition

MNL-127-99.....Erector's Manual: Standards and Guidelines for  
the Erection of Precast Concrete Products

E. American Welding Society (AWS):

D1.1/D1.1M-10.....Structural Welding Code - Steel

D1.4-11.....Structural Welding Code - Reinforcing Steel

**PART 2 - PRODUCTS**

**2.1 MATERIALS:**

- A. Portland Cement: ASTM C150, Type I or III.
- B. Aggregates: ASTM C33, Coarse and Fine.
- C. Air-entraining Admixture: ASTM C260.
- D. Chemical Admixtures: ASTM C494.
- E. Mixing Water: Fresh, clean, and potable.
- F. Reinforcing Steel: ASTM A615M, Grade 400 MPa (ASTM A615, Grade 60), deformed.
- G. Weldable Reinforcing Steel: ASTM A706M, Grade 400 MPa, (ASTM A706 Grade 60).
- H. Galvanized Reinforcing Steel: ASTM A767M, Grade 400 MPa, (ASTM A767, Grade 60) Class II, hot-dipped galvanized after fabrication and bending.
- I. Epoxy-Coated Reinforcing Steel: ASTM A775M, Grade 400 MPa, (ASTM A775, Grade 60).
- J. Anchor Bolts: ASTM A307, low-carbon steel bolts, regular hexagon nuts and carbon steel washers, galvanized.
- K. High-Strength Threaded Fasteners: Heavy hexagon structural bolts, heavy hexagon bolts, and hardened washers complying with ASTM A325, galvanized.
- L. Welded Wire Fabric: ASTM A185.
- M. Wire Reinforcement: ASTM A82.
- N. Prestressing Steel: ASTM A416, Grade 250K or 270K, uncoated, 7-wire, stress-relieved strand.
- O. Anchors and Inserts: ASTM A36 structural steel plates and shapes, ASTM A153 or ASTM A123 hot dipped galvanized finish.
- P. Non-metallic Shrinkage-Resistant Grout: Proprietary pre-mixed, non-metallic, non-corrosive, non-staining product containing selected silica sands, Portland cement, shrinkage compensating agents, plasticizing and water reducing agents, complying with CRD-C-621. Minimum cube strength of 62 MPa (9000 psi) at 28 days when placed at flowable consistency.
- Q. Bearing Pads:
  - 1. Elastomeric Pads: Vulcanized, chloroprene elastomeric compound, molded to size or cut from a molded sheet, 50-60 shore A durometer.

2. Laminated Fabric-Rubber Pads: Preformed, unused synthetic fibers and new, unvulcanized rubber. Surface hardness of 70-80 shore A durometer.
  4. Sliding Pads: Manufactured assembly with Polyetrafluoroethylene (PTFE) surface, with glass fiber reinforcing as required for service load bearing stress. Combine with elastomeric base where required for full contact bearing.
  5. Plastic: Multi-monomer plastic strips, non-leaching and able to support construction loads with no visible overall expansion.
- R. Welded Studs: AWS D1.1.
- S. Welded Rebar: AWS D1.4.
- T. Caulking and Sealants: Specified under Section 07 92 00, JOINT SEALANTS.
- U. Accessories: Provide clips, hangers, and other accessories required for installation of project units and for support of subsequent construction or finishes.

## **2.2 CONCRETE MIXES:**

- A. Normal-Weight Concrete:
1. Compressive Strength: 35 MPa (5000 psi) minimum at 28 days.
  2. Release Strength: 25 MPa (3500 psi) minimum at transfer of prestress.
- B. Do not use calcium chloride, chloride ions or other salts.

## **2.3 FABRICATION:**

- A. Fabrication Procedures: PCI MNL-116.
- B. Fabrication Tolerances: PC MNL-116 and ACI 117 for reinforcing steel placement.
- C. Finishes:
1. Standard Underside: Resulting from casting against approved forms using good industry practice in cleaning of forms, design of concrete mix, placing and curing. Small surface holes caused by air bubbles, normal color variations, normal form joint marks, and minor chips and spalls will be tolerated, but no major or unsightly imperfections, honeycomb, or other defects will be permitted.
  2. Standard Top: Result of vibrating screed and additional hand finishing at projections. Normal color variations, minor indentations, minor chips and spalls will be permitted. No major imperfections, honeycomb, or defects will be permitted.
  3. Exposed Vertical Ends: Strands shall be recessed and the ends of member will receive sacked finish.
- D. Supports for Reinforcement: Provide supports for reinforcement including bolsters, chairs, spacers and other devices for spacing, supporting and fastening reinforcing, complying with CRSI recommendations. For exposed-

to-view concrete surfaces, shear legs of supports are in contact with forms, provide supports with legs that are plastic protected or stainless steel protected.

- E. Use epoxy coated reinforcing whenever concrete cover is less than 50 mm (2 inches) for top surfaces exposed to deicing salts, brackish water or salt spray, such as entrance flaming.
- F. Openings: Primarily on thin sections, factory fabricate those openings 250 mm (10 inches) round or square or larger as shown on drawings. Locate and field drill or cut other openings where no contact is made with prestressing or reinforcing steel after precast prestressed products have been erected. Opening shall be approved by COR before drilling or cutting.
- G. Patching: Patching will be acceptable providing structural adequacy of product and appearance are not impaired.
- H. Defective Work: Precast concrete units which do not conform to specified requirements, including strength, tolerances, and finishes, shall be removed and replaced with precast concrete units that meet the requirements of this section. Contractor is also responsible for cost of corrections to other work affected by or resulting from corrections to precast concrete work.
- I. Fasteners: Cast in galvanized hardware such structural inserts, bolts and plates as required by drawings.

**PART 3 - EXECUTION**

**3.1 ERECTION:**

- A. Site Access: Provide suitable access to building, proper drainage, and firm, level bearing for hauling and erection equipment to operate under their own power.
- B. Preparation:
  - 1. Provide true, level surfaces on field placed bearing walls and other field placed supporting members.
  - 2. Place and accurate align anchor bolts, plates or dowels in column footings, grade beams and other field placed support members.
  - 3. Shoring required for composite beams and slab shall have a minimum load factor of 1.5 times (dead load plus construction loads).
- C. Installation: Installation of precast prestressed concrete shall be performed by the fabricator or a competent erector in accordance with PCI MNL-127. Lift members with suitable lifting devices at points provided by manufacturer. Temporary shoring and bracing, when necessary, shall comply with manufacturer's recommendations.

D. Alignment: Align and level precast members as required by the approved shop drawings. Level out variations between adjacent members by jacking, loading, or any other feasible method as recommended by the manufacturer and acceptable to COR. Individual pieces are considered plumb, level, and aligned if the error does not exceed 1:500 excluding structural deformation caused by loads.

**3.2 FIELD WELDING:**

- A. Field welding is to be done by qualified welders using equipment and materials compatible to base material in accordance with AWS D1.1 and AWS D1.4.
- B. Field coat with galvanized paint specified under Section 09 91 00, PAINTING all welded connections.

**3.3 ATTACHMENTS:**

- A. Do not use powder-actuated or air-driven fasteners or drill the precast units for surface attachment of accessory items unless otherwise accepted by the precast manufacturer.

**3.4 INSPECTION AND ACCEPTANCE:**

- A. Final inspection and acceptance of erected precast prestressed concrete shall be made by COR to verify conformance with drawings and specifications.

- - - E N D - - -



**SECTION 04 05 13  
MASONRY MORTARING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. Section specifies mortar materials and mixes.

**1.2 RELATED WORK:**

- A. Mortar used in Section:
  - 3. Section 04 20 00, UNIT MASONRY.
  - 5. Section 04 72 00, CAST STONE MASONRY.

**1.3 TESTING LABORATORY-CONTRACTOR RETAINED**

- A. Engage a commercial testing laboratory approved by COR to perform tests specified below.
- B. Submit information regarding testing laboratory's facilities and qualifications of technical personnel to COR.

**1.4 TESTS**

- A. Test mortar and materials specified.
- B. Certified test reports.
- C. Identify materials by type, brand name and manufacturer or by origin.
- D. Do not use materials until laboratory test reports are approved by COR.
- E. After tests have been made and materials approved, do not change without additional test and approval of COR.
- F. Testing:
  - 1. Test materials proposed for use for compliance with specifications in accordance with test methods contained in referenced specifications and as follows:
  - 2. Mortar:
    - a. Test for compressive strength and water retention; ASTM C270.
    - b. Mortar compressive strengths 28 days as follows:
      - Type M: Minimum 17230 kPa (2500 psi) at 28 days.
      - Type S: Minimum 12400 kPa (1800 psi) at 28 days.
      - Type N: Minimum 5170 kPa (750 psi) at 28 days.
  - 3. Cement:
    - a. Test for water soluble alkali (nonstaining) when nonstaining cement is specified.
    - b. Nonstaining cement shall contain not more than 0.03 percent water soluble alkali.
  - 4. Sand: Test for deleterious substances, organic impurities, soundness and grading.

**1.5 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Certificates:
  - 2. Indicating that following items meet specifications:
    - a. Portland cement.
    - b. Masonry cement.
    - c. Mortar cement.
    - d. Hydrated lime.
    - e. Fine aggregate (sand).
    - g. Color admixture.
- C. Laboratory Test Reports:

1. Mortar, each type.
2. Admixtures.
- D. Manufacturer's Literature and Data:
  1. Cement, each kind.
  2. Hydrated lime.
  3. Admixtures.
  4. Liquid acrylic resin.

#### **1.6 PRODUCT DELIVERY, STORAGE AND HANDLING**

- A. Deliver masonry materials in original sealed containers marked with name of manufacturer and identification of contents.
- B. Store masonry materials under waterproof covers on planking clear of ground, and protect damage from handling, dirt, stain, water and wind.

#### **1.7 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - C40-04.....Organic Impurities in Fine Aggregates for Concrete
  - C91-05.....Masonry Cement
  - C109-08.....Compressive Strength of Hydraulic Cement Mortars (Using 2-in. or 50-MM Cube Specimens)
  - C144-04.....Aggregate for Masonry Mortar
  - C150-09.....Portland Cement
  - C207-06.....Hydrated Lime for Masonry Purposes
  - C270-10.....Mortar for Unit Masonry
  - C307-03(R2008).....Tensile Strength of Chemical - Resistant Mortar, Grouts, and Monolithic Surfacing
  - C321-00(R2005).....Bond Strength of Chemical-Resistant Mortars
  - C348-08.....Flexural Strength of Hydraulic Cement Mortars
  - C595-10.....Blended Hydraulic Cement
  - C780-10.....Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry
  - C979-10.....Pigments for Integrally Colored Concrete
  - C1329-05.....Mortar Cement

### **PART 2 - PRODUCTS**

#### **2.1 HYDRATED LIME**

- A. ASTM C207, Type S.

#### **2.2 AGGREGATE FOR MASONRY MORTAR**

- A. ASTM C144 and as follows: Sand color to match existing.
- B. Test sand for color value in accordance with ASTM C40. Sand producing color darker than specified standard is unacceptable.

#### **2.3 BLENDED HYDRAULIC CEMENT**

- A. ASTM C595, Type IS, IP.

#### **2.4 MASONRY CEMENT**

- A. ASTM C91. Type N, S, or M.

#### **2.5 MORTAR CEMENT**

- A. ASTM C1329, Type N, S or M.

## **2.6 PORTLAND CEMENT**

- A. ASTM C150, Type I.

## **2.7 LIQUID ACRYLIC RESIN**

- A. A formulation of acrylic polymers and modifiers in liquid form designed for use as an additive for mortar to improve physical properties.

## **2.8 WATER**

- A. Potable, free of substances that are detrimental to mortar, masonry, and metal.

## **2.9 POINTING MORTAR**

- A. For Cast Stone or Precast Concrete: Proportion by volume; One part white Portland cement, two parts white sand, and 1/5 part hydrated lime.

## **2.10 MASONRY MORTAR**

- A. Conform to ASTM C270.
- B. Admixtures:
  - 1. Do not use mortar admixtures, unless approved by COR.
  - 2. Submit laboratory test report showing effect of proposed admixture on strength, water retention, and water repellency of mortar.
  - 3. Do not use antifreeze compounds.
- C. Colored Mortar:
  - 1. Maintain uniform mortar color for exposed work throughout.
  - 2. Match mortar color in approved sample or mock-up.
- D. Color Admixtures:
  - 1. Proportion as specified by manufacturer.

## **2.11 HIGH BOND MORTAR**

- A. Mixture by volume, one-part Portland cement, 1/4-part hydrated lime, three-parts sand, water, and liquid acrylic resin.
- B. Mortar properties when tested in accordance with referenced specifications.
  - 1. Compressive Strength, ASTM C109: Minimum 19,305 kPa (2800 psi), using 50 mm (2 inch) cubes.
  - 2. Tensile Strength, ASTM C307: 3861 kPa Minimum (560 psi), using the 25mm (1 inch) briquettes.
  - 3. Flexural Strength, ASTM C348: Minimum 6067 kPa (880 psi), using flexural bar.
  - 4. Bond Strength, ASTM C321: Minimum 2965 kPa (430 psi), using crossed brick.

## **2.12 COLOR ADMIXTURE**

- A. Mortar Color: Mortar exposed to view to match existing.
- B. Pigments: ASTM C979.
- C. Use mineral pigments only. Organic pigments are not acceptable.
- D. Pigments inert, stable to atmospheric conditions, nonfading, alkali resistant and water insoluble.

## **PART 3 - EXECUTION**

### **3.1 MIXING**

- A. Mix in a mechanically operated mortar mixer.
  - 1. Mix mortar for at least three minutes but not more than five minutes.
- B. Measure ingredients by volume. Measure by the use of a container of known capacity.

- C. Mix water with dry ingredients in sufficient amount to provide a workable mixture which will adhere to vertical surfaces of masonry units.
- D. Mortar that has stiffened because of loss of water through evaporations:
  - 1. Discard mortar that has reached its initial set or has not been used within two hours.

**3.2 MORTAR USE LOCATION**

- A. For brick veneer over frame back up walls, use Type N portland cement-lime.

- - - E N D - - -

**SECTION 04 20 00**  
**UNIT MASONRY**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

A. This section specifies requirements for unit masonry veneers.

**1.2 RELATED WORK**

- A. Mortars: Section 04 05 13, MASONRY MORTARING.
- B. Section 04 72 00, CAST STONE MASONRY
- C. Steel lintels and shelf angles: Section 05 50 00, METAL FABRICATIONS.
- D. Cavity insulation: Section 07 21 13, THERMAL INSULATION.
- E. Flashing: Section 07 60 00, FLASHING AND SHEET METAL.
- F. Sealants and sealant installation: Section 07 92 00, JOINT SEALANTS.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Samples:
  - 1. Face brick, sample panel, 200 mm by 400 mm (8 inches by 16 inches,) showing full color range and texture of bricks, bond, and proposed mortar joints.
  - 2. Concrete masonry units, when exposed in finish work.
  - 3. Anchors, and ties, one each and joint reinforcing 1200 mm (48 inches) long.
- C. Shop Drawings:
  - 1. Drawings, showing reinforcement, applicable dimensions and methods of hanging soffit or lintel masonry and reinforcing masonry for embedment of anchors for hung fixtures.
  - 2. Shop Drawings: Submit shop drawings for fabrication, bending, and placement of reinforcing bars. Comply with ACI 315. Show bar schedules, diagrams of bent bars, stirrup spacing, lateral ties and other arrangements and assemblies as required for fabrication and placement of reinforcement for unit masonry work.
- D. Certificates:
  - 1. Certificates signed by manufacturer, including name and address of contractor, project location, and the quantity, and date or dates of shipment of delivery to which certificate applies.
  - 2. Indicating that the following items meet specification requirements:
    - a. Face brick.
    - b. Solid and load-bearing concrete masonry units, including fire-resistant rated units.
- E. Manufacturer's Literature and Data:
  - 1. Anchors, ties, and reinforcement.
  - 2. Shear keys.
  - 3. Reinforcing bars.

**1.4 SAMPLE PANEL**

- A. Before starting masonry, lay up minimum 48" x 48" sample panel in accordance with Masonry Standards Joint Committee (MSJC) and Brick Industry Association (BIA).
  - 1. Use masonry units from random cubes of units delivered on site.
  - 2. Include reinforcing, ties, and anchors.
  - 3. Include one course of cast stone masonry.
- B. Use sample panels approved by COR for standard of workmanship of new masonry work.

C. Use sample panel to test cleaning methods.

### 1.5 WARRANTY

A. Warrant exterior masonry walls against moisture leaks and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be five years.

### 1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
- A951-06.....Steel Wire for Masonry Joint Reinforcement.
  - A615/A615M-09.....Deformed and Plain Billet-Steel Bars for Concrete Reinforcement.
  - A675/A675M-03(R2009)....Standard Specification for Steel Bars, Carbon, Hot-Wrought, Special Quality, Mechanical Properties  
C34-03 C62-10 Building Brick (Solid Masonry Units Made From Clay or Shale)
  - C67-09.....Sampling and Testing Brick and Structural Clay Tile
  - C90-11.....Load-Bearing Concrete Masonry Units
  - C126-10.....Ceramic Glazed Structural Clay Facing Tile, Facing Brick, and Solid Masonry Units
  - C216-10.....Facing Brick (Solid Masonry Units Made From Clay or Shale)
  - C476-10.....Standard Specification for Grout for Masonry
  - D1056-07.....Flexible Cellular Materials - Sponge or Expanded Rubber
  - D2000-08.....Rubber Products in Automotive Applications
  - D2240-05(R2010).....Rubber Property - Durometer Hardness
  - D3574-08.....Flexible Cellular Materials-Slab, Bonded, and Molded Urethane Foams
  - F1667-11.....Fasteners: Nails, Spikes and Staples
- C. Masonry Industry Council:  
Hot and Cold Weather Masonry Construction Manual-98 (R2000).
- D. American Welding Society (AWS):  
D1.4-11 Structural Welding Code - Reinforcing Steel.
- E. Federal Specifications (FS):  
FF-S-107C-00.....Screws, Tapping and Drive
- F. Brick Industry Association - Technical Notes on Brick Construction (BIA):
- 11-2001.....Guide Specifications for Brick Masonry, Part I
  - 11A-1988.....Guide Specifications for Brick Masonry, Part II
  - 11B-1988.....Guide Specifications for Brick Masonry, Part III Execution
  - 11C-1998.....Guide Specification for Brick Masonry Engineered Brick Masonry, Part IV
  - 11D-1988.....Guide Specifications for Brick Masonry Engineered Brick Masonry, Part IV continued
- G. Masonry Standards Joint Committee; Specifications for Masonry Structures  
TMS 602-08/ACI 530.1-08/ASCE 6-08 (2008 MSJC Book Version TMS-0402-08).

## PART 2 - PRODUCTS

### 2.1 BRICK

- A. Face Brick:
1. ASTM C216, Grade SW, Type FBS.

2. Brick when tested in accordance with ASTM C67: Classified slightly efflorescent or better.
3. Size:
  - a. Modular
- B. Building Brick: ASTM C62, Grade MW for backup and interior work; Grade SW where in contact with earth.

## 2.2 CONCRETE MASONRY UNITS

- A. Hollow and Solid Load-Bearing Concrete Masonry Units: ASTM C90.
  1. Unit Weight: Normal weight.
  2. Sizes: Modular.
  3. For molded faces used as a finished surface, use concrete masonry units with uniform fine to medium surface texture unless specified otherwise.
  4. Use bullnose concrete masonry units at corners exposed in finished work with 25 mm (one inch) minimum radius rounded vertical exterior corners (bullnose units).

## 2.3 SHEAR KEYS

- A. ASTM D2000, solid extruded cross-shaped section of rubber, neoprene, or polyvinyl chloride, with a durometer hardness of approximately 80 when tested in accordance with ASTM D2240, and a minimum shear strength of 3.5 MPa (500 psi).
- B. Shear key dimensions: Approximately 70 mm by 8 mm for long flange and 38 mm by 16 mm for short flange (2-3/4 inches by 5/16 inch for long flange, and 1-1/2 inches by 5/8 inch for short flange).

## 2.4 ANCHORS, TIES, AND REINFORCEMENT

- A. Steel Reinforcing Bars: ASTM A615M, deformed bars, grade as shown.
- B. Joint Reinforcement:
  1. Form from wire complying with ASTM A951.
  2. Galvanized after fabrication.
  3. Width of joint reinforcement 40 mm (0.16 inches) less than nominal width of masonry wall or partition.
  4. Cross wires welded to longitudinal wires.
  5. Joint reinforcement at least 3000 mm (10 feet) in length.
  6. Joint reinforcement in rolls is not acceptable.
  7. Joint reinforcement that is crimped to form drip is not acceptable.
  8. Maximum spacing of cross wires 400 mm (16 inch) to longitudinal wires.
  9. Ladder Design:
    - a. Longitudinal wires deformed // 4 mm (0.16 inch) // 5 mm (0.20 inch) diameter wire.
    - b. Cross wires // 2.6 mm (0.10 inch) // 4 mm (0.16 inch) diameter.
  10. Trussed Design:
    - a. Longitudinal and cross wires not less than 4 mm (0.16 inch nominal) diameter.
    - b. Longitudinal wires deformed.
- C. Adjustable Veneer Anchor for Frame Walls:
  1. Two piece, adjustable anchor and tie.
  2. Anchor and tie may be either type; use only one type throughout.
  3. Loop Type:
    - a. Anchor: Screw-on galvanized steel anchor strap 2.75 mm (0.11 inch) by 19 mm (3/4 inch) wide by 225 mm (9 inches) long, with 9 mm (0.35 inch) offset and 100 mm (4 inch) adjustment. Provide 5 mm (0.20 inch) hole at each end for fasteners.
    - b. Ties: Triangular tie, fabricated of 5 mm (0.20 inch) diameter galvanized cold drawn steel wire. Ties long enough to engage the

anchor and be embedded not less than 50 mm (2 inches) into the bed joint of the masonry veneer.

4. Angle Type:
  - a. Anchor: Minimum 2 mm (16 gage) thick galvanized steel angle shaped anchor strap. Provide hole in vertical leg for fastener. Provide hole near end of outstanding leg to suit upstanding portion of tie.
  - b. Tie: Fabricate from 5 mm (0.20 inch) diameter galvanized cold drawn steel wire. Form "L" shape to be embedded not less than 50 mm (2 inches) into the bed joint of the masonry veneer and provide upstanding leg to fit through hole in anchor and be long enough to allow 50 mm (2 inches) of vertical adjustment.
- D. Dovetail Anchors:
  1. 2. Triangular wire dovetail anchor 100 mm (4 inch) wide formed of 4 mm (9 gage) steel wire with galvanized steel dovetail insert. Anchor length to extend at least 75 mm (3 inches) into masonry, 25 mm (1 inch) into 40 mm (1-1/2 inch) thick units.
  2. Form dovetail anchor slots from 0.6 mm (0.0239 inch) thick galvanized steel (with felt or fiber filler).
- E. Individual ties:
  1. Rectangular ties: Form from 5 mm (3/16 inch) diameter galvanized steel rod to a rectangular shape not less than 50 mm (2 inches) wide by sufficient length for ends of ties to extend within 25 mm (1 inch) of each face of wall. Ties that are crimped to form drip are not permitted.
  2. Adjustable Cavity Wall Ties:
    - a. Adjustable wall ties may be used at Contractor's option.
    - b. Two piece type permitting up to 40 mm (1-1/2 inch) adjustment.
    - c. Form ties from 5 mm (3/16 inch) diameter galvanized steel wire.
    - d. Form one piece to a rectangular shape 105 mm (4-1/8 inches) wide by length required to extend into the bed joint 50 mm (2 inches).
    - e. Form the other piece to a 75 mm (3 inch) long by 75 mm (3 inch) wide shape, having a 75 mm (3 inch) long bent section for engaging the 105 mm (4-1/8 inch) wide piece to form adjustable connection.
- F. Wall Ties, (Mesh or Wire):
  1. Mesh wall ties formed of ASTM A82, W0.5, 2 mm, (16 gage) galvanized steel wire 13 mm by 13 mm (1/2 inch by 1/2 inch) mesh, 75 mm (3 inches) wide by 200 mm (8 inches) long.
  2. Rectangular wire wall ties formed of W1.4, 3 mm, (9 gage) galvanized steel wire 50 mm (2 inches) wide by 200 mm (8 inches) long.
- G. Corrugated Wall Tie:
  1. Form from 1.5 mm (0.0598 inch) thick corrugated, galvanized steel 30 mm (1-1/4 inches) wide by lengths so as to extend at least 100 mm (4 inches) into joints of new masonry plus 38 mm (1-1/2 inch) turn-up.
  2. Provide 5 mm (3/16 inch) hole in turn-up for fastener attachment.
- H. Adjustable Steel Column Anchor:
  1. Two piece anchor consisting of a 6 mm (1/4 inch) diameter steel rod to be welded to steel with offset ends, rod to permit 100 mm (4 inch) vertical adjustment of wire anchor.
  2. Triangular shaped wire anchor 100 mm (4 inches) wide formed from 5 (3/16 inch) diameter galvanized wire, to extend at least 75 mm (3 inches) into joints of masonry.
- I. Adjustable Steel Beam Anchor:
  1. Z or C type steel strap, 30 mm (1 1/4 inches) wide, 3 mm (1/8 inch) thick.
  2. Flange hook not less than 38 mm (1 1/2 inches) long.
  3. Length to embed in masonry not less than 50 mm (2 inches) in 100 mm (4 inch) nominal thick masonry and 100 mm (4 inches) in thicker masonry.



4. Bend masonry end not less than 40 mm (1 1/2 inches).

## **2.5 PREFORMED COMPRESSIBLE JOINT FILLER**

- A. Thickness and depth to fill the joint as specified.
- B. Closed Cell Neoprene: ASTM D1056, Type 2, Class A, Grade 1, B2F1.
- C. Non-Combustible Type: ASTM C612, Class 5, 1800 degrees F.

## **2.6 ACCESSORIES**

- A. Weep Hole Wicks: Glass fiber ropes, 10 mm (3/8 inch) minimum diameter, 300 mm (12 inches) long.
- B. Box Board:
  1. Mineral Fiber Board: ASTM C612, Class 1.
  2. 25 mm (1 inch) thickness.
  3. Other spacing material having similar characteristics may be used subject to the COR's approval.
- C. Masonry Cleaner:
  1. Detergent type cleaner selected for each type masonry used.
  2. Acid cleaners are not acceptable.
  3. Use soapless type specially prepared for cleaning brick or concrete masonry as appropriate.
- D. Fasteners:
  1. Concrete Nails: ASTM F1667, Type I, Style 11, 19 mm (3/4 inch) minimum length.
  2. Masonry Nails: ASTM F1667, Type I, Style 17, 19 mm (3/4 inch) minimum length.
  3. Screws: FS-FF-S-107, Type A, AB, SF thread forming or cutting.

## **PART 3 - EXECUTION**

### **3.1 JOB CONDITIONS**

- A. Protection:
  1. Cover tops of walls with nonstaining waterproof covering, when work is not in progress. Secure to prevent wind blow off.
  2. On new work protect base of wall from mud, dirt, mortar droppings, and other materials that will stain face, until final landscaping or other site work is completed.
- B. Cold Weather Protection:
  1. Masonry may be laid in freezing weather when methods of protection are utilized.
  2. Comply with MSJC and "Hot and Cold Weather Masonry Construction Manual".

### **3.2 CONSTRUCTION TOLERANCES**

- A. Lay masonry units plumb, level and true to line within the tolerances as per MSJC requirements and as follows:
- B. Maximum variation from plumb:
  1. In 3000 mm (10 feet) - 6 mm (1/4 inch).
  2. In 6000 mm (20 feet) - 10 mm (3/8 inch).
  3. In 12 000 mm (40 feet) or more - 13 mm (1/2 inch).
- C. Maximum variation from level:
  1. In any bay or up to 6000 mm (20 feet) - 6 mm (1/4 inch).
  2. In 12 000 mm (40 feet) or more - 13 mm (1/2 inch).
- D. Maximum variation from linear building lines:
  1. In any bay or up to 6000 mm (20 feet) - 13 mm (1/2 inch).
  2. In 12 000 mm (40 feet) or more - 19 mm (3/4 inch).
- E. Maximum variation in cross-sectional dimensions of columns and thickness of walls from dimensions shown:
  1. Minus 6 mm (1/4 inch).

2. Plus 13 mm (1/2 inch).
- F. Maximum variation in prepared opening dimensions:
  1. Accurate to minus 0 mm (0 inch).
  2. Plus 6 mm (1/4 inch).

### 3.3 INSTALLATION GENERAL

- A. Keep finish work free from mortar smears or spatters, and leave neat and clean.
- B. Wall Openings:
  1. Fill hollow metal frames built into masonry walls and partitions solid with mortar as laying of masonry progresses.
  2. If items are not available when walls are built, prepare openings for subsequent installation.
- C. Tooling Joints:
  1. Do not tool until mortar has stiffened enough to retain thumb print when thumb is pressed against mortar.
  2. Tool while mortar is soft enough to be compressed into joints and not raked out.
  3. Finish joints in exterior face masonry work with a jointing tool, and provide smooth, water-tight concave joint unless specified otherwise.
  4. Tool Exposed interior joints in finish work concave unless specified otherwise.
- D. Lintels:
  1. Use steel lintels, for openings in brick veneer, unless shown otherwise.
  2. Length for minimum bearing of 100 mm (4 inches) at ends.
- I. Before connecting new masonry with previously laid, remove loosened masonry or mortar, and clean and wet work in place as specified under wetting.
- M. Wetting and Wetting Test:
  1. Test and wet brick or clay tile in accordance with BIA 11B.
  2. Do not wet concrete masonry units before laying.

### 3.4 ANCHORAGE

- A. Veneer to Frame Walls:
  1. Use adjustable veneer anchors.
  2. Fasten anchor to stud through sheathing with self drilling and tapping screw, one at each end of loop type anchor.
  3. Space anchors not more than 400 mm (16 inches) on center vertically at each stud.
- C. Masonry Facing to Backup and Cavity Wall Ties:
  1. Use individual ties for new work.
  2. Stagger ties in alternate courses, and space at 400 mm (16 inches) maximum vertically, and 600 mm (2 feet) horizontally.
  3. At openings, provide additional ties spaced not more than 900 mm (3 feet) apart vertically around perimeter of opening, and within 300 mm (12 inches) from edge of opening.
- D. Anchorage of Abutting Masonry:
  1. Anchor interior 100 mm (4 inch) thick masonry partitions to exterior masonry walls with wall ties. Space ties at 600 mm (2 foot) maximum vertical intervals. Extend ties 100 mm (4 inches) minimum into masonry.
  2. Anchor interior masonry bearing walls or interior masonry partitions over 100 mm (4 inches) thick to masonry walls with rigid wall anchors spaced at 400 mm (16 inch) maximum vertical intervals.
  3. Anchor abutting masonry walls and partitions to concrete with dovetail anchors. Install dovetail slots vertically in concrete at centerline of abutting wall or partition. Locate dovetail anchors at

400 mm (16 inch) maximum vertical intervals. Secure anchors to existing wall with two 9 mm (3/8 inch) by 75 mm (3 inch) expansion bolts or two power-driven fasteners.

4. Anchor abutting interior masonry partitions to existing concrete and existing masonry construction, with corrugated wall ties. Extend ties at least 100 mm (4 inches) into joints of new masonry. Fastened to existing concrete and masonry construction, with powder actuated drive pins, nail or other means that provides rigid anchorage. Install anchors at 400 mm (16 inch) maximum vertical intervals.

E. Masonry Furring:

1. Anchor masonry furring less than 100 mm (4 inches) nominal thick to masonry walls or to concrete with corrugated wall ties or dovetail anchors.
2. Space not over 600 mm (2 feet) on centers in both directions.

### 3.5 REINFORCEMENT

A. Joint Reinforcement:

1. Brick veneer over frame backing walls does not require joint reinforcement. [REVIEW WITH STRUCTURAL]
2. Locate joint reinforcement in mortar joints at 400 mm (16 inch) maximum vertical intervals.
3. Joint reinforcement is required in every other course of stack bond CMU masonry.

B. Steel Reinforcing Bars:

1. Install in cells of hollow masonry units where required for vertical reinforcement and in bond beam units for lintels and bond beam horizontal reinforcement. Install in wall cavities of reinforced masonry walls where shown.
2. Use grade 60 bars if not specified otherwise.
3. Bond Beams:
  - a. Form Bond beams of load-bearing concrete masonry units filled with ASTM C476 grout and reinforced with 2-#15m (#5) reinforcing steel unless shown otherwise. Do not cut reinforcement.
  - b. Brake bond beams only at expansion joints and at control joints, if shown.
5. Grout openings:
  - a. Leave cleanout holes in double wythe walls during construction by omitting units at the base of one side of the wall.
  - b. Locate 75 mm x 75 mm (3 in. x 3 in.) min. clean-out holes at location of vertical reinforcement.
  - c. Keep grout space clean of mortar accumulation and sand debris. Clean the grout space every day using a high pressure jet stream of water, or compressed air, or industrial vacuum, or by laying wood strips on the metal ties as the wall is built. If wood strips are used, lift strips with wires as the wall progresses and before placing each succeeding course of wall ties.

### 3.6 BRICK EXPANSION AND CMU CONTROL JOINTS.

- A. Provide brick expansion and CMU control joints where shown on drawings.
- B. Keep joint free of mortar and other debris.
- C. Where joints occur in masonry walls.
  1. Install preformed compressible joint filler in brick wythe.
  2. Install cross shaped shear keys in concrete masonry unit wythe with preformed compressible joint filler on each side of shear key unless otherwise specified.
  3. Install filler, backer rod, and sealant on exposed faces.
- D. Use standard notched concrete masonry units (sash blocks) made in full and half-length units where shear keys are used to create a continuous vertical joint.

- E. Interrupt steel joint reinforcement at expansion and control joints unless otherwise shown.
- F. Fill opening in exposed face of expansion and control joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

### 3.7 BUILDING EXPANSION AND SEISMIC JOINTS

- A. Keep joint free of mortar. Remove mortar and other debris.
- B. Install non-combustible, compressible type joint filler to fill space completely except where sealant is shown on joints in exposed finish work.
- C. Where joints are on exposed faces, provide depth for backer rod and sealant as specified in Section 07 92 00, JOINT SEALANTS, unless shown otherwise.

### 3.8 BRICKWORK

- A. Lay clay brick in accordance with BIA Technical Note 11 series.
- B. Laying:
  - 1. Lay brick in running bond with course of masonry bonded at corners unless shown otherwise. Match bond of existing building.
  - 2. Maintain bond pattern throughout.
  - 3. Do not use brick smaller than half-brick at any angle, corner, break or jamb.
  - 4. Where length of cut brick is greater than one half but less than a whole brick, maintain the vertical joint location of such units.
  - 5. Lay exposed brickwork joints symmetrical about center lines of openings.
  - 6. Do not structural bond multi wythe brick walls unless shown.
  - 7. Before starting work, lay facing brick on foundation wall and adjust bond to openings, angles, and corners.
  - 8. Lay brick for sills with wash and drip.
  - 9. Build solid brickwork as required for anchorage of items.
- C. Joints:
  - 1. Exterior and interior joint widths: Lay for three equal joints in 200 mm (eight inches) vertically, unless shown otherwise.
  - 2. Rake joints for pointing with colored mortar when colored mortar is not full depth.
- D. Weep Holes:
  - 1. Install weep holes at 600 mm (24 inches) on center in bottom of vertical joints of exterior masonry veneer or cavity wall facing over foundations, bond beams, and other water stops in the wall.
  - 2. Form weep holes using wicks made of mineral fiber insulation strips turned up 200 mm (8 inches) in cavity. Anchor top of strip to backup to securely hold in place.
  - 3. Install sand or pea gravel in cavity approximately 75 mm (3 inches) high between weep holes.
- F. Cavity Type Exterior Walls:
  - 1. Keep air space clean of mortar accumulations and debris.
    - a. Clean cavity by use of hard rubber, wood or metal channel strips having soft material on sides contacting wythes.
    - b. Lift strips with wires before placing next courses of horizontal joint reinforcement or individual ties or adjustable cavity wall ties.
  - 2. For each lift lay two courses of concrete masonry units, followed by six courses of brick facing.
  - 3. Veneer Framed Walls:
    - a. Build with 100 mm (4 inches) of face brick over sheathed stud wall with air space.

### 3.9 CONCRETE MASONRY UNITS

#### A. Kind and Uses:

1. Provide special concrete masonry shapes as required, including lintel and bond beam units. Use solid concrete masonry units where full units cannot be used or where needed for anchorage of accessories.
2. Provide solid load-bearing concrete masonry units or grout the cell of hollow units at jambs of openings in walls, where structural members impose loads directly on concrete masonry, and where shown.
3. Provide rounded corner (bullnose) shapes at opening jambs in exposed work and at exterior corners.

#### B. Laying:

1. Lay concrete masonry units with 10 mm (3/8 inch) joints, with a bond overlap of not less than 1/4 of the unit length, except where stack bond is required.
2. Do not wet concrete masonry units before laying.
3. Bond external corners of partitions by overlapping alternate courses.
4. Lay first course in a full mortar bed.
5. Set anchorage items as work progress.
6. Where ends of anchors, bolts, and other embedded items, project into voids of units, completely fill such voids with mortar or grout.
7. Provide a 6 mm (1/4 inch) open joint for caulking between CMU and abutting construction.
8. Lay concrete masonry units with full face shell mortar beds and fill head joint beds for depth equivalent to face shell thickness.
9. Lay concrete masonry units so that cores of units, that are to be filled with grout, are vertically continuous with joints of cross webs of such cores completely filled with mortar. Unobstructed core openings not less than 50 mm (2 inches) by 75 mm (3 inches).
10. Do not wedge the masonry against the steel reinforcing. Minimum 13 mm (1/2 inch) clear distance between reinforcing and masonry units.
11. Steel reinforcement, at time of placement, free of loose flaky rust, mud, oil, or other coatings that will destroy or reduce bond.
13. Steel reinforcement in place before grouting.
14. Minimum clear distance between parallel bars: One bar diameter.
15. Hold vertical steel reinforcement in place by centering clips, caging devices, tie wire, or other approved methods, vertically at spacings noted.
16. Support vertical bars near each end and at intermediate intervals not exceeding 192 bar diameters.
17. Reinforcement shall be fully encased by grout or concrete.
18. Splice reinforcement or attach reinforcement to dowels by placing in contact and secured or by placing the reinforcement within 1/5 of the required bar splice length.
19. Stagger splices in adjacent horizontal reinforcing bars. Lap reinforcing bars at splices a minimum of 40 bar diameters.
20. Grout cells of concrete masonry units, containing the reinforcing bars, solid as specified under grouting.
21. Cavity and joint horizontal reinforcement may be placed as the masonry work progresses.

### 3.10 POINTING

- A. Fill joints with pointing mortar using rubber float trowel to rub mortar solidly into raked joints.
- B. Wipe off excess mortar from joints of glazed masonry units with dry cloth.
- C. Finish exposed joints in finish work with a jointing tool to provide a smooth concave joint unless specified otherwise.

### 3.11 GROUTING

- A. Preparation:
  - 1. Clean grout space of mortar droppings before placing grout.
  - 2. Close cleanouts.
  - 3. Install vertical solid masonry dams across grout space for full height of wall at intervals of not more than 9000 mm (30 feet). Do not bond dam units into wythes as masonry headers.
  - 4. Verify reinforcing bars are in cells of units or between wythes as shown.
- B. Placing:
  - 1. Place grout by hand bucket, concrete hopper, or grout pump.
  - 2. Consolidate each lift of grout after free water has disappeared but before plasticity is lost.
  - 3. Do not slush with mortar or use mortar with grout.
  - 4. Interruptions:
    - a. When grouting must be stopped for more than an hour, top off grout 40 mm (1-1/2 inch) below top of last masonry course.
    - b. Grout from dam to dam on high lift method.
    - c. A longitudinal run of masonry may be stopped off only by raking back one-half a masonry unit length in each course and stopping grout 100 mm (4 inches) back of rake on low lift method.
- C. Puddling Method:
  - 1. Double wythe masonry constructed grouted in lifts not to exceed 300 mm (12 inches) or less than 50 mm (2 inches) wide.
  - 2. Consolidate by puddling with a grout stick during and immediately after placing.
  - 3. Grout the cores of concrete masonry units containing the reinforcing bars solid as the masonry work progresses.
- D. Low Lift Method:
  - 1. Construct masonry to a height of 1.5 m (5 ft) maximum before grouting.
  - 2. Grout in one continuous operation and consolidate grout by mechanical vibration and reconsolidate after initial water loss and settlement has occurred.

### 3.12 PLACING REINFORCEMENT

- A. General: Clean reinforcement of loose rust, mill scale, earth, ice or other materials which will reduce bond to mortar or grout. Do not use reinforcement bars with kinks or bends not shown on the Contract Drawings or final shop drawings, or bars with reduced cross-section due to excessive rusting or other causes.
- B. Position reinforcement accurately at the spacing indicated. Support and secure vertical bars against displacement. Horizontal reinforcement may be placed as the masonry work progresses. Where vertical bars are shown in close proximity, provide a clear distance between bars of not less than the nominal bar diameter or 25 mm (1 inch), whichever is greater.
- C. Splice reinforcement bars where shown; do not splice at other places unless accepted by the COR. Provide lapped splices, unless otherwise indicated. In splicing vertical bars or attaching to dowels, lap ends, place in contact and wire tie.
- D. Provide not less than minimum lap as indicated on shop drawings, or if not indicated, as required by governing code.
- E. Weld splices where indicated. Comply with the requirements of AWS D1.4 for welding materials and procedures.
- F. Embed metal ties in mortar joints as work progresses, with a minimum mortar cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations.

- G. Embed prefabricated horizontal joint reinforcement as the work progresses, with a minimum cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations. Lap joint reinforcement not less than 150 mm (6 inches) at ends. Use prefabricated "L" and "T" sections to provide continuity at corners and intersections. Cut and bend joint reinforcement as recommended by manufacturer for continuity at returns, offsets, column fireproofing, pipe enclosures and other special conditions.
- H. Anchoring: Anchor reinforced masonry work to supporting structure as indicated.
- I. Anchor reinforced masonry walls to non-reinforced masonry where they intersect.

### 3.13 INSTALLATION OF REINFORCED CONCRETE UNIT MASONRY

- A. Do not wet concrete masonry units (CMU).
- B. Lay CMU units with full-face shell mortar beds. Fill vertical head joints (end joints between units) solidly with mortar from face of unit to a distance behind face equal to not less than the thickness of longitudinal face shells. Solidly bed cross-webs of starting courses in mortar. Maintain head and bed joint widths shown, or if not shown, provide 10 mm (3/8 inch) joints.
- C. Where solid CMU units are shown, lay with full mortar head and bed joints.
- D. Walls:
  - 1. Pattern Bond: Lay CMU wall units in 1/2-running bond with vertical joints in each course centered on units in courses above and below, unless otherwise indicated. Bond and interlock each course at corners and intersections. Use special-shaped units where shown, and as required for corners, jambs, sash, control joints, lintels, bond beams and other special conditions.
  - 2. Maintain vertical continuity of core or cell cavities, which are to be reinforced and grouted, to provide minimum clear dimension indicated and to provide minimum clearance and grout coverage for vertical reinforcement bars. Keep cavities free of mortar. Solidly bed webs in mortar where adjacent to reinforced cores or cells.
  - 3. Where horizontal reinforced beams (bond beams) are shown, use special units or modify regular units to allow for placement of continuous horizontal reinforcement bars. Place small mesh expanded metal lath or wire screening in mortar joints under bond beam courses over cores or cells of non-reinforced vertical cells, or provide units with solid bottoms.

### 3.14 CLEANING AND REPAIR

- A. General:
  - 1. Clean exposed masonry surfaces on completion.
  - 2. Protect adjoining construction materials and landscaping during cleaning operations.
  - 3. Cut out defective exposed new joints to depth of approximately 19 mm (3/4 inch) and repoint.
  - 4. Remove mortar droppings and other foreign substances from wall surfaces.
- B. Brickwork:
  - 1. First wet surfaces with clean water, then wash down with a solution of soapless detergent. Do not use muriatic acid.
  - 2. Brush with stiff fiber brushes while washing, and immediately thereafter hose down with clean water.
  - 3. Free clean surfaces of traces of detergent, foreign streaks, or stains of any nature.

- - - E N D - - -

**SECTION 04 72 00**  
**CAST STONE MASONRY**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This sections specifies manufactured concrete units to simulate a natural stone.
- B. Installation of cast stone units.

**1.2 RELATED WORK**

- A. Setting and pointing mortar: Section 04 05 13, MASONRY MORTARING.
- B. Joint sealant and application: Section 07 92 00, JOINT SEALANTS.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
  - 1. Cast stone, sample panel, size 100 by 300 by 300 mm (4 by 12 by 12 inches) each color and finish.
  - 2. Show finish on two 100 mm (4-inch) edges and 300 by 300 mm (12 by 12 inch) surface.
- C. Shop Drawings:
  - 1. Cast stone showing exposed faces, profiles, cross sections, anchorage, reinforcing, jointing and sizes.
  - 2. Setting drawings with setting mark.
- D. Certificates: Test results indicating that the cast stone meets specification requirements and proof of plant certification.
- E. Submit manufacturers test results of cast stone previously made by manufacturer.
- F. Laboratory Data: Description of testing laboratories facilities and qualifications of its principals and key personnel.
- G. List of jobs furnished by the manufacturer, which were similar in scope and at least three (3) years of age.

**1.4 PRODUCT DELIVERY, STORAGE AND HANDLING**

- A. Store cast stone under waterproof covers on palettes clear of ground.
- B. Protect from handling, dirt, stain, and water damage.
- C. Mark production units with the identification marks as shown on the shop drawings.
- D. Package units and protect them from staining or damage during shipping and storage.
- E. Provide an itemized list of product to support the bill of lading.

**1.5 WARRANTY**

- A. Warranty exterior masonry walls against moisture leaks, any defects and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be five years.

**1.6 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by the basic designation only. Comply with applicable provisions and recommendations of the following, except as otherwise shown or specified.
- B. Cast Stone Institute Technical Manual and Cast Stone Institute standard specifications.
- C. American Society for Testing and Materials (ASTM):



A167-99(R2009).....	Stainless and Heat Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
A185-07.....	Steel, Welded Wire Fabric, Plain for Concrete
A615/A615M-09.....	Deformed and Plain Billet-Steel Bars for Concrete Reinforcement
C33-11.....	Concrete Aggregates
C150-09.....	Portland Cement
C568-10.....	Limestone Dimension Stone
C979-10.....	Pigments for Integrally Colored Concrete
C1194-03.....	Compressive Strength of Architectural Cast Stone
C1195-03.....	Absorption of Architectural Cast Stone
C1364-10.....	Architectural Cast Stone.
D2244-09.....	Calculation of Color Differences from Instrumentally Measured Color Coordinates.

### 1.7 QUALITY ASSURANCE

- A. The Manufacturer:
  - 1. Must have ten (10) years minimum continuous operating experience and have facilities for manufacturing cast stone as described herein. Manufacturer shall have sufficient plant facilities to produce the shapes, quantities and size of cast stone required in accordance with the project schedule.
  - 2. Must be a member of the Cast Stone Institute.
  - 3. Plant manufacturing stone for project to be certified by the Cast Stone Institute.
- B. Stone setter: Must have ten (5) years experience setting cast or natural building stone.
- C. Testing: One (1) sample from production units may be selected at random from the field for each 500 cubic feet (14 m<sup>3</sup>) delivered to the job:
  - 1. Three (3) field cut cube specimens from each of these sample shall have an average minimum compressive strength of not less than 85% with no single specimen testing less than 75% of design strength as specified.
  - 2. Three (3) field cut cube specimens from each of these samples shall have an average maximum cold-water absorption of 6%.
  - 3. Field specimens shall be tested in accordance with ASTM C 1194 and C 1195.
  - 4. Manufacturer shall submit a written list of projects similar and at least three (3) years of age, along with owner, architect and contractor references.

### 1.8 MANUFACTURING TOLERANCES

- A. Cross section dimensions shall not deviate by more than + 1/16 in. from approved dimension.
- B. Length of units shall not deviate by more than length /360 Maximum length of any unit shall not exceed 15 times the average thickness of such unit unless otherwise agreed by the manufacturer.
- C. Warp bow or twist of units shall not exceed length/360 .
- D. Location of dowel holes, anchor slots, flashing grooves, false joints and similar features - On formed sides of unit, 1/8 in maximum deviation.

### 1.9 MOCK-UP

- A. Provide units for incorporation in mockup of face brick. See section 04 20 00. Mock-up becomes the standard of workmanship for the project.

## **PART 2 - PRODUCTS**

### **2.1 ARCHITECTURAL CAST STONE**

- A. Comply with ASTM C 1364
- B. Physical properties: Provide the following:
  - 1. Compressive Strength - ASTM C 1194: 6,500 psi (45 Mpa) minimum for products at 28 days.
  - 2. Absorption - ASTM C 1195: 6% maximum by the cold water method, or 10% maximum by the boiling method for products as 28 days.
  - 3. Air Content - ASTM C173 or C231, for wet cast product shall be 4-8% for units exposed to freeze-thaw environments. Air entrainment is not required for vibrant dry tamp (VDT) products.
  - 4. Freeze thaw - ASTM C 1364L The cumulative percent weight loss (CPWL) shall be less than 5% after 300 cycles of freezing and thawing.
  - 5. Linear Shrinkage - ASTM C 426L Shrinkage shall not exceed 0.065%.
- C. Job site testing - One (1) sample from production units may be selected at random from the field for each 500 cubic feet (14m<sup>3</sup>) delivered to the job site:
  - 1. Three (3) field cut cube specimens from each of these samples shall have an average minimum compressive strength of not less than 85% with no single specimen testing less than 75% of design strength as allowed by ACI 318.
  - 2. Three (3) field cut cube specimens from each of these samples shall have an average maximum cold-water absorption of 6%.
  - 3. Field specimens shall be tested in accordance with ASTM C 1194 and C 1195.

### **2.2 RAW MATERIALS**

- A. Portland cement - Type I or Type III, white and/or grey, ASTM C 150.
- B. Coarse aggregates - Granite, quartz or limestone, ASTM C 33, except for gradation, and are optional for the vibrant dry tamp (VDT) casting method.
- C. Fine aggregates - Manufactured or natural sands, ASTM C 33, except for gradation.
- D. Colors - Inorganic iron oxide pigments, ASTM C 979 except that carbon black pigments shall not be used.
- E. Admixtures- Comply with the following:
  - 1. ASTM C 260 for air-entraining admixtures.
  - 2. ASTM C 494/C 495 M Types A-G for water reducing, retarding, accelerating and high range admixtures.
  - 3. Other admixtures: integral water repellents and other chemicals, for which no ASTM Standard exists, shall be previously established as suitable for use in concrete by proven field performance or through laboratory testing.
  - 4. ASTM C 618 mineral admixtures of dark and variable colors shall not be used in surfaces intended to be exposed to view.
  - 5. ASTM C 989 granulated blast furnace slag may be used to improve physical properties. Tests are required to verify these features.
- F. Water - Potable
- G. Reinforcing bars:
  - 1. ASTM A 615/A 615M. Grade 40 or 60 steel galvanized or epoxy coated when cover is less than 1.5 in. (37 mm).
  - 2. Welded Wire Fabric: ASTM A 185 where applicable for wet cast units.
- H. All anchors, dowels and other anchoring devices and shims shall be standard building stone anchors commercially available in a non-corrosive material such as zinc plated, galvanized steel, brass, or stainless steel Type 302 or 304.

### 2.3 COLOR AND FINISH

- A. Match existing in place.
- B. All surfaces intended to be exposed to view shall have a fine-grained texture similar to natural stone, with no air voids in excess of 1/32 in. (0.8 mm) and the density of such voids shall be less than 3 occurrences per any 1 in<sup>2</sup> (25mm<sup>2</sup>) and not obvious under direct daylight illumination at a 5 ft. (1.5m) distance.
- C. Units shall exhibit a texture approximately equal to the approved sample when viewed under direct daylight illumination at a 10 ft (3m) distance.
- D. ASTM D 2244 permissible variation in color between units of comparable age subjected to similar weathering exposure.
  - 1. Total color difference - not greater than 6 units.
  - 2. Total hue difference-not greater than 2 units.

### 2.4 REINFORCING

- A. Reinforce the units as required by the drawings and for safe handling and structural stress.
  - 1. Minimum reinforcing shall be 0.25 percent of the cross section area.
- B. Reinforcement shall be non-corrosive where faces exposed to weather are covered with less than 1.5in. (38 mm) of concrete material. All reinforcement shall have minimum coverage of twice the diameter of the bars.
- C. Minor chipping resulting from shipment and delivery shall not be grounds for rejection. Minor chips shall not be obvious under direct daylight illumination from a 20-ft (6m) distance.
- D. The occurrence of crazing or efflorescence shall not constitute a cause for rejection.
- E. Remove cement film, if required, from exposed surface prior to packaging for shipment.

### 2.5 CURING

Cure units in a warm curing chamber 100 F (37.8 C) at 95 percent relative humidity for approximately 12 hours, or cure in a 95 percent moist environment at a minimum 70F (21.1 C) for 16 hours after casting. Additional yard curing at 95 percent relative humidity shall be 350-degree-days (i.e. 7 days @ 50F (10.0 C) or 5 days @ 70F (21.0 C) prior to shipping. Form cured units shall be protected from moisture evaporation with curing blankets or curing compounds after casting.

## PART 3 - EXECUTION

### 3.1 EXAMINATION

- A. Installing contractor shall check cast stone materials for fit and finish prior to installation. Do not set unacceptable units.

### 3.2 SETTING TOLERANCES

- A. Comply with Cast Stone Institute <sup>SM</sup> Technical Manual.
- B. Set stones 1/8 in. (3 mm) or less, within the plane of adjacent units.
- C. Joints, plus - 1/6 in. (1.5 mm), minus - 1/8 in. (3 mm).

### 3.3 JOINTING

- A. Joint size:
  - 1. At stone/brick joints 3/8 in. (9.5 mm).
  - 2. At stone/stone joints in vertical position 1/4 in. (6 mm) (3/8 in. (9.5 mm) optional).
  - 3. Stone/stone joint exposed on top 3/8 in. (.5 mm).
- B. Joint Materials:

1. Mortar, Type N, ASTM C 270.
  2. Use a full bed of mortar at all bed joints.
  3. Flush vertical joints full with mortar.
  4. Leave all joints with exposed tops or under relieving angles open for sealant.
  5. Leave head joints in coping and projecting components open for sealant.
- B. Location of joints:
1. As shown on shop drawings.
  2. At control and expansion joints unless otherwise shown.

#### **3.4 SETTING**

- A. Drench units with clean water prior to setting.
- B. Fill dowel holes and anchor slots completely with mortar or non-shrink grout.
- C. Set units in full bed of mortar, unless otherwise detailed.
- D. Rake mortar joints 3/4 in. (18 mm) in. for pointing.
- E. Remove excess mortar from unit faces immediately after setting.
- F. Tuck point unit joints to a slight concave profile.

#### **3.5 JOINT PROTECTION**

- A. Comply with requirements of Section 07 92 00, JOINT SEALANTS.
- B. Prime ends of units, insert properly sized backing rod and install required sealant.

#### **3.6 REPAIR AND CLEANING**

- A. Repair chips with touchup materials furnished by manufacturer.
- B. Saturate units to be cleaned prior to applying an approved masonry cleaner.
- C. Consult with manufacturer for appropriate cleaners.

#### **3.7 INSPECTION AND ACCEPTANCE**

- A. Inspect finished installation according to Bulletin #36 published by the Cast Stone Institute.

- - - E N D - - -

**SECTION 05 12 00**  
**STRUCTURAL STEEL FRAMING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

This section specifies structural steel shown and classified by Section 2, Code of Standard Practice for Steel Buildings and Bridges.

**1.2 RELATED WORK:**

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Painting: Section 09 91 00, PAINTING.
- C. Steel Joist: Section 05 21 00, STEEL JOIST FRAMING.
- D. Steel Decking: Section 05 31 00, STEEL DECKING.
- E. Composite Steel Deck: Section 05 36 00, COMPOSITE METAL DECKING.

**1.3 QUALITY ASSURANCE:**

- A. Fabricator and erector shall maintain a program of quality assurance in conformance with Section 8, Code of Standard Practice for Steel Buildings and Bridges. Work shall be fabricated in an AISC certified Category Std fabrication plant.
- B. Before authorizing the commencement of steel erection, the controlling contractor shall ensure that the steel erector is provided with the written notification required by 29 CFR 1926.752. Provide copy of this notification to the COR.

**1.4 TOLERANCES:**

- A. Fabrication tolerances for structural steel shall be held within limits established by ASTM A6, by AISC 303, Sections 6 and 7, Code of Standard Practice for Buildings and Bridges, except as follows:
- B. Elevation tolerance for closure plates at the building perimeter and at slab openings prior to concrete placement is 6 mm (1/4 inch).

**1.5 REGULATORY REQUIREMENTS:**

- A. AISC 360: Specification for Structural Steel Buildings
- B. AISC 303: Code of Standard Practice for Steel Buildings and Bridges.

**1.6 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop and Erection Drawings: Complete

- C. Certificates:
  - 1. Structural steel.
  - 2. Steel for all connections.
  - 3. Welding materials.
  - 4. Shop coat primer paint.
- D. Test Reports:
  - 1. Welders' qualifying tests.
- E. Design Drawings.
- F. Record Surveys.

**1.8 APPLICABLE PUBLICATIONS:**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Institute of Steel Construction (AISC):
  - 1. AISC 360-10 Specification for Structural Steel Buildings
  - 2. AISC 303-10 Code of Standard Practice for Steel Buildings and Bridges
- C. American National Standards Institute (ANSI):
  - B18.22.1-65(R2008).....Plain Washers
  - B18.22M-81(R2000).....Metric Plain Washers
- D. American Society for Testing and Materials (ASTM):
  - A6/A6M-11.....Standard Specification for General Requirements  
for Rolled Structural Steel Bars, Plates,  
Shapes, and Sheet Piling
  - A36/A36M-08.....Standard Specification for Carbon Structural  
Steel
  - A53/A53M-10.....Standard Specification for Pipe, Steel, Black  
and Hot-Dipped, Zinc-Coated Welded and Seamless
  - A123/A123M-09.....Standard Specification for Zinc (Hot-Dip  
Galvanized) Coatings on Iron and Steel Products
  - A242/A242M-04 (R2009)....Standard Specification for High-Strength Low-  
Alloy Structural Steel
  - A283/A283M-03 (R2007)....Standard Specification for Low and Intermediate  
Tensile Strength Carbon Steel Plates
  - A307-10.....Standard Specification for Carbon Steel Bolts  
and Studs, 60,000 psi Tensile Strength

- A325-10.....Standard Specification for Structural Bolts,  
Steel, Heat Treated, 120/105 ksi Minimum  
Tensile Strength
- A490-12.....Standard Specification for Heat-Treated Steel  
Structural Bolts 150 ksi Minimum Tensile  
Strength
- A500/A500M-10a.....Standard Specification for Cold Formed Welded  
and Seamless Carbon Steel Structural Tubing in  
Rounds and Shapes
- A501-07.....Standard Specification for Hot-Formed Welded  
and Seamless Carbon Steel Structural Tubing
- A572/A572M-07.....Standard Specification for High-Strength  
Low-Alloy Columbium-Vanadium Structural Steel
- A992/A992M-11.....Standard Specification for Structural Steel  
Shapes
- E. American Welding Society (AWS):
  - D1.1/D1.1M-10.....Structural Welding Code-Steel
- F. Research Council on Structural Connections (RCSC) of The Engineering  
Foundation:
  - Specification for Structural Joints Using ASTM A325 or A490 Bolts
- G. Military Specifications (Mil. Spec.):
  - MIL-P-21035.....Paint, High Zinc Dust Content, Galvanizing,  
Repair
- H. Occupational Safety and Health Administration (OSHA):
  - 29 CFR Part 1926-2001...Safety Standards for Steel Erection

**PART 2 - PRODUCTS**

**2.1 MATERIALS:**

- A. Structural Steel: Per Drawings.
- B. Structural Tubing: Per Drawings.
- C. Structural Tubing: Per Drawings.
- D. Steel Pipe: Per Drawings.
- E. Bolts, Nuts and Washers per drawings.
- F. Zinc Coating: ASTM A123.
- G. Galvanizing Repair Paint: Mil. Spec. MIL-P-21035.

**PART 3 - EXECUTION**

**3.1 CONNECTIONS (SHOP AND FIELD):**

- A. Welding: Welding in accordance with AWS D1.1. Welds shall be made only by welders and welding operators who have been previously qualified by tests as prescribed in AWS D1.1 to perform type of work required.
- B. High-Strength Bolts: High-strength bolts tightened to a bolt tension not less than 70% of their minimum tensile strength. Tightening done with properly calibrated wrenches, by turn-of-nut method or by use of direct tension indicators (bolts or washers). Tighten bolts in connections identified as slip-critical using Direct Tension Indicators. Twist-off torque bolts are not an acceptable alternate fastener for slip critical connections.

**3.2 FABRICATION:**

- A. Fabrication in accordance with Chapter M, AISC 360.

**3.3 SHOP PAINTING:**

- A. General: Shop paint steel with primer in accordance with AISC 303, Section 6.
- B. Shop paint for steel surfaces is specified in Section 09 91 00, PAINTING.
- C. Do not apply paint to following:
  - 1. Surfaces within 50 mm (2 inches) of joints to be welded in field.
  - 2. Surfaces which will be encased in concrete.
  - 4. Top flange of members which will have shear connector studs applied.
- D. Zinc Coated (Hot Dip Galvanized) per ASTM A123 (after fabrication):  
Touch-up after erection: Clean and wire brush any abraded and other spots worn through zinc coating, including threaded portions of bolts and welds and touch-up with galvanizing repair paint.

**3.4 ERECTION:**

- A. General: Erection in accordance with AISC 303, Section 7B. Temporary Supports: Temporary support of structural steel frames during erection in accordance with AISC 303, Section 7

**3.5 FIELD PAINTING:**

- A. After erection, touch-up steel surfaces specified to be shop painted. After welding is completed, clean and prime areas not painted due to field welding.



B. Finish painting of steel surfaces is specified in Section 09 91 00,  
PAINTING.

**3.6 SURVEY:**

A. Upon completion of finish bolting or welding on any part of the work,  
and prior to start of work by other trades that may be supported,  
attached, or applied to the structural steel work, submit a certified  
report of survey to COR for approval. Reports shall be prepared by  
Registered Land Surveyor or Registered Civil Engineer as specified in  
Section 01 00 00, GENERAL REQUIREMENTS. Report shall specify that  
location of structural steel is acceptable for plumbness, level and  
alignment within specified tolerances specified in the AISC Manual.

- - - E N D - - -

**SECTION 05 21 00  
STEEL JOIST FRAMING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

This section specifies open web, and longspan steel joists.

**1.2 RELATED WORK:**

- A. Structural Steel: Section 05 12 00, STRUCTURAL STEEL FRAMING.
- B. Finish Painting: Section 09 91 00, PAINTING.

**1.3 DESIGN REQUIREMENTS:**

Design all elements with the latest published version of applicable Codes.

**1.4 TOLERANCES:**

Deviation from a straight line between ends of any installed joist shall not exceed 10 mm in 3 m (3/8 inch in 10 feet).

**1.5 REGULATORY REQUIREMENTS:**

STEEL JOIST INSTITUTE: Standard Specifications, Load Tables and Weight Tables for Steel Joists and Joist Girders, (Latest Edition).

**1.6 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop and Erection Drawings: Complete.
  - 1. Fabrication drawings including details and schedules for the fabrication and assembly of each joist.
  - 2. Erection drawings showing the size and location of each joist, bridging, cross bracing, bearing details, connections, welds, bolts and bearing plates.
- C. Certificates: STEEL JOIST INSTITUTE compliance.

**1.7 QUALITY ASSURANCE:**

Provide documentation that the joist manufacturer is a member of the Steel Joist Institute and has satisfactorily completed work of a similar scope and nature.

**1.8 APPLICABLE PUBLICATIONS:**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Institute of Steel Construction (AISC):
  - 1. Specification for Structural Steel Buildings - Allowable Stress Design and Plastic Design (Latest Edition).

2. Load and Resistance Factor Design Specification for Structural Steel Buildings (Latest Edition).
- C. American Society for Testing and Materials (ASTM):
- A307-07.....Carbon Steel Bolts and Studs, 400 MPa (60,000 psi) Tensile Strength
  - A325-09.....Structural Bolts, Steel, Heat Treated, 800/700 MPa (120/105 ksi) Minimum Tensile Strength
  - A490-08.....Heat-Treated Steel Structural Bolts, 1000 MPa (150 ksi) Minimum Tensile Strengths
- D. American Welding Society (AWS):
- D1.1-08.....Structural Welding Code - Steel
- E. SSPC: The Society for Protective Coatings:
- Steel Structures Painting Manual, Volumes 1 and 2
- F. Steel Joist Institute (STEEL JOIST INSTITUTE):
- Standard Specifications, Load Tables and Weight Tables for Steel Joists and Joist Girders (Latest Edition).
- G. U.S. Army Corps of Engineers:
- CRD-C-621.....Specification for Non-Shrink Grout

**PART 2 - PRODUCTS**

**2.1 OPEN WEB STEEL JOISTS:**

K-Series conforming to STEEL JOIST INSTITUTE standard specifications.

**2.2 LONGSPAN STEEL JOISTS:**

LH-Series conforming to STEEL JOIST INSTITUTE standard specifications.

**2.3 ACCESSORIES - FITTINGS:**

- A. Accessories and fittings, including end supports and bridging, in accordance with standard STEEL JOIST INSTITUTE specification under which joists were designed.
- B. Unfinished Threaded Fasteners: ASTM A307, Grade A, regular hexagon type, low carbon steel.
- C. High-strength bolts, including nuts and washers: ASTM A325 or A490 heavy hexagon structural bolts.

**PART 3 - EXECUTION**

**3.1 FABRICATION:**

- A. Fabrication and assembly in accordance with applicable standard STEEL JOIST INSTITUTE specification:
  - 1. Make chord splices with full penetration welds capable of developing the ultimate strength in tension of the parent material. Make no allowance for the strength of back-up bars or other material incidental to welding.

2. Provide shop-welded connection plates at panel points to receive supplemental framing.
3. Holes in Chord Members: Provide holes in chord members where shown for securing other work to steel joists; however, deduct area of holes from the area of chord when calculating strength of member.
4. Extended Ends: Provide extended ends on joists where shown, complying with manufacturer's standards and requirements of applicable STEEL JOIST INSTITUTE specifications.
5. Ceiling Extensions: Provide ceiling extension in areas having ceilings attached directly to joist bottom chord. Provide either an extended bottom chord element or a separate unit, to suit manufacturer's standards, of sufficient strength to support ceiling construction. Extend ends to within 12 mm (1/2 inch) of finished wall surface unless otherwise indicated.
6. Bridging: Provide horizontal or diagonal type bridging for joists and joist girders, complying with STEEL JOIST INSTITUTE specifications. Provide bridging anchors for ends of bridging lines terminating at walls or beams. Provide bridging adequate to resist the loads indicated on the Contract Documents.
7. End Anchorage: Provide end anchorages, including bearing plates, to secure joists to adjacent construction, complying with STEEL JOIST INSTITUTE specifications, unless otherwise indicated. Design all end anchorages to resist a minimum net uplift of 1.6 kPa (35 pounds per square foot) of supported area.
8. Header Units: Provide header units to support all joists at openings in floor or roof system not framed with steel shapes.
9. Provide supplemental steel support framing for metal deck where normal deck bearing is precluded by other framing members and minor openings.

### **3.2 SHOP PAINTING:**

- A. Shop painting in accordance with applicable STEEL JOIST INSTITUTE standard specification.
- B. Shop paint joists and accessories with a rust-inhibiting primer paint. For joists which will be finish painted, limit paint to a primer which is compatible with specified finish paint. In high humidity areas, shop paint joists with a zinc-rich primer to receive top coats per the paint system manufacturer's recommendations.

### **3.3 ERECTION:**

- A. Installation of joists in accordance with applicable STEEL JOIST INSTITUTE standard specification.

- B. Handle joists in a manner to avoid damaging of joists. Remove damaged joists from site, except when field repair is approved and such repairs are satisfactorily made in accordance with manufacturer's recommendations.
- C. Accurately set joists and end anchorage in accordance with the applicable STEEL JOIST INSTITUTE standard specification. Secure joists resting on masonry or concrete bearing surfaces by welding or bolting to the steel bearing plates as indicated on the Contract Documents. Secure bridging and anchoring in place prior to application of any construction loads. Distribute any temporary loads so that carrying capacity of any joist is not exceeded. Loads shall not be applied to bridging where joist lengths are 12 m (40 feet) and longer. Where joist lengths are 12 m (40 feet) and longer, install a center row of bolted diagonal bridging to provide lateral stability before slackening of hoisting lines.

**3.4 FIELD PAINTING:**

- A. Clean abraded, corroded, and field welded areas and touch up with same type of paint used in shop painting.
- B. Finish painting of steel surfaces is specified in Section 09 91 00, PAINTING.

- - - E N D - - -

**SECTION 05 31 00**  
**STEEL DECKING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

This section specifies material and services required for installation of steel decking as shown and specified.

**1.2 RELATED WORK:**

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Finish Painting: Section 09 91 00, PAINTING.

**1.3 DESIGN REQUIREMENTS:**

- A. Design steel decking in accordance with AISI publication, "Specification for the Design of Cold-formed Steel Structural Members" except as otherwise shown or specified.
- B. Design all elements with the latest published version of applicable codes.

**1.4 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Shop and erection drawings showing decking unit layout, connections to supporting members, and similar information necessary for completing installation as shown and specified, including supplementary framing, sump pans, ridge and valley plates, cant strips, cut openings, special jointing or other accessories. Show welding, side lap, closure, deck reinforcing and closure reinforcing details. Show openings required for work of other trades, including openings not shown on structural drawings. Indicate where temporary shoring is required to satisfy design criteria.
- C. Manufacturer's Literature and Data: Showing steel decking section properties and specifying structural characteristics.
- D. Certification: For each type and gauge of metal deck supporting concrete slab or fill, furnish certification of the specified fire ratings. Certify that the units supplied are U.L. listed as a "Steel Floor and Form Unit".
- E. Insurance Certification: Assist the Government in preparation and submittal of roof installation acceptance certification as may be necessary in connection with fire and extended coverage insurance.

**1.5 APPLICABLE PUBLICATIONS:**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A36/A36M-08.....Standard Specification for Carbon Structural Steel
  - ASTM A1008/A1008M-12....Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Bake Hardenable.
  - A653/A653M-11.....Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvanized) by the Hot-Dip Process
  - C423-09a.....Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
- C. American Institute of Steel Construction (AISC):
  - 360-10.....Specification for Structural Steel Buildings.
- D. American Iron and Steel Institute (AISI):
  - S100-07.....North American Specification for the Design of Cold-Formed Steel Structural Members, 2007 Edition with Supplement 2.aisc
- E. American Welding Society (AWS):
  - D1.3-08.....Structural Welding Code - Sheet Steel
- F. Factory Mutual (FM Global):
  - 1. Loss Prevention Data Sheet 1-28: Wind Loads to Roof Systems and Roof Deck Securement
  - 2. Factory Mutual Research Approval Guide (2002)
- G. Military Specifications (Mil. Spec.)
  - MIL-P-21035B.....Paint, High Zinc Dust Content, Galvanizing Repair

**PART 2 - PRODUCTS**

**2.1 MATERIALS:**

- A. Steel Decking: ASTM A653, Structural Quality.
- B. Galvanizing: ASTM A653, G60.
- C. Galvanizing Repair Paint: Mil. Spec. MIL-P-21035B.
- D. Miscellaneous Steel Shapes: ASTM A36.

- E. Welding Electrode: E60XX minimum.
- F. Sheet Metal Accessories: ASTM A653, galvanized, unless noted otherwise. Provide accessories of every kind required to complete the installation of metal decking in the system shown. Finish sheet metal items to match deck including, but not limited to, the following items:
1. Metal Cover Plates: For end-abutting deck units, to close gaps at changes in deck direction, columns, walls and openings. Same quality as deck units but not less than 1.3 mm (18 gauge) sheet steel.
  2. Continuous Sheet Metal Edging: At openings, concrete slab edges and roof deck edges. Same quality as deck units but not less than 1.3 mm (18 gauge) steel. Side and end closures supporting concrete and their attachment to supporting steel shall be designed by the manufacturer to safely support the wet weight of concrete and construction loads. The deflection of cantilever closures shall be limited to 3 mm (1/8 inch) maximum.
  3. Metal Closure Strips: For openings between decking and other construction, of not less than 1.3 mm (18 gauge) sheet steel of the same quality as the deck units. Form to the configuration required to provide tight-fitting closures at open ends of flutes and sides of decking.
  4. Seat Angles for Deck: Provide where a beam does not frame into a column.
  5. Sump Pans for Roof Drains: Fabricated from single piece of minimum 1.9 mm (14 gauge) galvanized sheet steel with level bottoms and sloping sides to direct water flow to drain, unless otherwise shown. Provide sump pans of adequate size to receive roof drains and with bearing flanges not less than 75 mm (3 inches) wide. Recess pans not less than 38 mm (1 1/2 inches) below roof deck surface, unless otherwise shown or required by deck configuration. Holes for drains will be cut in the field.

## **2.2 REQUIREMENTS:**

- A. Provide steel decking of the type, depth, gauge, and section properties as shown.
- B. Metal Roof Deck: Single pan fluted units with flat horizontal top surfaces utilized to act as a permanent support for all superimposed loads. Comply with the depth and minimum gage requirements as shown on the Contract Documents.
- C. Do not use steel deck for hanging supports for any type or kind of building components including suspended ceilings, electrical light



fixtures, plumbing, heating, or air conditioning pipes or ducts or electrical conduits.

**PART 3 - EXECUTION**

**3.1 ERECTION:**

- A. Do not start installation of metal decking until corresponding steel framework has been plumbed, aligned and completed and until temporary shoring, where required, has been installed. Remove any oil, dirt, paint, ice, water and rust from steel surfaces to which metal decking will be welded.
- B. Coordinate and cooperate with structural steel erector in locating decking bundles to prevent overloading of structural members.
- C. Do not use floor deck units for storage or working platforms until permanently secured. Do not overload deck units once placed. Replace any deck units that become damaged after erection and prior to casting concrete at no cost to the Government.
- D. Provide steel decking in sufficient lengths to extend over 3 or more spans.
- E. Place steel decking units at right angles to supporting members. End laps of sheets of roof deck shall be a minimum of 50 mm (2 inches) and shall occur over supports.
- F. Fastening Deck Units:
  - 1. Tack weld or use self-tapping No. 8 or larger machine screws at 915 mm (3 feet) o.c. for fastening end closures. Only use welds to attach longitudinal end closures.
  - 2. Fasten roof deck units to steel supporting members by not less than 16 mm (5/8 inch) diameter puddle welds or elongated welds of equal strength, spaced not more than 305 mm (12 inches) o.c. at every support, and at closer spacing where required for lateral force resistance by diaphragm action. Attach split or partial panels to the structure in every valley. In addition, secure deck to each supporting member in ribs where side laps occur. Power driven fasteners may be used in lieu of welding for roof deck if strength equivalent to the welding specified above is provided. Submit test data and design calculations verifying equivalent design strength.
  - 3. Mechanically fasten side laps of adjacent roof deck units with spans greater than 1524 mm (5 feet) between supports, at intervals not exceeding 915 mm (3 feet) o.c., or midspan, whichever is closer, using self-tapping No. 8 or larger machine screws.

4. Uplift Loading: Install and anchor roof deck units to resist gross uplift loading of 2.1 kPa (45 psf) at eave overhang and 1.4 kPa (30 psf) for other roof areas.

G. Cutting and Fitting:

1. Cut all metal deck units to proper length in the shop prior to shipping.
2. Field cutting by the metal deck erector is restricted to bevel cuts, notching to fit around columns and similar items, and cutting openings that are located and dimensioned on the Structural Drawings.
3. Other penetrations shown on the approved metal deck shop drawings but not shown on the Structural Drawings are to be located, cut and reinforced by the trade requiring the opening.
4. Make all cuts neat and trim using a metal saw, drill or punchout device; cutting with torches is expressly prohibited.
5. Do not make any cuts in the metal deck that are not shown on the approved metal deck drawings. If an additional opening not shown on the approved shop drawings is required, submit a sketch, to scale, locating the required new opening and any other openings and supports in the immediate area. Do not cut the opening until the sketch has been reviewed and accepted by the COR. Provide any additional reinforcing or framing required for the opening at no cost to the Government. Failure to comply with these requirements is cause for rejection of the work and removal and replacement of the affected metal deck.
6. Reinforcement at Openings: Provide additional metal reinforcement and closure pieces as required for strength, continuity of decking, and support of other work shown.

**3.2 WELDING:**

Welds shall be made only by welders and welding operators who have been previously qualified by tests as prescribed in AWS D1.3.

**3.3 FIELD REPAIR:**

1. Areas scarred during erection.
2. Welds to be thoroughly cleaned and touched-up. Touch-up paint for zinc-coated units shall be zinc rich galvanizing repair paint.

- - - E N D - - -

**SECTION 05 36 00**  
**COMPOSITE METAL DECKING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

This section specifies material and services required for installation of composite steel decking including shear connector studs and miscellaneous closures required to prepare deck for concrete placement as shown and specified.

**1.2 RELATED WORK:**

Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

**1.3 DESIGN REQUIREMENTS:**

- A. Design steel decking in accordance with American Iron And Steel Institute publication "Specifications for the Design of Cold Formed Steel Structural Members", except as otherwise shown or specified.
- B. Design all elements with the latest published version of applicable codes.

**1.4 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Shop and erection drawings showing decking unit layout, connections to supporting members, and information necessary to complete the installation as shown and specified, including supplementary framing, cant strips, cut openings, special jointing or other accessories. Show welding, side lap, closure, deck reinforcing and closure reinforcing details. Show openings required for work of other trades, including openings not shown on structural drawings. Indicate where temporary shoring is required to satisfy design criteria.
- C. Manufacturer's Literature and Data: Showing steel decking section properties and specifying structural characteristics as specified herein.
- D. Manufacturer's written recommendations for:
  - 1. Shape of decking section to be used.
  - 2. Cleaning of steel decking prior to concrete placement.
- E. Test Report - Establishing structural characteristics of composite concrete and steel decking system.
- F. Test Report - Stud base qualification.
- G. Welding power setting recommendation by shear stud manufacturer.

- H. Shear Stud Layouts: Submit drawings showing the number, pattern, spacing and configuration of the shear studs for each beam and girder.
- I. Certification: For each type and gauge of metal deck supporting concrete slab or fill, furnish certification of the specified fire ratings. Certify that the units supplied are U.L. listed as a "Steel Floor and Form Unit".

**1.5 QUALITY ASSURANCE:**

Underwriters' Label: Provide metal floor deck units listed in Underwriters' Laboratories "Fire Resistance Directory", with each deck unit bearing the UL label and marking for specific system detailed.

**1.6 APPLICABLE PUBLICATIONS:**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only. Refer to the latest edition of all referenced Standards and codes.
- B. American Iron and Steel Institute (AISI):  
Specification and Commentary for the Design of Cold-Formed Steel Structural Members (Latest Edition).
- C. American Society of Testing and Materials (ASTM):  
A36/A36M-08.....Standard Specification for Carbon Structural Steel  
A108-07.....Standard Specification for Steel Bars, Carbon, Cold Finished, Standard Quality  
A653/A653M-10.....Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvanized) by the Hot-Dip Process
- D. American Institute of Steel Construction (AISC):  
1. Specification for Structural Steel Buildings - Allowable Stress Design and Plastic Design (Latest Edition)  
2. Load and Resistance Factor Design Specification for Structural Steel Buildings (Latest Edition)
- E. American Welding Society (AWS):  
D1.1/D1.1M-10.....Structural Welding Code - Steel  
D1.3/D1.3M-08.....Structural Welding Code - Sheet Steel
- F. Military Specifications (Mil. Spec.):  
MIL-P-21035B.....Paint, High Zinc Dust Content, Galvanizing Repair

**PART 2 - PRODUCTS**

**2.1 MATERIALS:**

- A. Steel Decking and all Flashings: ASTM A653, Structural Quality.

- B. Galvanizing: ASTM A653, G60.
- C. Shear connector studs: ASTM A108, Grades 1015-1020, yield 350 Mpa (50,000 psi) minimum, tensile strength - 400 Mpa (60,000 psi) minimum, reduction of area 50 percent minimum. Studs of uniform diameter; heads shall be concentric and normal to shaft; stud, after welding free from any substance or defect which would interfere with its function as a shear connector. Studs shall not be painted or galvanized. Size of studs shall be as shown on drawings. Studs manufactured by a company normally engaged in the manufacture of shear studs and can furnish equipment suitable for weld-through installation of shear studs.
- D. Galvanizing Repair Paint: Mil. Spec. MIL-P-21035B.
- E. Miscellaneous Steel Shapes: ASTM A36.
- F. Welding Electrode: E60XX minimum.
- G. Sheet Metal Accessories: ASTM A653, galvanized, unless noted otherwise. Provide accessories of every kind required to complete the installation of metal decking in the system shown. Finish sheet metal items to match deck including, but not limited to, the following items:
  - 1. Metal Cover Plates: For end-abutting deck units, to close gaps at changes in deck direction, columns, walls and openings. Same quality as deck units but not less than 1.3 mm (18 gauge) sheet steel.
  - 2. Continuous sheet metal edging: at openings and concrete slab edges. Same quality as deck units but not less than 1.3 mm (18 gauge) steel. Side and end closures supporting concrete and their attachment to supporting steel shall be designed by the manufacturer to safely support the wet weight of concrete and construction loads. The deflection of cantilever closures shall be limited to 3 mm (1/8 inch) maximum.
  - 3. Metal Closure Strips: For openings between decking and other construction, of not less than 1.3 mm (18 gauge) sheet steel of the same quality as the deck units. Form to the configuration required to provide tight-fitting closures at open ends of flutes and sides of decking.
  - 4. Seat angles for deck: Where a beam does not frame into a column.

## **2.2 REQUIREMENTS:**

- A. Steel decking depth, gage, and section properties to be as shown. Provide edges of deck with vertical interlocking male and female lip providing for a positive mechanical connection.
- B. Fabricate deck units with integral embossments to provide mechanical bond with concrete slab. In combination with concrete slab, capable of supporting total design loads on spans shown.

- C. Steel decking capable of safely supporting total, normal construction service loads without damage to decking unit.
- D. Steel decking units shall include an integral system which provides a simple point of attachment for light duty hanger devices for flexibility for attaching hangers for support of acoustical, lathing, plumbing, heating, air conditioning and electrical items. System shall provide for minimum spacing pattern of 300 mm (12 inches) on centers longitudinally and 600 mm or 900 mm (24 or 36 inches) on centers transversely. Suspension system shall be capable of safely supporting a maximum allowable load of 45 kg (100 pounds) concentrated at any one hanger attachment point. System may consist of fold-down type hanger tabs or a lip hanger.

**PART 3 - EXECUTION**

**3.1 ERECTION:**

- A. Do not start installation of metal decking until corresponding steel framework has been plumbed, aligned and completed and until temporary shoring, where required, has been installed. Remove any oil, dirt, paint, ice, water and rust from steel surfaces to which metal decking will be welded.
- B. Coordinate and cooperate with structural steel erector in locating decking bundles to prevent overloading of structural members.
- C. Do not use floor deck units for storage or working platforms until permanently secured. Do not overload deck units once placed. Replace any deck units that become damaged after erection and prior to casting concrete at no cost to the Government.
- D. Erect steel deck in accordance with manufacturer's printed instructions.
- E. Ship steel deck units to project in standard widths and cut to proper length.
- F. Provide steel decking in sufficient lengths to extend over 3 or more spans, except where structural steel layout does not permit.
- G. Place steel decking units on supporting steel framework and adjust to final position before being permanently fastening. Bring each unit to proper bearing on supporting beams. Place deck units in straight alignment for entire length of run of flutes and with close registration of flutes of one unit with those of abutting unit. Maximum space between ends of abutting units is 13 mm (1/2 inch). If space exceeds 13 mm (1/2 inch), install closure plates at no additional cost to Government.
- H. Ceiling hanger loops, if used, must be flattened or removed to obtain bearing of units on structural steel.
- I. Fastening Deck Units:

1. Fasten floor deck units to steel supporting members by not less than 16 mm (5/8 inch) diameter puddle welds or elongated welds of equal strength, spaced not more than 305 mm (12 inches) o.c. with a minimum of two welds per unit at each support. Where two units abut, fasten each unit individually to the supporting steel framework.
  2. Tack weld or use self-tapping No. 8 or larger machine screws at 915 mm (3 feet) o.c. for fastening end closures. Only use welds to attach longitudinal end closures.
  3. Weld side laps of adjacent floor deck units that span more than 1524 mm (5 feet). Fasten at midspan or 915 mm (3 feet) o.c., whichever is smaller.
- J. Welding to conform to AWS D1.3 and done by competent experienced welding mechanics.
- K. Areas scarred during erection and welds shall be thoroughly cleaned and touched-up with zinc rich galvanizing repair paint. Paint touch-up is not required for welds or scars that are to be in direct contact with concrete.
- L. Provide metal concrete stops at edges of deck as required.
- M. Cutting and Fitting:
1. Cut all metal deck units to proper length in the shop prior to shipping.
  2. Field cutting by the metal deck erector is restricted to bevel cuts, notching to fit around columns and similar items, and cutting openings that are located and dimensioned on the structural drawings.
  3. Other penetrations shown on the approved metal deck shop drawings but not shown on the structural drawings are to be located, cut and reinforced by the trade requiring the opening.
  4. Make all cuts neat and trim using a metal saw, drill or punchout device; cutting with torches is expressly prohibited.
  5. Do not make any cuts in the metal deck that are not shown on the approved metal deck drawings. If an additional opening not shown on the approved shop drawings is required, submit a sketch, to scale, locating the required new opening and any other openings and supports in the immediate area. Do not cut the opening until the sketch has been reviewed and accepted by the COR. Provide any additional reinforcing or framing required for the opening at no cost to the Government. Failure to comply with these requirements is cause for rejection of the work and removal and replacement of the affected metal deck.

6. Reinforcement at Openings: Provide additional metal reinforcement and closure pieces as required for strength, continuity of decking and support of other work shown.
- N. Installation of shear connector studs through previously installed metal deck to conform to AWS D1.1, Section 7, except all studs will be installed with automatically timed welding equipment and as specified below:
1. Do not place reinforcing steel temperature mesh or other materials and equipment which will interfere with stud installation on steel deck until shear connector studs are installed.
  2. Steel deck sheets shall be free of oil, rust, dirt, and paint. Release water in deck's valley so that it does not become entrapped between deck and beam. Surface to which stud is to be welded shall be clean and dry.
  3. Rest metal deck tightly upon top flange of structural member with bottom of deck rib in full contact with top of beam flange.
  4. Weld studs only through a single thickness of deck. Place decking so that a butt joint is obtained. Place studs directly over beam web, where one row of studs are required.
  5. Ferrules specially developed for the weld-through technique must be used. Ferrules shall be appropriate for size of studs used and be removed after welding.
  6. Submit report of successful test program for stud base qualification as required by AWS D1.1, Appendix K.

**3.2 CLEANING:**

Clean deck in accordance with manufacturer's recommendation before concrete placement.

- - - E N D - - -



**SECTION 05 40 00**  
**COLD-FORMED METAL FRAMING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

A. This section specifies materials and services required for installation of cold-formed steel, including tracks and required accessories as shown and specified. This Section includes the following:

1. Exterior load-bearing steel stud walls.
2. Exterior non-load-bearing steel stud curtain wall.
3. Steel joists.

**1.2 RELATED WORK:**

- A. Structural steel framing: Section 05 12 00, STRUCTURAL STEEL FRAMING.
- B. Open web steel joists: Section 05 21 00, STEEL JOIST FRAMING.
- C. Non-load-bearing metal stud framing assemblies: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- D. Gypsum board assemblies: Section 09 29 00, GYPSUM BOARD.

**1.3 DESIGN REQUIREMENTS:**

- A. Design steel in accordance with American Iron and Steel Institute Publication "Specification for the Design of Cold-Formed Steel Structural Members", except as otherwise shown or specified.
- B. Structural Performance: Engineer, fabricate and erect cold-formed metal framing with the minimum physical and structural properties indicated.
- C. Structural Performance: Engineer, fabricate, and erect cold-formed metal framing to withstand design loads within limits and under conditions required.
  1. Design Loads: As indicated.
  2. Design framing systems to withstand design loads without deflections greater than the following:
    - a. Exterior Load-Bearing Walls: Lateral deflection of 1/240 of the wall height.
    - b. Exterior Non-load-Bearing Curtain wall: Lateral deflection of 1/600 of the wall height.
  - b. Joists: Vertical deflection of 1/360 of the span.

3. Design framing systems to provide for movement of framing members without damage or overstressing, sheathing failure, connection failure, undue strain on fasteners and anchors, or other detrimental effects when subject to a maximum ambient temperature change (range) of 67 degrees C (120 degrees F).
4. Design framing system to accommodate deflection of primary building structure and construction tolerances, and to maintain clearances at openings.
5. Design exterior non-load-bearing curtain wall framing to accommodate lateral deflection without regard to contribution of sheathing materials.
6. Engineering Responsibility: Engage a fabricator who assumes undivided responsibility for engineering cold-formed metal framing by employing a qualified professional engineer to prepare design calculations, shop drawings, and other structural data.

**1.4 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Shop and erection drawings showing steel unit layout, connections to supporting members, and information necessary to complete installation as shown and specified.
- C. Manufacturer's Literature and Data: Showing steel component sections and specifying structural characteristics.
- D. For cold-formed metal framing indicated to comply with certain design loadings, include structural analysis data sealed and signed by the qualified professional engineer who was responsible for its preparation.

**1.5 APPLICABLE PUBLICATIONS:**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Iron and Steel Institute (AISI):

Specification and Commentary for the Design of Cold-Formed Steel  
Structural Members (1996)

C. American Society of Testing and Materials (ASTM):

A36/A36M-08.....Standard Specifications for Carbon Structural  
Steel

A123/A123M-09.....Standard Specifications for Zinc (Hot-Dip  
Galvanized) Coatings on Iron and Steel Products

A153/A153M-09.....Standard Specifications for Zinc Coating (Hot-  
Dip) on Iron and Steel Hardware

A307-10.....Standard Specifications for Carbon Steel Bolts  
and Studs

A653/A653M-10.....Standard Specifications for Steel Sheet, Zinc-  
Coated (Galvanized) or Zinc-Iron Alloy-Coated  
(Galvannealed) by the Hot-Dip Process

C1107/C1107M-08.....Standard Specifications for Packaged Dry,  
Hydraulic-Cement Grout (Non-shrink)

E488-96 (R2003).....Standard Test Methods for Strength of Anchors  
in Concrete and Masonry Elements

E1190-95 (R2007).....Standard Test Methods for Strength of Power-  
Actuated Fasteners Installed in Structural  
Members

D. American Welding Society (AWS):

D1.3/D1.3M-08.....Structural Welding Code-Sheet Steel

E. Military Specifications (Mil. Spec.):

MIL-P-21035B.....Paint, High Zinc Dust Content, Galvanizing  
Repair

**PART 2 - PRODUCTS**

**2.1 MATERIALS:**

- A. Sheet Steel for joists, studs and accessories 16 gage and heavier: ASTM A653, structural steel, zinc coated G90, with a yield of 340 MPa (50 ksi) minimum.
- B. Sheet Steel for joists, studs and accessories 18 gage and lighter: ASTM A653, structural steel, zinc coated G60, with a yield of 230 MPa (33 ksi) minimum.
- C. Galvanizing Repair Paint: MIL-P-21035B.
- D. Nonmetallic, Non-shrink Grout: Premixed, nonmetallic, noncorrosive, nonstaining grout containing selected silica sands, Portland cement, shrinkage-compensating agents, plasticizing and water-reducing agents, complying with ASTM C1107, with fluid consistency and a 30 minute working time.

**2.2 WALL FRAMING:**

- A. Steel Studs: Manufacturer's standard C-shaped steel studs of web depth indicated, with lipped flanges, and complying with the following:
  - 1. Design Uncoated-Steel Thickness as required by stud designer.
  - 2. Flange Width as required by stud designer.
  - 3. Web: Punched.
- B. Steel Track: Manufacturer's standard U-shaped steel track, unpunched, of web depths indicated, with straight flanges, and complying with the following:
  - 1. Design Uncoated-Steel Thickness: Matching steel studs.
  - 2. Flange Width: Manufacturer's standard deep flange where indicated, standard flange elsewhere.

**2.3 JOIST FRAMING:**

- A. Steel Joists: Manufacturer's standard C-shaped steel joists, unpunched, of web depths indicated, with lipped flanges, and complying with the following:
  - 1. Design Uncoated-Steel Thickness as required by joist designer.
  - 2. Flange Width as required by joist designer.

B. Steel Joist Track: Manufacturer's standard U-shaped steel joist track, unpunched, of web depths indicated, with straight flanges, and complying with the following:

1. Design Uncoated-Steel Thickness: Matching steel joists.
2. Flange Width as required by stud designer.

#### **2.4 FRAMING ACCESSORIES:**

A. Fabricate steel framing accessories of the same material and finish used for framing members, with a minimum yield strength of 230 MPa (33 ksi).

B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:

1. Supplementary framing.
2. Bracing, bridging, and solid blocking.
3. Web stiffeners.
4. Deflection track and vertical slide clips.
5. Stud kickers and girts.
6. Joist hangers and end closures.
7. Reinforcement plates.

#### **2.5 ANCHORS, CLIPS, AND FASTENERS:**

A. Steel Shapes and Clips: ASTM A36, zinc coated by the hot-dip process according to ASTM A123.

B. Cast-in-Place Anchor Bolts and Studs: ASTM A307, Grade A, zinc coated by the hot-dip process according to ASTM A153.

C. Expansion Anchors: Fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 5 times the design load, as determined by testing per ASTM E488 conducted by a qualified independent testing agency.

D. Power-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 10 times

the design load, as determined by testing per ASTM E1190 conducted by a qualified independent testing agency.

- E. Mechanical Fasteners: Corrosion-resistant coated, self-drilling, self-threading steel drill screws. Low-profile head beneath sheathing, manufacturer's standard elsewhere.

## **2.6 REQUIREMENTS:**

- A. Welding in accordance with AWS D1.3
- B. Furnish members and accessories by one manufacturer only.

## **PART 3 - EXECUTION**

### **3.1 FABRICATION:**

- A. Framing components may be preassembled into panels. Panels shall be square with components attached.
- B. Cut framing components squarely or as required for attachment. Cut framing members by sawing or shearing; do not torch cut.
- C. Hold members in place until fastened.
- D. Fasten cold-formed metal framing members by welding or screw fastening, as standard with fabricator. Wire tying of framing members is not permitted.
  - 1. Comply with AWS requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
  - 2. Locate mechanical fasteners and install according to cold-formed metal framing manufacturer's instructions with screw penetrating joined members by not less than 3 exposed screw threads.
- E. Where required, provide specified insulation in double header members and double jamb studs which will not be accessible after erection.

### **3.2 ERECTION:**

- A. Handle and lift prefabricated panels in a manner as to not distort any member.
- B. Securely anchor tracks to supports as shown.
- C. At butt joints, securely anchor two pieces of track to same supporting member or butt-weld or splice together.

- D. Plumb, align, and securely attach studs to flanges or webs of both upper and lower tracks.
- E. Install jack studs above and below openings and as required to furnish support. Securely attach jack studs to supporting members.
- F. Install headers in all openings that are larger than the stud spacing in that wall.
- G. Attach bridging for studs in a manner to prevent stud rotation. Space bridging rows as shown.
- H. Studs in one piece for their entire length, splices will not be permitted.
- I. Provide a load distribution member at top track where joist is not located directly over bearing stud.
- J. Provide joist bridging and web stiffeners at reaction points where required by stud designer.
- K. Provide end blocking where joist ends are not restrained from rotation.
- L. Provide temporary bracing and leave in place until framing is permanently stabilized.
- M. Do not bridge building expansion joints with cold-formed metal framing. Independently frame both sides of joints.
- N. Fasten reinforcement plate over web penetrations that exceed size of manufacturer's standard punched openings.

**3.3 TOLERANCES:**

- A. Vertical alignment (plumbness) of studs shall be within 1/960th of the span.
- B. Horizontal alignment (levelness) of walls shall be within 1/960th of their respective lengths.
- C. Spacing of studs shall not be more than 3 mm (1/8 inch) +/- from the designed spacing providing that the cumulative error does not exceed the requirements of the finishing materials.
- D. Prefabricated panels shall be not more than 3 mm (1/8 inch) +/- out of square within the length of that panel.

**3.4 FIELD REPAIR:**

Touch-up damaged galvanizing with galvanizing repair paint.

- - - E N D - - -



**SECTION 05 50 00**  
**METAL FABRICATIONS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies items and assemblies fabricated from structural steel shapes and other materials as shown and specified.
- B. Items specified include support for wall and ceiling mounted items, loose lintels, shelf angles and railings.

**1.2 RELATED WORK**

- A. Railings attached to steel stairs: Section 05 51 00, METAL STAIRS.
- B. Prime and finish painting: Section 09 91 00, PAINTING.
- C. Corner guards: Section 10 26 00, WALL AND DOOR PROTECTION.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Colors: For prefinished items, submit samples of manufacturer's standard colors on actual base material for Owner's selection.
- B. Shop Drawings:
  - 1. Each item specified, showing complete detail, location in the project, material and size of components, method of joining various components and assemblies, finish, and location, size and type of anchors.
  - 2. Mark items requiring field assembly for erection identification and furnish erection drawings and instructions.
  - 3. Provide templates and rough-in measurements as required.
- C. Manufacturer's Certificates: Live load designs as specified.
- D. Design Calculations for specified live loads including dead loads.
- E. Furnish setting drawings and instructions for installation of anchors to be preset into concrete and masonry work, and for the positioning of items having anchors to be built into concrete or masonry construction.

**1.4 QUALITY ASSURANCE**

- A. Each manufactured product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.
- B. Each product type shall be the same and be made by the same manufacturer.
- C. Assembled product to the greatest extent possible before delivery to the site.
- D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

**1.5 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):
  - B18.6.1-97.....Wood Screws
  - B18.2.2-87(R2005).....Square and Hex Nuts
- C. American Society for Testing and Materials (ASTM):
  - A36/A36M-08.....Structural Steel
  - A47-99(R2009).....Malleable Iron Castings

- A48-03(R2008).....Gray Iron Castings
- A53-10.....Pipe, Steel, Black and Hot-Dipped, Zinc-Coated  
Welded and Seamless
- A123-09.....Zinc (Hot-Dip Galvanized) Coatings on Iron and  
Steel Products
- A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel  
Steel Plate, Sheet and Strip
- A269-10.....Seamless and Welded Austenitic Stainless Steel  
Tubing for General Service
- A307-10.....Carbon Steel Bolts and Studs, 60,000 PSI Tensile  
Strength
- A312/A312M-09.....Seamless, Welded, and Heavily Cold Worked  
Austenitic Stainless Steel Pipes
- A391/A391M-07.....Grade 80 Alloy Steel Chain
- A653/A653M-10.....Steel Sheet, Zinc Coated (Galvanized) or Zinc-  
Iron Alloy Coated (Galvannealed) by the Hot-Dip  
Process
- A786/A786M-09.....Rolled Steel Floor Plate
- B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods,  
Wire, Shapes, and Tubes
- B456-03(R2009).....Electrodeposited Coatings of Copper Plus Nickel  
Plus Chromium and Nickel Plus Chromium
- B632-08.....Aluminum-Alloy Rolled Tread Plate
- C1107-08.....Packaged Dry, Hydraulic-Cement Grout (Nonshrink)
- D3656-07.....Insect Screening and Louver Cloth Woven from  
Vinyl-Coated Glass Yarns
- F436-10.....Hardened Steel Washers
- F468-10.....Nonferrous Bolts, Hex Cap Screws, and Studs for  
General Use
- F593-02(R2008).....Stainless Steel Bolts, Hex Cap Screws, and Studs
- F1667-11.....Driven Fasteners: Nails, Spikes and Staples
- D. American Welding Society (AWS):
  - D1.1-10.....Structural Welding Code Steel
  - D1.2-08.....Structural Welding Code Aluminum
  - D1.3-08.....Structural Welding Code Sheet Steel
- E. National Association of Architectural Metal Manufacturers (NAAMM)
  - AMP 521-01.....Pipe Railing Manual
  - AMP 500-06.....Metal Finishes Manual
  - MBG 531-09.....Metal Bar Grating Manual
  - MBG 532-09.....Heavy Duty Metal Bar Grating Manual
- F. Structural Steel Painting Council (SSPC)/Society of Protective Coatings:
  - SP 1-04.....No. 1, Solvent Cleaning
  - SP 2-04.....No. 2, Hand Tool Cleaning
  - SP 3-04.....No. 3, Power Tool Cleaning
- G. Federal Specifications (Fed. Spec):
  - RR-T-650E.....Treads, Metallic and Nonmetallic, Nonskid

## **PART 2 - PRODUCTS**

### **2.1 DESIGN CRITERIA**

- A. In addition to the dead loads, design fabrications to support the following live loads unless otherwise specified.
- B. Railings and Handrails: 900 N (200 pounds) in any direction at any point.

### **2.2 MATERIALS**

- A. Structural Steel: ASTM A36.
- B. Stainless Steel: ASTM A167, Type 302 or 304.

- C. Aluminum, Extruded: ASTM B221, Alloy 6063-T5 unless otherwise specified. For structural shapes use alloy 6061-T6 and alloy 6061-T4511.
- D. Floor Plate:
  - 1. Steel ASTM A786.
  - 2. Aluminum: ASTM B632.
- E. Steel Pipe: ASTM A53.
  - 1. Galvanized for exterior locations.
  - 2. Type S, Grade A unless specified otherwise.
  - 3. NPS (inside diameter) as shown.
- F. Cast-Iron: ASTM A48, Class 30, commercial pattern.
- G. Malleable Iron Castings: A47.
- H. Primer Paint: As specified in Section 09 91 00, PAINTING.
- I. Stainless Steel Tubing: ASTM A269, type 302 or 304.
- J. Modular Channel Units:
  - 1. Factory fabricated, channel shaped, cold-formed sheet steel shapes, complete with fittings bolts and nuts required for assembly.
  - 2. Form channel with in turned pyramid shaped clamping ridges on each side.
  - 3. Provide case hardened steel nuts with serrated grooves in the top edges designed to be inserted in the channel at any point and be given a quarter turn so as to engage the channel clamping ridges. Provide each nut with a spring designed to hold the nut in place.
  - 4. Factory finish channels and parts with oven baked primer when exposed to view. Channels fabricated of ASTM A525, G90 galvanized steel may have primer omitted in concealed locations. Finish screws and nuts with zinc coating.
  - 5. Fabricate snap-in closure plates to fit and close exposed channel openings of not more than 0.3 mm (0.0125 inch) thick stainless steel.
- K. Grout: ASTM C1107, pourable type.

### 2.3 HARDWARE

- A. Rough Hardware:
  - 1. Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electro-galvanizing process. Galvanized G-90 where specified.
  - 2. Use G90 galvanized coating on ferrous metal for exterior work unless non-ferrous metal or stainless is used.
- B. Fasteners:
  - 1. Bolts with Nuts:
    - a. ASME B18.2.2.
    - b. ASTM A307 for 415 MPa (60,000 psi) tensile strength bolts.
    - c. ASTM F468 for nonferrous bolts.
    - d. ASTM F593 for stainless steel.
  - 2. Screws: ASME B18.6.1.
  - 3. Washers: ASTM F436, type to suit material and anchorage.
  - 4. Nails: ASTM F1667, Type I, style 6 or 14 for finish work.

### 2.4 FABRICATION GENERAL

- A. Material
  - 1. Use material of commercial quality and suitable for intended purpose for material that is not named or its standard of quality not specified.
  - 2. Use material free of defects that could affect the appearance or service ability of the finished product.
- B. Size:
  - 1. Size and thickness of members as shown or as required to support indicated loads.

2. When size and thickness is not specified or shown for an individual part, use size and thickness not less than that used for the same component on similar standard commercial items or in accordance with established shop methods.

C. Connections

1. Except as otherwise specified, connections may be made by welding, riveting or bolting.
2. Field riveting will not be approved.
3. Design size, number and placement of fasteners, to develop a joint strength of not less than the design value.
4. Holes, for rivets and bolts: Accurately punched or drilled and burrs removed.
5. Size and shape welds to develop the full design strength of the parts connected by welds and to transmit imposed stresses without permanent deformation or failure when subject to service loadings.
6. Use rivets and bolts of material selected to prevent corrosion (electrolysis) at bimetallic contacts. Plated or coated material will not be approved.
7. Use stainless steel connectors for removable members machine screws or bolts.

D. Fasteners and Anchors

1. Where fasteners and anchors are not shown, design the type, size, location and spacing to resist the loads imposed without deformation of the members or causing failure of the anchor or fastener, and suit the sequence of installation.
2. Use material and finish of the fasteners compatible with the kinds of materials that are fastened together and their location in the finished work.
3. Fasteners for securing metal fabrications to new construction only, may be by use of threaded or wedge type inserts or by anchors for welding to the metal fabrication for installation before the concrete is placed or as masonry is laid.
4. Fasteners for securing metal fabrication to existing construction or new construction may be expansion bolts, toggle bolts, power actuated drive pins, welding, self-drilling and tapping screws or bolts.

E. Workmanship

1. General:

- a. Fabricate items to design shown.
  - b. Furnish members in longest lengths commercially available within the limits shown and specified.
  - c. Fabricate straight, true, free from warp and twist, and where applicable square and in same plane.
  - d. Provide holes, sinkages and reinforcement shown and required for fasteners and anchorage items.
  - e. Provide openings, cut-outs, and tapped holes for attachment and clearances required for work of other trades.
  - f. Prepare members for the installation and fitting of hardware.
  - g. Cut openings in gratings and floor plates for the passage of ducts, sumps, pipes, conduits and similar items. Provide reinforcement to support cut edges.
  - h. Fabricate surfaces and edges free from sharp edges, burrs and projections which may cause injury.
2. Welding:
- a. Weld in accordance with AWS.
  - b. Welds shall show good fusion, be free from cracks and porosity and accomplish secure and rigid joints in proper alignment.
  - c. Where exposed in the finished work, continuous weld for the full length of the members joined and have depressed areas filled and protruding welds finished smooth and flush with adjacent surfaces.

- d. Finish welded joints to match finish of adjacent surface.
- 3. Joining:
  - a. Miter or butt members at corners.
  - b. Where frames members are butted at corners, cut leg of frame member perpendicular to surface, as required for clearance.
- 4. Anchors:
  - a. Where metal fabrications are shown to be preset in concrete, weld 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 150 mm (6 inches) long with 25 mm (one inch) hooked end, to back of member at 600 mm (2 feet) on center, unless otherwise shown.
  - b. Where metal fabrications are shown to be built into masonry use 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 250 mm (10 inches) long with 50 mm (2 inch) hooked end, welded to back of member at 600 mm (2 feet) on center, unless otherwise shown.
- 5. Cutting and Fitting:
  - a. Accurately cut, machine and fit joints, corners, copes, and miters.
  - b. Fit removable members to be easily removed.
  - c. Design and construct field connections in the most practical place for appearance and ease of installation.
  - d. Fit pieces together as required.
  - e. Fabricate connections for ease of assembly and disassembly without use of special tools.
  - f. Joints firm when assembled.
  - g. Conceal joining, fitting and welding on exposed work as far as practical.
  - h. Do not show rivets and screws prominently on the exposed face.
  - i. The fit of components and the alignment of holes shall eliminate the need to modify component or to use exceptional force in the assembly of item and eliminate the need to use other than common tools.
- F. Finish:
  - 1. Finish exposed surfaces in accordance with NAAMM Metal Finishes Manual.
  - 2. Steel and Iron: NAAMM AMP 504.
    - a. Zinc coated (Galvanized): ASTM A123, G90 unless noted otherwise.
    - b. Surfaces exposed in the finished work:
      - 1) Finish smooth rough surfaces and remove projections.
      - 2) Fill holes, dents and similar voids and depressions with epoxy type patching compound.
    - c. Shop Prime Painting:
      - 1) Surfaces of Ferrous metal:
        - a) Items not specified to have other coatings.
        - b) Galvanized surfaces specified to have prime paint.
        - c) Remove all loose mill scale, rust, and paint, by hand or power tool cleaning as defined in SSPC-SP2 and SP3.
        - d) Clean of oil, grease, soil and other detrimental matter by use of solvents or cleaning compounds as defined in SSPC-SP1.
        - e) After cleaning and finishing apply one coat of primer as specified in Section 09 91 00, PAINTING.
      - 2) Non ferrous metals: Comply with MAAMM-500 series.
    - 3. Stainless Steel: NAAMM AMP-504 Finish No. 4.
  - G. Protection:
    - 1. Insulate aluminum surfaces that will come in contact with concrete, masonry, plaster, or metals other than stainless steel, zinc or white bronze by giving a coat of heavy-bodied alkali resisting bituminous paint or other approved paint in shop.

2. Spot prime all abraded and damaged areas of zinc coating which expose the bare metal, using zinc rich paint on hot-dip zinc coat items and zinc dust primer on all other zinc coated items.

#### 2.4 SUPPORTS

- A. General:
  1. Fabricate ASTM A36 structural steel shapes as shown.
  2. Use clip angles or make provisions for welding hangers and braces to overhead construction.
  3. Field connections may be welded or bolted.
- B. For Wall Mounted Items:
  1. For items supported by metal stud partitions.
  2. Steel strip or hat channel minimum of 1.5 mm (0.0598 inch) thick.
  3. Steel strip minimum of 150 mm (6 inches) wide, length extending one stud space beyond end of item supported.
  4. Steel hat channels where shown. Flange cut and flatted for anchorage to stud.
  5. Structural steel tube or channel for grab bar at water closets floor to structure above with clip angles or end plates formed for anchors.
  6. Use steel angles for thru wall counters. Drill angle for fasteners at ends and not over 100 mm (4 inches) on center between ends.
- C. For Trapeze Bars:
  1. Construct assembly above ceilings as shown and design to support not less than a 340 kg (750 pound) working load at any point.
  2. Fabricate trapeze supports as shown, with all exposed members, including screws, nuts, bolts and washers, fabricated of stainless steel.
  3. Fabricate concealed components of structural steel shapes unless shown otherwise.
  4. Stainless steel ceiling plate drilled for eye bolt.
  5. Continuously weld connections where welds shown.
  6. Use modular channel where shown with manufacturers bolts and fittings.
    - a. Weld ends of steel angle braces to steel plates and secure to modular channel units as shown. Drill plates for anchor bolts.
    - b. Fabricate eye bolt, special clamp bolt, and plate closure full length of modular channel at ceiling line and secure to modular channel unit with manufacturers standard fittings.

#### 2.5 LOOSE LINTELS

- A. Furnish lintels of sizes shown. Where size of lintels is not shown, provide the sizes specified.
- B. Fabricate lintels with not less than 150 mm (6 inch) bearing at each end for nonbearing masonry walls, and 200 mm (8 inch) bearing at each end for bearing walls.
- C. Provide one angle lintel for each 100 mm (4 inches) of masonry thickness as follows except as otherwise specified or shown.
  1. Openings 750 mm to 1800 mm (2-1/2 feet to 6 feet) - 100 x 90 x 8 mm (4 x 3-1/2 x 5/16 inch).
  2. Openings 1800 mm to 3000 mm (6 feet to 10 feet) - 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).
- D. For 150 mm (6 inch) thick masonry openings 750 mm to 3000 mm (2-1/2 feet to 10 feet) use one angle 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).
- E. Provide bearing plates for lintels where shown.
- F. Weld or bolt upstanding legs of double angle lintels together with 19 mm (3/4 inch bolts) spaced at 300 mm (12 inches) on centers.
- G. Insert spreaders at bolt points to separate the angles for insertion of metal windows, louver, and other anchorage.

- H. Where shown or specified, punch upstanding legs of single lintels to suit size and spacing of anchor bolts.

## 2.6 SHELF ANGLES

- A. Fabricate from steel angles of size shown.
- B. Fabricate angles with horizontal slotted holes for 19 mm (3/4 inch) bolts spaced at not over 900 mm (3 feet) on centers and within 300 mm (12 inches) of ends.
- C. Provide adjustable malleable iron inserts for embedded in concrete framing.

## 2.7 RAILINGS

- A. In addition to the dead load design railing assembly to support live load specified.
- B. Fabrication General:
  - 1. Provide continuous welded joints, dressed smooth and flush.
  - 2. Standard flush fittings, designed to be welded, may be used.
  - 3. Exposed threads will not be approved.
  - 4. Form handrail brackets to size and design shown.
  - 5. Exterior Post Anchors:
    - a. Fabricate tube or pipe sleeves with closed ends or plates as shown.
    - b. Where inserts interfere with reinforcing bars, provide flanged fittings welded or threaded to posts for securing to concrete with expansion bolts.
    - c. Provide heavy pattern sliding flange base plate with set screws at base of pipe or tube posts
  - 6. Interior Post Anchors:
    - a. Provide flanged fittings for securing fixed posts to floor with expansion bolts, unless shown otherwise.
    - b. Weld or thread flanged fitting to posts at base.
    - c. For securing removable posts to floor, provide close fitting sleeve insert or inverted flange base plate with stud bolts or rivets concrete anchor welded to the base plate.
    - d. Provide sliding flange base plate on posts secured with set screws.
    - e. Weld flange base plate to removable posts set in sleeves.
- C. Handrails:
  - 1. Close free ends of rail with flush metal caps welded in place except where flanges for securing to walls with bolts are shown.
  - 2. Make provisions for attaching handrail brackets to wall, posts, and handrail as shown.
- D. Steel Pipe Railings:
  - 1. Fabricate of steel pipe with welded joints.
  - 2. Number and space of rails as shown.
  - 3. Space posts for railings not over 1800 mm (6 feet) on centers between end posts.
  - 4. Form handrail brackets from malleable iron.
  - 5. Fabricate removable sections with posts at end of section.
  - 6. Removable Rails:
    - a. Provide "U" shape brackets at each end to hold removable rail as shown. Use for top and bottom horizontal rail when rails are joined together with vertical members.
    - b. Secure rail to brackets with 9 mm (3/8 inch) stainless steel through bolts and nuts at top rail only when rails joined with vertical members.
    - c. Continuously weld brackets to post.
    - d. Provide slotted bolt holes in rail bracket.

- e. Weld bolt heads flush with top of rail.
  - f. Weld flanged fitting to post where posts are installed in sleeves.
- F. Stainless Steel Railings:
- 1. Fabricate from 38 mm (1-1/2 inches) outside diameter stainless steel tubing, ASTM A269, having a wall thickness of 1.6 mm (0.065 inch).
  - 2. Join sections by an internal connector to form hairline joints where field assembled.
  - 3. Fabricate with continuous welded connections.
  - 4. Fabricate brackets of stainless steel to design shown.
  - 5. Fabricate stainless steel sleeves at least 150 mm (6 inches) deep having internal dimensions at least 13 mm (1/2 inch) greater than external dimensions of post.

### **PART 3 - EXECUTION**

#### **3.1 INSTALLATION, GENERAL**

- A. Set work accurately, in alignment and where shown, plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Items set into concrete or masonry.
  - 1. Provide temporary bracing for such items until concrete or masonry is set.
  - 2. Place in accordance with setting drawings and instructions.
  - 3. Build strap anchors, into masonry as work progresses.
- C. Set corner guards and similar items flush with finish floor or wall surface and, where applicable, flush with side of opening.
- D. Field weld in accordance with AWS.
  - 1. Design and finish as specified for shop welding.
  - 2. Use continuous weld unless specified otherwise.
- E. Install anchoring devices and fasteners as shown and as necessary for securing metal fabrications to building construction as specified. Power actuated drive pins may be used except for removable items and where members would be deformed or substrate damaged by their use.
- F. Spot prime all abraded and damaged areas of zinc coating as specified and all abraded and damaged areas of shop prime coat with same kind of paint used for shop priming.
- G. Isolate aluminum from dissimilar metals and from contact with concrete and masonry materials as required to prevent electrolysis and corrosion.
- H. Secure escutcheon plate with set screws.

#### **3.2 INSTALLATION OF SUPPORTS**

- A. Anchorage to structure.
  - 1. Secure angles or channels and clips to overhead structural steel by continuous welding unless bolting is shown.
  - 2. Secure supports to concrete inserts by bolting or continuous welding as shown.
  - 3. Secure supports to mid height of concrete beams when inserts do not exist with expansion bolts and to slabs, with expansion bolts. unless shown otherwise.
  - 4. Secure steel plate or hat channels to studs as detailed.
- B. Ceiling Hung Toilet Stalls:
  - 1. Securely anchor hangers of continuous steel channel above pilasters to structure above.
  - 2. Bolt continuous steel angle at wall to masonry or weld to face of each metal stud.
  - 3. Secure brace for steel channels over toilet stall pilasters to wall angle supports with bolts at each end spaced as shown.
  - 4. Install diagonal angle brace where the suspended ceiling over toilet stalls does not extend to side wall of room.



5. Install stud bolts in lower flange of channel before installing furred down ceiling over toilet stalls.
  6. Install support for ceiling hung pilasters at entrance screen to toilet room similar to toilet stall pilasters.
- C. Supports for Wall Mounted items:
1. Locate center of support at anchorage point of supported item.
  2. Locate support at top and bottom of wall hung cabinets.
  3. Locate support at top of floor cabinets and shelving installed against walls.
  4. Locate supports where required for items shown.
- F. Support for cantilever grab bars:
1. Locate channels or tube in partition for support as shown, and extend full height from floor to underside of structural slab above.
  2. Anchor at top and bottom with angle clips bolted to channels or tube with two, 9 mm (3/8 inch) diameter bolts.
  3. Anchor to floors and overhead construction with two 9 mm (3/8 inch) diameter bolts.
  4. Fasten clips to concrete with expansion bolts, and to steel with machine bolts or welds.
- G. Supports for Trapeze Bars:
1. Secure plates to overhead construction with fasteners as shown.
  2. Secure angle brace assembly to overhead construction with fasteners as shown and bolt plate to braces.
  3. Fit modular channel unit flush with finish ceiling, and secure to plate with modular channel unit manufacturer's standard fittings through steel shims or spreaders as shown.
    - a. Install closure plates in channel between eye bolts.
    - b. Install eyebolts in channel.

### 3.7 GUARDS

- A. Steel Angle Corner Guards:
1. Build into masonry as the work progress.
  2. Set into formwork before concrete is placed.
  3. Set angles flush with edge of opening and finish floor or wall or as shown.
  4. At existing construction fasten angle and filler piece to adjoining construction with 16 mm (5/8 inch) diameter by 75 mm (3 inch) long expansion bolts 450 mm (18 inches) on center.

### 3.9 STEEL LINTELS

- A. Use lintel sizes and combinations shown or specified.
- B. Install lintels with longest leg upstanding, except for openings in 150 mm (6 inch) masonry walls install lintels with longest leg horizontal.
- C. Install lintels to have not less than 150 mm (6 inch) bearing at each end for nonbearing walls, and 200 mm (8 inch) bearing at each end for bearing walls.

### 3.10 SHELF ANGLES

- A. Anchor shelf angles with 19 mm (3/4 inch) bolts unless shown otherwise in adjustable malleable iron inserts, set level at elevation shown.
- B. Provide expansion space at end of members.

### 3.14 RAILINGS

- A. Steel Posts:
1. Secure fixed posts to concrete with expansion bolts through flanged fittings except where sleeves are shown with pourable grout.
  2. Install sleeves in concrete formwork.

3. Set post in sleeve and pour grout to surface. Apply beveled bead of urethane sealant at perimeter of post or under flange fitting as specified in Section 07 92 00, JOINT SEALANTS—on exterior posts.
  4. Secure removable posts to concrete with either machine screws through flanged fittings which are secured to inverted flanges embedded in and set flush with finished floor, or set posts in close fitting pipe sleeves without grout.
  5. Secure sliding flanged fittings to posts at base with set screws.
  6. Secure fixed flanged fittings to concrete with expansion bolts.
  7. Secure posts to steel with welds.
- B. Stainless Steel Railing Posts:
1. Install pipe sleeves in concrete formwork.
  2. Set posts in sleeve and pour grout to surface on exterior locations and to within 6 mm (1/4 inch) of surface for interior locations except to where posts are required to be removable.
  3. Apply beveled bead of urethane sealant over sleeve at post perimeter for exterior posts and flush with surface for interior posts as specified in Section 07 92 00, JOINT SEALANTS.
- C. Anchor to Walls:
1. Anchor rails to concrete or solid masonry with machine screws through flanged fitting to steel plate.
    - a. Anchor steel plate to concrete or solid masonry with expansion bolts.
    - b. Anchor steel plate to hollow masonry with toggle bolts.
  2. Anchor flanged fitting with toggle bolt to steel support in frame walls.
- G. Handrails:
1. Anchor brackets for metal handrails as detailed.
  2. Install brackets within 300 mm (12 inches) of return of walls, and at evenly spaced intermediate points not exceeding 1200 mm (4 feet) on centers unless shown otherwise.
  3. Expansion bolt to concrete or solid masonry.
  4. Toggle bolt to installed supporting frame wall and to hollow masonry unless shown otherwise.

### 3.19 CLEAN AND ADJUSTING

- A. Adjust movable parts including hardware to operate as designed without binding or deformation of the members centered in the opening or frame and, where applicable, contact surfaces fit tight and even without forcing or warping the components.
- B. Clean after installation exposed prefinished and plated items and items fabricated from stainless steel, aluminum and copper alloys, as recommended by the metal manufacture and protected from damage until completion of the project.

- - - E N D - - -

**SECTION 05 51 00**  
**METAL STAIRS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Section specifies steel stairs with railings.
- B. Types: Industrial stairs: Open riser stairs.

**1.2 RELATED WORK**

- B. Wall handrails and railings for other than steel stairs: Section 05 50 00, METAL FABRICATIONS.
- C. Requirements for shop painting: Section 09 91 00, PAINTING.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Show design, fabrication details, installation, connections, material, and size of members.

**1.4 APPLICATION PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation.
- B. American Society for Testing and Materials (ASTM):
  - A36/A36M-08.....Structural Steel
  - A47-99 (R2009).....Ferritic Malleable Iron Castings
  - A48-03(R2008).....Gray Iron Castings
  - A53-10.....Pipe, Steel, Black and Hot-Dipped Zinc-Coated Welded and Seamless
  - A307-10.....Carbon Steel Bolts and Studs, 60000 psi Tensile Strength
  - A653/653M-10.....Steel Sheet, Zinc Coated (Galvanized) or Zinc Alloy Coated (Galvannealed) by the Hot-Dip Process
  - A563-07.....Carbon and Alloy Steel Nuts
  - A1008-10.....Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength, Low-Alloy
  - A786/A786M-09.....Rolled Steel Floor Plates
  - A1011-10.....Steel, Sheet and Strip, Strip, Hot-Rolled Carbon, Structural, High-Strength, Low-Alloy
- C. American Welding Society (AWS):
  - D1.1-10.....Structural Welding Code-Steel
  - D1.3-08.....Structural Welding Code-Sheet Steel
- D. The National Association of Architectural Metal Manufacturers (NAAMM) Manuals:
  - Metal Bar Gratings (ANSI/NAAMM MBG 531-09)
  - AMP521-01.....Pipe Railing Manual, Including Round Tube
- E. American Iron and Steel Institute (AISI):
  - 2001.....Design of Cold-Formed Steel Structural Members

**PART 2 - PRODUCTS**

**2.1 DESIGN CRITERIA**

- A. Design stairs to support a live load of 500 kg/m<sup>2</sup> (100 pounds per square foot).

- B. Structural design, fabrication and assembly in accordance with requirements of NAAMM Metal Stairs Manual, except as otherwise specified or shown.
- C. Design Grating treads in accordance with NAAMM Metal Bar Grating Manual.
- D. Design pipe railings in accordance with NAAMM Pipe Railing Manual for 900 N (200 pounds) in any direction at any point.

## 2.2 MATERIALS

- A. Steel Pipe: ASTM A53, Standard Weight, zinc coated.
- B. Steel Grating: Metal bar type grating NAAMM BG.
- C. Sheet Steel: ASTM A1008.
- D. Structural Steel: ASTM A36.
- E. Steel Floor Plate: ASTM 786.
- F. Steel Decking: Form from zinc coated steel conforming to ASTM A446, with properties conforming to AISI Specification for the Design of Cold-Formed Steel Structural Members.
- G. Steel Plate: ASTM A1011.

## 2.3 FABRICATION GENERAL

- A. Fasteners:
  - 1. Conceal bolts and screws wherever possible.
  - 2. Use countersunk heads on exposed bolts and screws with ends of bolts and screws dressed flush after nuts are set.
- B. Welding:
  - 1. Structural steel, AWS D1.1 and sheet steel, AWS D1.3.
  - 2. Where possible, locate welds on unexposed side.
  - 3. Grind exposed welds smooth and true to contour of welded member.
  - 4. Remove welding splatter.
- C. Remove sharp edges and burrs.
- D. Fit stringers to head channel and close ends with steel plates welded in place where shown.
- E. Fit face stringer to newel post by tenoning into newel post, or by notching and fitting face stringer to side of newel where shown.
- F. Shop Prime Painting: Prepare surface and apply primer as specified for ferrous metals in Section 09 91 00, PAINTING.

## 2.4 RAILINGS

- A. Fabricate railings, including handrails, from steel pipe with flush welds.
  - 1. Connections may be standard fittings designed for welding, or coped or mitered pipe with full welds.
- B. Return ends of handrail to wall and close free end.
- C. Provide standard terminal castings where fastened to newel.
- D. Space intermediate posts not over six feet on center between end post or newel post.
- E. Fabricate handrail brackets from cast malleable iron.
- F. Provide standard terminal fittings at ends of post and rails.

## 2.6 INDUSTRIAL STAIRS

- A. Provide treads, platforms, railings, stringers and other supporting members as shown.
- B. Treads and platforms of checkered steel floor plate:
  - 1. Turn floor plate down to form nosing on treads and edge of platform at head of stairs.
  - 2. Support tread and platforms with angles welded to plate.
  - 3. Do not leave exposed fasteners on top of treads or platform surfaces.
- C. Treads and platforms of steel grating:

1. Fabricate steel grating treads and platforms in accordance with requirements of NAAMM Metal Bar Grating Manuals.
2. Provide end banding bars, except where carrier angle are used at tread ends.
3. Support treads by use of carrier plates or carrier angle. Use carrier plate end banding bars on exterior stairs.
4. Provide abrasive nosing on treads and edge of platforms at head of stairs.
5. Provide toe plates on platforms.

**PART 3 - EXECUTION**

**3.1 STAIR INSTALLATION**

- A. Provide hangers and struts required to support the loads imposed.
- B. Perform job site welding and bolting as specified for shop fabrication.
- C. Set stairs and other members in position and secure to structure as shown.
- D. Install stairs plumb, level and true to line.
- E. Provide steel closure plate to fill any gap between the stringer and surrounding shaft wall. Weld and finish with prime and paint finish of adjoining steel.

**3.2 RAILING INSTALLATION**

- A. Install standard terminal fittings at ends of posts and rails.
- B. Secure brackets, posts and rails to steel by welds, and to masonry or concrete with expansion sleeves and bolts, except secure posts at concrete by setting in sleeves filled with commercial non-shrink grout.
- C. Set rails horizontal or parallel to rake of stairs to within 3 mm in 3650 mm (1/8-inch in 12 feet).
- D. Set posts plumb and aligned to within 3 mm in 3650 mm (1/8-inch in 12 feet).

**3.3 FIELD PRIME PAINTING**

- A. When installation is complete, clean field welds and surrounding areas to bright metal, and coat with same primer paint used for shop priming.
- B. Touch-up abraded areas with same primer paint used for shop priming.
- C. Touch up abraded galvanized areas with zinc rich paint as specified in section 09 91 00, PAINTING.

- - - E N D - - -

**SECTION 06 10 00**  
**ROUGH CARPENTRY**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. Section specifies wood blocking, furring, nailers, and rough hardware.

**1.2 RELATED WORK:**

- A. Gypsum sheathing: Section 09 29 00, GYPSUM BOARD.

**1.3 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings showing framing connection details, fasteners, connections and dimensions.

**1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:**

- A. Protect lumber and other products from dampness both during and after delivery at site.
- B. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.
- C. Stack plywood and other board products so as to prevent warping.
- D. Locate stacks on well drained areas, supported at least 150 mm (6 inches) above grade and cover with well ventilated cover.

**1.5 APPLICABLE PUBLICATIONS:**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Forest and Paper Association (AFPA):  
National Design Specification for Wood Construction  
NDS-05.....Conventional Wood Frame Construction
- D. American Society of Mechanical Engineers (ASME):  
B18.2.1-96(R2005).....Square and Hex Bolts and Screws  
B18.2.2-87.....Square and Hex Nuts  
B18.6.1-97.....Wood Screws  
B18.6.4-98(R2005).....Thread Forming and Thread Cutting Tapping Screws  
and Metallic Drive Screws
- E. American Plywood Association (APA):  
E30-07.....Engineered Wood Construction Guide
- F. American Society for Testing And Materials (ASTM):  
A47-99(R2009).....Ferritic Malleable Iron Castings  
A48-03(R2008).....Gray Iron Castings  
A653/A653M-10.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-  
Iron Alloy Coated (Galvannealed) by the Hot Dip  
Process  
C954-10.....Steel Drill Screws for the Application of Gypsum  
Board or Metal Plaster Bases to Steel Studs from  
0.033 inch (2.24 mm) to 0.112-inch (2.84 mm) in  
thickness  
C1002-07.....Steel Self-Piercing Tapping Screws for the  
Application of Gypsum Panel Products or Metal  
Plaster Bases to Wood Studs or Metal Studs  
F844-07.....Washers, Steel, Plan (Flat) Unhardened for  
General Use  
F1667-08.....Nails, Spikes, and Staples

- G. Federal Specifications (Fed. Spec.):  
MM-L-736C.....Lumber; Hardwood
- H. Commercial Item Description (CID):  
A-A-55615.....Shield, Expansion (Wood Screw and Lag Bolt Self  
Threading Anchors)
- I. Military Specification (Mil. Spec.):  
MIL-L-19140E.....Lumber and Plywood, Fire-Retardant Treated
  
- K. U.S. Department of Commerce Product Standard (PS)  
PS 1-95.....Construction and Industrial Plywood  
PS 20-05.....American Softwood Lumber Standard

## **PART 2 - PRODUCTS**

### **2.1 LUMBER:**

- A. Unless otherwise specified, each piece of lumber bear grade mark, stamp, or other identifying marks indicating grades of material, and rules or standards under which produced.
  - 1. Identifying marks in accordance with rule or standard under which material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
  - 2. Inspection agency for lumber approved by the Board of Review, American Lumber Standards Committee, to grade species used.
- C. Lumber Other Than Structural:
  - 1. Unless otherwise specified, species graded under the grading rules of an inspection agency approved by Board of Review, American Lumber Standards Committee.
  - 2. Framing lumber: Minimum extreme fiber stress in bending of 1100.
  - 3. Furring, blocking, nailers and similar items 100 mm (4 inches) and narrower Standard Grade; and, members 150 mm (6 inches) and wider, Number 2 Grade.
- D. Sizes:
  - 1. Conforming to Prod. Std., PS20.
  - 2. Size references are nominal sizes, unless otherwise specified, actual sizes within manufacturing tolerances allowed by standard under which produced.
- E. Moisture Content:
  - 1. At time of delivery and maintained at the site.
  - 2. Boards and lumber 50 mm (2 inches) and less in thickness: 19 percent or less.
  - 3. Lumber over 50 mm (2 inches) thick: 25 percent or less.
- F. Fire Retardant Treatment:
  - 1. Mil Spec. MIL-L-19140 with piece of treated material bearing identification of testing agency and showing performance rating.
  - 2. Treatment and performance inspection, by an independent and qualified testing agency that establishes performance ratings.
- G. Preservative Treatment:
  - 1. Do not treat Heart Redwood and Western Red Cedar.
  - 2. Treat wood members and plywood exposed to weather or in contact with plaster, masonry or concrete<sup>3</sup>. Treat other members specified as preservative treated (PT).
  - 3. Preservative treat by the pressure method complying with ASTM D1760, except any process involving the use of Chromated Copper arsenate (CCA) for pressure treating wood is not permitted.

### **2.2 PLYWOOD**

- A. Comply with Prod. Std., PS 1.

- B. Bear the mark of a recognized association or independent inspection agency that maintains continuing control over quality of plywood which identifies compliance by veneer grade, group number, span rating where applicable, and glue type.

#### **2.4 ROUGH HARDWARE:**

- A. Anchor Bolts:
  - 1. ASME B18.2.1 and ANSI B18.2.2 galvanized, 13 mm (1/2 inch) unless shown otherwise.
  - 2. Extend at least 200 mm (8 inches) into masonry or concrete with ends bent 50 mm (2 inches).
- B. Miscellaneous Bolts: Expansion Bolts: C1D, A-A-55615; lag bolt, long enough to extend at least 65 mm (2-1/2 inches) into masonry or concrete. Use 13 mm (1/2 inch) bolt unless shown otherwise.
- C. Washers
  - 1. ASTM F844.
  - 2. Use zinc or cadmium coated steel or cast iron for washers exposed to weather.
- D. Screws:
  - 1. Wood to Wood: ANSI B18.6.1 or ASTM C1002.
  - 2. Wood to Steel: ASTM C954, or ASTM C1002.

#### **PART 3 - EXECUTION**

##### **3.1 INSTALLATION OF FRAMING AND MISCELLANEOUS WOOD MEMBERS:**

- A. Fasteners:
  - 1. Bolts:
    - a. Fit bolt heads and nuts bearing on wood with washers.
    - b. Countersink bolt heads flush with the surface of nailers.
    - c. Embed in concrete and solid masonry or use expansion bolts. Special bolts or screws designed for anchor to solid masonry or concrete in drilled holes may be used.
    - d. Use toggle bolts to hollow masonry or sheet metal.
    - e. Use bolts to steel over 2.84 mm (0.112 inch, 11 gage) in thickness. Secure wood nailers to vertical structural steel members with bolts, placed one at ends of nailer and 600 mm (24 inch) intervals between end bolts. Use clips to beam flanges.
  - 2. Drill Screws to steel less than 2.84 mm (0.112 inch) thick.
    - a. ASTM C1002 for steel less than 0.84 mm (0.033 inch) thick.
    - b. ASTM C 954 for steel over 0.84 mm (0.033 inch) thick.
  - 3. Power actuated drive pins may be used where practical to anchor to solid masonry, concrete, or steel.
  - 4. Do not anchor to wood plugs or nailing blocks in masonry or concrete. Use metal plugs, inserts or similar fastening.
  - 5. Screws to Join Wood:
    - a. Where shown or option to nails.
    - b. ASTM C1002, sized to provide not less than 25 mm (1 inch) penetration into anchorage member.
    - c. Spaced same as nails.
- B. Blocking Nailers, and Furring:
  - 1. Install furring, blocking, nailers, and grounds where shown.
  - 2. Use longest lengths practicable.
  - 3. Use fire retardant treated wood blocking where shown at openings and where shown or specified.
  - 4. Layers of Blocking or Plates:
    - a. Stagger end joints between upper and lower pieces.
    - b. Nail at ends and not over 600 mm (24 inches) between ends.



c. Stagger nails from side to side of wood member over 125 mm (5 inches) in width.

C. Rough Bucks:

1. Install rough wood bucks at opening in masonry or concrete where wood frames or trim occur.
2. Brace and maintain bucks plumb and true until masonry has been built around them or concrete cast in place.
3. Cut rough bucks from 50 mm (2 inch) thick stock, of same width as partitions in which they occur and of width shown in exterior walls.
4. Extend bucks full height of openings and across head of openings; fasten securely with anchors specified.

- - - E N D - - -

**SECTION 06 65 10**  
**SOLID SURFACE FABRICATIONS**

**PART 1 – GENERAL**

**1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the contract, including general and supplementary conditions and Division 1 Specification Sections, apply to this Section.

**1.2 SUMMARY**

- A. This Section includes countertops with sinks, shower enclosures and windowsills.

**1.3 DEFINITION**

- A. Solid surface is defined as nonporous, homogeneous material maintaining the same composition throughout the part with a composition of acrylic polymer, aluminum trihydrate filler and pigment.

**1.4 SUBMITTALS**

- A. Product data for each type of product indicated.
- B. Shop drawings:
  - 1. Show location of each item, dimensioned plans and elevations, large-scale details, attachment devices and other components.
    - a. Show full-size details, edge details, thermoforming requirements, attachments, etc.
    - b. Show locations and sizes of furring, blocking, including concealed blocking and reinforcement specified in other Sections.
    - c. Show locations and sizes of cutouts and holes for plumbing fixtures, faucets, soap dispensers, waste receptacle and other items installed in solid surface.
- C. Samples:
  - 1. Initial Selection: Submit samples showing manufacturer's full standard colors for selection by Owner.
  - 2. For each type of product indicated.
    - a. Submit minimum 12-inch by 12-inch sample in specified gloss.
    - b. Cut sample and seam together for representation of inconspicuous seam.
    - c. Indicate full range of color and pattern variation.
  - 3. Approved samples will be retained as a standard for work.
- D. Product data:
  - 1. Indicate product description, fabrication information and compliance with specified performance requirements.
- E. Maintenance data:
  - 1. Submit manufacturer's care and maintenance data, including repair and cleaning instructions.
  - 2. Include in project closeout documents.

**1.5 QUALITY ASSURANCE**

- A. Qualifications: Shop that employs skilled workers who custom fabricate products similar to those required for this project and whose products have a minimum 5-year record of successful in-service performance.
- B. Fabricator/installer qualifications: Work of this section shall be by a certified fabricator/installer, certified in writing by the manufacturer.
- C. Field measure existing conditions prior to preparation of shop drawings and fabrication.
- D. Applicable standards:

1. Standards of the following, as referenced herein:
  - a. American National Standards Institute (ANSI)
  - b. American Society for Testing and Materials (ASTM)
  - c. National Electrical Manufacturers Association (NEMA)
  - d. NSF International
- E. Coordination drawings: Prepare for coordination with plumbing and other adjacent work as needed.

#### **1.6 DELIVERY, STORAGE AND HANDLING**

- A. Deliver no components to project site until areas are ready for installation.
- B. Store components indoors prior to installation.
- C. Handle materials to prevent damage to finished surfaces.
  1. Provide protective coverings to prevent physical damage or staining following installation for duration of project.

#### **1.7 WARRANTY**

- A. Provide manufacturer's warranty against defects in materials.
  1. Warranty shall provide material and labor to repair or replace defective materials.
  2. Damage caused by physical or chemical abuse or damage from excessive heat will not be warranted.

### **PART 2 – PRODUCTS**

#### **2.1 MATERIALS**

- A. Basis of design is Samsung Staron. Products by other manufacturer's meeting the following requirement may be submitted for review and approval prior to submission of bids.
  - B. Solid polymer components
    1. Cast, nonporous, filled polymer, not coated, laminated or of composite construction with through body colors meeting ANSI Z124.3 or ANSI Z124.6, having minimum physical and performance properties specified.
    2. Superficial damage to a depth of 0.010 inch (.25 mm) shall be repairable by sanding and/or polishing.
  - C. Thickness:
    1. 1/4 inch for vertical surfaces
    2. 1/2 inch for horizontal surfaces
  - D. Integral sink:
    1. Model as selected from solid surface manufacturer's standard configurations.
    2. Mounting: Seamed undermount.
  - E. Backsplash: Coved
  - F. Sidesplash: Coved
- Shower Enclosures
- G. 3 wall panel kit, 36"x36" shower pan with 96" high wall panels.
  - H. Performance characteristics:
    1. Tensile Strength: 6,000 psi, ASTM D 638
    2. Tensile Modulus:  $1.5 \times 10^{-6}$  psi, ASTM D 638
    3. Tensile Elongation: 0.4% min., ASTM D 638
    4. Flexural Strength: 10,000 psi, ASTM D 790
    5. Flexural Modulus:  $1.2 \times 10^{-6}$  psi, ASTM D 790
    6. Hardness: >85, Rockwell "M" Scale, ASTM D 785
    7. Thermal Expansion:  $3.02 \times 10^{-5}$  in./in./°C, ASTM D 696 ( $1.80 \times 10^{-5}$  in./in./°F)
    8. Gloss: (60° Gardner), 5-75, ANSI Z124
    9. Light Resistance: (Xenon Arc) No effect, NEMA LD 3-2000, Method 3.3

10. Wear and Cleanability: Passes, ANSI Z124.3 & Z124.6
11. Stain Resistance, Sheets: Passes, ANSI Z124.3 & Z124.6
12. Fungus and Bacteria Resistance: Does not support microbial growth, ASTM G21&G22
13. Boiling Water Resistance: No visible change, NEMA LD 3-2000, Method 3.5
14. High Temperature Resistance: No change, NEMA LD 3-2000, Method 3.6  
Izod Impact: 0.28 ft.-lbs./in. of notch, ASTM D 256 (Notched S Specimen), (Method A)
15. Ball Impact: No fracture—1/2 lb. Ball, NEMA LD 3-2000, 1/4" slab—36" drop, Method 3.8; 1/2" slab—144" drop
16. Weatherability:  $\Delta E^*94 < 5$  in 1,000 hrs., ASTM G 155
17. Toxicity: 99 (solid colors), Pittsburgh Protocol, Test ("LC50" Test)
18. Flammability, all colors: Class I and Class A, ASTM E 84, NFPA 255 & UL 723
19. Flame Spread Index: <25
20. Smoke Developed Index: <25

## 2.2 ACCESSORIES

- A. Joint adhesive: Manufacturer's standard one- or two-part adhesive kit to create inconspicuous, nonporous joints.
- B. Sealant: Manufacturer's standard mildew-resistant, FDA-compliant, NSF 51-compliant (food zone - any type), UL-listed silicone sealant in colors matching components.
- C. Sink/lavatory mounting hardware: Manufacturer's standard bowl clips, panel inserts and fasteners for attachment of undermount sinks/lavatories.
- D. Conductive Tape: Manufacturer's standard aluminum foil tape, with required thickness, for use with cutouts near heat sources.
- E. Insulating Felt Tape: Manufacturer's standard for use with conductive tape in insulating solid surface material from adjacent heat source.

## 2.3 FACTORY FABRICATION

- A. Shop assembly
  1. Fabricate components to greatest extent practical to sizes and shapes indicated, in accordance with approved shop drawings and manufacturer's printed instructions and technical bulletins.
  2. Form joints between components using manufacturer's standard joint adhesive without conspicuous joints.
    - a. Reinforce with strip of solid polymer material, 2" wide.
  3. Provide factory cutouts for plumbing fittings and bath accessories as indicated on the drawings.
  4. Rout and finish component edges with clean, sharp returns.
    - a. Rout cutouts, radii and contours to template.
    - b. Smooth edges.
    - c. Repair or reject defective and inaccurate work.
- B. Thermoforming:
  1. Comply with manufacturer's data.
  2. Heat entire component.
    - a. Material shall be uniform, between 275 and 325 degrees Fahrenheit during forming.
  3. Form pieces to shape prior to seaming and joining.
  4. Cut pieces to finished dimensions.
  5. Sand edges and remove nicks and scratches.

## 2.4 FINISHES

- A. Select from the manufacturer's standard color chart.
- B. Finish:
  1. Provide surfaces with a uniform finish.

2. Matte; gloss range of 5-20.

### **PART 3 – EXECUTION**

#### **3.1 EXAMINATION**

- A. Examine substrates and conditions, with fabricator present for compliance with requirements for installation tolerances and other conditions affecting performance of work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

#### **3.2 INSTALLATION**

- A. Install components plumb, level and rigid, scribed to adjacent finishes, in accordance with approved shop drawings and product data.
  1. Provide product in the largest pieces available.
  2. Form field joints using manufacturer's recommended adhesive, with joints inconspicuous in finished work.
    - a. Exposed joints/seams shall not be allowed.
  3. Reinforce field joints with solid surface strips extending a minimum of 1 inch on either side of the seam with the strip being the same thickness as the top.
  4. Cut and finish component edges with clean, sharp returns.
  5. Rout radii and contours to template.
  6. Anchor securely to base cabinets or other supports.
  7. Align adjacent countertops and form seams to comply with manufacturer's written recommendations using adhesive in color to match countertop.
  8. Carefully dress joints smooth, remove surface scratches and clean entire surface.
  9. Install countertops with no more than 1/8-inch (3 mm) sag, bow or other variation from a straight line.
- B. Coved backsplashes and sidesplashes:
  1. Provide coved backsplashes and sidesplashes at all walls and adjacent millwork.
  2. Fabricate radius cove at intersection of counters with backsplashes to dimensions shown on the drawings.
  3. Adhere to countertops using manufacturer's standard color-matched Joint Adhesive.
- E. Integral sinks/vanities:
  1. Provide solid surface materials bowls and/or lavatories sinks with overflows in locations shown on the drawings.
  2. Secure sinks and lavatory bowls to tops using manufacturer's recommended sealant, adhesive and mounting hardware to maintain warranty.
- F. Shower Enclosure: Install in accordance with manufacturer's instructions and recommendations for applications indicated and as needed to provide a watertight installation.

#### **3.3 REPAIR**

- A. Repair or replace damaged work that cannot be repaired to Project Engineer's satisfaction.

#### **3.4 CLEANING AND PROTECTION**

- A. Keep components clean during installation.
- B. Remove adhesives, sealants and other stains.

-END-

**SECTION 07 01 50.19  
PREPARATION FOR RE-ROOFING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Partial roof tear-off, temporary roofing roof re-cover preparation, removal of base flashings on existing construction in preparation to receive new roofing membrane.
- B. Existing Membrane Roofing System: Modified bituminous roofing membrane, with related insulation, surfacing, and components and accessories between deck and roofing membrane.

**1.2 RELATED WORK**

- A. Use of the premises and phasing requirements: Section 01 00 00 GENERAL REQUIREMENTS.
- B. Temporary construction and environmental-protection measures for reroofing preparation: Section 01 00 00 GENERAL REQUIREMENTS

**1.3 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):
  - ANSI/SPRI FX-1-01(R2006) Standard Field Test Procedure for Determining the Withdrawal Resistance of Roofing Fasteners.
- C. ASTM International (ASTM):
  - C208-08.....Cellulosic Fiber Insulating Board
  - C728-05.....Perlite Thermal Insulation Board
  - C1177/C1177M-08.....Standard Specification for Glass Mat Gypsum Substrate for Use as Sheathing
  - C1278/C1278M-07.....Standard Specification for Fiber-Reinforced Gypsum Panel
  - D1079-09.....Standard Terminology Relating to Roofing and Waterproofing
- D. FM Approvals: RoofNav Approved Roofing Assemblies and Products.
  - 4450-89.....Approved Standard for Class 1 Insulated Steel Deck Roofs
  - 4470-10.....Approved Standard for Class 1 Roof Coverings
  - 1-28-09.....Loss Prevention Data Sheet: Design Wind Loads.
  - 1-29-09.....Loss Prevention Data Sheet: Above-Deck Roof Components
  - 1-49-09.....Loss Prevention Data Sheet: Perimeter Flashing
- E. National Roofing Contractors Association: Roofing and Waterproofing Manual

**1.4 DEFINITIONS**

- A. Refer to ASTM D1079 and NRCA "The NRCA Roofing and Waterproofing Manual" for definition of terms.

### 1.5 QUALITY CONTROL

- A. Requirements of Division 07 roofing section for qualifications of roofing system and roofing insulation Installer; work of this section shall be performed by same Installer.
  - 1. Where Project requirements include work affecting existing roofing system to remain under warranty, Installer must be approved by warrantor of existing roofing system.
- B. Regulatory Requirements: Comply with governing EPA notification regulations. Comply with hauling and disposal regulations of authorities having jurisdiction.
- C. Reroofing Conference: Conduct conference at Project site.
  - 1. Meet with COR roofing system manufacturer's representative; roofing Installer including project manager, superintendent, and foreman; and installers whose work interfaces with or affects reroofing.
  - 2. Review methods and procedures related to roofing system tear-off and replacement

### 1.6 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Recover boards.
- C. Qualification Data: For Installer.
  - 1. Certificate indicating Installer is approved by warrantor of existing roofing system.

### 1.7 PROJECT CONDITIONS

- A. Owner will occupy portions of building below reroofing area. Conduct reroofing so Owner's operations will not be disrupted.
  - 1. Coordinate work activities daily with Owner.
  - 2. Provide Owner with not less than 72 hours' notice of activities that may affect Owner's operations.
- B. Protect building and landscaping from damage from reroofing operations.
- C. Maintain access to existing walkways and adjacent occupied facilities.
- D. Weather Limitations: Proceed with reroofing preparation only when weather conditions permit Work to proceed without water entering existing roofing system or building.
- E. Hazardous Materials: It is not expected that Contractor will encounter hazardous materials such as asbestos-containing materials.
  - 1. Owner will remove hazardous materials before start of the Work.
  - 2. Do not disturb materials suspected of containing hazardous materials. Notify COR. Hazardous materials will be removed by Owner under a separate contract.

### 1.8 WARRANTY

- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces affected by reroofing, by methods and with materials acceptable to warrantor.
  - 1. Notify warrantor of existing roofing system before proceeding, and upon completion of reroofing.
  - 2. Obtain documentation verifying that existing roofing system has been inspected by warrantor and warranty remains in effect. Submit documentation at Project closeout.

## **PART 2 - PRODUCTS**

### **2.1 INFILL MATERIALS**

- A. Use infill materials matching existing membrane roofing system materials.

### **2.2 TEMPORARY ROOFING MATERIALS**

- A. Design of temporary roofing and selection of materials are responsibilities of Contractor.

### **2.3 RECOVER BOARDS**

- A. Recover Board: Fan-folded, unfaced, extruded-polystyrene board insulation; 1/4-inch nominal thickness.
- B. Fasteners: Factory-coated steel fasteners, No. 12 or 14, and metal or plastic plates listed in FM Approval's "RoofNav."

### **2.4 AUXILIARY REROOFING MATERIALS**

- A. General: Auxiliary reroofing preparation materials recommended by roofing system manufacturer and compatible with components of existing and new membrane roofing system.
- B. Base Sheet Fasteners: Capped head, factory-coated steel fasteners, listed in FM Approval's "RoofNav."
- C. Metal Flashing Sheet: Metal flashing sheet is specified in Section 07 60 00 SHEET METAL FLASHING AND TRIM.

## **PART 3 - EXECUTION**

### **3.1 PREPARATION**

- A. Protect adjacent existing membrane roofing system that is indicated not to be reroofed.
  - 1. Limit traffic and material storage to areas of existing roofing membrane that have been protected.
  - 2. Maintain temporary protection and leave in place until replacement roofing has been completed. Remove temporary protection upon completion of reroofing.
- B. Coordinate with COR to shut down air-intake equipment in the vicinity of the Work. Cover air-intake louvers before proceeding with reroofing work that could affect indoor air quality or activate smoke detectors in the ductwork.
  - 1. Comply with Owner's requirements for maintaining fire watch when temporarily disabling smoke detectors.
- C. Do not demolish existing roofing when the weather forecast indicates likelihood of rain. Remove only amount of existing roof that can be recovered by end of work day.
- D. Maintain roof drainage system in functioning condition to ensure roof drainage at end of each workday. Prevent debris from entering or blocking roof drains and conductors. Use roof-drain plugs specifically designed for this purpose. Remove roof-drain plugs at end of each workday, when no work is taking place, or when rain is forecast.
  - 1. If roof drains are temporarily blocked or unserviceable due to roofing system removal or partial installation of new membrane roofing system, provide alternative drainage method to remove water and eliminate ponding.
  - 2. Do not permit water to enter into or under existing membrane roofing system components that are to remain.



- E. Verify that rooftop utilities and service piping have been shut off before beginning the Work.

### **3.2 ROOF TEAR-OFF**

- A. General: Notify Owner each day of extent of roof tear-off proposed for that day and obtain authorization to proceed.
- B. Remove aggregate ballast from roofing membrane. Store aggregate ballast for reuse.
- C. Remove loose aggregate from aggregate-surfaced built-up bituminous roofing using a power broom.
- D. Remove accessories from roofing membrane. Store and protect for reuse. Discard and replace damaged units.
- E. Remove protection mat and insulation from protected roofing membrane.
  - 1. Discard insulation that is wet.
  - 2. Store insulation for reuse and protect from physical damage.
- F. Partial Roof Tear-Off: Where indicated, remove existing roofing membrane and other membrane roofing system components down to the deck.
  - 1. Comply with FM Approvals requirements for removal of excess asphalt from steel decks.
  - 2. Remove fasteners from deck or cut fasteners off slightly above deck surface and apply recover board prior to installing roof membrane.

### **3.3 DECK PREPARATION**

- A. Inspect deck after tear-off or partial tear-off of membrane roofing system.
- B. Verify that concrete substrate is visibly dry and free of moisture. Test for capillary moisture by plastic sheet method according to ASTM D 4263. Do not proceed with roofing work if moisture condenses under the plastic sheet.
- C. If broken or loose fasteners that secure deck panels to one another or to structure are observed or if deck appears or feels inadequately attached, immediately notify COR. Do not proceed with installation until directed by COR.
- D. If deck surface is not suitable for receiving new roofing or if structural integrity of deck is suspect, immediately notify COR. Do not proceed with installation until directed by COR.

### **3.5 TEMPORARY ROOFING MEMBRANE**

- A. Install approved temporary roofing membrane over area to be reroofed.
- B. Remove temporary roofing membrane before installing new roofing membrane.
- C. Prepare the temporary roof to receive new roofing membrane according to approved temporary roofing membrane proposal. Restore temporary roofing membrane to watertight condition. Obtain approval for temporary roof substrate from roofing membrane manufacturer and COR before installing new roof.

### **3.6 ROOF RE-COVER PREPARATION**

- A. Remove blisters, ridges, buckles, and other substrate irregularities from existing roofing membrane that inhibit new recover boards from conforming to substrate.
  - 1. Remove loose aggregate from aggregate-surfaced built-up bituminous roofing with a power broom.
  - 2. Broom clean existing substrate.
  - 3. Coordinate with Owner's inspector to schedule times for tests and inspections before proceeding with installation of recover boards.

4. Remove materials that are wet or damp. Removal will be paid for by adjusting the Contract Sum according to unit prices included in the Contract Documents.
- B. Remove blisters, ridges, buckles, and other substrate irregularities from existing roofing membrane that inhibit new installations from conforming to substrate.
  1. Remove loose aggregate from aggregate-surfaced built-up bituminous roofing with a power broom.
  2. Broom clean existing substrate.
  3. Coordinate with Owner's inspector to schedule times for tests and inspections.
  4. Remove materials that are wet and damp. Removal will be paid for by adjusting the Contract Sum according to unit prices included in the Contract Documents.
  5. Remove loose aggregate from aggregate-surfaced built-up bituminous roofing with a power broom.
  6. Power vacuum the existing roof surface. If recommended by manufacturer, prime dried surface at recommended rate with recommended primer.

### **3.7 EXISTING BASE FLASHINGS**

- A. Remove existing base flashings around parapets, curbs, walls, and penetrations.
  1. Clean substrates of contaminants such as asphalt, sheet materials, dirt, and debris.
- B. Do not damage flashings indicated to remain. Replace components damaged during removal in accordance with Section 07 60 00 SHEET METAL FLASHING.

### **3.9 RECOVER BOARD INSTALLATION**

- A. Install recover boards over roof insulation with long joints in continuous straight lines and end joints staggered between rows. Loosely butt recover boards together and fasten to deck.
  1. Install additional fasteners near board corners and edges as necessary to conform boards to substrate and to adjacent boards.

### **3.10 DISPOSAL**

- A. Collect demolished materials and place in containers. Promptly dispose of demolished materials off site. Do not allow demolished materials to accumulate on-site.
  1. Storage or sale of demolished items or materials on-site is not permitted.

END OF SECTION

**SECTION 07 21 13  
THERMAL INSULATION**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. This section specifies thermal and acoustical insulation for buildings.
- B. Acoustical insulation is identified by thickness and words "Acoustical Insulation".

**1.2 RELATED WORK**

- A. Insulation for insulated wall panels: Section 07 40 00, ROOFING AND SIDING PANELS.
- B. Insulation in connection with roofing and waterproofing: Section 07 22 00, ROOF AND DECK INSULATION.
- C. Safing insulation: Section 07 84 00, FIRESTOPPING.

**1.3 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES .
- B. Manufacturer's Literature and Data:
  - 1. Insulation, each type used
  - 2. Adhesive, each type used.
  - 3. Tape
- C. Certificates: Stating the type, thickness and "R" value (thermal resistance) of the insulation to be installed.

**1.4 STORAGE AND HANDLING:**

- B. Protect insulation from damage from handling, weather and construction operations before, during, and after installation.

**1.5 APPLICABLE PUBLICATIONS:**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - C270-10.....Mortar for Unit Masonry
  - C552-07.....Cellular Glass Thermal Insulation.
  - C553-08.....Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications
  - C578-10.....Rigid, Cellular Polystyrene Thermal Insulation
  - C591-09.....Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation
  - C612-10.....Mineral Fiber Block and Board Thermal Insulation
  - C665-06.....Mineral Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing
  - C954-10.....Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Base to Steel Studs From 0.033 (0.84 mm) inch to 0.112 inch (2.84 mm) in thickness
  - C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
  - D312-00(R2006).....Asphalt Used in Roofing

E84-10.....Surface Burning Characteristics of Building  
 Materials  
 F1667-11.....Driven Fasteners: Nails, Spikes and Staples.

**PART 2 - PRODUCTS**

**2.1 INSULATION - GENERAL:**

- A. Where thermal resistance ("R" value) is specified or shown for insulation, the thickness shown on the drawings is nominal. Use only insulation with actual thickness that is not less than that required to provide the thermal resistance specified.
- B. Where "R" value is not specified for insulation, use the thickness shown on the drawings.
- C. Where more than one type of insulation is specified, the type of insulation for each use is optional, except use only one type of insulation in any particular area.
- D. Insulation Products shall comply with following minimum content standards for recovered materials:

Material Type	Percent by Weight
Polyisocyanurate/polyurethane	
Rigid foam	9 percent recovered material
Foam-in-place	5 percent recovered material
Glass fiber reinforced	6 percent recovered material
Rock wool material	75 percent recovered material

The minimum-content standards are based on the weight (not the volume) of the material in the insulating core only.

**2.2 MASONRY CAVITY WALL INSULATION:**

- A. Mineral Fiber Board: ASTM C612, Type II, faced with a vapor retarder having a perm rating of not more than 0.5.
- B. Polyurethane or Polyisocyanurate Board: ASTM C591, Type I, faced with a vapor retarder having a perm rating of not more than 0.5.
- C. Polystyrene Board: ASTM C578, Type X.

**2.3 EXTERIOR FRAMING OR FURRING INSULATION:**

- A. Batt or Blanket: Optional.
- B. Mineral Fiber: ASTM C665, Type II, Class C, Category I where framing is faced with gypsum board.
- C. Mineral Fiber: ASTM C665, Type III, Class A where framing is not faced with gypsum board.

**2.4 ACOUSTICAL INSULATION:**

- A. Mineral Fiber boards: ASTM C553, Type II, flexible, or Type III, semirigid (4.5 pound nominal density).
- B. Mineral Fiber Batt or Blankets: ASTM C665. Maximum flame spread of 25 and smoke development of 450 when tested in accordance with ASTM E84.
- C. Thickness as shown; of widths and lengths to fit tight against framing.

**2.5 RIGID INSULATION:**

- A. On the inside face of exterior walls, spandrel beams, floors, bottom of slabs, and where shown.
- B. Mineral Fiber Board: ASTM C612, Type IB or 2.
- C. Cellular Glass Block: ASTM C552, Type I.

**2.6 FASTENERS:**

- A. Screws: ASTM C954 or C1002, size and length best suited for purpose with washer not less than 50 mm (two inches) in diameter.
- B. Impaling Pins: Steel pins with head not less than 50 mm (two inches) in diameter with adhesive for anchorage to substrate. Provide impaling pins of length to extend beyond insulation and retain cap washer when washer is placed on the pin.

**2.7 ADHESIVE:**

- A. As recommended by the manufacturer of the insulation.
- B. Asphalt: ASTM D312, Type III or IV.
- C. Mortar: ASTM C270, Type 0.

**2.8 TAPE:**

- A. Pressure sensitive adhesive on one face.
- B. Perm rating of not more than 0.50.

**PART 3 - EXECUTION**

**3.1 INSTALLATION - GENERAL**

- A. Install insulation with the vapor barrier facing the heated side, unless specified otherwise.
- B. Install rigid insulating units with joints close and flush, in regular courses and with cross joints broken.
- C. Install batt or blanket insulation with tight joints and filling framing void completely. Seal cuts, tears, and unlapped joints with tape.
- D. Fit insulation tight against adjoining construction and penetrations, unless specified otherwise.
- E. Where batt insulation is shown in horizontal installation, support with continuous wire webbing or 20 ga. wire at 12" o.c.

**3.2 MASONRY CAVITY WALLS:**

- A. Mount insulation on exterior faces of inner wythes of masonry cavity walls and brick faced concrete walls. Fill joints with same material used for bonding.
- B. Bond polystyrene board to surfaces with adhesive or Portland cement mortar mixed and applied in accordance with recommendations of insulation manufacturer.
- C. Bond mineral fiberboard, polyurethane or polyisocyanurate board to surfaces with adhesive as recommended by insulation manufacturer.

**3.3 EXTERIOR FRAMING OR FURRING BLANKET INSULATION:**

- A. Pack insulation around doorframes and windows and in building expansion joints, door soffits and other voids. Pack behind outlets around pipes, ducts, and services encased in walls. Open voids are not permitted. Hold insulation in place with pressure sensitive tape.
- B. Lap vapor retarder flanges together over face of framing for continuous surface. Seal all penetrations through the insulation.

- C. Fasten blanket insulation between metal studs or framing and exterior wall furring by continuous pressure sensitive tape along flanged edges.

**3.4 RIGID INSULATION ON SURFACE OF EXTERIOR WALLS:**

- A. On the interior face of solid masonry and concrete walls, beams, beam soffits, underside of floors, and to the face of studs for interior wall finish where shown.
- B. Bond to solid vertical surfaces with adhesive as recommended by insulation manufacturer. Fill joints with adhesive cement.
- C. Use impaling pins for attachment to underside of horizontal surfaces. Space fastenings as required to hold insulation in place and prevent sagging.
- D. Fasten board insulation to face of studs with screws, nails or staples. Space fastenings not more than 300 mm (12 inches) apart. Stagger fasteners at joints of boards. Install at each corner.

**3.5 ACOUSTICAL INSULATION:**

- A. Fasten blanket insulation between metal studs and wall furring with continuous pressure sensitive tape along edges or adhesive.
- B. Pack insulation around door frames and windows and in cracks, expansion joints, control joints, door soffits and other voids. Pack behind outlets, around pipes, ducts, and services encased in wall or partition. Hold insulation in place with pressure sensitive tape or adhesive.
- C. Do not compress insulation below required thickness except where embedded items prevent required thickness.

- - - E N D - - -

**SECTION 07 22 00  
ROOF AND DECK INSULATION**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Roof and deck insulation, substrate board, cover board on new construction ready to receive roofing or waterproofing membrane.
- B. Repairs and alteration work to existing roof insulation.

**1.2 RELATED WORK**

- A. General sustainable design documentation requirements: Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS.
- B. Perimeter, rigid, and batt or blanket insulation not part of roofing system: Section 07 21 13, THERMAL INSULATION.
- C. Sheet metal components and wind uplift requirements for roof-edge design: Section 07 60 00, FLASHING AND SHEET METAL.
- D. Roofing: Section 07 54 23, THERMOPLASTIC POLYOLEFIN (TPO) ROOFING

**1.3 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. American Society of Heating, Refrigeration and Air Conditioning (ASHRAE):
  - 90.1-07.....Energy Standard for Buildings Except Low-Rise Residential Buildings
- C. ASTM International (ASTM):
  - C208-08.....Cellulosic Fiber Insulating Board
  - C552-07.....Cellular Glass Thermal Insulation
  - C726-05.....Mineral Fiber Roof Insulation Board
  - C728-05.....Perlite Thermal Insulation Board
  - C1177/C1177M-08.....Standard Specification for Glass Mat Gypsum Substrate for Use as Sheathing
  - C1278/C1278M-07.....Standard Specification for Fiber-Reinforced Gypsum Panel
  - C1289-10.....Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board
  - C1396/C1396M-09.....Standard Specification for Gypsum Board
  - D41-05.....Asphalt Primer Used in Roofing, Dampproofing, and Waterproofing
  - D312-06.....Asphalt Used in Roofing
  - D1970-09.....Standard Specification for Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection
  - D2178-04.....Asphalt Glass Felt Used in Roofing and Waterproofing
  - D2822-05.....Asphalt Roof Cement
  - D4586-07.....Standard Specification for Asphalt Roof Cement, Asbestos-Free
  - E84-09.....Standard Test Method for Surface Burning Characteristics of Building Material
  - F1667-05.....Driven Fasteners: Nails, Spikes, and Staples

- D. FM Approvals: RoofNav Approved Roofing Assemblies and Products.
  - 4450-89.....Approved Standard for Class 1 Insulated Steel Deck Roofs
  - 4470-10.....Approved Standard for Class 1 Roof Coverings
  - 1-28-09.....Loss Prevention Data Sheet: Design Wind Loads.
  - 1-29-09.....Loss Prevention Data Sheet: Above-Deck Roof Components
  - 1-49-09.....Loss Prevention Data Sheet: Perimeter Flashing
- E. National Roofing Contractors Association: Roofing and Waterproofing Manual
- F. U.S. Department of Agriculture (USDA): USDA BioPreferred Catalog, [www.biopreferred.gov](http://www.biopreferred.gov)
- G. Underwriters Laboratories, Inc. (UL): Fire Resistance Directory (2009)
- H. U.S. Department of Commerce National Institute of Standards and Technology (NIST):
  - DOC PS 1-09.....U.S. Product Standard for Construction and Industrial Plywood
  - DOC PS 2-04.....Performance Standard for Wood-Based Structural-Use Panels.

**1.4 PERFORMANCE REQUIREMENTS**

- A. Thermal Performance: Provide roof insulation meeting minimum overall average R-value of 33, with minimum R-value at any location of 10.
- B. FM Approvals: Provide roof insulation complying with requirements in FM Approvals 4450 and 4470 as part of specified roofing system, listed in FM Approvals "RoofNav" as part of roofing system meeting Fire/Windstorm Classification in Division 07 roofing section.

**1.5 QUALITY CONTROL**

- A. Requirements of Division 07 roofing section for qualifications of roofing system insulation Installer; Work of this Section shall be performed by same Installer.
- B. Requirements of Division 07 roofing section for inspection of Work of this Section and qualifications of Inspector.
- C. Unless specified otherwise, comply with the recommendations of the NRCA "Roofing and Waterproofing Manual" applicable to insulation for storage, handling, and application.
- D. Requirements of roofing system uplift pressure design for specified roofing system.
- E. Requirements of applicable FM Approval for specified roofing system insulation attachment.
- F. Requirements of applicable Miami-Dade County approval for high-wind zone design.
  - 1.
- G. Bio-Based Materials: Where applicable, provide products designated by USDA and meeting or exceeding USDA recommendations for bio-based content, and products meeting Rapidly Renewable Materials and certified sustainable wood content definitions; refer to [www.biopreferred.gov](http://www.biopreferred.gov).

**1.6 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Product Data:
  - 1. Asphalt and adhesive materials, each type.
  - 2. Roofing cement, each type.
  - 3. Roof insulation, each type.



4. Substrate board, each type.
5. Cover board, each type.
6. Fastening requirements.
7. Insulation span data for flutes of metal decks.
- C. Shop Drawings: Include plans, sections, details, and attachments.
  1. Nailers, cants, and terminations.
  2. Layout of insulation showing slopes, tapers, penetration, and edge conditions.
- D. Samples:
  1. Roof insulation, each type.
- E. Certificates:
  1. Indicating type, thermal conductance, and minimum and average thickness of insulation.
  2. Indicating materials and method of application of insulation system meet the requirements of FM Approvals for specified roofing system.
- F. Laboratory Test Reports: Thermal values of insulation products.
- G. Layout of tapered roof system showing units required.
- H. Documentation of supervisors' and inspectors' qualifications.

#### **1.7 DELIVERY, STORAGE AND MARKING**

- A. Comply with the recommendations of the NRCA "Roofing and Waterproofing Manual" applicable to built-up roofing for storage, handling and installation requirements.

#### **1.8 QUALITY ASSURANCE:**

- A. Roof insulation on combustible or steel decks shall have a flame spread rating not greater than 75 and a smoke developed rating not greater than 150, exclusive of covering, when tested in accordance with ASTM E84, or shall have successfully passed FM Approvals 4450.
  1. Insulation bearing the UL label and listed in the UL Building Materials Directory as meeting the flame spread and smoke developed ratings will be accepted in-lieu-of copies of test reports.
  2. Compliance with flame spread and smoke developed ratings will not be required when insulation has been tested as part of a roof construction assembly of the particular type used for this project and the construction is listed as fire-classified in the UL Building Materials Directory or listed as Class I roof deck construction in the FM Approvals "RoofNav."
  3. Insulation tested as part of a roof construction assembly shall bear UL or FM labels attesting to the ratings specified herein.

### **PART 2 - PRODUCTS**

#### **2.1 ADHESIVE MATERIALS**

- A. Adhesive Materials, General: Adhesive and sealant materials recommended by roofing system manufacturer for intended use, identical to materials utilized in approved listed roofing system, and compatible with roofing membrane.
  1. Liquid-type adhesive materials shall comply with VOC limits of authorities having jurisdiction.
  2. Adhesives and sealants that are not on the exterior side of weather barrier shall comply with the following limits for VOC content when calculated according to 40 CFR 59, Subpart D (EPA Method 24):
    - a. Plastic Foam Adhesives: 50 g/L.
    - b. Multipurpose Construction Adhesives: 70 g/L.
    - c. Fiberglass Adhesives: 80 g/L.

- d. Contact Adhesives: 80 g/L.
  - e. Other Adhesives: 250 g/L.
  - f. Nonmembrane Roof Sealants: 300 g/L.
  - g. Sealant Primers for Nonporous Substrates: 250 g/L.
  - h. Sealant Primers for Porous Substrates: 775 g/L.
- B. Primer: ASTM D41.
- C. Asphalt: ASTM D312, Type III or IV for vapor retarders and insulation.
- D. Modified Asphaltic Insulation Adhesive: Insulation manufacturer's recommended modified asphaltic, asbestos-free, cold-applied adhesive formulated to attach roof insulation to substrate or to another insulation layer.
- E. Bead-Applied Urethane Insulation Adhesive: Insulation manufacturer's recommended bead-applied, low-rise, one- or multicomponent urethane adhesive formulated to attach roof insulation to substrate or to another insulation layer.
- F. Roof Cement: Asbestos free, ASTM D2822, Type I or Type II, ; or, D4586, Type I or Type II.

## 2.2 ROOF AND DECK INSULATION

- A. Roof and Deck Insulation, General: Preformed roof insulation boards approved by roofing manufacturer and listed as component of FM Approvals-approved roofing system.
- B. Polyisocyanurate Board Insulation: ASTM C1289, Type II, Class 1, Grade 2, felt or glass-fiber mat facer on both major surfaces.
- C. Tapered Roof Insulation System:
- 1. Fabricate of mineral fiberboard, polyisocyanurate, perlite board, or cellular glass. Use only one insulation material for tapered sections. Use only factory-tapered insulation.
  - 2. Cut to provide high and low points with crickets and slopes as shown.
  - 3. Minimum thickness of tapered sections; 38 mm (1-1/2 inch).
  - 4. Minimum slope 1:48 (1/4 inch per 12 inches).

## 2.3 INSULATION ACCESSORIES

- A. Vapor Retarder:
- 1. Glass-Fiber Felts: ASTM D2178, Type IV, asphalt impregnated.
  - 2. Self-Adhering Sheet Vapor Retarder: ASTM D1970, minimum of 1.0-mm- (40-mil-) thick, polyethylene film laminated to layer of rubberized asphalt adhesive, or 0.76- to 1.0-mm- (30- to 40-mil-) thick, polyethylene film laminated to layer of butyl rubber adhesive; maximum permeance rating of 6 ng/Pa x s x sq. m (0.1 perm).
- B. Cover Board: High density polyisocyanurate.

## 2.4 FASTENERS

- A. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with FM Approvals 4470, designed for fastening substrate board to roof deck.
- B. Staples and Nails: ASTM F1667. Type as designated for item anchored and for substrate.

## PART 3 - EXECUTION

### 3.1 EXAMINATION

- A. Comply with requirements of Division 07 roofing section.

### **3.2 PREPARATION**

- A. Comply with requirements of Division 07 roofing section.

### **3.3 SUBSTRATE BOARD INSTALLATION**

- A. Fasten substrate board to top flanges of steel deck to resist uplift pressures according to roofing system manufacturers instructions and requirements of FM Approvals listing for specified roofing system.

### **3.4 VAPOR RETARDER INSTALLATION**

- A. General:
  - 1. Install continuous vapor retarder on roof decks where indicated.
  - 2. At vertical surfaces, turn up vapor retarder to top of insulation or base flashing.
  - 3. At all pipes, walls, and similar penetrations through vapor retarder, seal openings with roof cement to prevent moisture entry from below.
  - 4. Seal penetrations with roof cement.
- B. Steel Deck:
  - 1. Material and method of application of roofing systems used on metal decks shall meet the requirements of FM Approvals for Class I-A Insulated Steel Roof Deck.
  - 2. Attach substrate board and subsequent components to meet the requirements of FM Approval's "RoofNav" listing for specified system meeting Fire/Windstorm Classification indicated in Division 07 roofing section.
  - 3. Locate the long dimension edge joints to have solid bearing on top of decking ribs; do not cantilever over rib openings or flutes.

### **3.5 RIGID INSULATION INSTALLATION**

- A. Insulation Installation, General:
  - 1. Install roof insulation in accordance with roofing system manufacturer's written instructions.
  - 2. Install roof insulation in accordance with requirements of FM Approval's Listing for specified roofing system.
  - 3. Vapor Barrier: Where required by roofing system, install one lapped vapor barrier specified in Division 07 roofing section by mechanically fastening to roofing substrate prior to installation of insulation.
- B. Insulation Thickness:
  - 1. Thickness of roof insulation shown on drawings is nominal. Actual thickness shall provide the average thermal resistance "R" value of not less than that specified in Performance Requirements Article.
  - 2. Insulation on Metal Decks: Provide minimum thickness of insulation for metal decks recommended by the insulation manufacturer to span rib opening (flute size) of metal deck used. Support edges of insulation on metal deck ribs.
  - 3. When thickness of insulation to be used is more or less than that shown on the drawings, make adjustments in the alignment and location of roof drains, flashing, gravel stops, fascias and similar items at no additional cost to the Government.
  - 4. Where tapered insulation is used, the thickness of the insulation at high points and roof edges shall be as shown on the drawings; the thickness at the low point (drains) shall be not less than 38 mm (1-1/2 inches).

5. Use not less than two layers of insulation when insulation is 68 mm (2.7 inch) or more in thickness unless specified otherwise. Stagger joints minimum 150 mm (6 inches).
- C. Lay insulating units with close joints, in regular courses and with cross joints broken. When laid in more than one layer, break joints of succeeding layers of roof insulation with those in preceding layer.
- D. Lay units with long dimension perpendicular to the rolled (longitudinal) direction of the roofing felt.
- E. Seal all cut edges at penetrations and at edges against blocking with bitumen or roof cement.
- F. Cut to fit tight against blocking or penetrations.
- G. Cover all insulation installed on the same day; comply with temporary protection requirements of Division 07 roofing section.
- H. Installation Method:
  1. Adhered Insulation:
    - a. Prime substrate as required.
    - b. Set each layer of insulation firmly in solid mopping of hot asphalt.
    - c. Set each layer of insulation firmly in ribbons of bead-applied insulation adhesive.
    - d. Set each layer of insulation firmly in uniform application of full-spread insulation adhesive.
  2. Mechanically Fastened Insulation:
    - a. Fasten insulation in accordance with FM Approval's "RoofNav" requirement in Division 07 roofing section.
    - b. Fasten insulation to resist uplift pressures specified in Division 07 roofing section.
  3. Mechanically Fastened and Adhered Insulation:
    - a. Fasten first layer of insulation according to "Mechanically Fastened Insulation" requirements.
    - b. Fasten each subsequent layer of insulation according to "Adhered Insulation" requirements.
  4. Cover Board: Install cover boards over insulation with long joints in continuous straight lines with staggered end joints in accordance with "adhered insulation" requirements. Offset cover board joints from insulation joints minimum 150 mm (6 inches).

- - - E N D - - -

**SECTION 07 27 13**  
**SHEET AIR BARRIERS**

**PART 1 GENERAL**

**1.1 SECTION INCLUDES**

- A Work includes self-adhering membrane air & vapor barrier and accessory products.

**1.2 RELATED SECTIONS**

- A. Section 03 30 00 - Cast-In-Place Concrete
- B. Section 04 20 00 - Unit Masonry
- C. Section 07 21 13 - Thermal Insulation
- D. Section 07 54 23 - TPO Roofing
- E. Section 07 60 00 - Flashing and Sheet Metal
- F. Section 08 41 13 - Aluminum Framed Entrances and Storefronts
- G. Section 09 29 00 - Gypsum Board.

**1.3 REFERENCES**

- A. ASTM C 920 Standard Specification for Elastomeric Joint Sealants
- B. ASTM D 146 Standard Test Methods for Sampling and Testing Bitumen Saturated Felts and Woven Fabrics for Roofing and Waterproofing
- C. ASTM D 412 Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers - Tension
- D. ASTM D 570 Standard Test Method for Water Absorption of Plastics
- E. ASTM D 903 Standard Test Method for Peel and Stripping Strength of Adhesive Bonds
- F. ASTM D 1876 Standard Test Method for Peel Resistance of Adhesive
- G. ASTM E 96 Standard Test Methods for Water Vapor Transmission of Materials.
- H. ASTM E 154 Standard Test Methods for Water Vapor Retarders used in Contact with Earth under Concrete Slabs, on Walls or as Ground Cover
- I. ASTM E 283 Standard Test Method for Determining the Rate of Air Leakage Through Exterior Windows, Curtain Walls and Doors under Specified Pressure Differences across the Specimen
- J. ASTM E 330 Standard Test Method for the Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Pressure Difference
- K. ASTM E 331 Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure
- L. ASTM E 783 Standard Test Method for Field Measurement of Air Leakage Through Installed Exterior Windows and Doors
- M. ASTM E 1105 Standard Test Method for Field Determination of Water Penetration of Installed Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform or Cyclic Static Air Pressure Difference
- N. ASTM E 2178 Standard Test Method for Air Permeance of Building Materials

**1.4 PERFORMANCE REQUIREMENTS**

- A. Installed product and accessories constitute an air barrier assembly, which shall be air-tight, durable and continuous, as described in Commonwealth of Massachusetts Building Code requirements: 780 CMR Chapter 13, Paragraphs 1304.3.1 Air Barriers and 1304.3.2 Air Barrier Penetrations.
- B. Installed product and accessories shall exhibit no visible water leakage when tested per ASTM E 331 and shall perform as a liquid water drainage plane flashed to discharge to the exterior any incidental condensation or water penetration.

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION

- C. Installed product and accessories shall exhibit an air leakage rate not exceeding 0.02 L/s\*m<sup>2</sup> at 75 Pa (0.004 CFM/ft<sup>2</sup> at 1.57 PSF) according to ASTM E 283. Air leakage shall not exceed this rate while product and accessories remain soundly adhered after exposure to sustained and gust wind loading according to ASTM E 330.
- D. Installed product and accessories shall perform as a vapor barrier, installed on the predominantly warm side of the insulation.
- E. Product shall consist of nominal 0.040 inch (40 mils) thickness membrane consisting of smooth surfaced, cross-laminated high-density polyethylene (HDPE) film fully-coated with rubberized asphalt adhesive. Film shall be legibly imprinted with manufacturer's brand name, logo and contact information. Membrane shall be provided in rolls of various widths interleaved with disposable silicone release paper.
- F. Product shall meet the following requirements:

REQUIREMENT	RESULT	TEST METHOD
Air Permeance	Not more than 0.000 Liters per second per square meter of area at 75 Pa pressure differential	ASTM E-2178
Tensile Strength	Not less than 500 psi	ASTM D-412
Tensile Elongation	Not less than 1,000 percent	ASTM D-412
Puncture Resistance	Not less than 50 lb.	ASTM E 154
Low Temperature Flexibility	Unaffected at minus 25 degrees F, 0.063 inch mandrel	ASTM D 146
Peel Adhesion	Not less than 5 lb per inch of width on concrete prepared with contact adhesive	ASTM D 903
Lap Adhesion	Not less than 7.5 lb. per inch of width	ASTM D 1876
Water Vapor Permeance	Not more than 0.05 Perm	ASTM E-96, Method B
Water Absorption	Not more than 0.12 percent by weight	ASTM D 570

**1.5 SUBMITTALS**

- A. Provide submittals in accordance with Section 01 33 00
- B. At bid submission, provide evidence to the Architect of installer qualification by the air & vapor barrier manufacturer.
- C. Provide evidence of evaluation of product by the Air Barrier Association of America (ABAA).
- D. At bid submission, provide evidence of licensing and certification under the ABAA Quality Assurance Program.
- E. Shop drawings showing locations and extent of air & vapor barrier and details of all typical conditions.
- F. Manufacturer's technical data sheets and material safety data sheets for product and accessories.
- G. Manufacturer's installation instructions.
- H. Manufacturer's documentation of volatile organic compounds (VOC) content for product and accessories.
- I. Certification of compatibility by Manufacturer, listing all materials on the project with which the product and accessories may come into contact
- J. Sample of product minimum 6 inch by 6 inch size.

## **1.6 QUALITY ASSURANCE**

- A. Installer Qualifications:
  - 1. Shall be experienced in applying the same or similar materials and shall be specifically approved in writing by Manufacturer.
  - 2. Shall be licensed and certified to install Self-Adhering Sheet Membrane Air Barriers by the Air Barrier Association of America (ABAA)
- B. Single-Source Responsibility: Obtain products and accessories from single manufacturer.
- C. Product and accessories shall comply with all state and local regulations controlling use of volatile organic compounds (VOCs).
- D. Pre-Installation Meeting: Convene one week prior to commencing work of this section. Coordinate with COR
- E. Mock-Ups: Prior to installation apply product and accessories on mock-up to verify details under shop drawing submittals, to demonstrate tie-ins with adjoining construction and other termination conditions and to become familiar with properties of materials in application:
  - 1. Apply materials to approximately 8 ft x 8 ft in place construction in manner to exhibit compliance with project and manufacturer's requirements. Obtain COR approval before proceeding with installation.

## **1.7 DELIVERY, STORAGE AND HANDLING**

- A. Deliver materials to Project site in original packages with seals unbroken, labeled with manufacturer's name, product, lot number and directions for storage.
- B. Store materials in their original undamaged packages in a clean, dry, protected location and within temperature range required by Manufacturer.
- C. Avoid spillage. Immediately notify COR if spillage occurs and start clean up procedures. Clean spills and leave area as it was prior to spill.

## **1.8 WASTE MANAGEMENT AND DISPOSAL**

- A. Separate and recycle waste materials in accordance with applicable Division 1 requirements.
- B. Place materials defined as hazardous or toxic waste in designated containers.
- C. Ensure emptied containers are stored safely for disposal away from children.

## **1.9 PROJECT CONDITIONS**

- A. Do not apply product or Accessories during rain or accumulating snowfall.
- B. Apply product and accessories within approved ambient and substrate temperature range stated in Manufacturer's literature.
- C. Do not apply product or Accessories over incompatible materials.
- D. Observe safety and environmental measures indicated in Manufacturer's MSDS, and mandated by federal, state and local regulations.

## **PART 2 PRODUCTS**

### **2.1 PRODUCTS**

- A. Basis of Design: Products as manufactured by Carlisle Coatings & Waterproofing, Incorporated. 900 Hensley Lane, Wylie, TX 75098.
  - 1. Standard: CCW-705 Air & Vapor Barrier
- B. Accessories: Provide as manufactured by Carlisle Coatings & Waterproofing, Incorporated.

1. Detail Membrane: 40 mil thickness self-adhering flashing provided in rolls of various widths, select either:
    - a. CCW-705 Air & Vapor Barrier Strips
    - b. CCW-705 LT Air & Vapor Barrier Strips
  2. Contact Adhesive, select any:
    - a. CCW-702 or CCW-702 LV Solvent-Based
    - b. CCW-702 WB Water-Based
    - c. CAV-GRIP™ Aerosol Spray
  3. Mastic, select either:
    - a. LM 800 XL solvent-based synthetic rubber
    - b. CCW-704 solvent-based rubber-modified asphalt
  4. Fill Compound, select either:
    - a. CCW-703 V Modified polyurethane, 2-part
    - b. CCW-201 Polyurethane, 2-part
  5. Aerosol Insulation Adhesive: CAV-GRIP™
- C. Related Materials By Others
1. Joint Sealant, select either:
    - a. CCW-201 non-sag, 2-part polyurethane
    - b. Sealant approved by Manufacturer. Shall conform to ASTM C 920 Type 1 or 2, Grade NS, Class 25 or 50.
  2. Polyurethane Foam, approved by Manufacturer, select either:
    - a. 1-part, can dispense
    - b. 2-part
  3. Insulation Adhesive: select product approved by Manufacturer

### **PART 3 EXECUTION**

#### **3.1 EXAMINATION**

- A. Examine substrates, areas, and conditions affecting installation of the air & vapor barrier and accessory products for compliance with requirements. Verify that surfaces and conditions are suitable prior to commencing Work of this section. Do not proceed with installation until unsatisfactory conditions have been corrected.
- B. Concrete shall be cured for a minimum of seven days.
- C. Surfaces shall be sound, dry and free of oil, grease, dirt, excess mortar or other contaminants.
- D. Surfaces shall be supported and flush at joints without large voids or sharp protrusions.
- E. Masonry joints shall be struck flush and completely filled with mortar. Mortar droppings shall be removed from masonry ties and surfaces.
- F. Damaged or improperly-fastened sheathing shall be remedied to comply with building code and sheathing manufacturer's requirements.
- G. Inform COR of:
  1. Cracks in concrete and masonry.
  2. Gaps or obstructions such as steel beams, angles, plates and projections that cannot be spanned or covered by membrane.
  3. Anticipated problems applying products or accessories over substrate.

#### **3.2 SURFACE PREPARATION**

- A. Fill cracks, gaps and joints exceeding ¼ inch width with fill compound or joint sealant.
- B. Fill rough gaps around pipe, conduit and similar penetrations with mortar, non-shrink grout or Polyurethane Foam.

#### **3.3 INSTALLATION**

- A. Allow sealants used during surface preparation to cure fully before applying product.



- B. Apply contact adhesive to substrate according to manufacturer's instructions.
- C. Apply product to prepared surfaces according to manufacturer's instructions and drawings.
- D. Laps between adjacent pieces of sheet membrane shall be 2 inches or greater.
- E. Sheet membrane shall bear 3 inches minimum onto dissimilar substrates.
- F. Cut edges, penetrations, non-shingled laps and similar surface defects of installed product shall be sealed with mastic.

#### **3.4 SCHEDULE**

- A. Seal penetrations made through installed product according to Manufacturer's instructions and drawings.
- B. Through-wall flashing installed before or after product:
- C. Fenestration installed before or after product: provide air and water seal between fenestration and opaque wall according to Manufacturer's instructions and drawings.
- D. Board insulation installed after product: Attach with Aerosol Insulation Adhesive plus mechanical fasteners or with insulation adhesive by others. Seal board joints in accordance with insulation manufacturer's instructions.
- E. Roof air barrier: join to product according to Manufacturer's instructions and drawings.

#### **3.5 REPAIR AND PROTECTION**

- A. Protect from damage during application and remainder of construction period.
- B. Inspect before covering. Repair or replace damaged material according to Manufacturer's instructions and drawings.
- C. Product and accessories are not designed for permanent exposure. Cover with insulation or exterior cladding as soon as schedule allows.
- D. Outdoor exposure of installed product shall not exceed 60 days.

- - - E N D - - -

**SECTION 07 40 00**  
**ROOFING AND SIDING PANELS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

A. This section specifies insulated metal wall panels as shown.

**1.2 RELATED WORK**

A. Sealant: Section 07 92 00, JOINT SEALANTS.

**1.3 MANUFACTURER'S QUALIFICATIONS**

A. Metal wall panels shall be products of a manufacturer regularly engaged in the fabrication and erection of metal panels of the type and design shown and specified.

**1.5 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples: Metal panel, 150 mm (six inch) square, showing finish, each color and texture options from manufacturer's standard options for selection by Owner.
- C. Shop Drawings: Wall panels, showing details of construction and installation with U value, thickness and kind of materials, closures, flashing, fastenings and related components and accessories.
- D. Manufacturer's Literature and Data: Wall panels
- E. Fire Test Report: Report of fire test by recognized testing laboratory for fire rating specified, showing details of construction.

**1.6 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A653/A653M-10 ..... Steel Sheet, Zinc-Coated (Galvanized), or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
  - A463-10 ..... Steel Sheet, Cold-Rolled, Aluminum-Coated, by the Hot-Dip Process
  - A924/A924M-10 ..... Steel Sheet, Metallic Coated by the Hot-Dip Process
  - A1008/A1008M-10 ..... Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy
  - B209/209M-07 ..... Aluminum and Aluminum Alloy Sheet and Plate
  - C1396-11 ..... Standard Specification for Gypsum Board
  - C553-08 ..... Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications
  - C591-09 ..... Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation
  - C612-10 ..... Mineral Fiber Block and Board Thermal Insulation
  - E119-10 ..... Fire Test of Building Construction and Materials

**PART 2 - PRODUCTS**

**2.1 MANUFACTURER**

- A. Drawings and specifications are based on Centria Formawall 2" thick vertical flat wall panels with manufacturer's PVDF "Sundance" MICA coating. Equal products by other manufacturers will be considered if submitted for review and approval in accordance with Division 0 bid requirements.
1. Surface Finish: Smooth Flat
  2. Coating: Metallic, selected from manufacturer's standards.
  3. Flashing by Manufacturer: To match panel finish

**2.1 SHEET STEEL**

- A. Steel, Sheet, Galvanized: ASTM A653/A653M, Structural.
1. Grade 40, galvanized coating conforming to ASTM A924/A924M, Class Z 275 G-90.
  2. 22 ga exterior face, 26 ga back face.

**2.3 FASTENERS**

- A. Fasteners for steel panels shall be stainless steel or cadmium plated steel and shall be as approved by manufacturer for installations indicated.

**2.5 THERMAL INSULATING MATERIALS**

- A. Polyisocyanurate foam.

**2.6 FABRICATION**

- A. Insulated metal wall panels shall consist of an insulating core enclosed between two metal face sheets, of configuration shown on drawings. Construct panels by pressing members together to form a structural unit with closed ends. Furnish Wall panels in one continuous length for full height with no horizontal joints, except as shown.. Overall thickness of panels is shown on drawings. Connection between panels shall be by interlocking male and female joints. Work shall include collateral steel framing, fastenings, flashing, clip, caulking, and related components and accessories.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

- A. General: Install panels in accordance with the manufacturer's approved erection instructions and diagrams, except as specified otherwise. Panels shall be in full and firm contact with supports and with each other at side and end laps. Where panels are cut in the field, or where any of the factory applied coverings or coatings are abraded or damaged in handling or installation, they shall, after the necessary repairs have been made with material of the same type and color as the weather coating, be approved before being installed. All cut ends and edges, including those at openings through the sheets shall be sealed completely. Correct defects or errors in the materials in an approved manner. Replace materials that cannot be corrected in an approved manner with nondefective material. Provide molded closure strips where indicated and whenever sheets terminate with open ends after installation.
- B. Wall Panels: Apply panels with the configuration in a vertical position. Provide panels in full heights from base to cap with no horizontal joints except at the junctions of door frames, window

frames, louver panels, at similar locations and as shown. Seal side and end laps with joint sealing material. Flash and seal walls at the base, at the top, around windows, door frames, framed louvers, and other similar openings. Install closure strips, flashings, and sealing material in an approved manner that will assure complete weather tightness. Flashing will not be required where approved "self-flashing" panels are used.

- C. Flashing: All flashing and related closures and accessories in connection with the preformed metal panels shall be provided as indicated and as necessary to provide a watertight installation. Details of installation, which are not indicated, shall be in accordance with the panel manufacturer's printed instruction and details, or the approved shop drawings. Installation shall allow for expansion and contraction of flashing.
- D. Fasteners: Fastener spacings shall be in accordance with the manufacturer's recommendations, and as necessary to withstand the design loads indicated. Install fasteners in valleys or crowns as recommended by the manufacturer of the sheet being used. Install fasteners in straight lines within a tolerance of 13 mm (1/2-inch) in the length of a bay. Drive exposed penetrating type fasteners normal to the surface, and to a uniform depth to seat gasketed washers properly, and drive so as not to damage factory applied coating. Exercise extreme care in drilling pilot holes for fastenings to keep drills perpendicular and centered in valleys, or crowns, as applicable. After drilling, remove metal filings and burrs from holes prior to installing fasteners and washers. Torque used in applying fasteners shall not exceed that recommended by the manufacturer. Remove panels deformed or otherwise damaged by over-torqued fastenings, and provide new panels. Remove metal shavings and filings from roofs on completion to prevent rusting and discoloration of the panels.

### 3.3 PROTECTION AND CLEANING

- A. Protect panels and other components from damage during and after erection, and until project is accepted by the Government.
- B. After completion of work, all exposed finished surfaces of panels shall be cleaned of soil, discoloration and disfiguration. Touch-up abraded surfaces of panels.
- C. Repair damaged or marred finishes or panels in manner that will eliminate all evidence of repair. Replace any panels that cannot be satisfactorily repaired.

- - - E N D - - -

**SECTION 07 54 23**  
**THERMOPLASTIC POLYOLEFIN (TPO) ROOFING**

**PART 1 GENERAL**

**1.1 DESCRIPTION**

- A. Fully adhered Thermoplastic Polyolefin (TPO) sheet roofing.

**1.2 RELATED WORK**

- A. General sustainable design documentation requirements: Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS.
- B. Treated wood framing, blocking, and nailers: Section 06 10 00, ROUGH CARPENTRY
- C. Roof Insulation: Section 07 22 00, ROOF AND DECK INSULATION.
- D. Sheet metal components and wind uplift requirements for roof-edge design: Section 07 60 00, FLASHING AND SHEET METAL.
- E. Miscellaneous items: Section 07 72 00, ROOF ACCESSORIES.

**1.3 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):  
ANSI/SPRI ES-1-03.....Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems.
- C. American Society of Civil Engineers/Structural Engineering Institute (ASCE/SEI):  
ASCE/SEI-7-10.....Minimum Design Loads for Buildings and Other Structures
- D. ASTM International (ASTM):  
C67-09.....Standard Test Methods for Sampling and Testing Brick and Structural Clay Tile  
C140-09.....Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units  
C1371-04.....Standard Test Method for Determination of Emittance of Materials Near Room Temperature Using Portable Emitters  
C1549-04.....Standard Test Method for Determination of Solar Reflectance Near Ambient Temperature Using a Portable Solar Reflectometer  
D4263.....Standard Test Method for Indicating Moisture in Concrete by the Plastic Sheet Method  
D4434-06.....Standard Specification for Poly (Vinyl Chloride) Sheet Roofing  
D6878-08.....Standard Specification for Thermoplastic Polyolefin Based Sheet Roofing  
E108-10.....Standard Test Methods for Fire Tests of Roof Coverings  
E408-71(R2008).....Standard Test Methods for Total Normal Emittance of Surfaces Using Inspection-Meter Techniques  
E1918-06.....Standard Test Method for Measuring Solar Reflectance of Horizontal and Low-Sloped Surfaces in the Field  
E1980-01.....Standard Test Method for Measuring Solar Reflectance of Horizontal and Low-Sloped Surfaces in the Field

- E. American Society of Heating, Refrigeration, and Air Conditioning Engineers (ASHRAE)  
ASHRAE 90.1-2007.....Energy Standard for Buildings Except Low-Rise Residential Buildings, Appendix f.
- F. Cool Roof Rating Council:  
CRRC-1.....Product Rating Program, [www.coolroofs.org](http://www.coolroofs.org)
- G. FM Approvals: RoofNav Approved Roofing Assemblies and Products.  
4450-89.....Approved Standard for Class 1 Insulated Steel Deck Roofs  
4470-10.....Approved Standard for Class 1 Roof Coverings  
1-28-09.....Loss Prevention Data Sheet: Design Wind Loads.  
1-29-09.....Loss Prevention Data Sheet: Above-Deck Roof Components  
1-49-09.....Loss Prevention Data Sheet: Perimeter Flashing
- H. National Roofing Contractors Association: Roofing and Waterproofing Manual
- I. U.S. Department of Agriculture (USDA): USDA BioPreferred Catalog, [www.biopreferred.gov](http://www.biopreferred.gov)
- J. U.S. Department of Energy (DoE): Roof Products Qualified Product List, [www.energystar.gov](http://www.energystar.gov)

#### 1.4 PERFORMANCE REQUIREMENTS

- A. Material Compatibility: Provide roofing materials that are compatible with one another under conditions of service and application required, as demonstrated by membrane roofing manufacturer based on testing and field experience.
- B. Roofing System Energy Performance Requirements: Provide a roofing system identical to components that that have been successfully tested by a qualified independent testing and inspecting agency to meet the following requirements:
  - 1. Energy Performance, Energy Star: Provide roofing system that is listed on DOE's ENERGY STAR "Roof Products Qualified Product List" for low-slope roof products.
  - 2. Energy Performance, Aged: Provide roofing system with minimum three-year aged solar reflectance not less than 0.55 when tested in accordance with ASTM C1549 or ASTM E1918, and in addition, a minimum three-year-aged thermal emittance of 0.75 when tested in accordance with ASTM C1371 or ASTM E408.
    - a. Where tested aged values are not available for proposed product, submit calculations to adjust initial solar reflectance to demonstrate compliance as indicated in ASHRAE 90.1-2007 Addendum f.
    - b. Alternatively, provide roofing system with minimum three-year aged Solar Reflectance Index of not less than 64 when determined in accordance with the Solar Reflectance Index method in ASTM E1980 using a convection coefficient of 2.1 BTU/h-ft<sup>2</sup> (12 W/m<sup>2</sup>K).

#### 1.5 QUALITY CONTROL

- A. Installer Qualifications:
  - 1. Licensed or approved in writing by manufacturer to perform work under warranty requirements of this Section.
  - 2. Employ full-time supervisors knowledgeable and experienced in roofing of similar types and scopes, and able to communicate with owner and workers.
- B. Inspector Qualifications: Inspection of work by third-party technical inspector or technical representative of manufacturer experienced in the installation and maintenance of the specified roofing system, qualified to perform roofing observation and inspection specified in Field Quality Control Article, to determine Installer's compliance with the

requirements of this Project, and approved by the manufacturer to issue warranty certification. The Roofing Inspector shall be one of the following:

1. An authorized full-time technical employee of the manufacturer, not engaged in the sale of products.
  2. An independent party certified as a Registered Roof Observer by the Roof Consultants Institute (RCI), retained by the Contractor or the Manufacturer and approved by the Manufacturer.
- C. Product/Material Requirements: Obtain products from single manufacturer or from sources recommended by manufacturer for use with roofing system and incorporated in manufacturer's warranty.
- D. Roofing system design standard requirements:
1. Recommendations of the NRCA "Roofing and Waterproofing Manual" applicable to sheet roofing for storage, handling and application.
  2. Recommendations of FM Approvals 1-49 Loss Prevention Data Sheet for Perimeter Flashings.
  3. Recommendations of ANSI/SPRI ES-1 for roof edge design.
  4. Roofing System Design: Provide roofing system that is identical to systems that have been successfully tested by a qualified testing and inspecting agency to resist uplift pressure calculated according to ASCE/SEI 7 as may be required by applicable Code.
  5. FM Approvals Listing: Provide roofing membrane, base flashing, and component materials that comply with requirements in FM Approvals 4450 and FM Approvals 4470 as part of a roofing system and that are listed in FM Approvals "RoofNav" for Class 1 or noncombustible construction, as applicable. Identify materials with FM Approvals markings.
    - a. Fire/Windstorm Classification: Class 1A-90.
    - b. Hail Resistance: SH.
  6. High Wind Zone Design Requirement: Contractor Option: In lieu of FM Approval Listing windstorm classification, provide roofing membrane, base flashing, and component materials that comply with Miami-Dade County, Florida requirements.
- E. Pre-Roofing Meeting:
1. Upon completion of roof deck installation and prior to any roofing application, hold a pre-roofing meeting arranged by the Contractor and attended by the Roofing Inspector, Material Manufacturers Technical Representative, Roofing Applicator, Contractor, and COR.
  2. Discuss specific expectations and responsibilities, construction procedures, specification requirements, application, environmental conditions, job and surface readiness, material storage, and protection.
  3. Inspect roof deck at this time to:
    - a. Verify that work of other trades that penetrate the roof deck is completed.
    - b. Determine adequacy of deck anchorage, presence of foreign material, moisture and unlevel surfaces, or other conditions that would prevent application of roofing system from commencing or cause a roof failure.
    - c. Review samples and installation instructions of manufacturer.

#### 1.6 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, SAMPLES.
- B. Product Data:
  1. Adhesive materials.
  2. Membrane sheet roofing and flashing membrane.
  3. Roofing cement.
  4. Roof walkway.

5. Fastening requirements.
6. Application instructions.
- D. Samples: Membrane and fasteners, each type.
- E. Shop Drawings: Include plans, sections, details, and attachments.
  1. Base flashings and terminations.
- F. Certificates:
  1. Indicating materials and method of application of roofing system meets requirements of FM Approvals "RoofNav" for specified fire/windstorm classification.
  2. Indicating compliance with energy performance requirement.
- G. Warranty: As specified.
- H. Documentation of supervisors' and inspectors' qualifications.
- I. Field reports of roofing inspector.
- J. Contract Close-out Submittals:
  1. Maintenance Manuals.
  2. Warranty signed by installer and manufacturer.

#### **1.7 DELIVERY, STORAGE AND HANDLING**

- A. Comply with the recommendations of the NRCA "Roofing and Waterproofing Manual" applicable to single ply membrane roofing for storage, handling and installation.
- B. Comply with the manufacturer's written instructions for proper material storage.
  1. Store roofing membrane in the original undisturbed in cool, shaded area. Discard materials that have degraded due to exposure.
  2. Store adhesives and sealants between 60°F and 80°F in dry areas protected from water and direct sunlight. If exposed to lower temperature, restore to 60°F minimum temperature before using.
  3. Store materials containing solvents in dry, well-ventilated spaces with proper fire and safety precautions. Keep lids on tight. Use before expiration of their shelf life.

#### **1.8 ENVIRONMENTAL REQUIREMENTS**

- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit roofing system to be installed according to manufacturer's written instructions and warranty requirements.
- B. Protection of interior spaces: Refer to Section 01 00 00, GENERAL REQUIREMENTS.

#### **1.9 WARRANTY**

- A. Roofing work subject to the terms of the Article "Warranty of Construction," FAR clause 52.246-21, except extend the warranty period to 10 years.

#### **1.10 JOB CONDITIONS, CAUTIONS AND WARNINGS**

- A. Material Safety Data Sheets (MSDS) must be on location at all times during the transportation, storage and application of materials.
- B. When positioning membrane sheets, exercise care to locate all field splices away from low spots and out of drain sumps. All field splices should be shingled to prevent bucking of water.
- C. When loading materials onto the roof, prevent overloading and possible damage to structure.
- D. Proceed with roofing work only when weather conditions are in compliance with the manufacturer's recommended limitations, and when conditions will permit the work to proceed in accordance with the manufacturer's requirements and recommendations.



- E. Proceed with work so new roofing materials are not subject to construction traffic. When necessary, new roof sections shall be protected and inspected upon completion for possible damage.
- F. Provide protection, such as 3/4 inch thick plywood, for all roof areas exposed to traffic during construction. Protection must be smooth and free of fasteners and splinters.
- G. The surface on which the insulation or roofing membrane is to be applied shall be clean, smooth, dry, and free of projections or contaminants that would prevent proper application of or be incompatible with the new installation, such as fins, sharp edges, foreign materials, oil and grease.
- H. New roofing shall be complete and weather tight at the end of the work day.
- I. Contaminants such as grease, fats and oils shall not be allowed to come in direct contact with the roofing membrane.

## **PART 2 - PRODUCTS**

### **2.1 TPO MEMBRANE ROOFING**

- A. TPO Sheet: ASTM D6878, internally fabric or scrim reinforced, 1.5 mm (60 mils) thick, with no backing.
  - 1. Color: White.

### **2.2 ACCESSORIES:**

- A. Sheet Flashing: Manufacturer's standard sheet flashing of same material, type, reinforcement, thickness, and color as TPO sheet membrane.
- B. Bonding Adhesive: Manufacturer's standard, water based.
- C. Metal Termination Bars: Manufacturer's standard, predrilled stainless-steel or aluminum bars, approximately 25 by 3 mm (1 by 1/8 inch) thick; with anchors.
- D. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with FM Approvals 4470, designed for fastening membrane to substrate.
- E. Flexible Walkways: Factory-formed, nonporous, heavy-duty, slip-resisting, surface-textured walkway pads, approximately 5 mm (3/16 inch) thick, and acceptable to membrane roofing system manufacturer.
- F. Miscellaneous Accessories: Provide sealers, preformed flashings, preformed inside and outside corner sheet flashings, T-joint covers, lap sealants, termination reglets, and other accessories acceptable to manufacturer.

### **2.3 ADHESIVE AND SEALANT MATERIALS:**

- A. General: Adhesive and sealant materials recommended by roofing system manufacturer for intended use, identical to materials utilized in approved listed roofing system, and compatible with roofing membrane.
  - 1. Liquid-type auxiliary materials shall comply with VOC limits of authorities having jurisdiction.

## **PART 3 - EXECUTION**

### **3.1 EXAMINATION:**

- A. Examine substrates and conditions with roofing Installer and roofing inspector to verify compliance with project requirements and suitability to accept subsequent roofing work. Correct unsatisfactory conditions before proceeding with roofing work.

- B. Do not apply roofing if roof surface will be used for subsequent work platform, storage of materials, or staging or scaffolding will be erected thereon unless system is protected.

### 3.2 PREPARATION

- A. Complete roof deck construction prior to commencing roofing work:
  - 1. Install curbs, blocking, edge strips, nailers, cants, and other components where insulation, roofing, and base flashing is attached to, in place ready to receive insulation and roofing.
  - 2. Complete deck and insulation to provide designed drainage to working roof drains.
  - 3. Document installation of related materials to be concealed prior to installing roofing work.
- B. Dry out surfaces, including the flutes of metal deck that become wet from any cause during progress of the work before roofing work is resumed. Apply materials to dry substrates.
- C. Sweep decks to broom clean condition. Remove all dust, dirt or debris.
- D. Remove projections that might damage materials.

### 3.3 TEMPORARY PROTECTION

- A. Install temporary protection at the end of day's work and when work is halted for an indefinite period or work is stopped when precipitation is imminent. Comply with approved temporary protection plan.
- B. Install temporary cap flashing over the top of base flashings where permanent flashings are not in place to provide protection against moisture entering the roof system through or behind the base flashing. Securely anchor in place to prevent blow off and damage by construction activities.
- C. Provide for removal of water or drainage of water away from the work.
- D. Provide temporary protection over installed roofing by means of duckboard walkways, plywood platforms, or other materials, as approved by COR, for roof areas that are to remain intact, and that are subject to foot traffic and damage. Provide notches in sleepers to permit free drainage.

### 3.4 INSTALLATION, GENERAL

- A. FM Approvals Installation Standard: Install roofing membrane, base flashings, wood cants, blocking, curbs, and nailers, and component materials in compliance with requirements in FMG 4450 and FMG 4470 as part of a membrane roofing system as listed in FM Approval's "RoofNav" for fire/windstorm classification indicated. Comply with recommendations in FM Approvals' Loss Prevention Data Sheet 1-49, including requirements for wood nailers and cants.
- B. NRCA Installation Standard: Install roofing system in accordance with applicable NRCA Manual Plates and NRCA recommendations.
- C. Manufacturer Recommendations: Comply with roofing system manufacturer's written installation recommendations.
- D. Coordination with related work: Coordinate roof operations with roof insulation and sheet metal work so that insulation and flashings are installed concurrently to permit continuous roofing operations.
- E. Installation Conditions:
  - 1. Apply dry roofing materials. Apply roofing work over dry substrates and materials.
  - 2. Apply materials within temperature range and surface and ambient conditions recommended by manufacturer.
  - 3. Except for temporary protection, do not apply materials during damp or rainy weather, during excessive wind conditions, nor while moisture (dew, snow, ice, fog or frost) is present in any amount in or on the materials to be covered or installed:

- a. Do not apply materials when the temperature is below 4 deg. C (40 deg. F).
- b. Do not apply materials to substrate having temperature of 4 deg. C (40 deg. F) or less.

### 3.5 INSTALLATION OF TPO ROOFING

- A. Do not allow the membrane to come in contact with surfaces contaminated with asphalt, coal tar, oil, grease, or other substances which are not compatible with TPO.
- B. Install the membrane so the sheets run perpendicular to the long dimension of the insulation boards.
- C. Commence installation at the low point of the roof and work towards the high point. Lap the sheets so the flow of water is not against the edges of the sheet.
- D. Position the membrane so it is free of buckles and wrinkles.
- E. Roll sheet out on deck; inspect for defects as being rolled out and remove defective areas. Allow for relaxing before proceeding.
  1. Lap edges and ends of sheets 50 mm (two inches) or more as recommended by the manufacturer.
  2. Heat weld laps. Apply pressure as required. Seam strength of laps as required by ASTM D4434.
  3. Check seams to ensure continuous adhesion and correct defects.
  4. Finish edges of laps with a continuous beveled bead of sealant to sheet edges to provide smooth transition.
  5. Finish seams as the membrane is being installed (same day).
  6. Anchor perimeter to deck or wall as specified.
- F. Repair areas of welded seams where samples have been taken or marginal welds, bond voids, or skips occurs.
- G. Repair fishmouths and wrinkles by cutting to lay flat and installing patch over cut area extending 100 mm (four-inches) beyond cut.
- H. Membrane Perimeter Anchorage:
  1. Install metal fastening strip at the perimeter of each roof level, curb flashing, expansion joints and similar penetrations as indicated and in accordance with membrane manufacturer's instructions on top of roof membrane to deck or wall.
  2. Mechanically Fastened Metal Fastening Strip:
    - a. Set top of mechanical fastener set flush with top surface of the metal fastening strip. Space mechanical fasteners a maximum 300 mm (12 inches) on center starting 25 mm (one inch) from the end of the nailing strip.
    - b. When strips are cut round corners and eliminate sharp corners.
    - c. After mechanically fastening strip cover and seal strip with a six-inch wide roof membrane strip; heat weld to roof membrane and seal edges.
    - d. At roof edge metal, turn the membrane down over the front edge of the blocking or the nailer to below blocking. Secure the membrane to the vertical portion of the nailer; or, if required by the membrane manufacturer with fasteners spaced not over 300 mm (12 inches) on centers.
    - e. At parapet walls, intersecting building walls and curbs, secure the membrane to the structural deck with fasteners 300 mm (12 inches) on centers or as shown on NRCA manual.
- I. Adhered System:
  1. Apply adhesive in quantities required by roof membrane manufacturer.
  2. Fold sheet back on itself after rolling out and coat the bottom side of the membrane and the top of the deck with adhesive. Do not coat the lap joint area.

3. After adhesive has set according to adhesive manufacturers application instruction, roll the membrane into the adhesive in a manner that minimizes voids and wrinkles.
4. Repeat for other half of sheet. Cut voids and wrinkles to lay flat and clean for repair patch over cut area.

### **3.6 INSTALLATION OF FLASHING**

- A. Install flashings as the membrane is being installed. If the flashing cannot be completely installed in one day, complete the installation until the flashing is in a watertight condition and provide temporary covers or seals.
- B. Flashing Roof Drains:
  1. Install roof drain flashing as recommended by the membrane manufacturer, generally as follows:
    - a. Coordinate to set the metal drain flashing in asphalt roof cement, holding cement back from the edge of the metal flange.
    - b. Do not allow the roof cement to come in contact with the TPO roof membrane.
    - c. Adhere the TPO roof membrane to the metal flashing with the membrane manufacturer's recommended adhesive.
  2. Turn down the metal drain flashing and TPO roof membrane into the drain body and install clamping ring and strainer.
- C. Installing TPO Base Flashing and Pipe Flashing:
  1. Install TPO flashing membranes to pipes, wall or curbs to a height not less than eight-inches above roof surfaces and 100 mm (four inches) on roof membrane.
    - a. Adhere flashing to pipe, wall or curb with adhesive.
    - b. Form inside and outside corners of TPO flashing membrane in accordance with NRCA manual. Form pipe flashing in accordance with NRCA manual use pipe boot.
    - c. Lap ends not less than 100 mm (four inches).
    - d. Heat weld flashing membranes together and flashing membranes to roof membranes. Finish exposed edges with sealant as specified.
    - e. Install flashing membranes in accordance with NRCA manual.
  2. Anchor top of flashing to walls or curbs with fasteners spaced not over 200 mm (eight inches) on centers. Use fastening strip on ducts. Use pipe clamps on pipes or other round penetrations.
  3. Apply sealant to top edge of flashing.
- D. Installing Building Expansion Joints:
  1. Install base flashing on curbs as specified.
  2. Coordinate installation with metal expansion joint cover or roof expansion joint system.
  2. Install flexible tubing 1-1/2 times width of joint over joint. Cover tubing with TPO flashing strip adhered to base flashing and lapping base flashing 100 mm (four inches). Finish edges of laps with sealants as specified.
- E. Repairs to membrane and flashings:
  1. Remove sections of TPO sheet roofing or flashing that is creased wrinkled or fishmouthed.
  2. Cover removed areas, cuts and damaged areas with a patch extending 100 mm (four inches) beyond damaged, cut, or removed area. Heat weld to roof membrane or flashing. Finish edge of lap with sealant as specified.

### **3.7 FLEXIBLE WALKWAYS**

- A. Use reinforced sheet not less than 900 mm (three feet) wide.
- B. Heat weld walkway sheet to roof sheet at edges. Weld area 50 mm (two inches) wide by the entire length of the walkway sheet.
- C. Finish edges of laps with sealants as specified.

**3.8 FIELD QUALITY CONTROL:**

- A. Roofing Inspector: Contractor shall engage a qualified roofing inspector for a minimum of 5 full-time days on site to perform roof tests and inspections and to prepare start up, interim, and final reports.
  - 1. Examine and probe seams in the membrane and flashing in the presence of COR and Membrane Manufacturer's Inspector.
  - 2. Probe edge of welded seams with a blunt tipped instrument. Use sufficient hand pressure to detect marginal welds, voids, skips, and fishmouths.
- B. Final Roof Inspection: Arrange for roofing system manufacturer's technical personnel to inspect roofing installation on completion.
  - 1. Notify Architect and Owner 48 hours in advance of date and time of inspection.
- C. Repair or remove and replace components of roofing work where test results or inspections indicate that they do not comply with specified requirements.
  - 1. Additional testing and inspecting, at Contractor's expense, will be performed to determine if replaced or additional work complies with specified requirements.

**3.10 PROTECTING AND CLEANING**

- A. Protect membrane roofing system from damage and wear during remainder of construction period.
- B. Correct deficiencies in or remove membrane roofing system that does not comply with requirements; repair substrates; and repair or reinstall membrane roofing system to a condition free of damage and deterioration at time of acceptance by Owner.
- C. Clean overspray and spillage from adjacent construction. Clean membrane and restore surface to like-new condition meeting solar reflectance requirements.

- - - E N D - - -

**SECTION 07 60 00**  
**FLASHING AND SHEET METAL**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Formed sheet metal work for wall and roof flashing, copings, roof edge metal, fasciae and drainage specialties are specified in this section.

**1.2 RELATED WORK**

- A. Manufactured flashing, copings, roof edge metal, and fasciae: Section 07 71 00 ROOF SPECIALTIES.
- B. Metal wall panels, SECTION 07 40 00 - ROOFING AND SIDING PANELS
- C. Membrane base flashings and stripping: SECTION 07 54 23 - THERMOPLASTIC POLYOLEFIN (TPO) ROOFING
- D. Joint Sealants: Section 07 92 00, JOINT SEALANTS.
- E. Integral flashing components of manufactured roof specialties and accessories or equipment: Section 07 72 00, ROOF ACCESSORIES, Division 22, PLUMBING sections and Division 23 HVAC sections.
- F. Paint materials and application: Section 09 91 00, PAINTING.
- G. Flashing of Roof Drains: Section 22 14 00, FACILITY STORM DRAINAGE .

**1.3 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. Aluminum Association (AA):
  - AA-C22A41.....Aluminum Chemically etched medium matte, with clear anodic coating, Class I Architectural, 0.7-mil thick
  - AA-C22A42.....Chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 0.7 mils thick
  - AA-C22A44.....Chemically etched medium matte with electrolytically deposited metallic compound, integrally colored coating Class I Architectural, 0.7-mil thick finish
- C. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):
  - ANSI/SPRI ES-1-03.....Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems
- D. American Architectural Manufacturers Association (AAMA):
  - AAMA 620.....Voluntary Specification for High Performance Organic Coatings on Coil Coated Architectural Aluminum
  - AAMA 621.....Voluntary Specification for High Performance Organic Coatings on Coil Coated Architectural Hot Dipped Galvanized (HDG) and Zinc-Aluminum Coated Steel Substrates
- E. ASTM International (ASTM):
  - A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

- A653/A653M-11.....Steel Sheet Zinc-Coated (Galvanized) or Zinc Alloy Coated (Galvanized) by the Hot- Dip Process
- B32-08.....Solder Metal
- B209-10.....Aluminum and Aluminum-Alloy Sheet and Plate
- B370-12..... Sheet and Strip for Building Construction
- D173-03(R2011).....Bitumen-Saturated Cotton Fabrics Used in Roofing and Waterproofing
- D412-06(R2013).....Vulcanized Rubber and Thermoplastic Elastomers-Tension
- D1187-97(R2011).....Asphalt Base Emulsions for Use as Protective Coatings for Metal
- D1784-11.....Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds
- D3656-07.....Insect Screening and Louver Cloth Woven from Vinyl-Coated Glass Yarns
- D4586-07.....Asphalt Roof Cement, Asbestos Free
- F. Sheet Metal and Air Conditioning Contractors National Association (SMACNA): Architectural Sheet Metal Manual.
- G. National Association of Architectural Metal Manufacturers (NAAMM): AMP 500-06.....Metal Finishes Manual
- H. Federal Specification (Fed. Spec):
  - A-A-1925A.....Shield, Expansion; (Nail Anchors)
  - UU-B-790A.....Building Paper, Vegetable Fiber
- I. International Code Commission (ICC): International Building Code, Current Edition

#### 1.4 PERFORMANCE REQUIREMENTS

- A. Wind Uplift Forces: Resist the following forces per FM Approvals 1-49 for wind zone applicable to project site.
- B. Wind Design Standard: Fabricate and install copings and roof-edge flashings tested per ANSI/SPRI ES-1 to resist design pressures required by Code.

#### 1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples: For prefinished items exposed to view, provide samples of manufacturer's full standard color and texture range for selection by Owner.
- C. Shop Drawings: For all specified items, including:
  - 1. Flashings
  - 2. Copings
  - 3. Gravel Stop-Fascia
  - 4. Gutter and Conductors
  - 5. Fascia-cant
- D. Manufacturer's Literature and Data: For all specified items, including:
  - 1. Two-piece counterflashing
  - 2. Nonreinforced, elastomeric sheeting
  - 3. Fascia-cant
- E. Certificates: Indicating compliance with specified finishing requirements, from applicator and contractor.

## **PART 2 - PRODUCTS**

### **2.1 COPINGS**

- A. Prefabricated, prefinished sheet metal, 24 ga., galvalume, Kynar finish, color as selected. Color to match metallic finish of metal wall panels.

### **2.2 MISCELLANEOUS FLASHING AND SHEET METAL MATERIALS**

- A. Galvanized Sheet: ASTM, A653.
- B. Nonreinforced, Elastomeric Sheeting: Elastomeric substances reduced to thermoplastic state and extruded into continuous homogenous sheet (0.056 inch) thick. Sheeting shall have not less than 7 MPa (1,000 psi) tensile strength and not more than seven percent tension-set at 50 percent elongation when tested in accordance with ASTM D412. Sheeting shall show no cracking or flaking when bent through 180 degrees over a 1 mm (1/32 inch) diameter mandrel and then bent at same point over same size mandrel in opposite direction through 360 degrees at temperature of -30°C (-20 °F).

### **2.3 FLASHING ACCESSORIES**

- A. Solder: ASTM B32; flux type and alloy composition as required for use with metals to be soldered.
- B. Rosin Paper: Fed-Spec. UU-B-790, Type I, Grade D, Style 1b, Rosin-sized sheathing paper, weighing approximately 3 Kg/10 m<sup>2</sup>( 6 lbs/100 sf).
- C. Bituminous Paint: ASTM D1187, Type I.
- D. Fasteners:
  - 1. Use , alloy, bronze, brass, or for and , and for and aluminum alloy. Use galvanized steel or stainless steel for galvanized steel.
  - 2. Nails:
    - a. Minimum diameter for aluminum nails 3 mm (0.105 inch).
    - b. Minimum diameter for stainless steel nails: 2 mm (0.095 inch) and annular threaded.
    - c. Length to provide not less than 22 mm (7/8 inch) penetration into anchorage.
  - 3. Rivets: Not less than 3 mm (1/8 inch) diameter.
  - 4. Expansion Shields: Fed Spec A-A-1925A.
- E. Sealant: As specified in Section 07 92 00, JOINT SEALANTS for exterior locations.
- G. Roof Cement: ASTM D4586.

### **2.4 SHEET METAL THICKNESS**

- A. Except as otherwise shown or specified use thickness or weight of sheet metal as follows:
- B. Concealed Locations (Built into Construction):
  - 4. Galvanized steel: 0.5 mm (0.021 inch) thick.
- D. Thickness of aluminum or galvanized steel is specified with each item.

### **2.5 FABRICATION, GENERAL**

- A. Jointing:
  - 1. In general joints shall be locked and soldered.
  - 2. Joints shall conform to following requirements:
    - a. Flat-lock joints shall finish not less than 19 mm (3/4 inch) wide.
    - b. Lap joints subject to stress shall finish not less than 25 mm (one inch) wide and shall be soldered and riveted.



- c. Unsoldered lap joints shall finish not less than 100 mm (4 inches) wide.
3. Flat and lap joints shall be made in direction of flow.
4. Edges of nonreinforced elastomeric sheeting shall be jointed by lapping not less than 100 mm (4 inches) in the direction of flow and cementing with asphalt roof cement or sealant as required by the manufacturer's printed instructions.
5. Soldering:
  - a. Pre tin both mating surfaces with solder for a width not less than 38 mm (1 1/2 inches).
  - b. Treat in accordance with metal producers recommendations other sheet metal required to be soldered.
  - c. Completely remove acid and flux after soldering is completed.
- B. Cleats:
  1. Fabricate cleats to secure flashings and sheet metal work over 300 mm (12 inches) wide and where specified.
  2. Provide cleats for maximum spacing of 300 mm (12 inch) centers unless specified otherwise.
  3. Form cleats of same metal and weights or thickness as the sheet metal being installed unless specified otherwise.
  4. Fabricate cleats from 50 mm (2 inch) wide strip. Form end with not less than 19 mm (3/4 inch) wide loose lock to item for anchorage. Form other end of length to receive nails free of item to be anchored and end edge to be folded over and cover nail heads.
- C. Edge Strips or Continuous Cleats:
  1. Fabricate continuous edge strips where shown and specified to secure loose edges of the sheet metal work.
  2. Use material compatible with sheet metal to be secured by the edge strip.
  3. Fabricate in 3000 mm (10 feet) maximum lengths with not less than 19 mm (3/4 inch) loose lock into metal secured by edge strip.
  4. Fabricate Strips for fascia anchorage to extend below the supporting wood construction to form a drip and to allow the flashing to be hooked over the lower edge at least 19 mm (3/4-inch).
- D. Drips:
  1. Form drips at lower edge of sheet metal counter-flashings (cap flashings), fascias, gravel stops, wall copings, by folding edge back 13 mm (1/2 inch) and bending out 45 degrees from vertical to carry water away from the wall.
  2. Form drip to provide hook to engage cleat or edge strip for fastening for not less than 19 mm (3/4 inch) loose lock where shown.
- E. Edges:
  1. Edges of flashings concealed in masonry joints opposite drain side shall be turned up 6 mm (1/4 inch) to form dam, unless otherwise specified or shown otherwise.
  2. Finish exposed edges of flashing with a 6 mm (1/4 inch) hem formed by folding edge of flashing back on itself when not hooked to edge strip or cleat. Use 6 mm (1/4 inch) minimum penetration beyond wall face with drip for through-wall flashing exposed edge.
- F. Metal Options:
  1. Where options are permitted for different metals use only one metal throughout.
  2. Stainless steel may be used in concealed locations for fasteners of other metals exposed to view.

## 2.6 FINISHES

- A. Use same finish on adjacent metal or components and exposed metal surfaces unless specified or shown otherwise.
- B. In accordance with NAAMM Metal Finishes Manual AMP 500, unless otherwise specified.
- C. Finish exposed metal surfaces as follows, unless specified otherwise:
  - 1. Aluminum:
    - a. Clear Finish: AA-C22A41 medium matte, clear anodic coating, Class 1 Architectural, 18 mm (0.7 mils) thick.
    - b. Colored Finish: AA-C22A42 (anodized) or AA-C22A44 (electrolytically deposited metallic compound) medium matte, integrally colored coating, Class 1 Architectural, 18 mm (0.7 mils) thick. Dyes will not be accepted.
    - c. Fluorocarbon Finish: AAMA 620, high performance organic coating.
    - d. Mill finish.
  - 2. Steel and Galvanized Steel:
    - a. Manufacturer's finish:
      - 1) Baked on prime coat over a phosphate coating.
      - 2) Baked-on prime and finish coat over a phosphate coating.
      - 3) Fluorocarbon Finish: AAMA 621, high performance organic coating.
- D. Window Sill Flashing and Lintel Flashing:
  - 1. Use either plane flat sheet, or nonreinforced elastomeric sheeting, bituminous coated, covered paper, or polyethylene coated.
  - 2. Fabricate flashing at ends with folded corners to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening.
  - 3. Form exposed portion with drip as specified or receiver.

## 2.7 BASE FLASHING

- A. Use metal base flashing at vertical surfaces intersecting built-up roofing without cant strips or where shown.
  - 1. Use stainless steel unless specified otherwise.
  - 2. When flashing is over 250 mm (10 inches) in vertical height or horizontal width use either 0.5 Kg (20 oz) or 0.5 mm (0.018 inch).
  - 3. Use stainless steel at aluminum roof curbs where flashing contacts the aluminum.
  - 4. Use stainless steel at pipe flashings.
- B. Fabricate metal base flashing up vertical surfaces not less than 200 mm (8 inch) nor more than 400 mm (16 inch).
- C. Fabricate roof flange not less than 100 mm (4 inches) wide unless shown otherwise. When base flashing length exceeds 2400 mm (8 feet) form flange edge with 13 mm (1/2 inch) hem to receive cleats.
- D. Form base flashing bent from strip except pipe flashing. Fabricate ends for riveted soldered lap seam joints. Fabricate expansion joint ends as specified.
- E. Pipe Flashing: (Other than engine exhaust or flue stack)
  - 1. Fabricate roof flange not less than 100 mm (4 inches) beyond sleeve on all sides.
  - 2. Extend sleeve up and around pipe and flange out at bottom not less than 13 mm (1/2 inch) and solder to flange and sleeve seam to make watertight.
  - 3. At low pipes 200 mm (8 inch) to 450 mm (18 inch) above roof:
    - a. Form top of sleeve to turn down into the pipe at least 25 mm (one inch).
    - b. Allow for loose fit around and into the pipe.

4. At high pipes and pipes with goosenecks or other obstructions which would prevent turning the flashing down into the pipe:
  - a. Extend sleeve up not less than 300 mm (12 inch) above roofing.
  - b. Allow for loose fit around pipe.

## 2.7 COUNTERFLASHING

- A. Fabricate to lap base flashing a minimum of 100 mm (4 inches) with drip:
  1. Form lock seams for outside corners. Allow for lap joints at ends and inside corners.
  2. In general, form flashing in lengths not less than 2400 mm (8 feet) and not more than 3000 mm (10 feet).
  3. Two-piece, lock in type flashing may be used in-lieu-of one piece counter-flashing.
  4. Manufactured assemblies may be used.
  5. Where counterflashing is installed at new work use an integral flange at the top designed to be extended into the masonry joint or reglet in concrete.
  6. Where counterflashing is installed at existing work use surface applied type, formed to provide a space for the application of sealant at the top edge.
- B. One-piece Counterflashing:
  1. Back edge turned up and fabricate to lock into reglet in concrete.
  2. Upper edge formed to extend full depth of masonry unit in mortar joint with back edge turned up 6 mm (1/4 inch).
- C. Two-Piece Counterflashing:
  1. Receiver to extend into masonry wall depth of masonry unit with back edge turned up 6 mm (1/4 inch) and exposed edge designed to receive and lock counterflashing upper edge when inserted.
  2. Counterflashing upper edge designed to snap lock into receiver.
- D. Surface Mounted Counterflashing; one or two piece:
  1. Use at existing or new surfaces where flashing can not be inserted in vertical surface.
  2. One piece fabricate upper edge folded double for 65 mm (2 1/2 inches) with top 19 mm (3/4 inch) bent out to form "V" joint sealant pocket with vertical surface. Perforate flat double area against vertical surface with horizontally slotted fastener holes at 400 mm (16 inch) centers between end holes. Option: One piece surface mounted counter-flashing (cap flashing) may be used. Fabricate as detailed on Plate 51 of SMACNA Architectural Sheet Metal Manual.
  3. Two pieces: Fabricate upper edge to lock into surface mounted receiver. Fabricate receiver joint sealant pocket on upper edge and lower edge to receive counterflashing, with slotted fastener holes at 400 mm (16 inch) centers between upper and lower edge.
- E. Pipe Counterflashing:
  1. Form flashing for water-tight umbrella with upper portion against pipe to receive a draw band and upper edge to form a "V" joint sealant receiver approximately 19 mm (3/4 inch) deep.
  2. Fabricate 100 mm (4 inch) over lap at end.
  3. Fabricate draw band of same metal and gauge as counterflashing.
  4. Use bolt on draw band tightening assembly.
  5. Vent pipe counter flashing may be fabricated to omit draw band and turn down 25 mm (one inch) inside vent pipe.
- F. Where vented edge decks intersect vertical surfaces, form in one piece, shape to slope down to a point level with and in front of edge-set notched plank; then, down vertically, overlapping base flashing.

## 2.9 GRAVEL STOPS

### A. General:

1. Fabricate in lengths not less than 2400 mm (8 feet) long and maximum of 3000 mm (10 feet).
2. Fabricate internal and external corners as one-piece with legs not less than 600 mm (2 feet) or more than 1200 mm (4 feet) long.
3. Fabricate roof flange not less than 100 mm (4 inches) wide.
4. Fabricate top edge to extend above roof not less than 25 mm (one inch) for embedded gravel aggregate and not less than 100 mm (4 inches) for loose laid ballast.
5. Fabricate lower edge outward at an angle of 45 degrees to form drip and as fascia or as counter flashing as shown:
  - a. Fabricate of one-piece material of suitable width for fascia height of 250 mm (10 inch) maximum or counterflashing lap of not less than 100 mm (4 inch) over base flashing.
  - b. Fabricate bottom edge of formed fascia to receive edge strip.
  - c. When fascia bottom edge forms counter flashing over roofing lap roofing not less than 150 mm (6 inches).

### B. Formed Flat Sheet Metal Gravel Stops and Fascia:

1. When fascia exceeds 150 mm (6 inches) in depth, form one or more horizontal stops not less than 13 mm (1/2 inch) high in the fascia.
2. Fabricate as two-piece fascia when fascia depth exceeds 250 mm (10 inches).
3. At joint between ends of sheets, provide a concealed clip soldered or welded near one end of each sheet to hold the adjoining sheet in lapped position. The clip shall be approximately 100 mm (4 inches) wide and shall be the full depth of the fascia less 25 mm (one inch) at top and bottom. Clip shall be of the same thickness as the fascia.
4. Provide edge strip as specified with lower hooked edge bent outward at an angle of 45 degrees.

### C. Formed Sheet Metal Gravel Stops and Fascia:

2. Sheets shall have 2 mm (1/16 inch) deep corrugations either transversely or diagonally rolled into the sheet. Crimped sheets are not acceptable.
3. Factory fabricate prepackaged system, complete with fastenings.
4. Provide concealed flashing splice plate at joints not less than 150 mm (6 inches) long and continuous edge strip at lower edge of fascia made from same metal.
5. Fabricate as two-piece fascia when fascia depth exceeds 175 mm (7 inches).

## 2.10 HANGING GUTTERS

- A. Fabricate hanging gutters in sections not less than 2400 mm (8 feet) long, except at ends of runs where shorter lengths are required.
- B. Building side of gutter shall be not less than 38 mm (1 1/2 inches) higher than exterior side
- C. Gutter Bead: Stiffen outer edge of gutter by folding edge over approximately 19 mm (3/4 inch) toward roof and down approximately 19 mm (3/4 inch) unless shown otherwise.
- D. Gutter Spacers:
  1. Fabricate of same material and thickness as gutter.
  2. Fabricate 25 mm (one inch) wide strap and fasten to gutters not over 900 mm (36 inches) on center.

3. Turn back edge up 25 mm (one inch) and lap front edge over gutter bead.
  4. Rivet and solder to gutter except rivet and seal to aluminum.
- E. Outlet Tubes:
1. Form outlet tubes to connect gutters to conductors of same metal and thickness as gutters extend into the conductor 75 mm (3 inch). Flange upper end of outlet tube 13 mm (1/2 inch).
  2. Lock and solder longitudinal seam.
  3. Solder tube to gutter.
  4. Fabricate basket strainers of same material as gutters.
- F. Gutter Brackets:
1. Fabricate of same metal as gutter.
  2. Fabricate to gutter profile.
  3. Drill two 5 mm (3/16 inch) diameter holes in anchor leg for countersunk flat head screws.

#### **2.11 CONDUCTORS (DOWNSPOUTS)**

- A. Fabricate conductors of same metal and thickness as gutters in sections approximately 3000 mm (10 feet) long [with 19 mm (3/4 inch) wide flat locked seams].
1. Fabricate open face channel shape with hemmed longitudinal edges.
- B. Fabricate elbows by mitering, riveting, and soldering except seal aluminum in lieu of solder. Lap upper section to the inside of the lower piece.
- C. Fabricate conductor brackets or hangers of same material as conductor, 2 mm (1/16 inch) thick by 25 mm (one inch) minimum width. Form to support conductors 25 mm (one inch) from wall surface in accordance with Architectural Sheet Metal Manual Plate 34, Design C for rectangular shapes and E for round shapes.
- D. Conductor Heads:
1. Fabricate of same material as conductor.
  2. Fabricate conductor heads to not less than 250 mm (10 inch) wide by 200 mm (8 inch) deep by 200 mm (8 inches) from front to back.
  3. Form front and side edges channel shape not less than 13 mm (1/2 inch) wide flanges with edge hemmed.
  4. Slope bottom to sleeve to conductor or downspout at not less than 60 degree angle.
  5. Extend wall edge not less than 25 mm (one inch) above front edge.
  6. Solder joints for water tight assembly.
  7. Fabricate outlet tube or sleeve at bottom not less than 50 mm (2 inches) long to insert into conductor.

#### **2.12 REGLETS**

- A. Fabricate reglets of one of the following materials:
1. Copper 0.4 Kg (16 ounce) .
  2. Stainless Steel, not less than 0.3 mm (0.012 inch) thick.
  3. Plastic coated extruded aluminum, not less than 1.4 mm (0.055 inch) thick prefilled with butyl rubber sealer and complete with plastic wedges inserted at 1000 mm (40 inches) on centers.
  4. Plastic, ASTM D1784, Type II, not less than 2 mm (0.075 inch) thick.
- B. Fill open-type reglets with fiberboard or other suitable separator, to prevent crushing of the slot during installation.
- C. Bend edges of reglets for setting into concrete to an angle of not less than 45 degrees, and make wide enough to provide firm anchorage in the concrete.

- D. Fabricate reglets for building into horizontal masonry mortar joints not less than 19 mm (3/4 inch) deep, nor more than 25 mm (one inch) deep.
- E. Fabricate mitered corners, fittings, and special shapes as may be required by details.
- F. Reglets for concrete may be formed to receive flashing and have a 10 mm (3/8 inch), 45 degree snap lock.

### **PART 3 - EXECUTION**

#### **3.1 INSTALLATION**

##### **A. General:**

1. Install flashing and sheet metal items as shown in Sheet Metal and Air Conditioning Contractors National Association, Inc., publication, ARCHITECTURAL SHEET METAL MANUAL, except as otherwise shown or specified.
2. Apply Sealant as specified in Section 07 92 00, JOINT SEALANTS.
3. Apply sheet metal and other flashing material to surfaces that are smooth, sound, clean, dry and free from defects that might affect the application.
4. Remove projections that would puncture the materials and fill holes and depressions with material compatible with the substrate. Cover holes or cracks in wood wider than 6 mm (1/4 inch) with sheet metal compatible with the roofing and flashing material used.
5. Coordinate with masonry work for the application of a skim coat of mortar to surfaces of unit masonry to receive flashing material before the application of flashing.
6. Confine direct nailing of sheet metal to strips 300 mm (12 inch) or less wide. Nail flashing along one edge only. Space nail not over 100 mm (4 inches) on center unless specified otherwise.
7. Install bolts, rivets, and screws where indicated, specified, or required in accordance with the SMACNA Sheet Metal Manual. Space rivets at 75 mm (3 inch) on centers in two rows in a staggered position. Use neoprene washers under fastener heads when fastener head is exposed.
9. Coordinate with roofing work for the installation of metal base flashings and other metal items having roof flanges for anchorage and watertight installation.
10. Nail continuous cleats on 75 mm (3 inch) on centers in two rows in a staggered position.
11. Nail individual cleats with two nails and bend end tab over nail heads. Lock other end of cleat into hemmed edge.
12. Install flashings in conjunction with other trades so that flashings are inserted in other materials and joined together to provide a water tight installation.
13. Where required to prevent galvanic action between dissimilar metal isolate the contact areas of dissimilar metal with sheet lead, waterproof building paper, or a coat of bituminous paint.
14. Isolate aluminum in contact with dissimilar metals others than , white bronze or other metal compatible with aluminum by:
  - a. Paint dissimilar metal with a prime coat of zinc-chromate or other suitable primer, followed by two coats of aluminum paint.
  - b. Paint dissimilar metal with a coat of bituminous paint.
  - c. Apply an approved caulking material between aluminum and dissimilar metal.

15. Paint aluminum in contact with or built into mortar, concrete, plaster, or other masonry materials with a coat of bituminous paint.

### 3.2 THROUGH-WALL FLASHING

#### A. General:

1. Install continuous through-wall flashing between top of concrete foundation walls and bottom of masonry building walls; at top of concrete floors; under masonry, concrete, or stone copings and elsewhere as shown.
  2. Where exposed portions are used as a counterflashings, lap base flashings at least 100 mm (4 inches) and use thickness of metal as specified for exposed locations.
  3. Exposed edge of flashing may be formed as a receiver for two piece counter flashing as specified.
  4. Terminate exterior edge beyond face of wall approximately 6 mm (1/4 inch) with drip edge where not part of counter flashing.
  5. Turn back edge up 6 mm (1/4 inch) unless noted otherwise where flashing terminates in mortar joint or hollow masonry unit joint.
  6. Terminate interior raised edge in masonry backup unit approximately 38 mm (1 1/2 inch) into unit unless shown otherwise.
  7. Under copings terminate both edges beyond face of wall approximately 6 mm (1/4 inch) with drip edge.
  8. Lap end joints at least two corrugations, but not less than 100 mm (4 inches). Seal laps with sealant.
  9. Where dowels, reinforcing bars and fastening devices penetrate flashing, seal penetration with sealing compound. Sealing compound is specified in Section 07 92 00, JOINT SEALANTS.
  10. Coordinate with other work to set in a bed of mortar above and below flashing so that total thickness of the two layers of mortar and flashing are same as regular mortar joint.
  11. Where ends of flashing terminate turn ends up 25 mm (1 inch) and fold corners to form dam extending to wall face in vertical mortar or veneer joint.
  12. Turn flashing up not less than 200 mm (8 inch) between masonry or behind exterior veneer.
  13. When flashing terminates in reglet extend flashing full depth into reglet and secure with lead or plastic wedges spaced 150 mm (6 inch) on center.
- B. Flashing at Top of Concrete Foundation Walls Where concrete is exposed. Turn up not less than 200 mm (8 inch) high and into masonry backup mortar joint or reglet in concrete backup as specified.
- C. Flashing at Top of Concrete Floors (except where shelf angles occur): Place flashing in horizontal masonry joint not less than 200 mm (8 inch) below floor slab and extend into backup masonry joint at floor slab 38 mm (1 1/2 inch).
- D. Flashing at Cavity Wall Construction: Where flashing occurs in cavity walls turn vertical portion up against backup under waterproofing, if any, into mortar joint. Turn up over insulation, if any, and horizontally through insulation into mortar joint.
- E. Flashing at Veneer Walls:
1. Install near line of finish floors over shelf angles or where shown.
  2. Turn up against sheathing.
  3. At stud framing, hem top edge 19 mm (3/4 inch) and secure to each stud with fasteners through sheathing.
  4. At concrete backing, extend flashing into reglet as specified.

5. Coordinate with installation of waterproofing or asphalt felt for lap over top of flashing.
- F. Lintel Flashing when not part of shelf angle flashing:
  1. Install flashing full length of lintel to nearest vertical joint in masonry over veneer.
  2. Turn ends up 25 mm (one inch) and fold corners to form dam and extend end to face of wall.
  3. Turn back edge up to top of lintel; terminate back edge as specified for back-up wall.
- G. Window Sill Flashing:
  1. Install flashing to extend not less than 100 mm (4 inch) beyond ends of sill into vertical joint of masonry or veneer.
  2. Turn back edge up to terminate under window frame.
  3. Turn ends up 25 mm (one inch) and fold corners to form dam and extend to face of wall.
- H. Flashing at Masonry, Stone, or Precast Concrete:
  1. Install flashing with drips on both wall faces unless shown otherwise.
  2. Form penetration openings to fit tight against dowel or other item with edge turned up. Seal penetrations with sealant.

### **3.3 BASE FLASHING**

- A. Install where roof membrane type base flashing is not used and where shown.
  1. Install flashing at intersections of roofs with vertical surfaces or at penetrations through roofs, to provide watertight construction.
  2. Install metal flashings and accessories having flanges extending out on top of the built-up roofing before final bituminous coat and roof aggregate is applied.
  3. Set flanges in heavy trowel coat of roof cement and nail through flanges into wood nailers over bituminous roofing.
  4. Secure flange by nailing through roofing into wood blocking with nails spaced 75 mm (3 inch) on centers or, when flange over 100 mm (4 inch) wide terminate in a 13 mm (1/2 inch) folded edge anchored with cleats spaced 200 mm (8 inch) on center. Secure one end of cleat over nail heads. Lock other end into the seam.
- B. For long runs of base flashings install in lengths of not less than 2400 mm (8 feet) nor more than 3000 mm (ten feet). Install a 75 mm (3 inch) wide slip type, loose lock expansion joint filled with sealant in joints of base flashing sections over 2400 mm (8 feet) in length. Lock and solder corner joints at corners.
- C. Extend base flashing up under counter flashing of roof specialties and accessories or equipment not less than 75 mm (3 inch).

### **3.4 COUNTERFLASHING (CAP FLASHING OR HOODS)**

- A. General:
  1. Install counterflashing over and in conjunction with installation of base flashings, except as otherwise specified or shown.
  2. Install counterflashing to lap base flashings not less than 100 mm (4 inch).
  3. Install upper edge or top of counterflashing not less than 225 mm (9 inch) above top of the roofing.
  4. Lap joints not less than 100 mm (4 inch). Stagger joints with relation to metal base flashing joints.
  5. Use surface applied counterflashing on existing surfaces and new work where not possible to integrate into item.



6. When fastening to concrete or masonry, use screws driven in expansion shields set in concrete or masonry. Use screws to wood and sheet metal. Set fasteners in mortar joints of masonry work.
- B. One Piece Counterflashing:
1. Where flashing is installed at new masonry, coordinate to insure proper height, embed in mortar, and end lap.
  2. Where flashing is installed in reglet in concrete insert upper edge into reglet. Hold flashing in place with lead wedges spaced not more than 200 mm (8 inch) apart. Fill joint with sealant.
  3. Where flashing is surface mounted on flat surfaces.
    - a. When top edge is double folded anchor flat portion below sealant "V" joint with fasteners spaced not over 400 mm (16 inch) on center:
      - 1) Locate fasteners in masonry mortar joints.
      - 2) Use screws to sheet metal or wood.
    - b. Fill joint at top with sealant.
  4. Where flashing or hood is mounted on pipe.
    - a. Secure with draw band tight against pipe.
    - b. Set hood and secure to pipe with a one by 25 mm x 3 mm (1 x 1/8 inch) bolt on draw band type clamp, or a stainless worm gear type clamp.
    - c. Completely fill joint at top with sealant.
- C. Two-Piece Counterflashing:
1. Where receiver is installed at new masonry coordinate to insure proper height, embed in mortar, and lap.
  2. Surface applied type receiver:
    - a. Secure to face construction in accordance, with manufacturers instructions.
    - b. Completely fill space at the top edge of receiver with sealant.
  3. Insert counter flashing in receiver in accordance with fabricator or manufacturer's instructions and to fit tight against base flashing.
- D. Where vented edge occur install so lower edge of counterflashing is against base flashing.
- E. When counter flashing is a component of other flashing install as shown.

### 3.5 REGLETS

- A. Install reglets in a manner to provide a watertight installation.
- B. Locate reglets not less than 225 mm (9 inch) nor more than 400 mm (16 inch) above roofing, and not less than 125 mm (5 inch) nor more than 325 mm (13 inch) above cant strip.
- C. Butt and align end joints or each section of reglet and securely hold in position until concrete or mortar are hardened:
  1. Coordinate reglets for anchorage into concrete with formwork construction.
  2. Coordinate reglets for masonry to locate horizontally into mortar joints.

### 3.6 GRAVEL STOPS

- A. General:
1. Install gravel stops and fascias with allowance for expansion at each joint; minimum of 6 mm (1/4 inch).
  2. Extend roof flange of gravel stop and splice plates not less than four inches out over roofing and nail or screw to wood nailers. Space fasteners on 75 mm (3 inch) centers in staggered pattern.

3. Install continuous cleat for fascia drip edge. Secure with fasteners as close to lower edge as possible on 75 mm (3 inch) centers.
4. Where ends of gravel stops and fascias abut a vertical wall, provide a watertight, flashed and sealant filled joint.
5. Set flange in roof cement when installed over built-up roofing.
6. Edge securement for low-slope roofs: Low-slope membrane roof systems metal edge securement, except gutters, shall be designed in accordance with ANSI/SPRI ES-1, except the basic wind speed shall be determined from Figure 1609, of IBC 2003.

B. Sheet metal gravel stops and fascia:

1. Install with end joints of splice plates sheets lapped three inches.
2. Hook the lower edge of fascia into a continuous edge strip.
3. Lock top section to bottom section for two piece fascia.

### 3.7 COPINGS

A. General:

1. Where shown turn down roof side of coping and extend down over base flashing as specified for counter-flashing. Secure counter-flashing to lock strip in coping at continuous cleat.
2. Install ends adjoining existing construction so as to form space for installation of sealants. Sealant is specified in Section 07 92 00, JOINT SEALANTS.

### 3.10 HANGING GUTTERS

- A. Hang gutters with high points equidistant from downspouts. Slope at not less than 1:200 (1/16 inch per foot).
- B. Lap joints, except for expansion joints, at least 25 mm (one inch) in the direction of flow. Rivet and seal or solder lapped joints.
- C. Support gutters in brackets spaced not more than 600 mm (24 inch) on centers, brackets attached to facial or wood nailer by at least two screws or nails.
- D. Secure brackets to gutters in such a manner as to allow free movement of gutter due to expansion and contraction.
- E. Gutter Expansion Joint:
  1. Locate expansion joints midway between outlet tubes.
  2. Provide at least a 25 mm (one inch) expansion joint space between end baffles of gutters.
  3. Install a cover plate over the space at expansion joint.
  4. Fasten cover plates to gutter section on one side of expansion joint only.
  5. Secure loose end of cover plate to gutter section on other side of expansion joint by a loose-locked slip joint.
- F. Outlet Tubes: Set bracket strainers loosely into gutter outlet tubes.

### 3.11 CONDUCTORS (DOWNSPOUTS)

- A. Set conductors plumb and clear of wall, and anchor to wall with two anchor straps, located near top and bottom of each section of conductor. Strap at top shall be fixed to downspout, intermediate straps and strap at bottom shall be slotted to allow not less than 13 mm (1/2 inch) movement for each 3000 mm (10 feet) of downspout.
- B. Install elbows, offsets and shoes where shown and required. Slope not less than 45 degrees.

- - - E N D - - -

**SECTION 07 72 00**  
**ROOF ACCESSORIES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies prefabricated copings, gravel stops, fascias, and expansion joint covers.

**1.2 RELATED WORK**

- A. Sealant material and installation: Section 07 92 00, JOINT SEALANTS.
- B. General insulation: Section 07 21 13, THERMAL INSULATION
- C. Rigid insulations for roofing: Section 07 22 00, ROOF AND DECK INSULATION
- D. Sheet metal flashings: Section 07 60 00 FLASHING AND SHEET METAL

**1.3 QUALITY CONTROL**

- A. All roof accessories shall be the products of manufacturers regularly engaged in producing the kinds of products specified.
- B. Each accessory type shall be the same and be made by the same manufacturer.
- C. Each accessory shall be completely assembled to the greatest extent possible before delivery to the site.

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
  - a. Submit representative sample panel of color anodized aluminum not less than 100 mm X 100 mm (four by four inches), except extrusions shall be a width not less than section to be used. Sample shall show coating with integral color and texture and shall include manufacturer's identifying label.
  - b. For prefinished items exposed to view, provide samples of manufacturer's full standard color and texture range for selection by Owner.
- C. Shop Drawings: Each item specified showing design, details of construction, installation and fastenings.
- D. Manufacturer's Literature and Data: Each item specified.
- E. Certificates: Stating that aluminum has been given specified thickness of anodizing.

**1.5 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extend referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Material (ASTM):
  - B209/209M-07.....Aluminum and Aluminum Alloy-Sheet and Plate
  - B221/221M-08.....Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
  - C612-10.....Mineral Fiber Block and Board Thermal Insulation
  - D1187-97 (R2002).....Asphalt-Base Emulsions for Use as Protective Coatings for Metal
- C. National Association of Architectural Metal Manufacturers (NAAMM):
  - AMP 500-06.....Metal Finishes Manual
- D. American Architectural Manufacturers Association (AAMA):

2605-11.....High Performance Organic Coatings on  
Architectural Extrusions and Panels.

## **PART 2 - PRODUCTS**

### **2.1 MATERIALS**

- A. Aluminum, Extruded: ASTM B221/B221M.
- B. Aluminum Sheet: ASTM B209/B209M.
- C. Galvanized Sheet Steel: ASTM A526/A526M; G-90 coating.
- D. Insulation: ASTM C612, Class 1 or 2.
- E. Asphalt Coating: ASTM D 1187, Type I, quick setting.

### **2.2 ROOF EXPANSION JOINT COVERS**

- A. Prefabricated Expansion Joint Covers: John Mansville "Expand-O-Flash" bellows type preformed expansion joint covers, as shown, or approved equal.

### **2.3 COPINGS AND GRAVEL STOPS**

- A. Fabricate of 24 ga galvanized sheet steel.
- B. Turn outer edges down each face of wall as shown.
- C. Maximum lengths of 3000 mm (10 feet).
- D. Shop fabricate external and internal corners as one piece assemblies with not less than 300 mm (12 inch) leg lengths.
- E. Provide 100 mm (four inch) wide 0.8 mm (0.032 inch) thick watertight joint covers.

### **2.4 FINISH**

- A. Fluorocarbon Finish: AAMA 2605.2 high performance organic coating.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION**

- A. Install roof accessories where shown.
- B. Secure with fasteners in accordance with manufacture's printed installation instructions and approved shop drawings unless shown otherwise.
- C. Coordinate to install insulation where shown; see Section 07 21 13, THERMAL INSULATION and Section 07 22 00, ROOF AND DECK INSULATION.
- D. Comply with section 07 92 00, JOINT SEALANTS to install sealants where manufactures installation instructions require sealant.
- E. Coordinate with roofing work for installation of items in sequence to prevent water infiltration.
- F. Gravel Stops and Fascias:
  - 1. Install gravel stops and fascia with butt joints with approximately 6 mm (1/4 inch) space for expansion.
  - 2. Over each joint provide cover plates of sheet aluminum, complete with concealed sheet aluminum flashing, centered under each joint.
  - 3. Lap cover plates and concealed flashing over the gravel stop and fascia not less than four inches.
  - 4. Extend concealed flashing over built-up roofing, embed in roof cement and turn down over face of blocking at roof edge.
- G. Expansion Joint Covers:
  - 1. Install to terminate base flashing 200 mm (8 inches) above roof.
  - 2. Install moisture seals to drain water to outlets that do not permit water to enter buildings construction.
  - 3. Use stainless steel screws when exposed.
  - 4. Install in accordance with manufacturer's instructions and recommendations for installations indicated.

**3.3 ADJUSTING**

- A. Adjust expansion joints to close tightly and be watertight; insuring maximum allowance for building movement.

**3.4 PROTECTION**

- A. Protect roof accessories from damage during installation and after completion of the work from subsequent construction.

- - - E N D - - -

**SECTION 07 84 00  
FIRESTOPPING**

**PART 1 GENERAL**

**1.1 DESCRIPTION**

- A. Closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction.
- B. Closure of openings in walls against penetration of gases or smoke in smoke partitions.

**1.2 RELATED WORK**

- A. Expansion and seismic joint firestopping: Section 07 95 13, EXPANSION JOINT COVER ASSEMBLIES.
- B. Sealants and application: Section 07 92 00, JOINT SEALANTS.
- C. Fire and smoke damper assemblies in ductwork: Section 23 31 00, HVAC DUCTS AND CASINGS

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturers literature, data, and installation instructions for types of firestopping and smoke stopping used.
- C. List of FM, UL, or WH classification number of systems installed.
- D. Certified laboratory test reports for ASTM E814 tests for systems not listed by FM, UL, or WH proposed for use.

**1.4 DELIVERY AND STORAGE**

- A. Deliver materials in their original unopened containers with manufacturer's name and product identification.
- B. Store in a location providing protection from damage and exposure to the elements.

**1.5 WARRANTY**

- A. Firestopping work subject to the terms of the Article "Warranty of Construction", FAR clause 52.246-21, except extend the warranty period to five years.

**1.6 QUALITY ASSURANCE**

- A. FM, UL, or WH or other approved laboratory tested products will be acceptable.

**1.7 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - E84-10.....Surface Burning Characteristics of Building Materials
  - E814-11.....Fire Tests of Through-Penetration Fire Stops
- C. Factory Mutual Engineering and Research Corporation (FM):
  - Annual Issue Approval Guide Building Materials
- D. Underwriters Laboratories, Inc. (UL):

- Annual Issue Building Materials Directory
- Annual Issue Fire Resistance Directory
- 1479-10.....Fire Tests of Through-Penetration Firestops
- E. Warnock Hersey (WH):
  - Annual Issue Certification Listings

**PART 2 - PRODUCTS**

**2.1 FIRESTOP SYSTEMS**

- A. Use either factory built (Firestop Devices) or field erected (through-Penetration Firestop Systems) to form a specific building system maintaining required integrity of the fire barrier and stop the passage of gases or smoke.
- B. Through-penetration firestop systems and firestop devices tested in accordance with ASTM E814 or UL 1479 using the "F" or "T" rating to maintain the same rating and integrity as the fire barrier being sealed. "T" ratings are not required for penetrations smaller than or equal to 100 mm (4 in) nominal pipe or 0.01 m<sup>2</sup> (16 sq. in.) in overall cross sectional area.
- C. Products requiring heat activation to seal an opening by its intumescence shall exhibit a demonstrated ability to function as designed to maintain the fire barrier.
- D. Firestop sealants used for firestopping or smoke sealing shall have following properties:
  - 1. Contain no flammable or toxic solvents.
  - 2. Have no dangerous or flammable out gassing during the drying or curing of products.
  - 3. Water-resistant after drying or curing and unaffected by high humidity, condensation or transient water exposure.
  - 4. When used in exposed areas, shall be capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.
- E. Firestopping system or devices used for penetrations by glass pipe, plastic pipe or conduits, unenclosed cables, or other non-metallic materials shall have following properties:
  - 1. Classified for use with the particular type of penetrating material used.
  - 2. Penetrations containing loose electrical cables, computer data cables, and communications cables protected using firestopping systems that allow unrestricted cable changes without damage to the seal.
  - 3. Intumescent products that would expand to seal the opening and act as fire, smoke, toxic fumes, and, water sealant.
- F. Maximum flame spread of 25 and smoke development of 50 when tested in accordance with ASTM E84.
- G. FM, UL, or WH rated or tested by an approved laboratory in accordance with ASTM E814.
- H. Materials to be asbestos free.

**2.2 SMOKE STOPPING IN SMOKE PARTITIONS**

- A. Use silicone sealant in smoke partitions as specified in Section 07 92 00, JOINT SEALANTS.
- B. Use mineral fiber filler and bond breaker behind sealant.
- C. Sealants shall have a maximum flame spread of 25 and smoke developed of 50 when tested in accordance with E84.

- D. When used in exposed areas capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

### **PART 3 - EXECUTION**

#### **3.1 EXAMINATION**

- A. Submit product data and installation instructions, as required by article, submittals, after an on site examination of areas to receive firestopping.

#### **3.2 PREPARATION**

- A. Remove dirt, grease, oil, loose materials, or other substances that prevent adherence and bonding or application of the firestopping or smoke stopping materials.
- B. Remove insulation on insulated pipe for a distance of 150 mm (six inches) on either side of the fire rated assembly prior to applying the firestopping materials unless the firestopping materials are tested and approved for use on insulated pipes.

#### **3.3 INSTALLATION**

- A. Do not begin work until the specified material data and installation instructions of the proposed firestopping systems have been submitted and approved.
- B. Install firestopping systems with smoke stopping in accordance with FM, UL, WH, or other approved system details and installation instructions.
- C. Install smoke stopping seals in smoke partitions.

#### **3.4 CLEAN-UP AND ACCEPTANCE OF WORK**

- A. As work on each floor is completed, remove materials, litter, and debris.
- B. Do not move materials and equipment to the next-scheduled work area until completed work is inspected and accepted by the Resident Engineer.
- C. Clean up spills of liquid type materials.

- - - E N D - - -



**SECTION 07 92 00**  
**JOINT SEALANTS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. Section covers all sealant and caulking materials and their application, wherever required for complete installation of building materials or systems.

**1.2 RELATED WORK:**

- A. Sealing of site work concrete paving: Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS.
- B. Masonry control and expansion joint: Section 04 20 00, UNIT MASONRY.
- C. Firestopping penetrations: Section 07 84 00, FIRESTOPPING.
- D. Glazing: Section 08 80 00, GLAZING.

**1.3 QUALITY CONTROL:**

- A. Installer Qualifications: An experienced installer who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance.
- B. Source Limitations: Obtain each type of joint sealant through one source from a single manufacturer.
- C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.
  - 1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
  - 2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.
  - 3. Test elastomeric joint sealants according to SWRI's Sealant Validation Program for compliance with requirements specified by reference to ASTM C920 for adhesion and cohesion under cyclic movement, adhesion-in peel, and indentation hardness.
  - 4. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.
- E. VOC: Acrylic latex and Silicon sealants shall have less than 50g/l VOC content.

**1.4 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples: For prefinished items exposed to view, provide samples of manufacturer's full standard color range for selection by Owner.
- C. Manufacturer's installation instructions for each product used.
- D. Cured samples of exposed sealants for each color where required to match adjacent material.
- E. Manufacturer's Literature and Data:
  - 1. Caulking compound
  - 2. Primers
  - 3. Sealing compound, each type, including compatibility when different sealants are in contact with each other.

**1.5 PROJECT CONDITIONS:**

- A. Environmental Limitations:
  - 1. Do not proceed with installation of joint sealants under following conditions:
    - a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 °C (40 °F).
    - b. When joint substrates are wet.
- B. Joint-Width Conditions:
  - 1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.
- C. Joint-Substrate Conditions:
  - 1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

**1.6 DELIVERY, HANDLING, AND STORAGE:**

- A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.
- B. Carefully handle and store to prevent inclusion of foreign materials.
- C. Do not subject to sustained temperatures exceeding 32° C (90° F) or less than 5° C (40° F).

**1.7 DEFINITIONS:**

- A. Definitions of terms in accordance with ASTM C717 and as specified.
- B. Back-up Rod: A type of sealant backing.
- C. Bond Breakers: A type of sealant backing.
- D. Filler: A sealant backing used behind a back-up rod.

**1.8 WARRANTY:**

- A. Warranty exterior sealing against leaks, adhesion, and cohesive failure, and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be extended to two years.
- B. General Warranty: Special warranty specified in this Article shall not deprive Government of other rights Government may have under other provisions of Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of Contract Documents.

**1.9 APPLICABLE PUBLICATIONS:**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - C509-06.....Elastomeric Cellular Preformed Gasket and Sealing Material.
  - C612-10.....Mineral Fiber Block and Board Thermal Insulation.
  - C717-10.....Standard Terminology of Building Seals and Sealants.
  - C834-10.....Latex Sealants.
  - C919-08.....Use of Sealants in Acoustical Applications.
  - C920-10.....Elastomeric Joint Sealants.

- C1021-08.....Laboratories Engaged in Testing of Building Sealants.
  - C1193-09.....Standard Guide for Use of Joint Sealants.
  - C1330-02 (R2007).....Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants.
  - D1056-07.....Specification for Flexible Cellular Materials—Sponge or Expanded Rubber.
  - E84-09.....Surface Burning Characteristics of Building Materials.
- C. Sealant, Waterproofing and Restoration Institute (SWRI).  
The Professionals' Guide

**PART 2 - PRODUCTS**

**2.1 SEALANTS:**

- A. S-1:
  - 1. ASTM C920, polyurethane or polysulfide.
  - 2. Type M.
  - 3. Class 25.
  - 4. Grade NS.
  - 5. Shore A hardness of 20-40
- B. S-2:
  - 1. ASTM C920, polyurethane or polysulfide.
  - 2. Type M.
  - 3. Class 25.
  - 4. Grade P.
  - 5. Shore A hardness of 25-40.
- C. S-3:
  - 1. ASTM C920, polyurethane or polysulfide.
  - 2. Type S.
  - 3. Class 25, joint movement range of plus or minus 50 percent.
  - 4. Grade NS.
  - 5. Shore A hardness of 15-25.
  - 6. Minimum elongation of 700 percent.
- D. S-4:
  - 1. ASTM C920 polyurethane or polysulfide.
  - 2. Type S.
  - 3. Class 25.
  - 4. Grade NS.
  - 5. Shore A hardness of 25-40.
- E. S-5:
  - 1. ASTM C920, polyurethane or polysulfide.
  - 2. Type S.
  - 3. Class 25.
  - 4. Grade P.
  - 5. Shore hardness of 15-45.
- F. S-6:
  - 1. ASTM C920, silicone, neutral cure.
  - 2. Type S.
  - 3. Class: Joint movement range of plus 100 percent to minus 50 percent.
  - 4. Grade NS.
  - 5. Shore A hardness of 15-20.
  - 6. Minimum elongation of 1200 percent.
- G. S-7:
  - 1. ASTM C920, silicone, neutral cure.
  - 2. Type S.

3. Class 25.
  4. Grade NS.
  5. Shore A hardness of 25-30.
  6. Structural glazing application.
- H. S-8:
1. ASTM C920, silicone, acetoxo cure.
  2. Type S.
  3. Class 25.
  4. Grade NS.
  5. Shore A hardness of 25-30.
  6. Structural glazing application.
- I. S-9:
1. ASTM C920 silicone.
  2. Type S.
  3. Class 25.
  4. Grade NS.
  5. Shore A hardness of 25-30.
  6. Non-yellowing, mildew resistant.
- J. S-10:
1. ASTM C920, coal tar extended fuel resistance polyurethane.
  2. Type M/S.
  3. Class 25.
  4. Grade P/NS.
  5. Shore A hardness of 15-20.
- K. S-11:
1. ASTM C920 polyurethane.
  2. Type M/S.
  3. Class 25.
  4. Grade P/NS.
  5. Shore A hardness of 35 to 50.
- L. S-12:
1. ASTM C920, polyurethane.
  2. Type M/S.
  3. Class 25, joint movement range of plus or minus 50 percent.
  4. Grade P/NS.
  5. Shore A hardness of 25 to 50.

## **2.2 CAULKING COMPOUND:**

- A. C-1: ASTM C834, acrylic latex.
- B. C-2: One component acoustical caulking, non drying, non hardening, synthetic rubber.

## **2.3 COLOR:**

- A. Sealants used with exposed masonry shall match color of mortar joints.
- B. Sealants used with unpainted concrete shall match color of adjacent concrete.
- C. Color of sealants for other locations shall be light gray or aluminum, unless specified otherwise.
- D. Caulking shall be light gray or white, unless specified otherwise.

## **2.4 JOINT SEALANT BACKING:**

- A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

- B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
  - 1. Type C: Closed-cell material with a surface skin.
- C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056, nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32° C (minus 26° F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.
- D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

**2.5 FILLER:**

- A. Mineral fiber board: ASTM C612, Class 1.
- B. Thickness same as joint width.
- C. Depth to fill void completely behind back-up rod.

**2.6 PRIMER:**

- A. As recommended by manufacturer of caulking or sealant material.
- B. Stain free type.

**2.7 CLEANERS-NON POUROUS SURFACES:**

- A. Chemical cleaners acceptable to manufacturer of sealants and sealant backing material, free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

**PART 3 - EXECUTION**

**3.1 INSPECTION:**

- A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.
- B. Coordinate for repair and resolution of unsound substrate materials.
- C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

**3.2 PREPARATIONS:**

- A. Prepare joints in accordance with manufacturer's instructions and SWRI.
- B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.
  - 1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
  - 2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include the following:
    - a. Concrete.
    - b. Masonry.

- c. Unglazed surfaces of ceramic tile.
- 3. Remove laitance and form-release agents from concrete.
- 4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
  - a. Metal.
  - b. Glass.
  - c. Porcelain enamel.
  - d. Glazed surfaces of ceramic tile.
- C. Do not cut or damage joint edges.
- D. Apply masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
  - 1. Do not leave gaps between ends of sealant backings.
  - 2. Do not stretch, twist, puncture, or tear sealant backings.
  - 3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions.
  - 1. Apply primer prior to installation of back-up rod or bond breaker tape.
  - 2. Use brush or other approved means that will reach all parts of joints.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

### **3.3 BACKING INSTALLATION:**

- A. Install back-up material, to form joints enclosed on three sides as required for specified depth of sealant.
- B. Where deep joints occur, install filler to fill space behind the back-up rod and position the rod at proper depth.
- C. Cut fillers installed by others to proper depth for installation of back-up rod and sealants.
- D. Install back-up rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.
- E. Where space for back-up rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

### **3.4 SEALANT DEPTHS AND GEOMETRY:**

- A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.
- B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

### **3.5 INSTALLATION:**

- A. General:
  - 1. Apply sealants and caulking only when ambient temperature is between 5° C and 38° C (40° and 100° F).
  - 2. Do not use polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
  - 3. Do not use sealant type listed by manufacture as not suitable for use in locations specified.
  - 4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.

5. Avoid dropping or smearing compound on adjacent surfaces.
  6. Fill joints solidly with compound and finish compound smooth.
  7. Tool joints to concave surface unless shown or specified otherwise.
  8. Finish paving or floor joints flush unless joint is otherwise detailed.
  9. Apply compounds with nozzle size to fit joint width.
  10. Test sealants for compatibility with each other and substrate. Use only compatible sealant.
- B. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise.
- C. Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.
1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
  2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
  3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.
  4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cut-outs to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
  5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

### **3.6 FIELD QUALITY CONTROL:**

- A. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements.
- B. Repair or replace sealants following same procedures used to originally seal joints. Ensure that original sealant surfaces are clean and new sealant contacts original sealant.

### **3.7 CLEANING:**

- A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by the caulking or sealant manufacturer.
- B. After filling and finishing joints, remove masking tape.
- C. Leave adjacent surfaces in a clean and unstained condition.

### **3.8 LOCATIONS:**

- A. Exterior Building Joints, Horizontal and Vertical:
  1. Metal to Metal: Type S-1, S-2
  2. Metal to Masonry or Stone: Type S-1
  3. Masonry to Masonry or Stone: Type S-1
  5. Cast Stone to Cast Stone: Type S-1
  6. Threshold Setting Bed: Type S-1, S-3, S-4
  7. Masonry Expansion and Control Joints: Type S-6
- B. Metal Reglets and Flashings:
  1. Flashings to Wall: Type S-6
  2. Metal to Metal: Type S-6
- C. Sanitary Joints:
  1. Walls to Plumbing Fixtures: Type S-9

2. Counter Tops to Walls: Type S-9
3. Pipe Penetrations: Type S-9
- D. Horizontal Traffic Joints:
  1. Concrete Paving, Unit Pavers: Type S-11 or S-12
  2. Garage/Parking Decks: Type S-10
- E. Interior Caulking:
  1. Typical Narrow Joint 6 mm, (1/4 inch) or less at Walls and Adjacent Components: Types C-1 and C-2.
  2. Perimeter of Doors, Windows, Access Panels which Adjoin Concrete or Masonry Surfaces: Types C-1 and C-2.
  3. Joints at Masonry Walls and Columns, Piers, Concrete Walls or Exterior Walls: Types C-1 and C-2.
  4. Exposed Isolation Joints at Top of Full Height Walls: Types C-1 and C-2.
  5. Concealed Acoustic Sealant Types S-4, C-1 and C-2.

- - - E N D - - -



**SECTION 07 95 13**  
**EXPANSION JOINT COVER ASSEMBLIES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Section specifies wall and ceiling building expansion joint assemblies.
- B. Types of assemblies:
  - Elastomeric Joint Covers
  - Preformed Elastomeric Sealant Joint

**1.2 RELATED WORK**

- A. Roof Expansion Joint Cover Assemblies: Section 07 72 00, ROOF ACCESSORIES.

**1.3 QUALITY ASSURANCE**

- A. Fire tests performed by Factory Mutual, Underwriters Laboratories, Inc., Warnock Hersey or other approved independent testing laboratory.

**1.4 DELIVERY STORAGE AND HANDLING**

- A. Take care in handling of materials so as not to damage finished surface and components.
- B. Store materials under cover in a dry and clean location off the ground.
- C. Remove materials that are damaged or otherwise not suitable for installation from job site and replace with new materials.

**1.5 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Submit copies of manufacturer's current literature and data for each item specified.
  - 2. Clearly indicate movement capability of cover assemblies and suitability of material used in exterior seals for ultraviolet exposure.
- C. Certificates: Material test reports from approved independent testing laboratory indicating and interpreting test results relative to compliance of fire-rated expansion joint assemblies with requirements specified.
- D. Shop Drawings:
  - 1. Showing full extent of expansion joint cover assemblies; include large-scale details indicating profiles of each type of expansion joint cover assembly, splice joints between sections, joiners with other type assemblies, special end conditions, anchorages, fasteners, and relationship to adjoining work and finishes.
  - 2. Include description of materials and finishes and installation instructions.
- E. Samples:
  - 1. Samples of each type and color of metal finish on metal of same thickness and alloy used in work.
  - 2. Samples of each type and color of flexible seal used in work.

**1.6 APPLICABLE PUBLICATIONS**

- A. Publications listed form part of this specification to extent referenced. Publications are referred to in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A36/A36M-08.....Structural Steel
  - A167-99 (R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
  - A283/A283M-07.....Low and Intermediate Tensile Strength Carbon Steel Plates
  - A786/A786M-05(R2009)....Rolled Steel Floor Plates
  - B36/B36M-08.....Brass, Plate, Sheet, Strip, and Rolled Bar
  - B121-01(R2006).....Leaded Brass Plate, Sheet, Strip and Rolled Bar
  - B209M-07.....Aluminum and Aluminum-Alloy Sheet and Plate (Metric)
  - B221M-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes (Metric)
  - B455-10.....Copper-Zinc Lead Alloy (Leaded Brass) Extruded Shapes
  - C864-05.....Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers
  - C920-11.....Elastomeric Joint Sealants
  - D1187-97 (R2002).....Asphalt Base Emulsions for Use as Protective Coatings for Metal
  - D2287-96 (R2010).....Non-rigid Vinyl Chloride Polymer and Copolymer Molding and Extrusion Compounds
  - E119-10.....Fire Tests of Building Construction and Materials
  - E814-11.....Fire Tests of Through-Penetration Fire Stops
- C. Federal Specifications (Fed. Spec):
  - TT-P-645B.....Primer, Paint, Zinc-Molybdate, Alkyd Type
- D. The National Association of Architectural Metal Manufacturers (NAAMM):
  - AMP 500 Series.....Metal Finishes Manual.
- E. National Fire Protection Association (NFPA):
  - 251-06.....Tests of Fire Endurance of Building Construction and Materials
- F. Underwriters Laboratories Inc. (UL):
  - 263-11.....Fire Tests of Building Construction and Materials

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

- A. Stainless Steel: ASTM A167, Type 302 or 304.
- B. Structural Steel Shapes: ASTM A36.
- C. Steel Plate: ASTM A283, Grade C.
- D. Rolled Steel Floor Plate: ASTM A786.
- E. Aluminum:
  - 1. Extruded: ASTM B221, alloy 6063-T5.
  - 2. Plate and Sheet: ASTM B209, alloy 6061-T6.
- F. Elastomeric Sealant:
  - 1. ASTM C920, polyurethane.
  - 2. Type.
  - 3. Class 25.
  - 4. Grade P or NS.
  - 5. Shore A hardness 25, unless specified otherwise.

- G. Thermoplastic Rubber:
  - 1. ASTM C864.
  - 2. Dense Neoprene or other material standard with expansion joint manufacturers having the same physical properties.
- H. Vinyl Invertor Sealant Waterstops: Manufacturers' standard shapes and grade.
- I. Fire Barrier:
  - 1. Designed for indicated or required dynamic structural movement without material degradation or fatigue.
  - 2. Tested in maximum joint width condition as a component of an expansion joint cover assembly in accordance with UL 263 NFPA 251, or ASTM E119 and E814, including hose steam test at full-rated period.
- J. Zinc-Molybdate Primer: Fed. Spec. TT-P-645.
- K. Accessories:
  - 1. Manufacturer's standard anchors, fasteners, set screws, spaces, flexible secondary water stops or seals and filler materials, drain tubes, adhesive and other accessories as indicated or required for complete installations.
  - 2. Compatible with materials in contact.
  - 3. Water stops.

## **2.2 FABRICATION**

- A. General:
  - 1. Use ceiling and wall expansion joint cover assemblies of same design as floor to wall expansion joint cover assemblies, unless shown otherwise.
  - 2. Provide expansion joint cover assemblies of design, basic profile, materials and operation indicated required to accommodate joint size variations in adjacent surfaces, and as required for anticipated structural movement.
  - 3. Deliver to job site ready for use and fabricated in as large sections and assemblies as practical. Assemblies identical to submitted and reviewed shop drawings, samples and certificates.
  - 4. Furnish units in longest practicable lengths to minimize number of end joints. Provide mitered corners where joint changes directions or abuts other materials.
  - 5. Include closure materials and transition pieces, tee-joints, corners, curbs, cross-connections and other assemblies.
  - 6. Fire Performance Characteristics:
    - a. Provide expansion joint cover assemblies identical to those of assemblies whose fire resistance has been determined per ASTM E119 and E814, NFPA 251, or UL 263 including hose stream test at full-rated period.
    - b. Fire rating: Not less than rating of adjacent floor or wall construction.
  - 7. Fire Barrier Systems:
    - a. Material to carry label of approved independent testing laboratory, and be subject to follow-up system for quality assurance.
    - b. Include thermal insulation where necessary, in accordance with above tests, with factory cut miters and transitions.
    - c. For joint widths up to and including 150 mm (six inches), supply barrier in lengths up to 15000 mm (50 feet) to eliminate field splicing.

- d. For joints within enclosed spaces such as chase walls, include 1 mm (0.032-inch) thick galvanized steel cover where conventional expansion joint cover is not used.
  8. Seal Strip: Factory - formed and bonded to metal frames and anchor members.
  9. Compression Seals: Prefabricate from thermoplastic rubber or dense neoprene to sizes and approximate profiles shown.
- B. Interior Wall Joint Cover Assemblies:
1. Surface Mounted Metal Cover Plates:
    - a. Concealed frame for fastening to wall on one sides of joint.
    - b. Extend cover to lap each side of joint and to permit free movement on one side.
    - c. Provide concealed attachment of cover t frame cover in close contact with adjacent finish wall surfaces.
    - d. Use angle cover plates at intersection of walls.
    - e. Use smooth surface cover plates matching floor plates.
    - f. Use expansion fire inserts in fire rated walls, rated same as hour rating of wall.
- C. Exterior Wall Joint Assemblies:
1. Variable movement with seal designed to prevent water and air infiltration.
  2. Use vinyl seal strip as secondary seal behind primary seal.
  3. Cover Plate Assemblies:
    - a. Surface mounted cover plate.
    - b. Concealed frame for fastening to wall on one side of joint.
    - c. Extend cover to lap each side of joint and to permit free movement on one side.
    - d. Provide concealed attachment of cover to frame for cover with cover in close contact with adjacent finish surfaces.
    - e. Use angle cover plate of intersection of walls.
  4. Extruded thermoplastic rubber joint assemblies.
    - a. Aluminum frames both sides of joint.
      - 1) Designed to receive flexible rubber primary seal on exposed face after installation of frame.
      - 2) Designed to receive continuous secondary vinyl sheet seal.
      - 3) Anchor spaced at ends and not over 600 mm (24-inches).
    - b. Variable movement extruded rubber primary seal designed to remain in aluminum frame, throughout movement of joint.
      - 1) Flush mounted seal minimum 3 mm (0.125-inch) thick with dual movement grooves designed for plus or minus 50 percent, movement of joint width.
      - 2) Recessed front face seal minimum 3 mm (0.125-inch) thick with no movement grooves, designed for plus or minus 50 percent movement of joint width.
    - c. Provide factory heat welded transitions where directional changes occur to ensure a watertight system.
    - d. Provide pantographic wind load supports, maximum 2400 mm (8 feet) on center to support seal systems of 300 mm (12-inches) and wider.
- D. Ceiling and Soffit Assemblies:
1. Variable movement vinyl insert in metal frame on both sides of joint.
  2. Designed for flush mounting with no exposed fasteners.
  3. Vinyl insert locked into metal frame.
  4. Vinyl and metal finish as selected by Owner.

5. Vinyl insert semi rigid either flush face or accordion shape as showed to span joint width without sagging.
- E. Preformed Sealant Joint: Factory installed elastomeric sealant between extruded aluminum angle frame both sides.
  1. Elastomeric Sealant: Two part polyurethane sealant with movement capability of +/- 25% of joint width per ASTM-C-920, Type M, Grade P, Class 25, Shore A hardness of 25+/-5.
    - a. Color:
  2. Frame: Extruded Aluminum: Clear anodized.

### **2.3 METAL FINISHES**

- A. General:
  1. Apply finishes in factory after products are fabricated.
  2. Protect finishes on exposed surfaces with protective covering before shipment.
- B. Aluminum Finishes:
  1. Finish letters and numbers for anodized aluminum are in accordance with the NAAMM AMP 501, Aluminum Association's Designation System).
    - a. Clear anodized finish: AA-C22A41 Chemically etched medium matte, clear anodic coating, Class I Architectural, 0.7 - mil thick.
  2. Factory-Primed Concealed Surface: NAAMM AMP 505 Protect concealed aluminum surfaces that will be in contact with plaster, concrete or masonry surfaces when installed by applying a shop coat of zinc-molybdate primer to contact surfaces. Provide minimum dry film thickness of 2.0 mils.
- C. Stainless Steel: NAAMM AMP 503, finish No. 2B.
- D. Carbon Steel: NAAMM AMP 504, Galvanized 690.

## **PART 3 EXECUTION**

### **3.1 EXAMINATION**

- A. Manufacturer's representative shall make a thorough examination of surfaces receiving work of this section.
- B. Before starting installation, notify prime contractor of defects, which would affect satisfactory completion of work.

### **3.2 PREPARATION**

- A. Verify measurements and dimensions at job site and cooperate in coordination and scheduling of work with work of related trades.
- B. Give particular attention to installation of items embedded in concrete and masonry so as not to delay job progress.
- C. Provide templates to related trade for location of support and anchorage items.

### **3.3 INSTALLATION**

- A. Install in accordance with manufacturers installation instructions unless specified otherwise.
- B. Provide anchorage devices and fasteners for securing expansion joint assemblies to in-place construction including threaded fasteners with drilled-in fasteners for masonry and concrete where anchoring members are not embedded in concrete. Provide metal fasteners of type and size to suit type of construction indicated and provide for secure attachment of expansion joint cover assemblies.
- C. Perform cutting, drilling and fitting required for installation of expansion joint cover assemblies.

- D. Install joint cover assemblies in true alignment and proper relationship to expansion joint opening and adjoining finished surfaces measured from established lines and levels.
- E. Allow for thermal expansion and contraction of metal to avoid buckling.
- F. Set floor covers at elevations flush with adjacent finished floor materials unless shown otherwise.
- G. Material and method of grouting floor frames set in prepared recesses in accordance with manufacturer's instructions.
- H. Locate wall, ceiling and soffit covers in continuous contact with adjacent surfaces. Securely attach in place with required accessories.
- I. Locate anchors at interval recommended by manufacturer, but not less than 75 mm (3-inches) from each ends, and, not more than 600 mm (24-inches) on centers.
- J. Maintain continuity of expansion joint cover assemblies with end joints held to a minimum and metal members aligned mechanically using splice joints.
- K. Cut and fit ends to produce joints that will accommodate thermal expansion and contraction of metal to avoid buckling of frames or plates.
- L. Flush Metal Cover Plates:
  - 1. Secure flexible filler between frames so that it will compress and expand.
  - 2. Adhere flexible filler materials to frames with adhesive or pressure-sensitive tape as recommended by manufacturer.
- M. Fire Barriers:
  - 1. Install in compliance with tested assembly.
  - 2. Install in floors and in fire rated walls.
  - 3. Use fire barrier sealant or caulk supplied with system.
- N. Sealants:

Install to prevent water and air infiltration.
- O. Vertical Exterior Extruded Thermoplastic Rubber.
  - 1. Install side frames mounted on sealant or butyl caulk tape with appropriate anchors 600 mm (24 inches) on center complete with independent continuous PVC back seal.
  - 2. Install primary seals retained in extruded aluminum side frames.
- P. Installation of Extruded Thermoplastic Rubber or Seals:
  - 1. For straight sections, provide preformed seals in continuous lengths.
  - 2. Vulcanize or heat-seal field splice joints to provide watertight joints using manufacturer's recommended procedures.
- Q. Installation of Preformed Elastomeric Sealant Joint:
  - 1. Locate joint directly over joints in wall or floor substrates.
  - 2. Full length shall be fastened to substrate using a construction adhesive.
  - 3. Install flush or slightly below finish material.

### 3.4 PROTECTION

- A. Take proper precautions to protect the expansion joint covers from damage after they are in place.
- B. Cover floor joints with plywood where wheel traffic occurs.

- - - E N D - - -

**SECTION 08 11 13  
HOLLOW METAL DOORS AND FRAMES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies steel doors, steel frames and related components.
- B. Terms relating to steel doors and frames as defined in ANSI A123.1 and as specified.

**1.2 RELATED WORK**

- A. Aluminum frames entrance work: Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS.
- B. Door Hardware: Section 08 71 00, DOOR HARDWARE.
- C. Glazing: Section 08 80 00, GLAZING.
- D. Card readers and biometric devices: Section 28 13 00, ACCESS CONTROL.

**1.3 TESTING**

- A. An independent testing laboratory shall perform testing.

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturers Literature and Data:
  - 1. Fire rated doors and frames, showing conformance with NFPA 80 and Underwriters Laboratory, Inc., or Intertek Testing Services or Factory Mutual fire rating requirements.

**1.5 SHIPMENT**

- A. Prior to shipment label each door and frame to show location, size, door swing and other pertinent information.
- B. Fasten temporary steel spreaders across the bottom of each door frame.

**1.6 STORAGE AND HANDLING**

- A. Store doors and frames at the site under cover.
- B. Protect from rust and damage during storage and erection until completion.

**1.7 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):
  - L-S-125B.....Screening, Insect, Nonmetallic
- C. Door and Hardware Institute (DHI):
  - A115 Series.....Steel Door and Frame Preparation for Hardware, Series A115.1 through A115.17 (Dates Vary)
- D. Steel Door Institute (SDI):
  - 113-01 (R2006).....Thermal Transmittance of Steel Door and Frame Assemblies
  - 128-09.....Acoustical Performance for Steel Door and Frame Assemblies
- E. American National Standard Institute:

- A250.8-2003 (R2008).....Specifications for Standard Steel Doors and Frames
- F. American Society for Testing and Materials (ASTM):
- A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
  - A568/568-M-11.....Steel, Sheet, Carbon, and High-Strength, Low-alloy, Hot-Rolled and Cold-Rolled
  - A1008-10.....Steel, sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy and High Strength Low Alloy with Improved Formability
  - B209/209M-10.....Aluminum and Aluminum-Alloy Sheet and Plate
  - B221/221M-12.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles and Tubes
  - D1621-10.....Compressive Properties of Rigid Cellular Plastics
  - D3656-07.....Insect Screening and Louver Cloth Woven from Vinyl Coated Glass Yarns
  - E90-09.....Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions
- G. The National Association Architectural Metal Manufacturers (NAAMM):  
Metal Finishes Manual (AMP 500-06)
- H. National Fire Protection Association (NFPA):  
80-13.....Fire Doors and Fire Windows
- I. Underwriters Laboratories, Inc. (UL):  
Fire Resistance Directory
- J. Intertek Testing Services (ITS):  
Certifications Listings...Latest Edition
- K. Factory Mutual System (FM):  
Approval Guide

## **PART 2 - PRODUCTS**

### **2.1 MATERIALS**

- A. Sheet Steel: ASTM A1008, cold-rolled for panels (face sheets) of doors.
- B. Anchors, Fastenings and Accessories: Fastenings anchors, clips connecting members and sleeves from zinc coated steel.
- C. Prime Paint: Paint that meets or exceeds the requirements of A250.8.

### **2.2 FABRICATION GENERAL**

- A. GENERAL:
  - 1. Follow ANSI A250.8 for fabrication of standard steel doors, except as specified otherwise. Doors to receive hardware specified in Section 08 71 00, DOOR HARDWARE. Tolerances as per ANSI A250.8. Thickness, 44 mm (1-3/4 inches), unless otherwise shown.
  - 2. Close top edge of exterior doors flush and seal to prevent water intrusion.
  - 3. When vertical steel stiffeners are used for core construction, fill spaces between stiffeners with mineral fiber insulation.
- B. Standard Duty Doors: ANSI A250.8, Level 1, Full flush seamless design of size and design shown. Use for interior locations only.
- C. Heavy Duty Doors: ANSI A250.8, Level 2, Full flush seamless design of size and design shown. Core construction types a, d, or f, for interior doors, and, types b, c, e, or f, for exterior doors.
- D. Smoke Doors:
  - 1. Close top and vertical edges flush.
  - 2. Provide seamless vertical edges.



3. Apply Steel astragal to the meeting style at the active leaf of pair of doors or double egress doors.
  4. Provide clearance at head, jamb and sill as specified in NFPA 80.
- E. Fire Rated Doors (Labeled):
1. Conform to NFPA 80 when tested by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual for the class of door or door opening shown.
  2. Fire rated labels of metal, with raised or incised markings of approving laboratory shall be permanently attached to doors.
  3. Close top and vertical edges of doors flush. Vertical edges shall be seamless. Apply steel astragal to the meeting stile of the active leaf of pairs of fire rated doors, except where vertical rod exit devices are specified for both leaves swinging in the same direction.

### 2.3 METAL FRAMES

- A. General:
1. ANSI A250.8, 1.3 mm (0.053 inch) thick sheet steel, types and styles as shown or scheduled.
  2. Frames for exterior doors: Fabricate from 1.7 mm (0.067 inch) thick galvanized steel conforming to ASTM A525.
  3. Frames for labeled fire rated doors.
    - a. Comply with NFPA 80. Test by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual.
    - b. Fire rated labels of approving laboratory permanently attached to frames as evidence of conformance with these requirements. Provide labels of metal or engraved stamp, with raised or incised markings.
  4. Knocked-down frames are not acceptable.
- B. Reinforcement and Covers:
1. ANSI A250.8 for, minimum thickness of steel reinforcement welded to back of frames.
  2. Provide mortar guards securely fastened to back of hardware reinforcements.
- C. Terminated Stops: ANSI A250.8.
- D. Glazed Openings:
- a. Form integral stop on exterior, corridor, or secure side of door.
  - b. Design rabbet width and depth to receive glazing material or panel shown or specified.
- F. Frame Anchors:
1. Floor anchors:
    - a. Where floor fills occur, provide extension type floor anchors to compensate for depth of fill.
    - b. At bottom of jamb use 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive two 6 mm (1/4 inch) floor bolts. Use 50 mm x 50 mm (2 inch by 2 inch) 9 mm by (3/8 inch) clip angle for lead lined frames, drilled for 9 mm (3/8 inch) floor bolts.
    - c. Where sill sections occur, provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for 6 mm (1/4 inch) floor bolts and frame anchor screws. Space floor bolts at 50 mm (24 inches) on center.
  2. Jamb anchors:
    - a. Locate anchors on jambs near top and bottom of each frame, and at intermediate points not over 600 mm (24 inches) apart, except for

fire rated frames space anchors as required by labeling authority.

- b. Form jamb anchors of not less than 1 mm (0.042 inch) thick steel unless otherwise specified.
- d. Anchors for stud partitions: Either weld to frame or use lock-in snap-in type. Provide tabs for securing anchor to the sides of the studs.
- e. Anchors for frames set in prepared openings:
  - 1) Steel pipe spacers with 6 mm (1/4 inch) inside diameter welded to plate reinforcing at jamb stops or hat shaped formed strap spacers, 50 mm (2 inches) wide, welded to jamb near stop.
  - 2) Drill jamb stop and strap spacers for 6 mm (1/4 inch) flat head bolts to pass thru frame and spacers.
  - 3) Two piece frames: Subframe or rough buck drilled for 6 mm (1/4 inch) bolts.
- f. Modify frame anchors to fit special frame and wall construction and provide special anchors where shown or required.

## 2.6 SHOP PAINTING

- A. ANSI A250.8.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Plumb, align and brace frames securely until permanent anchors are set.
  - 1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.
  - 2. Use wood spreaders at bottom of frame if the shipping spreader is removed.
  - 3. Protect frame from damage.
  - 4. Remove spreaders after frames are set and anchored.
  - 5. Remove wood spreaders and braces only after the walls are built and jamb anchors are secured.
- B. Floor Anchors:
  - 1. Anchor the bottom of door frames to floor with two 6 mm (1/4 inch) diameter expansion bolts. Use 9 mm (3/8 inch) bolts on lead lined frames.
  - 2. Power actuated drive pins may be used to secure frame anchors to concrete floors.
- C. Jamb Anchors:
  - 1. Anchors in masonry walls: Embed anchors in mortar. Fill space between frame and masonry wall with grout or mortar as walls are built.
  - 2. Secure anchors to sides of studs with two fasteners through anchor tabs. Use steel drill screws to steel studs.
  - 3. Frames set in prepared openings of masonry or concrete: Expansion bolt to wall with 6 mm (1/4 inch) expansion bolts through spacers. Where subframes or rough bucks are used, 6 mm (1/4 inch) expansion bolts on 600 mm (24 inch) centers or power activated drive pins 600 mm (24 inches) on centers. Secure two piece frames to subframe or rough buck with machine screws on both faces.
- D. Install anchors for labeled fire rated doors to provide rating as required.
- E. Overhead Bracing (Lead Lined Frames): Where jamb extensions extend to structure above, anchor clip angles with not less than two, 9 mm (3/8

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
Sam Rayburn Memorial Veterans Center, Bonham, Texas  
100% ISSUED FOR CONSTRUCTION  
01-01-13

inch) expansion bolts or power actuated drive pins to concrete slab.  
Weld to steel overhead members.

- - - E N D - - -

**SECTION 08 14 00**  
**INTERIOR WOOD DOORS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies interior flush doors with prefinish, prefit option.
- B. Section includes fire rated doors.

**1.2 RELATED WORK**

- A. Metal doorframes: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.
- B. Door hardware including hardware location (height): Section 08 71 00, DOOR HARDWARE.
- C. Glazing: Section 08 80 00, GLAZING.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples: Veneer sample 200 mm (8 inch) by 275 mm (11 inch) by 6 mm (1/4 inch) showing specified wood species sanded to receive a transparent finish. Factory finish veneer sample where the prefinished option is accepted.
- C. Shop Drawings:
  - 1. Show every door in project and schedule location in building.
  - 2. Indicate type, grade, finish and size; include pertinent details.
  - 3. Provide information concerning specific requirements not included in the manufacturer's literature and data submittal.
- D. Manufacturer's Literature and Data: Labeled fire rated doors showing conformance with NFPA 80.
- E. Laboratory Test Reports:
  - 1. Screw holding capacity test report in accordance with WDMA T.M.10.
  - 2. Split resistance test report in accordance with WDMA T.M.5.
  - 3. Cycle/Slam test report in accordance with WDMA T.M.7.
  - 4. Hinge-Loading test report in accordance with WDMA T.M.8.

**1.4 WARRANTY**

- A. Doors are subject to terms of Article titled "Warranty of Construction", FAR clause 52.246-21, except that warranty shall be as follows:
  - 1. For interior doors, manufacturer's warranty for lifetime of original installation.

**1.5 DELIVERY AND STORAGE**

- A. Factory seal doors and accessories in minimum of 6 mill polyethylene bags or cardboard packages which shall remain unbroken during delivery and storage.
- B. Store in accordance with WDMA I.S.1-A, Job Site Information.
- C. Label package for door opening where used.

**1.6 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

- B. Window and Door Manufacturers Association (WDMA):
  - I.S.1A-11.....Architectural Wood Flush Doors
  - I.S.4-09.....Water-Repellent Preservative Non-Pressure Treatment for Millwork
  - I.S.6A-11.....Architectural Wood Stile and Rail Doors
  - T.M.6-08.....Adhesive (Glue Bond) Durability Test Method
  - T.M.7-08.....Cycle-Slam Test Method
  - T.M.8-08.....Hinge Loading Test Method
  - T.M.10-08.....Screwholding Test Method
- C. National Fire Protection Association (NFPA):
  - 80-10.....Protection of Buildings from Exterior Fire
  - 252-08.....Fire Tests of Door Assemblies
- D. ASTM International (ASTM):
  - E90-09.....Laboratory Measurements of Airborne Sound Transmission Loss

**PART 2 - PRODUCTS**

**2.1 FLUSH DOORS**

- A. General:
  - 1. Meet requirements of WDMA I.S.1-A, Extra Heavy Duty.
  - 2. Adhesive: Type II
  - 3. Thickness: 45 mm (1-3/4 inches) unless otherwise shown or specified.
- B. Face Veneer:
  - 1. In accordance with WDMA I.S.1-A.
  - 2. One species throughout the project unless scheduled or otherwise shown.
  - 3. For transparent finishes: Premium Grade. rotary cut, red oak.
    - a. Match face veneers for doors for uniform effect of color and grain at joints.
    - b. Door edges shall be same species as door face veneer.
    - c. In existing buildings, where doors are required to have transparent finish, use wood species and grade of face veneers to match adjacent existing doors
- C. Fire rated wood doors:
  - 1. Fire Performance Rating:
    - a. "B" label, 1-1/2 hours.
    - b. "C" label, 3/4 hour.
  - 2. Labels:
    - a. Doors shall conform to the requirements of ASTM E2074, or NFPA 252, and, carry an identifying label from a qualified testing and inspection agency for class of door or opening shown designating fire performance rating.
    - b. Metal labels with raised or incised markings.
  - 3. Performance Criteria for Stiles of doors utilizing standard mortise leaf hinges:
    - a. Hinge Loading: WDMA T.M.8. Average of 10 test samples for Extra Heavy Duty doors.
    - b. Direct screw withdrawal: WDMA T.M.10 for Extra Heavy Duty doors. Average of 10 test samples using a steel, fully threaded #12 wood screw.
    - c. Cycle Slam: 1,000,000 cycles with no loose hinge screws or other visible signs of failure when tested in accordance with WDMA T.M.7.
  - 4. Additional Hardware Reinforcement:
    - a. Provide fire rated doors with hardware reinforcement blocking.

- b. Size of lock blocks as required to secure hardware specified.
- c. Top, bottom and intermediate rail blocks shall measure not less than 125 mm (five inches) minimum by full core width.
- d. Reinforcement blocking in compliance with manufacturer's labeling requirements.
- e. Mineral material similar to core is not acceptable.
- 5. Other Core Components: Manufacturer's standard as allowed by the labeling requirements.
- 6. Provide steel frame approved for use in labeled doors for vision panels.
- 7. Provide steel astragal on pair of doors.
- D. Smoke Barrier Doors:
  - 1. For glazed openings use steel frames approved for use in labeled doors.
  - 2. Provide a steel astragal on one leaf of pairs of doors, including double egress doors.

## **2.2 PREFINISH, PREFIT OPTION**

- A. Flush doors may be factory machined to receive hardware, bevels, undercuts, cutouts, accessories and fitting for frame.
- B. Factory fitting to conform to specification for shop and field fitting, including factory application of sealer to edge and routings.
- C. Flush doors to receive transparent finish (in addition to being prefit) may be factory finished as follows:
  - 1. WDMA I.S.1-A Section F-3 specification for System TR-4, Conversion Varnish or System TR-5, Catalyzed Vinyl.
  - 2. Use stain when required to produce the selected finish.

## **2.3 IDENTIFICATION MARK:**

- A. On top edge of door.
- B. Either a stamp, brand or other indelible mark, giving manufacturer's name, door's trade name, construction of door, code date of manufacture and quality.
- C. Accompanied by either of the following additional requirements:
  - 1. An identification mark or a separate certification including name of inspection organization.
  - 2. Identification of standards for door, including glue type.
  - 3. Identification of veneer and quality certification.
  - 4. Identification of preservative treatment for stile and rail doors.

## **2.4 SEALING:**

- A. Give top and bottom edge of doors two coats of catalyzed polyurethane or water resistant sealer before sealing in shipping containers.

## **PART 3 - EXECUTION**

### **3.1 DOOR PREPARATION**

- A. Field, shop or factory preparation: Do not violate the qualified testing and inspection agency label requirements for fire rated doors.
- B. Clearances between Doors and Frames and Floors:
  - 1. Maximum 3 mm (1/8 inch) clearance at the jambs, heads, and meeting stiles, and a 19 mm (3/4 inch) clearance at bottom, except as otherwise specified.
  - 2. Maximum clearance at bottom of sound rated doors, light-proofed doors, doors to operating rooms, and doors designated to be fitted with mechanical seal: 10 mm (3/8 inch).

- C. Provide cutouts for special details required and specified.
- D. Rout doors for hardware using templates and location heights specified in Section, 08 71 00 DOOR HARDWARE.
- E. Fit doors to frame, bevel lock edge of doors 3 mm (1/8 inch) for each 50 mm (two inches) of door thickness // undercut where shown. //
- F. Immediately after fitting and cutting of doors for hardware, seal cut edges of doors with two coats of water resistant sealer.
- G. Finish surfaces, including both faces, top and bottom and edges of the doors smooth to touch.
- H. Apply a steel astragal on the opposite side of active door on pairs of fire rated doors.
- I. Apply a steel astragal to meeting style of active leaf of pair of doors or double egress smoke doors.

### **3.2 DOOR PROTECTION**

- A. As door installation is completed, place polyethylene bag or cardboard shipping container over door and tape in place.
- B. Provide protective covering over knobs and handles in addition to covering door.
- C. Maintain covering in good condition until removal is approved by COR.

- - - E N D - - -

**SECTION 08 31 13  
ACCESS DOORS AND FRAMES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. Section specifies access doors or panels.

**1.2 RELATED WORK:**

- A. Lock Cylinders: Section 08 71 00, DOOR HARDWARE.
- B. Locations of access doors for duct work cleanouts: Section 23 31 00,  
HVAC DUCTS AND CASINGS

**1.3 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Access doors, each type, showing construction, location and installation details.
- C. Manufacturer's Literature and Data: Access doors, each type.

**1.4 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A167-99(R-2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip
  - A1008-10.....Steel Sheet, Cold-Rolled, Carbon, Structural, High Strength Low-Alloy
- C. American Welding Society (AWS):
  - D1.3-08.....Structural Welding Code Sheet Steel
- D. National Fire Protection Association (NFPA):
  - 80-10.....Fire Doors and Windows
- E. The National Association of Architectural Metal Manufacturers (NAAMM):
  - AMP 500 Series.....Metal Finishes Manual
- F. Underwriters Laboratories, Inc. (UL):
  - Fire Resistance Directory

**PART 2 - PRODUCTS**

**2.1 FABRICATION, GENERAL**

- A. Fabricate components to be straight, square, flat and in same plane where required.
  - 1. Slightly round exposed edges and without burrs, snags and sharp edges.
  - 2. Exposed welds to be continuous and ground smooth.
  - 3. Weld in accordance with AWS D1.3.
- B. Number of locks and non-continuous hinges as required to maintain alignment of panel with frame. For fire rated doors, use hinges and locks as required by fire test.
- C. Provide anchors or make provisions in frame for anchoring to adjacent construction. Provide size, number and location of anchors on four sides to secure access door in opening. Provide anchors as required by fire test.



**2.2 ACCESS DOORS, FIRE RATED:**

- A. Shall meet requirements for "B" label 1-1/2 hours with maximum temperature rise of 120 degree C (250 degrees F).
- B. Comply with NFPA 80 and have Underwriters Laboratories Inc., or other nationally recognized laboratory label for Class B opening.
- C. Door Panel: Form of 0.9 mm (0.0359 inch) thick steel sheet, insulated sandwich type construction.
- D. Frame: Form of 1.5 mm (0.0598 inch) thick steel sheet of depth and configuration to suit material and type of construction where installed. Provide frame flange at perimeter where installed in concrete masonry or gypsum board openings.
  - 1. Weld exposed joints in flange and grind smooth.
  - 2. Provide frame flange at perimeter where installed in concrete masonry or gypsum board.
- E. Automatic Closing Device: Provide automatic closing device for door.
- F. Hinge: Continuous steel hinge with stainless steel pin.
- G. Lock:
  - 1. Self-latching, with provision for fitting flush a standard screw-in type lock cylinder. Lock cylinder specified in Section 08 71 00, DOOR HARDWARE.
  - 2. Provide latch release device operable from inside of door. Mortise case in door.

**2.3 ACCESS DOORS, FLUSH PANEL:**

- A. Door Panel:
  - 1. Form of 1.9 mm (0.0747 inch) thick steel thick steel sheet.
  - 2. Reinforce to maintain flat surface.
- B. Frame:
  - 1. Form of 1.5 mm (0.0598 inch) thick steel sheet of depth and configuration to suit material and type of construction where installed.
  - 2. Provide surface mounted units having frame flange at perimeter where installed in concrete, masonry, or gypsum board construction.
  - 3. Weld exposed joints in flange and grind smooth.
- C. Hinge:
  - 1. Concealed spring hinge to allow panel to open 175 degrees.
  - 2. Provide removable hinge pin to allow removal of panel from frame.
- D. Lock:
  - 1. Flush, screwdriver operated cam lock.

**2.4 ACCESS DOOR, RECESSED PANEL:**

- A. Door Panel:
  - 1. Form of 1.2 mm (0.0478 inch) thick steel sheet to form a 25 mm (one inch) deep recessed pan to accommodate the installation of acoustical units or other materials where shown in walls and ceiling.
  - 2. Reinforce as required to prevent sagging.
- B. Frame:
  - 1. Form of 1.5 mm (0.0598 inch) thick steel sheet of depth and configuration to suit installation in suspension system of ceiling or wall framing.
  - 2. Extend sides of frame to protect edge of acoustical units when panel is in open position.
  - 3. Provide shims, bushings, clips and other devices necessary for installation.

- C. Hinge: Continuous steel hinge with stainless steel pin or concealed hinge.
- D. Lock:
  - 1. Flush screwdriver operated cam lock.
  - 2. Provide sleeve of plastic or stainless steel grommet to protect hole made in acoustical unit for screwdriver access to lock.

**2.5 FINISH:**

- A. Provide in accordance with NAAMM AMP 500 series on exposed surfaces.
- B. Steel Surfaces: Baked-on prime coat over a protective phosphate coating.

**2.6 SIZE:**

- A. Minimum 600 mm (24 inches) square door unless otherwise shown.

**PART 3 - EXECUTION**

**3.1 LOCATION:**

- A. Provide access panels or doors wherever any valves, traps, dampers, cleanouts, and other control items of mechanical, electrical and conveyor work are concealed in wall or partition, or are above inaccessible ceilings.
- B. Use fire rated doors in fire rated partitions.
- C. Use flush panels in partitions and gypsum board or plaster ceilings, except lay-in acoustical panel ceilings or upward access acoustical tile ceilings.

**3.2 INSTALLATION, GENERAL:**

- A. Install access doors in openings to have sides vertical in wall installations, and parallel to ceiling suspension grid or side walls when installed in ceiling.
- B. Set frames so that edge of frames without flanges will finish flush with surrounding finish surfaces.
- C. Set frames with flanges to overlap opening and so that face will be uniformly spaced from the finish surface.
- D. Set recessed panel access doors recessed so that face of surrounding materials will finish on the same plane, when finish in door is installed.

**3.3 ANCHORAGE:**

- A. Secure frames to adjacent construction using anchors attached to frames or by use of bolts or screws through the frame members.
- B. Type, size and number of anchoring device suitable for the material surrounding the opening, maintain alignment, and resist displacement during normal use of access door.
- C. Anchors for fire rated access doors shall meet requirements of applicable fire test.

**3.4 ADJUSTMENT:**

- A. Adjust hardware so that door panel will open freely.
- B. Adjust door when closed so door panel is centered in the frame.

- - - E N D - - -

**SECTION 08 41 13**  
**ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. This section specifies aluminum entrance work including storefront construction, hung doors, horizontal acting doors and other components to make a complete assembly.

**1.2 RELATED WORK:**

- A. Glass and Glazing: Section 08 80 00, GLAZING.
- B. Hardware: Section 08 71 00, DOOR HARDWARE.
- C. Automatic Door Operators: Section 08 71 13, AUTOMATIC DOOR OPERATORS.

**1.3 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: (1/2 full scale) showing construction, anchorage, reinforcement, and installation details.
- C. Manufacturer's Literature and Data:
  - 1. Doors, each type.
  - 2. Entrance and Storefront construction.
- D. Manufacturer's Certificates:
  - 1. Stating that aluminum has been given specified thickness of anodizing.
  - 2. Indicating manufacturer's qualifications specified.
- E. Samples: For prefinished items exposed to view, provide samples of manufacturer's full standard color and texture range for selection by Owner.

**1.4 QUALITY ASSURANCE:**

- A. Approval by Contracting Officer is required of products of proposed manufacturer, or supplier, and will be based upon submission by Contractor certification.
- B. Certify manufacturer regularly and presently manufactures aluminum entrances and storefronts as one of their principal products.

**1.5 DELIVERY, STORAGE AND HANDLING:**

- A. Deliver aluminum entrance and storefront material to the site in packages or containers; labeled for identification with the manufacturer's name, brand and contents.
- B. Store aluminum entrance and storefront material in weather-tight and dry storage facility.
- C. Protect from damage from handling, weather and construction operations before, during and after installation.

**1.6 APPLICABLE PUBLICATIONS:**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):  
B209-07.....Aluminum and Aluminum-Alloy Sheet and Plate

- B221-08.....Aluminum and Aluminum-Alloy Extruded Bars,  
Rods, Wire, Shapes, and Tubes
- E283-04.....Rate of Air Leakage Through Exterior Windows,  
Curtain Walls, and Doors Under Specified  
Pressure Differences Across the Specimen
- E331-00(R2009).....Water Penetration of Exterior Windows, Curtain  
Walls, and Doors by Uniform Static Air Pressure  
Difference
- F468-10.....Nonferrous Bolts, Hex Cap Screws, and Studs for  
General Use
- F593-02(R2008).....Stainless Steel Bolts, Hex Cap Screws, and  
Studs
- C. National Association of Architectural Metal Manufacturers (NAAMM):  
AMP 500 Series.....Metal Finishes Manual
- D. American Architectural Manufacturer's Association (AAMA):  
2604-10.....High Performance Organic Coatings on  
Architectural Aluminum Extrusions and Panels
- E. American Welding Society (AWS):  
D1.2-08.....Structural Welding Code Aluminum

**1.7 PERFORMANCE REQUIREMENTS:**

- A. Shapes and thickness of framing members shall be sufficient to withstand a design wind load as required by Code for supported area with a deflection of not more than 1/175 times the length of the member and a safety factor of not less than 1.65 (applied to overall load failure of the unit). Provide glazing beads, moldings, and trim of not less than 1.25 mm (0.050 inch) nominal thickness.
- B. Air Infiltration: When tested in accordance with ASTM E 283, air infiltration shall not exceed 2.63 x 10<sup>-5</sup> cm per square meter (0.06 cubic feet per minute per square foot) of fixed area at a test pressure of 0.30 kPa (6.24 pounds per square foot) 80 kilometers (50 mile) per hour wind.
- C. Water Penetration: When tested in accordance with ASTM E 331, there shall be no water penetration at a pressure of 0.38 kPa (8 pounds per square foot) of fixed area.

**PART 2 - PRODUCTS**

**2.1 MATERIALS:**

- A. Aluminum, ASTM B209 and B221:
  - 1. Alloy 6063 temper T5 for doors, door frames, fixed glass sidelights and storefronts.
  - 2. Alloy 6061 temper T6 for guide tracks for extruded structural members.
  - 3. For color anodized finish, use aluminum alloy as required to produce specified color.
- B. Thermal Break: Manufacturer standard low conductive material retarding heat flow in the framework, where insulating glass is scheduled.
- C. Fasteners:
  - 1. Aluminum: ASTM F468, Alloy 2024.
  - 2. Stainless Steel: ASTM F593, Alloy Groups 1, 2 and 3.

**2.2 FABRICATION:**

- A. Fabricate doors, of extruded aluminum sections not less than 3 mm (0.125 inch) thick. Fabricate glazing beads of aluminum not less than 1.0 mm (0.050 inch) thick.

- B. Accurately form metal parts and accurately fit and rigidly assemble joints, except those joints designed to accommodate movement. Seal joints to prevent leakage of both air and water.
- C. Make welds in aluminum in accordance with the recommended practice AWA D1.2. Use electrodes and methods recommended by the manufacturers of the metals and alloys being welded. Make welds behind finished surfaces so as to cause no distortion or discoloration of the exposed side. Clean welded joints of welding flux and dress exposed and contact surfaces.
- D. Make provisions in doors and frames to receive the specified hardware and accessories. Coordinate schedule and template for hardware specified under Section 08 71 00, DOOR HARDWARE. Where concealed closers or other mechanisms are required, provide the necessary space, cutouts, and reinforcement for secure fastening.
- E. Fit and assemble the work at the manufacturer's plant. Mark work that cannot be permanently plant-assembled to assure proper assembly in the field.

### **2.3 PROTECTION OF ALUMINUM:**

- A. Isolate aluminum from contact with dissimilar metals other than stainless steel, white bronze, or zinc by any of the following:
  - 1. Coat the dissimilar metal with two coats of heavy-bodied alkali resistant bituminous paint.
  - 2. Place caulking compound, or non-absorptive tape, or gasket between the aluminum and the dissimilar metal.
  - 3. Paint aluminum in contact with mortar, concrete and plaster, with a coat of aluminum paint primer.

### **2.4 FRAMES:**

- A. Fabricate doors, frames, mullions, transoms, frames for fixed glass and similar members from extruded aluminum not less than 3 mm (0.125 inch) thick.
- B. Provide integral stops and glass rebates and applied snap-on type trim.
- C. Use concealed screws, bolts and other fasteners. Secure cover boxes to frames in back of all lock strike cutouts.
- D. Fabricate framework with thermal breaks in frames where insulating glass is scheduled and specified under Section 08 80 00, GLAZING.

### **2.5 STILE AND RAIL DOORS:**

- A. Nominal 1-3/4 inch thick, with 5" stiles and head rail and minimum 6.75" tall bottom rail.
- B. Bevel single-acting doors 3 mm (1/8 inch) at lock, hinge and meeting stile edges. Provide clearances of 2 mm (1/16 inch) at hinge stiles, 3 mm (1/8 inch) at lock stiles and top rails, and 5 mm (3/16 inch) at floors and thresholds. Form glass rebates integrally with stiles and rails. Glazing beads may be formed integrally with stiles and rails or applied type secured with fasteners at 150 mm (six inches) on centers.
- C. Construct doors with a system of welded joints or interlocking dovetail joints between stiles and rails. Clamp door together through top and bottom rails with 9 mm (3/8 inch) primed steel rod extending into the stiles, and having a self-locking nut and washer at each end. Reinforce stiles and rails to prevent door distortion when tie rods are tightened. Provide a compensating spring-type washer under each nut to take up any stresses that may develop. Construct joints between rails and stiles to remain rigid and tight when door is operated.

- D. Weather-stripping: Provide removable, woven pile type (silicone-treated) weather-stripping attached to aluminum or vinyl holder. Make slots for applying weather-stripping integral with doors and door frame stops. Apply continuous weather-stripping to heads, jambs, bottom, and meeting stiles of doors and frames. Install weather-stripping so doors can swing freely and close positively.

**2.7 REINFORCEMENT FOR BUILDERS HARDWARE:**

- A. Fabricate from stainless steel plates.
- B. Hinge and pivot reinforcing: 4.55 mm (0.1793 inch) thick.
- C. Reinforcing for lock face, flush bolts, concealed holders, concealed or surface mounted closers: 2.66 mm (0.1046 inch) thick.
- D. Reinforcing for all other surface mounted hardware: 1.5 mm (0.0598 inch) thick.

**2.9 FINISH**

- A. In accordance with NAAMM AMP 500 series.
- B. Anodized Aluminum: Color Finish: Chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 7 mils thick. More than 50 percent variation of the maximum shade range approved will not be accepted in a single component or in adjacent components, stiles, and rails on a continuous series.

**PART 3 - EXECUTION**

**3.1 INSTALLATION:**

- A. Allowable Installation Tolerances: Install work plumb and true, in alignment and in relation to lines and grades shown. Variation of 3 mm (1/8 inch) in 2400 mm (eight feet), non-accumulative, is maximum permissible for plumb, level, warp, bow and alignment.
- B. Anchor aluminum frames to adjoining construction at heads, jambs and bottom and to steel supports, and bracing. Anchor frames with stainless steel or aluminum countersunk flathead, expansion bolts or machine screws, as applicable. Use aluminum clips for internal connections of adjoining frame sections.
- C. Where work is installed within masonry or concrete openings, place no parts other than built-in anchors and provision for operating devices located in the floor, until after the masonry or concrete work is completed.
- D. Install hardware specified under Section 08 71 00, DOOR HARDWARE.
- E. Install hung door operators specified under Section 08 71 13, AUTOMATIC DOOR OPERATORS.

**3.2 ADJUSTING:**

After installation of entrance and storefront work is completed, adjust and lubricate operating mechanisms to insure proper performance.

**3.3 PROTECTION, CLEANING AND REPAIRING:**

Remove all mastic smears and other unsightly marks, and repair any damaged or disfiguration of the work. Protect the installed work against damage or abuse.

- - - E N D - - -

**SECTION 08 45 00**  
**ALL-GLASS ENTRANCES**

**PART 1 GENERAL**

**1.1 SECTION INCLUDES**

- A. Swinging all-glass entrances with matching sidelights as indicated.

**1.2 RELATED SECTIONS**

- A. Section 05 50 00 - Metal Fabrications
- B. Section 08 71 00 - Door Hardware.

**1.3 REFERENCES**

- A. ASTM A 666 - Standard Specification for Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.
- B. ASTM B 221 - Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes.
- C. ASTM B 221M - Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes (Metric).
- D. ASTM B 455 - Standard Specification for Copper-Zinc-Lead (Leaded Brass) Extruded Shapes.
- E. ASTM C 920 - Standard Specification for Elastomeric Joint Sealants.
- F. ASTM C 1036 - Standard Specification for Flat Glass.
- G. ASTM C 1048 - Standard Specification for Heat Treated Flat Glass-Kind HS, Kind FT Coated and Uncoated Glass.
- H. NAAMM Metal Finishes Manual; National Association of Architectural Metal Manufacturers.

**1.4 SUBMITTALS**

- A. Product Data: Manufacturer's descriptive literature for each component in all-glass entrance assembly.
- B. Shop Drawings: Dimensioned drawings as follows:
  - 1. Plans: Indicate layout of all-glass entrance assemblies.
  - 2. Elevations:
    - a. Appearance of all-glass entrance layouts.
    - b. Locations and identification of manufacturer-supplied door hardware and fittings.
    - c. Locations and sizes of cut-outs and drilled holes for other door hardware.
  - 3. Details:
    - a. Interface with adjacent construction; include requirements for support and bracing at openings.
    - b. Installation details.
    - c. Appearance of manufacturer-supplied door hardware and fittings.
  - 4. Schedule: Listing of each type component in all-glass entrance assemblies, cross-referenced to shop drawing plans, elevations, and details.
- C. Selection Samples: Two sets, representing manufacturer's full range of available metal materials and finishes.
- D. Certificates: Contractor's certification that installer of entrance assemblies meets specified qualifications.
- E. Closeout Submittals: Operation and maintenance data for manufacturer-supplied operating hardware.

**1.5 QUALITY ASSURANCE**

- A. Installer Qualifications: Minimum three (3) years installing entrance assemblies similar to that specified in this section.

**1.6 DELIVERY, STORAGE, AND HANDLING**

- A. Store products of this section in manufacturer's unopened packaging until installation.

**1.7 PROJECT CONDITIONS**

- A. Field Measurements: When construction activities permit, take field measurements at locations to receive products of this section; note discrepancies on submitted shop drawings.

**PART 2 PRODUCTS**

**2.1 MANUFACTURERS**

- A. Basis of Design: Oldcastle Type "P" all glass doors.

**2.2 MATERIALS**

- A. Aluminum Components: Conforming to ASTM B 221/ASTM B 221M, Alloy 6063, Temper T5.  
B. Stainless Steel Components: Conforming to ASTM A 666, Type 304.  
C. Brass Components: Conforming to ASTM B 455, UNS C38500, Architectural Bronze.  
D. Sealant: One-part silicone sealant, conforming to ASTM C 920, color as selected.

**2.3 SWINGING ALL-GLASS ENTRANCES**

- A. Doors:
1. Glazing: Float glass meeting requirements of ASTM C 1036, Type 1, Quality q3, fully tempered in accordance with ASTM C 1048, Kind FT, and as follows:
    - a. Thickness: 1/2 inch (12 mm).
    - b. Color: Clear, Class 1.
    - c. Prepare glazing panels for indicated fittings and hardware before tempering; alteration of glazing panels after tempering is not permitted.
    - d. Polish edges that will be sight-exposed in finished work to bright flat polish.
    - e. Temper glass materials horizontally; visible tong marks or tong mark distortions are not permitted.
  2. Fittings:
    - a. Type: Continuous rail at top and bottom of door.
  3. Rails:
    - a. Cross-section: 1-3/4 inches (44.4 mm) wide by 3-1/2 inches (88.9 mm) high.
    - b. Profile: Tapered.
  4. Sight-exposed metal:
    - a) Material: Stainless steel cladding
    - b) Finish: Bright
- B. Door Hardware: Supplied by manufacturer as follows:
1. Hinges
  2. Push/pulls: Oldcastle Type OG-8, polished stainless steel. Install inverted to match existing.



3. Locksets: Floor locks with removable cores and dust-proof strikes.  
Coordinate with Section 08 71 00, DOOR HARDWARE.
4. Finish of sight-exposed metals: Matching finish of fittings.

#### **2.4 SIDELIGHTS**

- A. Sidelights: Glass and framing to be by door manufacturer and to match door glass, framing and finish.

#### **2.5 FABRICATION**

- A. Prepare components for specified hardware.
- B. Apply strippable protective materials to finished surfaces.
- C. Assemble components to extent practical, considering shipping limitations.

### **PART 3 EXECUTION**

#### **3.1 EXAMINATION**

- A. Verify that prepared openings are in accordance with shop drawings.
- B. Installer's Examination:
  1. Have installer of this section examine conditions under which construction activities of this section are to be performed, then submit written notification if such conditions are unacceptable.
  2. Beginning construction activities of this section before unacceptable conditions have been corrected is prohibited.
  3. Beginning construction activities of this section indicates installer's acceptance of conditions.

#### **3.2 INSTALLATION**

- A. Install components of all-glass assemblies in accordance with shop drawings.
- B. Site Tolerances:
  1. Variation from level, horizontal components and sight lines: 1/8 inch in 10 feet (3 mm in 3 m), non-cumulative.
  2. Variation from plumb, vertical components and sight lines: 1/8 inch in 10 feet (3 mm in 3 m), non-cumulative.
  3. Variation from plane, installed assembly: Maximum 1/16 inch (1.5 mm)

#### **3.3 ADJUSTING**

- A. Adjust entrance doors to swing correctly, without binding to frame, sill, or adjacent doors.
- B. Adjust door hardware to operate correctly.

#### **3.4 CLEANING**

- A. Immediately prior to Substantial Completion, remove strippable protective materials from metal surfaces; clean metal surfaces free of adhesive residue and other foreign substances, using cleaning materials and methods recommended by fabricator of this section.

#### **3.5 PROTECTION**

- A. Protect finished installation from damage by subsequent construction activities until Substantial Completion.
- B. Repair components damaged by subsequent construction activities in accordance with manufacturer's recommendations; replace damaged components that cannot be repaired to Architect's acceptance.

-END -

**SECTION 08 45 23**  
**INSULATED TRANSLUCENT PANELS**

**PART 1 - GENERAL**

**1.1 SUMMARY**

- A. Section includes the insulated translucent sandwich panel skylight system and accessories as shown and specified. Work includes providing and installing flat factory prefabricated structural insulated translucent sandwich panels with aluminum flashing and attached accessories required for complete installation.
- B. Related Sections:
  - 1. Structural Steel Section: 05 12 00
  - 2. Flashing and Sheet Metal: Section 07 60 00
  - 3. Joint Sealers: Section 07 92 00

**1.2 SUBMITTALS**

- A. Submit manufacturer's product data. Include construction details, material descriptions, profiles and finishes of skylight components.
- B. Submit shop drawings. Include plan, elevations and details.
- C. Samples
  - 1. Submit manufacturer's color charts showing the full range of colors available for factory-finished aluminum.
  - 2. Submit samples for each exposed finish required, in same thickness and material indicated for the work and in size indicated below. If finishes involve normal color variations, include sample sets consisting of two or more units showing the full range of variations expected.
    - a. Sandwich panels: 14" x 28" units
    - b. Factory finished aluminum: 5" long sections
  - 3. Submit Installer Certificate, signed by installer, certifying compliance with project qualification requirements.
  - 4. Submit product reports from a qualified independent testing agency indicating each type and class of panel system complies with the project performance requirements, based on comprehensive testing of current products. Previously completed reports will be acceptable if for current manufacturer and indicative of products used on this project.
    - a. International Building Code Evaluation Report
    - b. Flame Spread and Smoke Developed (UL 723) - Submit UL Card
    - c. Burn Extent (ASTM D 635)
    - d. Color Difference (ASTM D 2244)
    - e. Impact Strength (UL 972)
    - f. Bond Tensile Strength (ASTM C 297 after aging by ASTM D 1037)
    - g. Bond Shear Strength (ASTM D 1002)
    - h. Beam Bending Strength (ASTM E 72)
    - i. Fall Through Resistance (ASTM E 661)
    - j. Insulation U-Factor (NFRC 100)
    - k. NFRC System U-Factor Certification (NFRC 700)
    - l. Solar Heat Gain Coefficient (NFRC or Calculations)
    - m. Condensation Resistance Factor (AAMA 1503)
    - n. Air Leakage (ASTM E 283)
    - o. Structural Performance (ASTM E 330)
    - p. Water Penetration (ASTM E 331)
    - q. Class A Roof Covering Burning Brand (ASTM E 108)
    - r. UL Listed Class A Roof System (UL 790). Submit UL Card
    - s. ASTM E1886/1996 or TAS 201, 202 and 203

### 1.3 QUALITY ASSURANCE

#### A. Manufacturer's Qualifications

1. Material and products shall be manufactured by a company continuously and regularly employed in the manufacture of specified materials for a period of at least ten consecutive years and which can show evidence of those materials being satisfactorily used on at least six projects of similar size, scope and location. At least three of the projects shall have been in successful use for ten years or longer.
2. Panel system must be listed by an ANSI accredited Evaluation Service, which requires quality control inspections and fire, structural and water infiltration testing of sandwich panel systems by an accredited agency.
3. Quality control inspections shall be conducted at least once each year and shall include manufacturing facilities, sandwich panel components and production sandwich panels for conformance with AC177 "Translucent Fiberglass Reinforced Plastic (FRP) Faced Panel Wall, Roof and Skylight Systems" as issued by the ICC-ES.

- #### B. Installer's Qualifications:
- Installation shall be by an experienced installer, which has been in the business of installing specified skylight systems for at least two consecutive years and can show evidence of satisfactory completion of projects of similar size, scope and type.

### 1.4 PERFORMANCE REQUIREMENTS

- #### A. The manufacturer shall be responsible for the configuration and fabrication of the complete skylight panel system.
1. When requested, include structural analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
  2. Standard skylight system shall have less than 0.01 cfm/ft<sup>2</sup> air leakage by ASTM E 283 at 6.24 PSF (50 mph) and no water penetration by ASTM E 331 at 15 PSF; and structural testing by ASTM E 330.
  3. Structural Loads; Provide skylight system capable of handling the following loads:
    - a. Live Load: 20 PSF
    - b. Snow Load: 5.5 PSF; Drift Load: N/A
    - c. Wind Load: As per applicable Code.

### 1.5 DELIVERY STORAGE AND HANDLING

- A. Deliver panel system, components and materials in manufacturer's standard protective packaging.
- B. Store panels on the long edge; several inches above the ground, blocked and under cover in accordance with manufacturer's storage and handling instructions.

### 1.6 WARRANTY

- #### A. Submit manufacturer's and installer's written warranty agreeing to repair or replace panel system work, which fails in materials or workmanship within 5 years of the date of installation. Failure of materials or workmanship shall include leakage, excessive deflection, deterioration of finish on metal in excess of normal weathering and defects in accessories, insulated translucent sandwich panels and other components of the work. Provide the following additional warranties:
1. 10 year warranty covering separation of faces from grid core, and/or abnormal color change of the exterior face.
  2. 20 year warranty against reinforcing fiberbloom.

**PART 2 - PRODUCTS**

**2.1 MANUFACTURER**

- A. The basis for this specification is for products manufactured by Kalwall Corporation. Other manufacturers may bid this project provided they comply with performance requirements of this specification and submit evidence thereof prior to receipt of bids.
- B. Kalwall Corporation, Tel: (800) 258-9777 - Fax: (603) 627-7905 - Email: info@kalwall.com

**2.2 PANEL COMPONENTS**

- A. Face Sheets
  - 1. Translucent faces: Manufactured from glass fiber reinforced thermoset resins, formulated specifically for architectural use.
    - a. Thermoplastic (e.g. polycarbonate, acrylic) faces are not acceptable.
    - b. Face sheets shall not deform, deflect or drip when subjected to fire or flame.
  - 2. Interior face sheets:
    - a. Flame spread: Underwriters Laboratories (UL) listed, which requires periodic unannounced retesting, with flame spread rating no greater than 50 and smoke developed no greater than 250 when tested in accordance with UL 723.
    - b. Burn extent by ASTM D 635 shall be no greater than 1".
  - 3. Exterior face sheets:
    - a. Color stability: Full thickness of the exterior face sheet shall not change color more than 3 CIE Units DELTA E by ASTM D 2244 after 5 years outdoor South Florida weathering at 5° facing south, determined by the average of at least three white samples with and without a protective film or coating to ensure long-term color stability. Color stability shall be unaffected by abrasion or scratching.
    - b. Strength: Exterior face sheet shall be uniform in strength, with panel meeting ASTM E1996 and ASTM E1886 or TAS 201, 202 and 203.
  - 4. Appearance:
    - a. Face Sheets: Smooth, 0.045" thick, white.
    - b. Face sheets shall not vary more than ± 10% in thickness and be uniform in color.
- B. Grid Core: Aluminum I-beam grid core shall be of 6063-T6 or 6005-T5 alloy and temper with provisions for mechanical interlocking of muntin-mullion and perimeter. Width of I-beam shall be no less than 7/16".
- C. Laminate Adhesive
  - 1. Heat and pressure resin type adhesive engineered for structural sandwich panel use, with minimum 25-years field use. Adhesive shall pass testing requirements specified by the International Code Council "Acceptance Criteria for Sandwich Panel Adhesives".
  - 2. Minimum tensile strength of 750 PSI when the panel assembly is tested by ASTM C 297 after two exposures to six cycles each of the aging conditions prescribed by ASTM D 1037.
  - 3. Minimum shear strength of the panel adhesive by ASTM D 1002 after exposure to four separate conditions:
    - a. 50% Relative Humidity at 68° F: 540 PSI
    - b. 182° F: 100 PSI
    - c. Accelerated Aging by ASTM D 1037 at room temperature: 800 PSI
    - d. Accelerated Aging by ASTM D 1037 at 182° F: 250 PSI

### **2.3 PANEL CONSTRUCTION**

- A. Provide sandwich panels of flat fiberglass reinforced translucent face sheets laminated to a grid core of mechanically interlocking I-beams. The adhesive bonding line shall be straight, cover the entire width of the I-beam and have a neat, sharp edge.
  - 1. Thickness: 2-3/4"
  - 2. Light transmission: 20%
- B. Standard panels shall deflect no more than 1.9" at 30 PSF in 10' 0" span without a supporting frame by ASTM E 72.
- C. Standard panels shall withstand 1200° F fire for minimum one hour without collapse or exterior flaming.
- D. Thermally broken panels: Minimum Condensation Resistance Factor of 80 by AAMA 1503 measured on the bond line.
- E. Skylight System: System shall pass Class A Roof Burning Brand Test By ASTM E 108.
- F. Skylight System shall meet the fall through requirements of OSHA 1910.23 as demonstrated by testing in accordance with ASTM E 661, thereby not requiring supplemental screens or railings.

### **2.4 BATTENS AND PERIMETER CLOSURE SYSTEM**

- A. Closure system:
  - 1. Extruded aluminum 6063-T6 and 6063-T5 alloy and temper clamp-tite screw type closure system.
  - 2. Curved closure system may be roll formed.
  - 3. Skylight perimeter closures at curbs shall be factory sealed to panels.
- B. Sealing tape: Manufacturer's standard, pre-applied to closure system at the factory under controlled conditions.
- C. Fasteners: 300 series stainless steel screws for aluminum closures, excluding final fasteners to the building.
- D. Finish: Manufacturer's factory applied finish, which meets the performance requirements of AAMA 2604. Color to be selected from manufacturer's standard color options.

## **PART 3 - EXECUTION**

### **3.1 EXAMINATION**

- A. Installer shall examine substrates, supporting structure and installation conditions.
- B. Do not proceed with panel installation until unsatisfactory conditions have been corrected.

### **3.2 PREPARATION**

- A. Metal Protection:
  - 1. Where aluminum will contact dissimilar metals, protect against galvanic action by painting contact surfaces with primer or by applying sealant or tape recommended by manufacturer for this purpose.
  - 2. Where aluminum will contact concrete, masonry or pressure treated wood, protect against corrosion by painting contact surfaces with bituminous paint or method recommended by manufacturer.

### **3.3 INSTALLATION**

- A. Install the skylight system in accordance with the manufacturer's installation recommendations and approved shop drawings.

1. Anchor component parts securely in place by permanent mechanical attachment system.
  2. Accommodate thermal and mechanical movements.
  3. Set perimeter framing in a full bed of sealant compound, or with joint fillers or gaskets to provide weather-tight construction.
- B. Install joint sealants at perimeter joints and within the panel system in accordance with manufacturer's installation instructions.

**3.4 FIELD QUALITY CONTROL**

- A. Water Test: Installer to test skylights according to procedures in AAMA 501.2.
- B. Repair or replace work that does not pass testing or that is damaged by testing and retest work.

**3.5 CLEANING**

- A. Clean the skylight system inside and outside, immediately after installation.
- B. Refer to manufacturer's written recommendations.

-- END --

**SECTION 08 51 13**  
**ALUMINUM WINDOWS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Aluminum windows of type and size shown, complete with hardware, related components and accessories.
- B. Type: Single Horizontal Sliding

**1.2 RELATED WORK**

- A. Storefront: Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS.
- B. Glazing: Section 08 80 00, GLAZING.

**1.4 DELIVERY, STORAGE AND HANDLING**

- A. Protect windows from damage during handling and construction operations before, during and after installation.
- B. Store windows under cover, setting upright.
- C. Do not stack windows flat.
- D. Do not lay building materials or equipment on windows.

**1.5 QUALITY ASSURANCE**

- A. Provide each type of window produced from one source of manufacture.
- B. Quality Certified Labels or certificate:
  - 1. Architectural Aluminum Manufacturers Association, "AAMA label" affixed to each window indicating compliance with specification.
  - 2. Certificates in lieu of label with copy of recent test report (not more than 4 years old) from an independent testing laboratory and certificate signed by window manufacturer stating that windows provided comply with specified requirements and AAMA 101/I.S.2/A440 for type of window specified.

**1.6 SUBMITTAL**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
  - 1. Identifying parts of window units by name and kind of metal or material, show construction, locking systems, mechanical operators, trim, installation and anchorages.
  - 3. Include glazing details and standards for factory glazed units.
- C. Manufacturer's Literature and Data: Window.
- D. Certificates:
  - 1. Certificates as specified in paragraph QUALITY ASSURANCE.
  - 2. Manufacturer's Certification that windows delivered to project are identical to windows tested.
- E. Samples: Provide 150 mm (six-inch) length samples showing finishes, specified. For prefinished items exposed to view, provide samples of manufacturer's full standard color and texture range for selection by Owner.

**1.7 WARRANTY**

- A. Warrant windows against malfunctions due to defects in thermal breaks, hardware, materials and workmanship, subject to the terms of Article

"WARRANTY OF CONSTRUCTION", FAR clause 52.246-21, except provide 10 year warranty period.

### 1.8 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society of Heating, Refrigerating and Air Conditioning Engineers (ASHRAE)  
90.1-07.....Energy Standard of Buildings
- C. American Architectural Manufacturers Association (AAMA):  
101/I.S.2/A440-11.....Windows, Doors, and Unit Skylights  
505-09.....Dry Shrinkage and Composite Performance Thermal Cycling Test Procedures  
2605-05.....Superior Performing Organic Coatings on Architectural Aluminum Extrusions and Panels  
TIR-A8-08.....Structural Performance of Poured and Debridged Framing Systems
- D. American Society for Testing and Materials (ASTM):  
A653/A653M-09.....Steel Sheet, Zinc Coated (Galvanized), Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-dip Process
- E 90-09.....Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions
- E. National Fenestration Rating Council (NFRC):  
NFRC 100-10.....Determining Fenestration Product U-Factors  
NFRC 200-10.....Determining Fenestration Product Solar Heat Gain Coefficient and Visible Transmittance at Normal Incidence
- F. National Association of Architectural Metal Manufacturers (NAAMM):  
AMP 500-06.....Metal Finishes Manual

## PART 2- PRODUCTS

### 2.1 MATERIALS

- A. Aluminum Extrusions; Sheet and Plate: AAMA 101/I.S.2/A440.
- B. Fasteners: AAMA 101/I.S.2/A440. Screws, bolts, nuts, rivets and other fastening devices to be non-magnetic stainless steel.
  - 1. Fasteners to be concealed when window is closed. Where wall thickness is less than 3 mm (0.125 inch) thick, provide backup plates or similar reinforcements for fasteners.
  - 2. Stainless steel self tapping screws may be used to secure Venetian blind hanger clips, vent guide blocks, friction adjuster, and limit opening device.
  - 3. Attach locking and hold-open devices to windows with concealed fasteners. Provide reinforcing plates where wall thickness is less than 3 mm (0.125 inch) thick.
- C. Hardware:
  - 1. Locks: Two position locking bolts or cam type tamperproof custodial locks with a single point control located not higher than five feet from floor level. Locate locking devices in the vent side rail. Fastenings for locks and keepers shall be concealed or nonremovable.
  - 2. Locking Device Strikes: Locate strikes in frame jamb. Strikes shall be adjustable for locking tension. Fabricate strikes from Type 304 stainless steel or white bronze.



3. Guide Blocks: Fabricate guide blocks of injection molded nylon. Install guide block fully concealed in vent/frame sill.
4. Hardware for Maintenance Opening of Windows: Opening beyond the six inch position shall be accomplished with a window washers key. The release device shall capture the key when window is in the open position.
5. Design operating device to prevent opening with standard tools, coins or bent wire devices.

## **2.2 FABRICATION**

- A. Fabrication to exceed or meet requirements of Physical Load Tests, Air Infiltration Test, and Water Resistance Test of AAMA 101/I.S.2/A440.
- B. Glazing:
  1. Factory or field glazing optional.
  2. Glaze in accordance with Section 08 80 00, GLAZING.
  3. Windows reglazable without dismantling sash framing.
  4. Design rabbet to suit glass thickness and glazing method specified.
  5. Provide removable fin type glazing beads.
- C. Trim:
  1. Trim includes casings, closures, and panning.
  2. Fabricate to shapes shown of aluminum not less than 1.6 mm (0.062 inch) thick
  3. Extruded or formed sections, straight, true, and smooth on exposed surfaces.
  4. Corners mitered and internal corners coped; fitted with hairline joints.
  5. Reinforce 1.6 mm (0.062 inch) thick members with not less than 3 mm (1/8-inch) thick aluminum.
  6. Except for strap anchors, provide reinforcing for fastening near ends and at intervals not more than 305 mm (12 inches) between ends.
  7. Design to allow unrestricted expansion and contraction of members and window frames.
  8. Secure to window frames with machine screws or expansion rivets.
  9. Exposed screws, fasteners or pop rivets are not acceptable.

## **2.3 SINGLE SASH HORIZONTAL SLIDING WINDOWS**

- A. AAMA 101/I.S.2/A440; Type: HS-AW40.
- B. AAMA certified product to the AAMA 101/I.S.2/A440. - 11 standard.

## **2.4 FINISH**

- A. In accordance with NAAMM AMP 500 series.
- B. Finish exposed aluminum surfaces Fluorocarbon Finish: AAMA 2605, superior performing organic coating.
- C. Hardware: Finish hardware exposed when window is in the closed position: Match window color.

## **PART 3 - EXECUTION**

### **3.1 PROTECTION (DISSIMILAR MATERIALS): AAMA 101/I.S.2/A440.**

### **3.2 INSTALLATION, GENERAL**

- A. Install window units in accordance with manufacturer's specifications and recommendations for installation of window units, hardware, operators and other components of work.
- B. Where type, size or spacing of fastenings for securing window accessories or equipment to building construction is not shown or

specified, use expansion or toggle bolts or screws, as best suited to construction material.

1. Provide bolts or screws minimum 6 mm (1/4-inch) in diameter.
  2. Sized and spaced to resist the tensile and shear loads imposed.
  3. Do not use exposed fasteners on exterior, except when unavoidable for application of hardware.
  4. Provide non-magnetic stainless steel Phillips flat-head machine screws for exposed fasteners, where required, or special tamper-proof fasteners.
  5. Locate fasteners to not disturb the thermal break construction of windows.
- C. Set windows plumb, level, true, and in alignment; without warp or rack of frames or sash.
- D. Anchor windows on four sides with anchor clips or fin trim.
1. Do not allow anchor clips to bridge thermal breaks.
  2. Use separate clips for each side of thermal breaks.
  3. Make connections to allow for thermal and other movements.
  4. Do not allow building load to bear on windows.
  5. Use manufacturer's standard clips at corners and not over 600 mm (24 inches) on center.
  6. Where fin trim anchorage is shown build into adjacent construction, anchoring at corners and not over 600 mm (24 inches) on center.

### 3.3 ADJUST AND CLEAN

- A. Adjust ventilating sash and hardware to provide tight fit at contact points, and at weather-stripping for smooth operation and weathertight closure.
- B. Clean aluminum surfaces promptly after installation of windows, exercising care to avoid damage to protective coatings and finishes.
- C. Remove excess glazing and sealant compounds, dirt, and other substances.
- D. Lubricate hardware and moving parts.
- E. Clean glass promptly after installation of windows. Remove glazing and sealant compound, dirt and other substances.
- F. Except when a window is being adjusted or tested, keep locked in the closed position during the progress of work on the project.

### 3.4 OPERATION DEVICES

- A. Provide wrenches, keys, or removable locking operating handles, as specified to operate windows.
- B. Provide one emergency ventilating operating handle for every four windows.

- - - E N D - - -

**SECTION 08625**

**TUBULAR DAYLIGHTING DEVICE**

**PART 1 GENERAL**

**1.1 SECTION INCLUDES**

- A. Tubular daylighting device, consisting of roof dome, reflective tube, and diffuser assembly; configuration as indicated on the drawings.

**1.2 RELATED SECTION**

- A. Section 07 54 23 - Thermoplastic Polyolefin (TPO) Roofing
- B. Section 07 60 00 - Flashing and Sheet Metal.

**1.3 REFERENCES**

- A. ASTM B 209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- B. ASTM E 84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2008a.
- C. ASTM A 463/A 463M - Standard Specification for Steel Sheet, Aluminum Coated, by the Hot Dip Process; 2006.
- D. ASTM A 653/A 653M - Standard Specification for Steel Sheet, Zinc Coated (Galvanized), by the Hot Dip Process; 2007.
- E. ASTM A792/A 792M - Standard Specification for Steel Sheet, 55% Aluminum-Zinc Alloy-Coated by the Hot-Dip Process
- F. ASTM E 283 - Test Method for Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen; 2004
- G. ASTM E 308 - Standard Practice for Computing the Colors of Objects by Using the CIE System; 2006.
- H. ASTM E 330 - Structural Performance of Exterior Windows, Curtain Walls and Doors; 2002.
- I. ASTM E 547 - Test Method for Water Penetration of Exterior Windows, Skylights, Doors and Curtain walls by Cyclic Air Pressure Difference; 2000.
- J. ASTM E 1886 - Standard Test Method for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Missile(s) and Exposed to Cyclic Pressure Differentials.
- K. ASTM E 1996 - Standard Specification for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Windborne Debris in Hurricane
- L. ASTM D 635 - Test Method for Rate of Burning and/or Extent of Time of Burning of Self-Supporting Plastics in a Horizontal Position; 2006.
- M. ASTM D-1929 - Test Method for Ignition Properties of Plastics; 1996 (2001).
- N. UL 181 - Factory Made Air Ducts and Air Connectors
- O. ICC AC-16 - Acceptance Criteria for Plastic Skylights; 2008.
- P. Florida Building Code TAS 201 - Impact Test Procedures.
- Q. Florida Building Code TAS 202 - Criteria for Testing Impact and Non Impact Resistant Building Envelope Components Using Uniform Static Air Pressure Loading.
- R. Florida Building Code TAS 203 - Criteria for Testing Products Subject to Cyclic Wind Pressure Loading.

**1.4 PERFORMANCE REQUIREMENTS**

- A. Completed tubular daylighting device assemblies shall be capable of meeting the following performance requirements:

1. Air Infiltration Test: Air infiltration will not exceed 0.30 cfm/sf aperture with a pressure delta of 1.57 psf across the tube when tested in accordance with ASTM E 283.
2. Water Resistance Test: No uncontrolled water leakage at 10.5 psf pressure differential with water rate of 5 gallons/hour/sf when tested in accordance with ASTM E 547.
3. Uniform Load Test:
  - a. No breakage, permanent damage to fasteners, hardware parts, or damage to make daylighting system inoperable or cause excessive permanent deflection of any section when tested at a Positive Load of 150 psf (7.18 kPa) or Negative Load of 70 psf (3.35 kPa).
  - b. All units shall be tested with a safety factor of (3) for positive pressure and (2) for negative pressure, acting normal to plane of roof in accordance with ASTM E 330.
4. Fire Testing:
  - a. When used with the Dome Edge Protection Band, all domes meet fire rating requirements as described in the 2006 International Building Code.
  - b. Self-Ignition Temperature - Greater than 650 degrees F per ASTM D-1929.
  - c. Smoke Density - Rating no greater than 450 per ASTM Standard E 84 in way intended for use. Classification C.
  - d. Rate of Burn and/or Extent - Maximum Burning Rate: 2.5 inches/min (62 mm/min) Classification CC-2 per ASTM D 635.

#### **1.5 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
  1. Preparation instructions and recommendations.
  2. Storage and handling requirements and recommendations.
  3. Installation methods.
- C. Shop Drawings. Submit shop drawings showing layout, profiles and product components, including anchorage, flashings and accessories.
- D. Test Reports: Independent testing agency or evaluation service reports verifying compliance with specified performance requirements.

#### **1.6 QUALITY ASSURANCE**

- A. Manufacturer Qualifications: Engaged in manufacture of tubular daylighting devices for minimum 10 years.

#### **1.7 DELIVERY, STORAGE, AND HANDLING**

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Store and dispose of solvent-based materials, and materials used with solvent-based materials, in accordance with requirements of local authorities having jurisdiction.

#### **1.8 PROJECT CONDITIONS**

- A. Maintain environmental conditions (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimum results. Do not install products under environmental conditions outside manufacturer's absolute limits.

## 1.9 WARRANTY

- A. Daylighting Device: Manufacturer's standard warranty for 10 years.

## PART 2 PRODUCTS

### 2.1 MANUFACTURERS

- A. Basis of Design: Solatube International, Inc.; 2210 Oak Ridge Way, Vista, CA 92081. ASD. Tel. Toll Free: 888-765-2882. Tel: (760) 477-1120. Fax: (760) 597-4488. Email: commsales@solatube.com. Web: www.solatube.com.
- B. Equal products meeting specified requirements may be submitted for substitution in accordance with applicable bid requirements.
- C. Requests for substitutions will be considered provided a lighting layout with photometric data are supplied to demonstrate light levels will meet original design intent.

### 2.2 TUBULAR DAYLIGHTING DEVICES

- A. Tubular Daylighting Devices General: Transparent roof-mounted skylight dome and self-flashing curb, reflective tube, and ceiling level diffuser assembly, transferring sunlight to interior spaces; complying with ICC AC-16.
- B. SolaMaster Series: Solatube Model 750 DS-O Open Ceiling, 21 inch (530 mm) Daylighting System, or approved equal with following:
1. Roof Dome Assembly: Transparent, UV and impact resistant dome with flashing base supporting dome and top of tube.
    - a. Outer Dome Glazing: Type DA, 0.125 inch (3.2 mm) minimum thickness injection molded acrylic classified as CC2 material; UV inhibiting (100 percent UV C, 100 percent UV B and 98.5 percent UV A), impact modified acrylic blend.
    - b. Raybender 3000: Variable prism optic molded into outer dome to capture low angle sunlight and limit high angle sunlight
    - c. Inner Dome Glazing: Type DAI, 0.115 inch (3 mm) minimum thickness acrylic classified as CC2 material.
  2. 3. Curb Insulator: Type CI, Thermal isolation material for use at curb base.
  3. Tube Ring: Attached to top of base section; 0.090 inch (2.3 mm) nominal thickness injection molded high impact PVC; to prevent thermal bridging between base flashing and tubing and channel condensed moisture out of tubing.
  4. Tube Ring Seal: Attached to the base of the dome ring; butyl glazing rope 0.24 inch (6 mm) diameter; to minimize air infiltration
  5. Dome Seal: Adhesive backed weatherstrip, 0.63 inch (16 mm) tall by 0.28 inch (7 mm) wide.
  6. Reflective Tubes: Aluminum sheet, thickness 0.018 inch (0.5 mm).
    - a. General:
      - 1) Interior Finish: Spectralight Infinity high reflectance specular finish on exposed reflective surface. Specular reflectance for visible spectrum (400 nm to 760 nm) greater than 99 percent. Total solar spectrum reflectance (400 nm to 2500 nm) less than 80.2 percent.
      - 2) Color: a\* and b\* (defined by CIE L\*a\*b\* color model) shall not exceed plus 2 or be less than minus 2 as determined in accordance to ASTM E 308.
    - d. Top Tube Angle Adapter and Bottom Tube Angle Adapter Kit, Type AK:

- 1) Reflective 45 degree adjustable top and bottom angle adapters (one each), 16 inches (406 mm) long
- e. Extension Tube:
  - 1) Reflective extension tube, Type EXX, Notched for Open Ceiling diffuser attachment, 24 inches (610 mm) or 48 inches (1220 mm) long.
- f. Reflective 90 degree Adjustable tube:
  - 1) Extension Tube Angle Adapter: Provide manufacturer's standard adapters for applications requiring:
    - (a) Type A1 one 0 to 90 degree extension tube angle adapter.
    - (b) Type A2 two 0 to 90 degree extension tube angle adapters.
7. Diffuser Assemblies for Tubes Not Penetrating Ceilings (Open Ceiling): Solatube Model 750 DS-O. 21 inch (530 mm) diameter diffuser attached directly to bottom of tube.
  - a. Lens: Type L1 OptiView Fresnel lens design to maximize light output and diffusion. Visible Light Transmission shall be greater than 90 percent at 0.022 inch (0.6 mm) thick. Classified as CC2.
  - b. Diffuser Seal: Open cell foam, acrylic adhesive backed, 0.75 in (19 mm) wide by 0.125 in (3.2 mm) thick to minimize condensation and bug, dirt and air infiltration per ASTM E 283.
  - c. Diffuser Trim Ring: Injection molded acrylic. Nominal wall thickness 0.172 inches (4.4 mm)
8. Wire Suspension Kit: Type E, Use the wire suspension kit when additional bracing to the structure is required.

### **2.3 ACCESSORIES**

- A. Fasteners: Same material as metals being fastened, non-magnetic steel, non-corrosive metal of type recommended by manufacturer, or injection molded nylon.
- B. Suspension Wire: Steel, annealed, galvanized finish, size and type for application and ceiling system requirement.
- C. Sealant: Polyurethane or copolymer based elastomeric sealant as provided or recommended by manufacturer.

## **PART 3 EXECUTION**

### **3.1 EXAMINATION**

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

### **3.2 PREPARATION**

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

### **3.3 INSTALLATION**

- A. Install in accordance with manufacturer's printed instructions.
- B. After installation of first unit, field test to determine adequacy of installation. Conduct water test in presence of Owner, Architect, or Contractor, or their designated representative. Correct if needed before proceeding with installation of subsequent units.

**3.4 PROTECTION**

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

- - - E N D - - -

**SECTION 08 71 00**  
**DOOR HARDWARE**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Door hardware and related items necessary for complete installation and operation of doors. Scope of work includes providing cylinders for rolling counter doors.

**1.2 RELATED WORK**

- A. Caulking: Section 07 92 00 JOINT SEALANTS.
- B. Application of Hardware: Section 08 14 00, WOOD DOORS; Section 08 11 13, HOLLOW METAL DOORS AND FRAMES; Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS; Section 08 71 13, AUTOMATIC DOOR OPERATORS
- C. Counter doors, Section 08 33 00, ROLLING COUNTER DOORS
- D. Painting: Section 09 91 00, PAINTING.
- E. Electrical: Division 26, ELECTRICAL
- F. Card Readers: Section 28 13 11, PHYSICAL ACCESS CONTROL SYSTEMS.
- G. Fire Detection: Section 28 31 00, FIRE DETECTION AND ALARM

**1.3 GENERAL**

- A. All hardware shall comply with UFAS, (Uniform Federal Accessible Standards) unless specified otherwise.
- B. Hardware for Labeled Fire Doors and Exit Doors: Conform to requirements of NFPA 80 for labeled fire doors and to NFPA 101 for exit doors, as well as to other requirements specified. Provide hardware listed by UL, except where heavier materials, large size, or better grades are specified herein under paragraph HARDWARE SETS. In lieu of UL labeling and listing, test reports from a nationally recognized testing agency may be submitted showing that hardware has been tested in accordance with UL test methods and that it conforms to NFPA requirements.
- C. Hardware for application on metal and wood doors and frames shall be made to standard templates. Furnish templates to the fabricator of these items in sufficient time so as not to delay the construction.
- D. The following items shall be of the same manufacturer, if possible, except as otherwise specified:
  - 1. Mortise locksets.
  - 2. Hinges for hollow metal and wood doors.
  - 3. Surface applied overhead door closers.
  - 4. Exit devices.
  - 5. Floor closers.

**1.4 WARRANTY**

- A. Automatic Operators shall be subject to the terms of FAR Clause 52.246-21, except that the warranty period shall be two years in lieu of one year for all items except as noted below:
  - 1. Locks, latchsets, and panic hardware: 5 years.
  - 2. Door Closers and Continuous Hinges: 10 years.

**1.5 MAINTENANCE MANUALS**

- A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on all door hardware.



**1.6 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. Submit 6 copies of the schedule, including 2 final copies of the approved schedule to the VAMC (or VISN) Locksmith for Record documentation.
- B. Hardware Schedule: Prepare and submit hardware schedule in the following form:

Hardware Item	Quantity	Size	Reference Publication Type No.	Finish	Mfr. Name and Catalog No.	Key Control Symbols	UL Mark (if fire rated and listed)	ANSI/BHMA Finish Designation

- C. Samples and Manufacturers' Literature:
  - 1. Samples: All hardware items (proposed for the project) that have not been previously approved by Builders Hardware Manufacturers Association shall be submitted for approval. Tag and mark all items with manufacturer's name, catalog number and project number.
  - 2. Samples are not required for hardware listed in the specifications by manufacturer's catalog number, if the contractor proposes to use the manufacturer's product specified.
- D. Certificate of Compliance and Test Reports: Submit certificates that hardware conforms to the requirements specified herein. Certificates shall be accompanied by copies of reports as referenced. The testing shall have been conducted either in the manufacturer's plant and certified by an independent testing laboratory or conducted in an independent laboratory, within four years of submittal of reports for approval.
- E. Installation instructions to be included with hardware product data.

**1.7 DELIVERY AND MARKING**

- A. Deliver items of hardware to job site in their original containers, complete with necessary appurtenances including screws, construction key cores, and instructions. Tag one of each different item of hardware and deliver to COR for reference purposes. Tag shall identify items by Project Specification number and manufacturer's catalog number. These items shall remain on file in COR's office until all other similar items have been installed in project, at which time the COR will deliver items on file to Contractor for installation in predetermined locations on the project.

**1.8 PREINSTALLATION MEETING**

- A. Convene a preinstallation meeting not less than 30 days before start of installation of door hardware. Require attendance of parties directly affecting the work of the section, including Contractor and Installer, Architect, Project Engineer and VA locksmith, Hardware Consultant, and Hardware Manufacturer's Representative. Review the following:
  - 1. Inspection of door hardware.
  - 2. Job and surface readiness.

3. Coordination with other work.
4. Protection of hardware surfaces.
5. Substrate surface protection.
6. Installation.
7. Adjusting.
8. Repair.
9. Field Quality Control.
10. Cleaning.

**1.9 INSTRUCTIONS**

- A. Hardware Set Symbols on Drawings: Except for protective plates, door stops, mutes, thresholds and the like specified herein, hardware requirements for each door are indicated on drawings by symbols. Symbols for hardware sets consist of letters "HW" followed by a number. Each number designates a set of hardware items applicable to a door type.
- B. Manufacturers' Catalog Number References: Where manufacturers' are indicated with an asterisk (\*) after their name in a hardware category, that manufacturer's product is specified in hardware groups. Products of other manufacturers which are considered equivalent to those specified may be used, whether or not they are listed herein.
  1. Products indicated as "facility standard" are not subject to substitution.
- C. Manufacturers whose products are specified are identified by abbreviations as follows:

AB	ABH Manufacturing, Inc.	Itasca, IL
AD	Adams Rite Mfg. Co.	Glendale, CA
BE	Best Access Systems	Indianapolis, IN
GL	Glynn Johnson Co.	Chicago, IL
LCN	LCN Closers	Princeton, IL
HA	Hager Hinge Company	Saint Louis, MO
HID	HID Global Corporation	Austin, TX
NA	National Guard Products	Memphis, TN
RUS	Record-USA	Monroe, NC
RX	Rixon-Firemark Co.	Chicago, IL
SH	Stanley Commercial	Indianapolis, IN
ST	Stanley Security Solutions	Indianapolis, IN
STAN	Stanley Access Technologies	Indianapolis, IN
SENT	UTC / GE Sentrol	Hartford, CT
TR	Trimco	Los Angeles, CA
Unican	Simplex Security Systems	Collinsville, CT
VO	Von Duprin Hardware Co.	Indianapolis, IN
ZERO	Zero Weather Stripping Co.	New York, NY

- C. Keying: Contractor to provide Construction cores only. COR to provide all permanent keys and cores.

1. Provide core cylinders that are removable only with a special key or tool without disassembly of knob or lockset and compatible with the COR's established key system. Cylinders shall be 7 pin SFIC type. Keying information shall be determined at a later date by the COR.

**1.10 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. In text, hardware items are referred to by series, types, etc., listed in such specifications and standards, except as otherwise specified.
- B. American Society for Testing and Materials (ASTM):
  - F883-04.....Padlocks
  - E2180-07.....Standard Test Method for Determining the Activity of Incorporated Antimicrobial Agent(s) in Polymeric or Hydrophobic Materials.
- C. American National Standards Institute/Builders Hardware Manufacturers Association (ANSI/BHMA):
  - A156.1-06.....Butts and Hinges
  - A156.2-03.....Bored and Pre-assembled Locks and Latches
  - A156.3-08.....Exit Devices
  - A156.4-08.....Door Controls (Closers)
  - A156.5-01.....Auxiliary Locks and Associated Products
  - A156.6-05.....Architectural Door Trim
  - A156.8-05.....Door Controls-Overhead Stops and Holders
  - A156.13-05.....Mortise Locks and Latches Series 1000
  - A156.14-07.....Sliding and Folding Door Hardware
  - A156.15-06.....Release Devices-Closer Holder, Electromagnetic and Electromechanical
  - A156.16-08.....Auxiliary Hardware
  - A156.17-04.....Self-Closing Hinges and Pivots
  - A156.18-06.....Materials and Finishes
  - A156.20-06.....Strap and Tee Hinges, and Hasps
  - A156.21-09.....Thresholds
  - A156.22-05.....Door Gasketing and Edge Seal Systems
  - A156.23-04.....Electromagnetic Locks
  - A156.24-03.....Delayed Egress Locking Systems
  - A156.25-07.....Electrified Locking Devices
  - A156.26-06.....Continuous Hinges
  - A156.28-07.....Master Keying Systems
  - A156.29-07.....Exit Locks and Alarms
  - A156.30-03.....High Security Cylinders
  - A156.31-07.....Electric Strikes and Frame Mounted Actuators
  - A250.8-03.....Standard Steel Doors and Frames
- D. National Fire Protection Association (NFPA):
  - 80-10.....Fire Doors and Fire Windows
  - 101-0.....Life Safety Code
- E. Underwriters Laboratories, Inc. (UL):
  - Building Materials Directory (2008)

**PART 2 - PRODUCTS**

## 2.1 BUTT HINGES

- A. ANSI A156.1. The following types of butt hinges shall be used for the types of doors listed, except where otherwise specified:
1. Exterior Doors: Type A2112/A5112 for doors 900 mm (3 feet) wide or less and Type A2111/A5111 for doors over 900 mm (3 feet) wide. Hinges for outswinging exterior doors shall have non-removable pins. Hinges for exterior fire-rated doors shall be stainless steel.
  2. Interior Doors: Type A8112/A5112 for doors 900 mm (3 feet) wide or less and Type A8111/A5111 for doors over 900 mm (3 feet) wide. Hinges for interior doors exposed to high humidity (shower or janitor rooms, kitchens) to be stainless steel.
  3. Automatic doors hung on butts, provide Type A2111 for exterior doors and aluminum doors, and Type A8111 for other doors.
  4. Labeled Wood Fire Doors: Type A8411 or Type A8412; these hinges shall be thru bolted to door with hex nuts and bolts.
  5. Manufacturers:
    1. Bommer
    2. Hager
    3. McKinney
    4. Stanley\*
- B. Provide quantity and size of hinges per leaf as follows:
1. Doors up to 1210 mm (4 feet) high: 2 hinges
  2. Doors up to 1210 mm (4 feet) to 2260 mm ( 7 feet 5 inches high): 3 hinges: 3 hinges minimum.
  3. Doors greater than 2260 mm (7 feet 5 inches high): 4 hinges.
  4. Doors up to 900 mm wide, use standard weight 114mm x 114mm (4 1/2 x 4 1/2 inches)
  5. Door over 900 mm (3 feet) to 1065 mm (3 feet 6 inches), furnish standard weight: 127 mm x 114 mm (5 x 4 1/2 inches).
  6. Door over 1065 mm (3 feet 6 inches) to 1210 mm (4 feet), furnish heavy weight: 127 mm x 114 mm (5 x 4 1/2 inches)
  7. Doors weighing 330kg (150 lbs.) or more, furnish 127 mm (5 inch) high hinges.
  8. Provide heavy weight hinges where specified.
- C. See Articles "MISCELLANEOUS HARDWARE" and "HARDWARE SETS" for pivots and hinges other than butts specified above and continuous hinges specified below.

## 2.2 CONTINUOUS HINGES

- A. ANSI/BHMA A156.26, Grade 1-150, Grade 1-300, and Grade 1-600.
  1. Listed under Category N in BHMA's "Certified Product Directory."
- B. General: Minimum 0.120-inch- (3.0-mm-) thick, hinge leaves with minimum overall width of 4 inches (102 mm); fabricated to full height of door and frame and to template screw locations; with components finished after milling and drilling are complete:
1. Fire Pins: Steel pins to hold labeled fire doors in place if required by tested listing.
- C. Continuous, Gear-Type Hinges: Extruded-aluminum, pinless, geared hinge leaves; joined by a continuous extruded-aluminum channel cap; with concealed, self-lubricating thrust bearings.
1. Manufacturers:
    - a. Bommer Industries, Inc.
    - b. Hager Companies.
    - c. McKinney Products Company; an ASSA ABLOY Group company.
    - d. Pemko Manufacturing Co.
    - e. Stanley Security Solutions.\*

- f. Select Products Limited.
- g. Zero International.

### **2.3 DOOR CLOSING DEVICES**

- A. Closing devices shall be products of one manufacturer for each type specified.

### **2.4 OVERHEAD CLOSERS**

- A. Conform to ANSI A156.4, Grade 1.
- B. Closers shall conform to the following:
  - 1. The closer shall have 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
  - 2. Where specified, closer shall have hold-open feature.
  - 3. Size Requirements: Size closers in accordance with manufacturer's recommendations or provide multi-size closers, sizes 1 through 6.
  - 4. Material of closer cylinder shall be of cast iron.
  - 5. Arm and brackets for closers shall be heavy duty steel, malleable iron or high strength ductile cast iron, except where non-corrosive stainless steel is required.
    - a. Provide parallel arm push side operation unless otherwise indicated.
    - b. Top jamb mounting is acceptable where conditions require.
  - 6. Closers shall have full size metal cover. Plastic covers are not acceptable.
  - 7. Provide all surface mounted closers with identical body attachment fastener pattern for interchangeable replacement.
  - 8. Closers shall have adjustable hydraulic back-check and separate valves for closing and latching speed.
  - 9. Pistons shall be minimum 38mm (1 1/2 inch) diameter.
  - 10. Provide all accessories required for mounting application, including but not limited to, drop plates, special soffit plates, spacers for HD arm fifth screws, bull-nose or other regular arm brackets, extended or shortened arms, and special factory templating. Provide special arms, drop plates, and templates as needed for proper operation of doors equipped with overhead stops or hold-opens.
  - 11. Closer arms or backcheck valve shall not be used to stop the door, except where wall, floor or overhead stop cannot be used.
  - 12. Manufacturers:
    - a. Stanley Security Solutions / Stanley D-4550\* (cast alum.)
    - b. Assa Abloy /Sargent 1431 Series (cast alum.)
    - c. Dorma 8900 Series (cast alum.)
  - 11. Where closers are exposed to exterior or are mounted in rooms that experience high humidity, provide closer body and arm assembly of stainless steel materials.
    - a. Manufacturers: Dorma STA8916, or approved equal

### **2.5 DOOR STOPS**

- A. Conform to ANSI A156.16.
- B. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use lead expansion shields for mounting door stops.
- C. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.

- D. Wall bumpers where used, must be installed to impact the trim or the door within the leading half of its width.
- E. Substitute floor stops as appropriate, when wall bumpers would not provide an effective door stop. Types L02141 or L02161 in office areas, L02121 with 3 fastener points, elsewhere.
- F. Where drywall partitions occur, use floor stops, Type L02141 or L02161 in office areas, L02121 elsewhere.
- G. Provide stop Type L02011 or L02181, as applicable for exterior doors. Where outswinging doors can accommodate a floor stop, provide L02181 stops mated to concrete anchors set in 3 inch diameter core-drilled hole and filled and leveled with quick setting cement.
- H. Omit stops where floor mounted door holders are required and where automatic operated doors occur.
- I. Provide appropriate roller bumper for each set of doors (except where closet doors occur) where two doors would interfere with each other in swinging.
- J. Provide appropriate door mounted stop on doors in individual toilets where floor or wall mounted stops cannot be used.
- K. Provide door stops on doors where combination closer magnetic holders are specified.
- L. Where specified wall or floor stop cannot be used, provide concealed overhead stops or surface mounted stops where concealed cannot be used.

## **2.6 OVERHEAD DOOR HOLDERS**

- A. Conform to ANSI Standard A156.8. Overhead holders shall be of sizes recommended by holder manufacturer for each width of door. Set overhead holders for 110 degree opening, unless limited by building construction or equipment.

## **2.7 LOCKS AND LATCHES**

- A. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1-3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not less than seven pins. Cylinders for all locksets shall be removable core type. Cylinders shall be furnished with construction removable cores and construction master keys. Cylinder shall be removable by special key or tool. Construct all cores so that they will be interchangeable into the core housings of all mortise locks, rim locks, cylindrical locks, and any other type lock included in the Great Grand Master Key System. Disassembly of lever or lockset shall not be required to remove core from lockset. All locksets or latches on double doors with fire label shall have latch bolt with 19 mm (3/4 inch) throw unless shorter throw is approved through testing by the manufacturer. Provide temporary keying device or construction core to allow opening and closing during construction and prior to the installation of final cores.
- B. In addition to above requirements, locks and latches shall comply with following requirements:
  - 1. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13. Mortise locksets shall be series 1000, minimum Grade 2. All locksets and latchsets, except on designated doors in Psychiatric (Mental Health) areas, shall have lever handles similar to Stanley 15D\* Lever Design. Lever handle shall be fabricated from wrought stainless steel. No substitute lever design or material shall be accepted. All locks and latchsets shall be furnished with curved lip strike and wrought box. Lock function F02 shall be furnished with key plates similar to Russwin's No. A70. All lock cases installed on lead lined

doors shall be lead lined before applying final hardware finish.  
Furnish armored fronts for all mortise locks.

2. Cylindrical Lock and Latch Sets: levers shall meet ADA (Americans with Disabilities Act) requirements. Cylindrical locksets shall be series 4000 Grade I.
  - a. All single door locksets to be furnished with ANSI S3 122.58 mm (4 7/8 inch) curved lip strike plates.
  - b. At double doors with overlapping astragal, provide ANSI S3-7/8" flat lip strike plate with 21 mm (7/8 inch) lip to center dimension.
  - c. Provide flat lever with angular end design to match existing (similar to Stanley 15D lever. Verify with COR.)
  - d. Where two turn pieces are specified for lock F76, turn piece on inside knob shall lock and unlock inside knob, and turn piece on outside knob shall unlock outside knob when inside knob is in the locked position. (This function is intended to allow emergency entry into these rooms without an emergency key or any special tool.) Single occupant Privacy function shall have a deadbolt thumbturn device with "in use" indicator, provided NOL or with outside thumbturn not requiring use of special key or tool for emergency entrance.
3. Auxiliary locks shall be as specified under hardware sets and conform to ANSI A156.5/A156.36.
4. Locks on designated doors in Psychiatric (Mental Health) areas shall be paddle type with arrow projection covers and be UL Listed. Provide these locks with paddle in the down position on both sides of the door. Locks shall be fabricated of wrought stainless steel.

## **2.8 MAGNETIC HOLD-OPENS**

- A. Conform to ANSI A156.15. Electrically powered, of strength and configuration for 35lbs holding force. UL listed with variable voltage 12V DC, 24 AC/DC, 120V AC. All metal construction with recessed box, pivoting armature. Provide armature length for clearance of specified operating trim and wall face when door is held at 90 degrees open.
- B. Manufacturers:
  1. ABH Manufacturing Inc.\*
  2. Dorma
  3. LCN / Allegion
  4. Security Door Controls

## **2.9 CARD READERS**

- A. Provide and install card readers where indicated. Integrate card readers with other specified systems and systems that are in place. Refer to Section 28 13 11, Physical Access Control Systems, for card reader requirements.
  1. Manufacturers: HID Global Corporation\*; FIPS-201. Facility Standard, no substitutions.

## **2.10 ELECTRIC STRIKES**

- A. ANSI/ BHMA A156.31 Grade 1.
- B. General: Use fail-secure electric strikes with fire-rated devices.
- C. Manufacturers:
  1. Adams Rite Manufacturing Co.
  2. HES, Inc.; an ASSA ABLOY Group company.
  4. Locknetics; an Allegion Company.
  5. Precision Hardware, Inc.
  6. Stanley Security Solutions.\*

## 2.11 KEYS

- A. Stamp all construction keys with change number and key set symbol. Verify temporary keying requirements with COR and follow any special instructions for labeling or identifying temporary keying.

## 2.12 ARMOR PLATES, COMBINATION KICK-MOP PLATES AND DOOR EDGING

- A. Conform to ANSI Standard A156.6.
- B. Provide protective plates as specified below:
  - 1. Kick-mop plates and armor plates of metal, Type J100 series.
  - 2. Provide kick-mop plates for both sides of each new door, except where noted as not required. Kick plates shall be 254 mm (10 inches) high or 305 mm (12 inches) high. Mop Plates to be 152 mm ( 6 inches) high. Both kick and mop plates to be 1.27 mm (0.50 inches) thick. Kick and mop plates to be beveled on all 4 edges (B4E). On push side of doors where jamb stop extends to floor, make combination kick-mop plates 38 mm (1-1/2 inches) less than width of door, except pairs of metal doors which shall have plates 25 mm (1 inch) less than width of each door. Extend all other kick and mop plates to within 6 mm (1/4 inch) of each edge of doors. Kick mop plates shall butt astragals. For jamb stop requirements, see specification sections pertaining to door frames.
  - 3. Kick and mop plates are not required on following door sides:
    - a) Armor plate side of doors;
    - b) Exterior side of exterior doors;
    - c) Closet side of closet doors;
    - d) Both sides of aluminum entrance doors.
  - 4. Armor plates for doors are listed under Article "Hardware Sets". Armor plates shall be 1.27 (0.50 inches) thick, and 875 mm (35 inches) high and 38 mm (1-1/2 inches) less than width of doors, except on pairs of metal doors. Plates on pairs of metal doors shall be 25 mm (1 inch) less than width of each door. Where top of intermediate rail of door is less than 875 mm (35 inches) from door bottom, extend armor plates to within 13 mm (1/2 inch) of top rail. On doors equipped with panic devices, extend armor plates to within 13 mm (1/2 inch) of panic bolt cross bar. Armor plates to be beveled on all 4 sides (B4E).
  - 5. Where louver or grille occurs in lower portion of doors, substitute stretcher plate and kick-mop plate in place of armor plate. Size of stretcher plate and kick-mop plate shall be 200 mm (8 inches) high.
  - 6. Provide stainless steel edge guards where specified at wood doors. Provide mortise type, except use surface type where door construction or tested assembly will not allow mortise trim. Provide edge guards of bevel and thickness to match wood door. Provide guards with factory cutouts to door hardware that must be installed thru or extend through edge guard. Provide full-height edge guards except where rated assembly will not allow it. In such cases, provide edge guards to height of bottom of typical lockset armor front. Provide edge guards to door manufacturer for factory installation.

## 2.13 EXIT DEVICES

- A. Conform to ANSI Standard A156.3. Exit devices shall be Grade 1; type and function are specified in hardware sets. Provide floor strikes flush with finished floor for vertical rod exit devices in interior of building. Trim shall have cast stainless steel lever handles similar to locksets, unless otherwise specified.



- B. Provide keyed cylinders for keyed operating trim, and where specified, cylinder dogging.
- C. Surface vertical rod panics shall only be provided less bottom rod with fire pins as required by exit device per tested door fire label. Do not provide surface vertical rod panic devices at exterior doors.
- D. Concealed vertical rod panic devices shall be provided less bottom rod at interior doors, unless lockable or otherwise specified. At exterior doors provide concealed vertical rod panics with both top and bottom rods.
- E. Where removable mullions are specified at pairs of doors with rim mounted panic devices, provide mullion with key-removable feature.
- F. At non-rated openings with panic devices, provide key cylinder dogging.
- G. Exit devices for fire doors shall comply with Underwriters Laboratories, Inc., requirements for Fire Exit Hardware. Submit proof of compliance.
- H. Manufacturers:
  - 1. Von Duprin 98/99 by Allegion. Facility Standard, no substitutions.

#### **2.14 FLUSH BOLTS (LEVER EXTENSION)**

- A. Conform to ANSI A156.16. Flush bolts shall be Type L24081 unless otherwise specified. Furnish dustproof strikes conforming to ANSI A156.16 for flush bolts required on lower part of doors. Modify flush bolts to fit stiles of aluminum doors on double-acting doors.
- B. Lever extension manual flush bolts to be used only at non-rated pairs of door at rooms only accessed by maintenance personnel.
- C. Face plates for cylindrical strikes shall be rectangular and not less than 25 mm by 63 mm (1 inch by 2-1/2 inches).
- D. Friction-fit cylindrical dustproof strikes with circular face plate may be used only where metal thresholds occur.
- E. Provide extension rods for top bolt where door height exceeds 2184 mm (7 feet 2 inches).

#### **2.15 FLUSH BOLTS (AUTOMATIC)**

- A. Conform to ANSI A156.16. Dimension of flush bolts shall conform to ANSI A115. Bolts shall conform to Underwriters Laboratories, Inc., requirements for fire door hardware. Flush bolts shall automatically latch and unlatch. Furnish dustproof strikes conforming to ANSI A156.16 for bottom flushbolt. Face plates for dustproof strike shall be rectangular and not less than 38 mm by 90 mm (1-1/2 by 3-1/2 inches).

#### **2.16 DOOR PULLS (WITH PLATES)**

- A. Conform to ANSI A156.6. Pull type J401 152 mm (6 inches) high by 19 mm (3/4 inch) diameter by 70 mm (2 3/4 inch) projection and 51 mm (2 inch) grasping clearance with J302 plate, unless otherwise specified. Cut plates of door pulls for cylinders, or turn pieces where required.

#### **2.17 PUSH PLATES**

- A. Conform to ANSI A156.6. Metal Type J302, 200 mm (8 inches) wide by 350 mm (14 inches) high. Provide Metal Type J302 plates 100 mm (4 inches wide by 350 mm (14 inches) high) where push plates are specified for doors with stiles less than 200 mm (8 inches) wide. Finish shall be as specified for kick-mop plates. Cut plates for cylinders, and turn pieces where required.

## **2.18 COMBINATION PUSH AND PULL PLATES**

- A. Conform to ANSI 156.6. Type J303, stainless steel 3 mm (1/8 inch) thick, 80 mm (3-1/3 inches) wide by 800 mm (16 inches) high), top and bottom edges shall be rounded. Secure plates to wood doors with 38 mm (1-1/2 inch) long No. 12 wood screws. Finish shall be as specified for kick-mop plates. Cut plates for turn pieces, and cylinders where required. Pull shall be mounted down.

## **2.19 COORDINATORS**

- A. Conform to ANSI A156.16. Coordinators, when specified for fire doors, shall comply with Underwriters Laboratories, Inc., requirements for fire door hardware. Coordinator may be omitted on exterior pairs of doors where either door will close independently regardless of the position of the other door. Coordinator may be omitted on interior pairs of non-labeled doors where open back strike is used. Open back strike shall not be used on labeled doors.
- B. Provide bar type coordinators, except where gravity coordinators are required at acoustically rated pairs of doors. Provide filler bars for full width and, as required, brackets for push side surface mounted closers, overhead stops, and vertical rod panic devices.
- C. Paint coordinators to match door frames, unless coordinators are plated.

## **2.20 THRESHOLDS**

- A. Conform to ANSI A156.21, mill finish extruded aluminum, except as otherwise specified. In existing construction, thresholds shall be installed in a bed of sealant with 1/4-20 machine screws and expansion shields. In new construction, embed aluminum anchors coated with epoxy in concrete to secure thresholds. Furnish thresholds for the full width of the openings.
- B. Provide non-slip abrasive finish at exterior doors and interior doors exposed to moisture.
- C. Provide mitered returns on thresholds that protrude beyond face of frames by more than 12 mm (1/2 inch).
- D. For thresholds at elevators entrances see other sections of specifications.
- E. Manufacturers:
  - a. National Guard Products\*
  - b. Pemko Products
  - c. Zero

## **2.21 WEATHERSTRIPS (FOR EXTERIOR DOORS)**

- A. Conform to ANSI A156.22. Air leakage shall not to exceed 0.50 CFM per foot of crack length (0.000774m<sup>3</sup>/s/m).

## **2.22 MISCELLANEOUS HARDWARE**

- A. Access Doors (including Sheet Metal, Screen and Woven Wire Mesh Types): Except for fire-rated doors and doors to Temperature Control Cabinets, equip each single or double metal access door with Lock Type E76213, conforming to ANSI A156.5. Key locks as directed. Ship lock prepaid to the door manufacturer. Hinges shall be provided by door manufacturer.
- B. Mutes: Conform to ANSI 156.16. Provide door mutes or door silencers Type L03011 or L03021, depending on frame type, of white or light gray color, except at fire-rated frames, lead-lined frames, and sound resistant, lightproof, or electromagnetically shielded frames. Provide 3 mutes for single doors, 2 mutes for each door in pairs, except where

double acting. Provide 4 mutes per frame for Dutch type door. Provide 2 mutes for each edge of sliding door frames where door contact will occur.

- B. Hardware Finishes for Existing Buildings: U.S. Standard finishes shall match finishes of hardware in (similar) existing spaces except where otherwise specified.

## 2.24 BASE METALS

- A. Apply specified U.S. Standard finishes on different base metals as following:

Finish	Base Metal
652	Steel
626	Brass or bronze
630	Stainless steel

## PART 3 - EXECUTION

### 3.1 HARDWARE HEIGHTS

- A. Locate hardware on doors at heights specified below, with all hand operated hardware centered within 864 mm (34 inches) to 1200 mm (48 inches), unless otherwise noted:
- B. Hardware Heights from Finished Floor:
1. Exit devices centerline of strike (where applicable) 1000 mm (40-5/16 inches).
  2. Locksets and latch sets centerline of strike 1000 mm (40-5/16 inches).
  3. Deadlocks centerline of strike 1200 mm (48 inches).
  4. Hospital arm pull 1170 mm (46 inches) to centerline of bottom supporting bracket.
  5. Centerline of door pulls to be 1000 mm (40 inches).
  6. Push plates and push-pull shall be 1250 mm (50 inches) to top of plate.
  7. Push-pull latch to be 1000 mm (40-5/16 inches) to centerline of strike.
  8. Centerline of deadlock strike to be 840 mm (33 inches) when used with push-pull latch.
  9. Locate other hardware at standard commercial heights. Locate push and pull plates to prevent conflict with other hardware.

### 3.2 INSTALLATION

- A. Closer devices, including those with hold-open features, shall be equipped and mounted to provide maximum door opening permitted by building construction or equipment. Closers shall be mounted on door face at inside of rooms, inside stair enclosures, and room side along corridors. At exterior doors, mount on interior side. Where closers are mounted on doors they shall be mounted with sex nuts and bolts; foot shall be fastened to frame with machine screws.

B. Hinge Size Requirements:

Door Thickness	Door Width	Hinge Height
45 mm (1-3/4 inch)	900 mm (3 feet) and less	113 mm (4-1/2 inches)
45 mm (1-3/4 inch)	Over 900 mm (3 feet) but not more than 1200 mm (4 feet)	125 mm (5 inches)
35 mm (1-3/8 inch) (hollow core wood doors)	Not over 1200 mm (4 feet)	113 mm (4-1/2 inches)

C. Hinge leaves shall be sufficiently wide to allow doors to swing clear of door frame trim.

D. Where new hinges are specified for new doors in existing frames or existing doors in new frames, sizes of new hinges shall match sizes of existing hinges; or, contractor may reuse existing hinges provided hinges are restored to satisfactory operating condition as approved by COR. Existing hinges shall not be reused on door openings having new doors and new frames. Coordinate preparation for hinge cut-outs and screw-hole locations on doors and frames.

E. Hinges Required Per Door:

Doors 1500 mm (5 ft) or less in height	2 butts
Doors over 1500 mm (5 ft) high and not over 2280 mm (7 ft 6 in) high	3 butts
Doors over 2280 mm (7 feet 6 inches) high	4 butts
Dutch type doors	4 butts

F. Fastenings: Suitable size and type and shall harmonize with hardware as to material and finish. Provide machine screws and lead expansion shields to secure hardware to concrete, ceramic or quarry floor tile, or solid masonry. Fiber or rawl plugs and adhesives are not permitted. All fastenings exposed to weather shall be of nonferrous metal.

**3.3 FINAL INSPECTION**

A. Installer to provide letter to VAMC COR that upon completion, installer has visited the Project and provided the following:

1. Re-adjusted hardware
2. Evaluated maintenance procedures and recommended changes or additions and instruct VAMC personnel.
3. Identified items that have deteriorated or failed.
4. Submitted written report identifying problems.

**3.4 DEMONSTRATION**

A. Demonstrate efficacy of mechanical and electro-mechanical hardware systems, including adjustment and maintenance procedures to the satisfaction of the VAMC COR and Locksmith.

### **3.4 HARDWARE SETS**

- A. Following sets of hardware correspond to hardware symbols shown on drawings. Where hardware set for a single door is specified for a pair of doors; equip each leaf of such pair of doors with set noted. Only those hardware sets that are shown on drawings will be required. Disregard hardware sets listed in specifications but not shown on drawings.
- B. Hardware Consultant will be responsible for providing additional information on the Hardware Sets as requested.
- C. The Hardware sets indicate BHMA product numbering code applicable for that particular category of hardware.
- D. Hardware Sets begin on the Next Page.

**Hardware Sets**

**Hardware Set #1 - Main Entry**

1 Auto Operators	Horizontal Sliding		STAN
	Refer to Section 087113		
	Balance of hardware by door manufacturer.		
	Cylinder as required		

**Hardware Set #2 - Exterior entry**

3 Hinges	A5112 (CB1960R)	32D	ST
1 Exit Device	E03 (33A-NL-OP X 388NL)	US26D	VO
	J401 pull by alum door mfr.		
1 Rim Cylinder	12E-72 STD	626	BE
1 Door Closer	C02021 (QDC115M)	689	SH
1 Floor Stop	L02181 (1214CK x 1268CK)	626	TR
	Core drilled with anchor. Cast in place		
1 Threshold	896 S 36"	AL	NA

NOTE: Weatherstripping by alum. door and frame mfr.

**Hardware Set #3 - Exterior Entry - AL Pair**

6 Hinges	A5112 (CB1960R)	32D	ST
2 Exit Device	E03 (33A-NL-OP X 388NL)	US26D	VO
	J401 pull by alum door mfr.		
2 Rim Cylinder	12E-72 STD	626	BE
1 Coordinator	3722	US28	AB
2 Door Closer	C02021 (QDC115M)	689	SH
2 Floor Stop	L02181 (1241CK x 1268CK)	626	TR
	Core drilled with anchor. Cast in place		
1 Threshold	896 S 72"	AL	NA

NOTE: Weatherstipping by alum. door and frame mfr.

**Hardware Set #4 - Exterior Entry HM**

3 Hinges	A5112 (CB1960R)	32D	ST
1 Exit Device	E03 (9847NLx110MD-NLx697)	US26D,US32D	VO
1 Rim Cylinder	12E-72 STD	626	BE
1 Door Closer	C02021 (QDC115M)	689	SH
1 Floor Stop	L02181 (1241CK x 1268CK)	626	TR
1 Closer Seal	9700 A 204"	NA	
1 Threshold	896 S 36"	AL	NA

**Hardware Set #5 - Cross Corridor**

6 Hinges	A8112 (CB1900R)	26D	ST
2 Fire Exit Device	9847WDC-L-F x 996L	US26D,US26D	VO

NOTE: Less bottom rod, with fire pin. Blank escutcheon, less dogging

2 Magnetic Holder	2100	US32D	AB
2 Door Closer	C02021 (QDC115M)	689	SH
2 Armor Plate	J101 (KA050-2) BE4	619	TR
2 Wall Bumper	L02251 (1270WV)	619	TR

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION

**Hardware Set #6 - Storage - Secure**

3 Hinges	A8112 (CB1900R)	26D	ST
	x NRP at outswinging doors.		
1 Deadlock	E2151 (8T3-7K S1)	626	BE
1 Lockset	F86 (9K3-7D15D)	626	BE
2 Kick Plate	J102 (KO050) BE4	619	TR
1 Floor Stop	L02141 (1211)	619	TR

**Hardware Set #7 - Exam**

3 Hinges	A8111 (CB1901R)	26D	ST
1 Lockset	F82 (9K3-17B15D)	626	BE
1 Kick Plate	J102 (KO050)	619	TR
1 Floor Stop	L02141 (1211)	619	TR

**Hardware Set #7A - Office**

3 Hinges	A8112 (CB1900R)	26D	ST
1 Lockset	F82 (9K3-17B15D)	626	BE
2 Kick Plate	J102 (KO050)	619	TR
1 Floor Stop	L02141 (1211 TR)	619	TR

**Hardware Set #7B - Office / Exam FR**

3 Hinges	A8112 (CB1900R)	26D	ST
1 Lockset	F82 (9K3-17B15D)	626	BE
1 Door Closer	C02021 (QDC115)	689	SH
2 Kick Plate	J102 (KO050)	619	TR
1 Floor Stop	L02141 (1211)	619	TR

**Hardware Set #8 - Public Toilet Rooms**

3 Hinges	A8112 (CB1900R)	26D	ST
1 Deadlock	E2151 (8T3-7K S1)	626	BE
2 Push/Pull Plate	J303 (1820)	619	TR
1 Door Closer	C02021 (QDC115)	689	SH
1 Armor Plate	J101 (KA050-2) BE4	619	TR
1 Wall Bumper	L02251 (1270WV)	619	TR

**Hardware Set #9 - Toilet Rooms - Private**

3 Hinges	A8112 (CB1900R)	26D	ST
----------	-----------------	-----	----

NOTE: x NRP at outswinging doors. Finish 32D at Shower Rooms

1 Deadlock	(QDB285 NOL)	626	SH
	In Use indicator only, no latch		
1 Privacy Set	F76 (9K3-0L15D)	626	BE
1 Concealed OH Stop	C01541 (1023)	630	AB
1 Armor Plate	J101 (KA050-2, BE4)	619	TR
1 Wall Bumper	L02251 (1270WV)	619	TR

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION

**Hardware Set #10 - HAC**

3 Hinges	A2111 (CB1961R)	32D	ST
1 Lockset	F86 (9K3-7D15D)	626	BE
1 Door Closer	C02061 (QDC116)	689	SH
	Push side mounting, with hold open		
1 Armor Plate	J101 (KA050-2, BE4)	619	TR
1 Wall Bumper	L02251 (1270WV)	619	TR

**Hardware Set #11 - Operations**

3 Hinges	A8112 (CB1900R)	26D	ST
1 Lockset	F86 (9K3-7D15D)	626	BE
1 Electric Strike	ES5 A S	630	BE
1 Door Closer	C02021 (QDC115M)	689	SH
2 Kick Plate	J102 (KO050)	619	TR
1 Floor Stop	L02141 (1211)	619	TR
1 Card Reader	FIPS-201		HID

NOTE: Presenting authorized credentials at card reader releases latch for temporary entry for prescribed interval. Free egress at all times. Door wire chase and wiring included. Card reader, power supply and relay by Security Contractor.

**Hardware Set #12 - Holding**

1 Continuous Hinge	661 CE UL 84"	AL	ST
1 Lockset	F80 (9K3-7S15D)	626	BE
1 Electric Strike	ES5 A S	630	BE
1 Door Closer	C02021 (QDC115M x SNB)	689	SH
	NOTE: Mount on pull side.		
2 Kick Plate	J102 (KO050)	619	TR
1 Wall Bumper	L02251 (1270WV)	619	TR
1 Position Switch	1045W-G	SENT	
	NOTE: Contact wired to local alarm		
2 Card Readers	FIPS-201		HID

NOTE: Presenting authorized credentials releases latch for temporary entry for prescribed interval. Card Readers on either side of door activates latch release. Door wire chase and wiring included. Card readers, power supply and relay by Security Contractor.

SECURITY NOTE: Interior lever is secured by turning and removing inside key with outside lever locked. When room is occupied, door must be supervised in this locked state to provide emergency release.

**Hardware Set #13 - Storage / Linen**

3 Hinges	A8111 (CB1901R)	26D	ST
1 Lockset	F86 (9K3-7D15D)	626	BE
1 Door Closer	C02021 (QDC115M)	689	SH
1 Concealed OH Stop	C01541 (1023)	630	AB
1 Armor Plate	J101 (KA050-2) BE4	619	TR
1 Wall Bumper	L02251 (1270WV)	619	TR

NOTE: Rooms G131, G142 only. No OH stop.



VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION

**Hardware Set #14 - Armory**

1 Continuous Hinge	661 CE UL 84"	AL	ST
1 Electro-mech Lock	DEU 45HW-7DEU15J) S1	630	BE
1 Door Closer	C02021 (QDC115M)	689	SH
	NOTE: Mount on pull side.		
1 Kick Plate	J102 (KO050)	619	TR
1 Floor Stop	L02141 (1211)	619	TR
1 Card Reader	FIPS-201		HID

NOTE: Presenting authorized credentials sends power to activate lever for temporary entry for prescribed interval. Free egress at all times. Door wire chase and wiring included. Card reader, power supply and relay by Security Contractor.

**Hardware Set #15 - Storage - Rated**

3 Hinges	A8112 (CB1900R)	26D	ST
1 Lockset	F86 (9K3-7D15D)	626	BE
1 Door Closer	C02021 (QDC115)	689	SH
1 Concealed OH Stop	C01541 (1023)	630	AB
1 Kick Plate	J102 (KO050)	619	TR
1 Wall Bumper	L02251 (1270WV)	619	TR

**Hardware Set #16 - Passage**

3 Hinges	A2111 (CB1961R)	32D	ST
1 Door Pull	J401 (1194-1)	630	TR
1 Door Closer	C02021 (QDC115M)	689	SH
2 Kick Plate	J102 (KO050)	619	TR
2 Push Plate	J302 (1001-2) B4E	619	TR
	Prep plate to receive pull		

**Hardware Set #17 - Communicating**

3 Hinges	A8112 (CB1900R)	26D	ST
1 Lockset	F84 (9K3-7R15D)	626	BE
1 Lockset	9K3-7S15D STD S3	626	BE
1 Kick Plate	J102 (KO050)	619	TR
1 Wall Bumper	L02251 (1270WV)	619	TR

**Hardware Set #18 - Telecom / IT**

1 Continuous Hinge	661 UL 84"	AL	ST
1 Lockset	F07 (45H-7D15H) S1	626	BE
1 Concealed OH Stop	C01541 (1023)	630	AB
2 Kick Plate	J102 (KO050)	619	TR

**Hardware Set #19 - Suite Entry**

3 Hinges	A8112 (CB1900R)	26D	ST
1 Exit Device	E03 (98L X 996L)	US26D, US26D	VO
1 Rim Cylinder	12E-72 STD	626	BE
1 Door Closer	C02021 (QDC115M)	689	SH
2 Kick Plate	J102 (KO050)	619	TR
1 Floor Stop	L02141 (1211)	619	TR

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION

**Hardware Set #20 - Secured suite**

2 Hinges	A8112 (CB1900R)	26D	ST
1 Lockset	F86 (9K3-7D15D)	626	BE
1 Electric Strike	ES5 A S	630	BE
1 Door Closer	C02021 (QDC115M)	689	SH
2 Kick Plate	J102 (KO050)	619	TR

NOTE: Presenting authorized credentials releases latch for temporary entry at prescribed interval. Free egress at all times. Door wire chase and wiring included. Card reader, power supply and relay by Security Contractor.

**Hardware Set #21 - Outside Storage**

6 Hinges	A5111 (CB1960R)	32D	ST
1 Surface Bolt	L04161 (3923)	630	TR
	Upper bolt only.		
1 Deadlock	E2151 (8T3-7K STD)	626	BE
1 Door Pull	J401 (1194-1)	630	TR
	Active leaf only		
2 Overhead Holder	C05511 (3312A)	US32D	AB
1 Push Plate	J302 (1001-2)	619	TR
	Active leaf only. Prep plate to receive pull. SS fasteners only.		
2 Gasketing Set	G610 A 36"	NA	
1 Astragal	139 SS 83"	304	NA

**Hardware Set #22 - Rooftop Access**

3 Hinges	A5111 (CB1960R)	32D	ST
1 Deadlock	E2151 (8T3-7K STD)	626	BE
1 Door Pull	J401 (1194-1)	630	TR
2 Push Plate	J302 (1001-2)	619	TR
	Interior side		
	Prep plate to receive pull. SS fasteners only.		
1 Gasketing Set	G610 A 36"	NA	
1 Threshold	896 S 36"	AL	NA

NOTE: Verify hinge preparation in existing frame and furnish size as required.

---END---

**SECTION 08 71 13**  
**AUTOMATIC DOOR OPERATORS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies equipment, controls and accessories for automatic operation of swing and sliding doors.

**1.2 RELATED WORK**

- A. Aluminum frames entrance work; Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS.
- B. Door hardware; Section 08 71 00, DOOR HARDWARE.
- D. Glass and glazing of doors and frames; Section 08 80 00, GLAZING.
- E. Electric general wiring, connections and equipment requirements; Division 26, ELECTRICAL.
- F. Section 28 31 00, FIRE DETECTION AND ALARM.

**1.3 QUALITY ASSURANCE**

- A. Automatic door operators, controls and other equipment shall be products of a manufacturer regularly engaged in manufacturing such equipment for a minimum of three years.
- B. One type of automatic door equipment shall be used throughout the building.
- C. Equipment installer shall have specialized experience and shall be approved by the manufacturer.

**1.4 WARRANTY**

- A. Automatic door operators shall be subject to the terms of the "Warranty of Construction", FAR clause 52.246-21, except that the Warranty period shall be two years in lieu of one year.

**1.5 MAINTENANCE MANUALS**

- A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on automatic door operators.

**1.6 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's literature and data describing operators, power units, controls, door hardware and safety devices.
- C. Shop Drawings:
  - 1. Showing location of controls and safety devices in relationship to each automatically operated door.
  - 2. Showing layout, profiles, product components, including anchorage, accessories, as applicable.
  - 3. Submit templates, wiring diagrams, fabrication details and other information to coordinate the proper installation of the automatic door operators.
- D. Submit in writing to COR that items listed in Article 1.3 are in compliance.

### 1.7 DESIGN CRITERIA

- A. As a minimum automatic door equipment shall comply with the requirements of BHMA 156.10. Except as otherwise noted on drawings, provide operators which will move the doors from the fully closed to fully opened position in five seconds maximum time interval, when speed adjustment is at maximum setting.
- B. Equipment: Conforming to UL 325. Provide key operated power disconnect wall switch for each door installation.
- C. Electrical Wiring, Connections and Equipment: Provide all motor, starter, controls, associated devices, and interconnecting wiring required for the installation. Equipment and wiring shall be as specified in Division 26, ELECTRICAL.

### 1.8 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Builders Hardware Manufacturers Association, Inc. (BHMA):  
A156.10-05.....Power Operated Pedestrian Doors (BHMA 1601)
- C. National Fire Protection Association (NFPA):  
101-09.....Life Safety Code
- D. Underwriters Laboratory (UL):  
325-10.....Door, Drapery, Gate, Louver, and Window  
Operators and Systems

### 1.9 DELIVERY AND STORAGE

- A. Delivery shall be in factory's original, unopened, undamaged container with identification labels attached.

## PART 2 - PRODUCTS

### 2.1 SWING DOOR OPERATORS

- A. General: Swing door operators shall be of institutional type, door panel size 600 mm to 1250 mm (2'-0" to 5'-0") width, weight not to exceed 300 kg (600 pounds), electric operated for overhead mounting within the header or transom. Furnish metal mounting supports, brackets and other accessories necessary for the installation of operators at the head of the door frames. The motor on automatic door operator shall be provided with an interlock so that the motor will not operate when doors are electrically locked from opening.
- B. Operators shall have checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle. Operators shall be capable of recycling doors instantaneously to full open position from any point in the closing cycle when control switch is activated. Operators shall, when automatic power is interrupted or shut-off, permit doors to easily open manually without damage to automatic operator system.
- C. Operator, enclosed in housing, shall open door by energizing motor and shall stop by electrically reducing voltage and stalling motor against mechanical stop. Door shall close by means of spring energy, and close force shall be controlled by gear system and motor being used as dynamic break without power, or controlled by hydraulic closer in electro-hydraulic operators. System shall operate as manual door

control in event of power failure. Opening and closing speeds shall be adjustable:

1. Operator Housing: Housing shall be a minimum of 112 mm (4-1/2 inches) wide by 140 mm (5.5 inches) high aluminum extrusions with enclosed end caps for application to 100 mm (4 inches) and larger frame systems. All structural sections shall have a minimum thickness of 3.2 mm (0.125 inch) and be fabricated of a minimum of 6063-T5 aluminum alloy.
2. Power Operator: Completely assembled and sealed unit which shall include gear drive transmission, mechanical spring and bearings, all located in aluminum case and filled with special lubricant for extreme temperature conditions. Complete unit shall be rubber mounted with provisions for easy maintenance and replacement, without removing door from pivots or frame.
3. Connecting hardware shall have drive arm attached to door with a pin linkage rotating in a self-lubricating bearing. Door shall not pivot on shaft of operator.
4. Electrical Control: Operator shall have a self contained electrical control unit, including necessary transformers, relays, rectifiers, and other electronic components for proper operation and switching of power operator. All connecting harnesses shall have interlocking plugs.

## **2.2 MICROPROCESSOR CONTROLS**

- A. The system shall include a multi-function microprocessor control providing adjustable hold open time (1-30 seconds), LED indications for sensor input signals and operator status and power assist close options. Control shall be capable of receiving activation signals from any device with normally open dry contact output. All activation modes shall provide fully adjustable opening speed:
- B. The door shall be held open by low voltage applied to the continuous duty motor. The control shall include an adjustable safety circuit that monitors door operation and stops the opening direction of the door if an obstruction is sensed. The motor shall include a recycle feature that reopens the door if an obstruction is sensed at any point during the closing cycle. The control shall include a standard three position key switch with functions for ON, OFF, and HOLD OPEN, mounted on operator enclosure, door frame, or wall, as indicated in the architectural drawings.

## **2.4 POWER UNITS**

Each power unit shall be self-contained, electric operated and independent of the door operator. Capacity and size of power circuits shall be in accordance with automatic door operator manufacturer's specifications and Division 26 - ELECTRICAL.

## **2.5 DOOR CONTROLS**

- A. Opening and closing actions of doors shall be actuated by controls and safety devices specified, and conform to ANSI 156.10. Controls shall cause doors to open instantly when control device is actuated; hold doors in open positions; then, cause doors to close, unless safety device or reactivated control interrupts operation.
- B. Manual Controls:
  1. Push Plate Wall Switch: Recess type, stainless steel push plate minimum 100 mm by 100 mm (four-inch by four-inch), with 13 mm (1/2-

- inch) high letters "To Operate Door--Push" engraved on face of plate.
- C. Motion Detector: The motion detector may be surface mounted or concealed, to provide a signal to actuate the door operator, and monitor the immediate zone, to detect intrusion by persons, carts or similar objects. The zone which the detector monitors shall be 1500 mm (five feet) deep and 1500 mm (five feet) across, plus or minus 150 mm (six inches) on all dimensions. The maximum response time shall be no less than 25 milliseconds. Unit shall be designed to operate on 24 volts AC. The control shall not be affected by cleaning material, solvents, dust, dirt and outdoor weather conditions.

## **2.6 SAFETY DEVICES**

- A. General: Area over which doors swing or slide shall be a safety section and anyone standing in path of door's movement shall be protected by a safety device.
- B. At sliding doors, provide two photoelectric beams mounted at heights of 600 mm (24 inches) and 1200 mm (48 inches) in the door frame on sliding doors. Provide overhead safety presence sensors at door head on each side of the opening. Beams shall parallel door openings to prevent doors from closing when anyone is in the center of the door or doors. When beams are activated, doors shall recycle to full open position. Actuation shall include a motion detector mounted on each side of the door for detection of traffic in each direction.
- C. Each swing door shall have installed on the pull side a presence sensor to detect any person standing in the door swing path and prevent the door from opening.
- D. Time delay switches shall be adjustable between 3 to 60 seconds and shall control closing cycle of doors.
- E. Decals with sign "In" or "Do Not Enter" shall be installed on both faces of each door where shown.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION**

- A. Coordinate installation of equipment with other related work. Manual controls and power disconnect switches shall be recessed or semi-flush mounted in partitions. Secure operator components to adjacent construction with suitable fastenings. Conceal conduits, piping, and electric equipment, in finish work.
- B. Install power units in locations shown. Where units are to be mounted on walls, provide metal supports or shelves for the units. All equipment, including time delay switches, shall be accessible for maintenance and adjustment.
- C. Operators shall be adjusted and must function properly for the type of traffic (pedestrians, carts, stretchers and wheelchairs) expected to pass through doors. Each door leaf of pairs of doors shall open and close in synchronization. On pairs of doors, operators shall allow either door to be opened manually without the other door opening.
- D. Install controls at positions shown and make them convenient for particular traffic expected to pass through openings. Maximum height of push plate wall switches from finished floors shall be 40 inches unless otherwise approved by the COR.

**3.2 INSTRUCTIONS**

- A. Following the installation and final adjustments of the door operators, the installer shall fully instruct VA personnel for 2 hours on the operating, servicing and safety requirements for the swing and sliding automatic door operators.
- B. Coordinate instruction to VA personnel with VACOR COR.

- - - E N D - - -

**SECTION 08 80 00**  
**GLASS AND GLAZING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies glass, related glazing materials and accessories. Glazing products specified apply to factory or field glazed items.

**1.2 RELATED WORK**

1. Mirrors: Section 10800, TOILET AND BATH ACCESSORIES.

**1.3 LABELS**

- A. Temporary labels:
1. Provide temporary label on each light of glass identifying manufacturer or brand and glass type, quality and nominal thickness.
  2. Label in accordance with NFRC (National Fenestration Rating Council) label requirements.
  3. Temporary labels shall remain intact until glass is approved by COR.
- B. Permanent labels:
1. Locate in corner for each pane.
  2. Label in accordance with ANSI Z97.1 and SGCC (Safety Glass Certification Council) label requirements.
    - a. Tempered glass.
    - b. Laminated glass or have certificate for panes without permanent label.

**1.4 PERFORMANCE REQUIREMENTS**

- A. Building Enclosure Vapor Retarder and Air Barrier:
1. Utilize the inner pane of multiple pane sealed units for the continuity of the air barrier and vapor retarder seal.
  2. Maintain a continuous air barrier and vapor retarder throughout the glazed assembly from glass pane to heel bead of glazing sealant.
- B. Glass Thickness:
1. Select thickness of exterior glass to withstand dead loads and wind loads acting normal to plane of glass at design pressures calculated in accordance with (ASTM E1996 and ASTM E1886 for large and small missile impact).
  2. Limit glass deflection to 1/200 or flexure limit of glass, whichever is less, with full recovery of glazing materials.
  3. Test in accordance with ASTM E 330.
  4. Thicknesses listed are minimum. Coordinate thicknesses with framing system manufacturers.

**1.5 SUBMITTALS**

- A. In accordance with Section 01340, SAMPLES AND SHOP DRAWINGS.
- B. Manufacturer's Certificates:
1. Certificates stating that exterior glazing, meets requirements of ASTM E 1996 and ASTM E 1886 for large and small missile impact glazing material as specified in ANSI Z97.1.
  2. Certificate on shading coefficient.
  3. Certificate on "R" value when value is specified.
- C. Warranty: Submit written guaranty, conforming to General Condition requirements, and to "Warranty of Construction" Article in this Section.
- D. Manufacturer's Literature and Data:
1. Glass, each kind required.
  2. Insulating glass units.



3. Transparent (one-way vision glass) mirrors.
  4. Glazing cushion.
  5. Sealing compound.
- E. Samples:
1. Size: 150 mm by 150 mm (6 inches by 6 inches).
  2. Tinted glass.
  3. Reflective glass.
  4. Transparent (one-way vision glass) mirrors.
- F. Preconstruction Adhesion and Compatibility Test Report: Submit glazing sealant manufacturer's test report indicating glazing sealants were tested for adhesion to glass and glazing channel substrates and for compatibility with glass and other glazing materials.

#### 1.6 DELIVERY, STORAGE AND HANDLING

- A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.
- B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.
- C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each.

#### 1.7 PROJECT CONDITIONS

Field Measurements: Field measure openings before ordering tempered glass products. Be responsible for proper fit of field measured products.

#### 1.8 WARRANTY

- A. Warranty: Conform to terms of "Warranty of Construction" Article in Section 01001, GENERAL CONDITIONS, except extend warranty period for the following:
  1. Insulating glass units to remain sealed for 10 years.
  2. Laminated glass units to remain laminated for 5 years.

#### 1.9 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):  
Z97.1-94.....Safety Glazing Material Used in Building -  
Safety Performance Specifications and Methods of  
Test.
- C. American Society for Testing and Materials (ASTM):  
C1363-97.....Thermal Performance of Building Assemblies, by  
Means of A Hot Box Apparatus  
C542-94 (R1999).....Lock-Strip Gaskets.  
C716-00.....Installing Lock-Strip Gaskets and Infill Glazing  
Materials.  
C864-99.....Dense Elastomeric Compression Seal Gaskets,  
Setting Blocks, and Spacers.  
C920-02.....Elastomeric Joint Sealants.  
C1036-01.....Flat Glass.  
C1048-97.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated  
and Uncoated Glass.  
C1172-96.....Laminated Architectural Flat Glass.

- E330-02.....Structural Performance of Exterior Windows,  
Curtain Walls, and Doors by Uniform Static Air  
Pressure Difference.
- E774-97.....Sealed Insulating Glass Units
- D. Code of Federal Regulations (CFR):  
16 CFR 1201 - Safety Standard for Architectural Glazing Materials; 1977,  
with 1984 Revision.
- E. Glass Association of North America (GANA):  
01.....Glazing Manual (1997 Edition).  
02.....Sealant Manual (1990 Edition).  
03.....Laminated Glass Design Guide (2000 Edition).  
04.....Tempered Glass Engineering Standard Manual (2001  
Edition).
- F. National Fenestration Rating Council (NFRC):  
Certified Products Directory (Latest Edition).
- F. Safety Glazing Certification Council (SGCC):  
Certified Products Directory (Issued Semi-Annually).

**PART 2 - PRODUCT**

**2.1 GLASS**

- A. Use thickness stated unless specified otherwise in assemblies.
- B. Clear Glass:
  - 1. ASTM C1036, Type I, Class 1, Quality q3.
  - 2. Thickness, as indicated.
- C. Tinted Heat reflective and low emissivity coated glass:
  - 1. ASTM C1036, Type I, Class 2, Quality q3.
  - 2. Color: Silver
  - 3. Thickness, as indicated.

**2.2 HEAT-TREATED GLASS**

- A. Clear Heat Strengthened Glass:
  - 1. ASTM C1048, Kind HS, Condition A, Type I, Class 1, Quality q3.
  - 2. Thickness, as indicated.
- B. Tinted Heat Strengthened Glass:
  - 1. ASTM C1048, Kind HS, Condition A, Type I, Class 2, Quality q3.
  - 2. Color: Bronze.
  - 3. Thickness, as indicated.
- C. Clear Tempered Glass.
  - 1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.
  - 2. Thickness, 6 mm (1/4 inch).
- D. Tinted Tempered Glass.
  - 1. ASTM C1048, Kind FT, Condition A, Type I, Class 2, Quality q3.
  - 2. Color: Bronze
  - 3. Thickness, 6 mm (1/4 inch).

**2.3 COATED GLASS**

- A. Low-E Tempered Glass:
  - 1. ASTM C1048, Kind FT, Condition C, Type I, Class 1, Quality q3 with  
low emissivity pyrolytic coating having an E of 0.15.
  - 2. Apply coating to surface of insulating glass units.
  - 3. Thickness, 6 mm (1/4 inch).
- B. Transparent Mirror (One-Way-Vision Glass):
  - 1. ASTM C1036, Type I, Class 1, Quality q2 or Class 3, Quality q3; Grey  
Glass.
  - 2. Thickness, 6 mm (1/4 inch).
  - 3. Coated one face with a hard adherent reflective film of chromium or  
other coating of proven equivalent durability.

4. Visible light transmittance; eight percent, plus or minus two percent.
5. Visible reflectance; sixty percent, plus or minus five percent.
6. Light ratio; mirror side 10 or more; observer side one or less.
7. Assemble with coating covered and protected with a layer of clear glass not less than 3 mm (1/8 inch) thick.
8. Clean interface glass prior to assembly.
9. Tape edge to seal interface and hold panes together.

#### **2.4 LAMINATED GLASS**

- A. Interlayer between glass panes: ASTM C 1172. Use heat and light stable polyvinyl butyral (PVB) plasticized resin sheeting.
- B. Colored PVB:
  1. Use colored PVB having heat and ultraviolet light color stabilization.
  2. Option: Use colored PVB with clear glass in lieu of tinted glass and clear PVB.
  3. Option: Use white PVB with clear glass in lieu of obscure glass and clear PVB.
  4. The PVB assembly shall have uniform color presenting same appearance as tinted glass assembly.
- C. Use 1.5 mm (0.060 inch) thick PVB for:
  1. Heat strengthened or fully tempered impact resistant glass assemblies.

#### **2.5 LAMINATED GLAZING ASSEMBLIES**

- A. Clear Glazing:
  1. Both panes clear glass ASTM C1036, Type I, Class 1, Quality q3.
  2. Thickness: Each pane, 3 mm (1/8 inch) thick.
- B. Clear Tempered Glazing:
  1. Both panes ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.
  2. Thickness: Each pane 4.8 mm (3/16 inch) thick minimum.
- C. Tinted Tempered Glazing (For Uninsulated Glazing Applications Only):
  1. Exterior pane ASTM C1036, Type I, Class 2, Quality q3, 3 mm (1/8 inch) thick minimum.
  2. Interior pane ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3, 3 mm (1/8 inch) thick minimum.
- D. Clear Heat Strengthened Glazing:
  1. Both panes, ASTM C1048, Kind HS, Condition A, Type I, Class 1, Quality q3.
  2. Thickness: Each pane, 3 mm (1/8 inch) thick.

#### **2.6 INSULATING GLASS UNITS**

- A. Provide factory fabricated, hermetically sealed glass unit consisting of two panes of glass separated by a dehydrated air space.
- B. Insulating glass shall be Class A preassembled units of dual-seal construction consisting of lites of glass separated by an aluminum, steel, or stainless steel, spacer and dehydrated space conforming to ASTM E 773 and ASTM E 774. Spacer shall be roll-formed, with bent or tightly welded or keyed and sealed joints to completely seal the spacer periphery and eliminate moisture and hydrocarbon vapor transmission into airspace through the corners. Primary seal shall be compressed polyisobutylene and the secondary seal shall be a specifically formulated silicone. Glass types shall be as follows:
  1. Low-E Insulating Glass: Exterior glass panes for Low-E insulating units shall be Type I heat strengthened flat glass 1/4" thick, Glass 1

- clear, safety laminated glass consisting of two nominal 1/8" glass panes bonded together with a low-emissivity coating on No. 3 surface (inside surface of interior pane) Quality q3 - glazing select, conforming to ASTM C 1036. Glass performance shall be K-Value/Winter Nighttime 0.31, shading coefficient 0.48. Color shall be bronze. The total thickness of the insulating unit including airspace shall be 1". Glazing within 2'-0" of a door, 18" of a walking surface, or a pane greater than 9 square feet, shall be safety glazed interior pane and tempered glass exterior pane.
- C. Fused Edge Units, (FEU):
1. Glass to glass sealed edges electrically fused.
  2. Air space not less than 4.8 mm (3/16 inch) wide up to 6 mm (1/4 inch) wide.
  3. R value not less than 1.5.
- D. FEU Clear Glass.
1. Interior and exterior panes, ASTM C1036, Type I, Class 1, Quality q3, 3 mm (1/8 inch) thick.
  2. Thickness, 11 mm (7/16 inch) minimum.

## 2.7 GLAZING ACCESSORIES

- A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work shall have a finish that will not corrode or stain while in service.
- B. Setting Blocks: ASTM C864:
1. Channel shape; having 6 mm (1/4 inch) internal depth.
  2. Shore a hardness of 80 to 90 Durometer.
  3. Block lengths: 50 mm (two inches) except 100 to 150 mm (four to six inches) for insulating glass.
  4. Block width: Approximately 1.6 mm (1/16 inch) less than the full width of the rabbet.
  5. Block thickness: Minimum 4.8 mm (3/16 inch). Thickness sized for rabbet depth as required.
- C. Spacers: ASTM C864:
1. Channel shape having a 6 mm (1/4 inch) internal depth.
  2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.
  3. Lengths: One to 25 to 76 mm (one to three inches).
  4. Shore a hardness of 40 to 50 Durometer.
- D. Sealing Tapes:
1. Semi-solid polymeric based material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
  2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.
- E. Glazing Gaskets: ASTM C864:
1. Firm dense wedge shape for locking in sash.
  2. Soft, closed cell with locking key for sash key.
  3. Flanges may terminate above the glazing-beads or terminate flush with top of beads.
- F. Lock-Strip Glazing Gaskets: ASTM C542, shape, size, and mounting as indicated.
- G. Glazing Sealants: ASTM C920, silicone neutral cure:
1. Type S.
  2. Class 25
  3. Grade NS.
  4. Shore A hardness of 25 to 30 Durometer.
- H. Structural Sealant: ASTM C920, silicone acetoxo cure:
1. Type S.

2. Class 25.
3. Grade NS.
4. Shore a hardness of 25 to 30 Durometer.

### **PART 3 - EXECUTION**

#### **3.1 EXAMINATION**

- A. Verification of Conditions:
  1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.
  2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer's approved shop drawings.
- B. Advise Contractor of conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation.
  1. Do not proceed with installation until unsatisfactory conditions have been corrected.
- C. Verify that wash down of adjacent masonry is completed prior to erection of glass and glazing units to prevent damage to glass and glazing units by cleaning materials.

#### **3.2 PREPARATION**

- A. For sealant glazing, prepare glazing surfaces in accordance with GANA-02 Sealant Manual.
- B. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.
- C. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.
- D. Verify that components used are compatible.
- E. Clean and dry glazing surfaces.
- F. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

#### **3.3 INSTALLATION - GENERAL**

- A. Install in accordance with GANA-01 Glazing Manual and GANA-02 Sealant Manual unless specified otherwise.
- B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.
- C. Set glazing without bending, twisting, or forcing of units.
- D. Do not allow glass to rest on or contact any framing member.
- E. Glaze doors and operable sash, in a securely fixed or closed and locked position, until sealant, glazing compound, or putty has thoroughly set.
- F. Tempered Glass: Install with roller distortions in horizontal position unless otherwise directed.
- G. Transparent (One-Way Vision Glass) Mirror: Use continuous channel glazing gasket.
- H. Laminated Glass:
  1. Tape edges to seal interlayer and protect from glazing sealants.
  2. Do not use putty or glazing compounds.
- I. Insulating Glass Units:
  1. Glaze in compliance with glass manufacturer's written instructions.
  2. When glazing gaskets are used, they shall be of sufficient size and depth to cover glass seal or metal channel frame completely.
  3. Do not use putty or glazing compounds.
  4. Do not grind, nip, cut, or otherwise alter edges and corners of fused glass units after shipping from factory.
  5. Install with tape or gunnable sealant in wood sash.

**3.4 INSTALLATION - DRY METHOD (TAPE AND GASKET SPLINE GLAZING)**

- A. Cut glazing tape or spline to length; install on glazing pane. Seal corners by butting and sealing junctions with butyl sealant.
- B. Place setting blocks at 1/4 or 1/3 points with edge block no more than 150 mm (6 inches) from corners.
- C. Rest glazing on setting blocks and push against fixed stop with sufficient pressure to attain full contact.
- D. Install removable stops without displacing glazing spline. Exert pressure for full continuous contact.
- E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.
- F. Trim protruding tape edge.

**3.5 INSTALLATION - WET/DRY METHOD (PREFORMED TAPE AND SEALANT)**

- A. Cut glazing tape to length and set against permanent stops, 5 mm (3/16 inch) below sight line. Seal corners by butting tape and dabbing with butyl sealant.
- B. Apply heel bead of butyl sealant along intersection of permanent stop with frame ensuring full perimeter seal between glass and frame to complete the continuity of the air and vapor seal.
- C. Place setting blocks at 1/4 or 1/3 points with edge block no more than 150 mm (6 inches) from corners.
- D. Rest glazing on setting blocks and push against tape and heel bead of sealant with sufficient pressure to achieve full contact at perimeter of pane or glass unit.
- E. Install removable stops, with spacer strips inserted between glazing and applied stops, 6 mm (1/4 inch) below sight line. Place glazing tape on glazing pane or unit with tape flush with sight line.
- F. Fill gap between glazing and stop with structural type sealant to depth equal to bite of frame on glazing, but not more than 9 mm (3/8 inch) below sight line.
- G. Apply cap bead of structural type sealant along void between the stop and the glazing, to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

**3.6 INSTALLATION - WET METHOD (SEALANT AND SEALANT)**

- A. Place setting blocks at 1/4 or 1/3 points and install glazing pane or unit.
- B. Install removable stops with glazing centered in space by inserting spacer shims both sides at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.
- C. Fill gaps between glazing and stops with structural type sealant to depth of bite on glazing, but not more than 9 mm (3/8 inch) below sight line to ensure full contact with glazing and continue the air and vapor seal.
- D. Apply sealant to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

**3.7 INSTALLATION - INTERIOR WET/DRY METHOD (TAPE AND SEALANT)**

- A. Cut glazing tape to length and install against permanent stops, projecting 1.6 mm (1/16 inch) above sight line.
- B. Place setting blocks at 1/4 or 1/3 points with edge block no more than 150 mm (6 inches) from corners.
- C. Rest glazing on setting blocks and push against tape to ensure full contact at perimeter of pane or unit.
- D. Install removable stops, spacer shims inserted between glazing and applied stops at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.

- E. Fill gaps between pane and applied stop with sealant to depth equal to bite on glazing, to uniform and level line.
- F. Trim protruding tape edge.

### **3.8 REPLACEMENT AND CLEANING**

- A. Clean new glass surfaces removing temporary labels, paint spots, and defacement after approval by COR.
- B. Replace cracked, broken, and imperfect glass, or glass which has been installed improperly.
- C. Leave glass, putty, and other setting material in clean, whole, and acceptable condition.

### **3.9 PROTECTION**

Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.

### **3.10 GLAZING SCHEDULE**

- A. Tempered Glass:
  - 1. Install in full and half glazed doors unless indicated otherwise.
  - 2. Install in storefront, windows, and door sidelights adjacent to doors.
  - 3. Use clear tempered glass on interior side lights and doors.
  - 4. Use tinted tempered glass in exterior pane and clear tempered glass in interior pane unless specified otherwise of laminated glass units in door.
- B. Tinted Glass: Exterior pane of dual glazed windows not receiving tinted tempered glass.
- C. Insulating Glass:
  - 1. Install SEU tinted and clear laminated glass in storefront windows.
- D. Laminated Glass: Install as specified in doors, observation windows and interior pane of dual glazed windows where indicated.

- - - E N D - - -

**SECTION 08 90 00**  
**LOUVERS AND VENTS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies fixed wall louvers.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:  
Each type, showing material, finish, size of members, method of assembly, and installation and anchorage details.
- C. Manufacturer's Literature and Data:  
Each type of louver.
- D. Samples: For prefinished items exposed to view, provide samples of manufacturer's full standard color and texture range for selection by Owner.

**1.4 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. The Master Painters Institute (MPI):  
Approved Product List - September 2011
- C. American Society for Testing and Materials (ASTM):  
B221-08.....Aluminum and Aluminum Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes  
B221M-07.....Aluminum and Aluminum Alloy Extruded Bars, Rods, Wire Shapes, and Tubes
- D. National Association of Architectural Metal Manufacturers (NAAMM):  
AMP 500-06.....Metal Finishes Manual
- E. National Fire Protection Association (NFPA):  
90A-09.....Installation of Air Conditioning and Ventilating Systems
- G. American Architectural Manufacturers Association (AAMA):  
2605-11.....High Performance Organic Coatings on Architectural Extrusions and Panels
- H. Air Movement and Control Association, Inc. (AMCA):  
500-L-07.....Testing Louvers

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

- A. Aluminum, Extruded: ASTM B221/B221M.
- B. Fasteners: Fasteners for securing louvers and wall vents to adjoining construction, except as otherwise specified or shown, shall be toggle or expansion bolts, of size and type as required for each specific type of installation and service condition.
  - 1. Where type, size, or spacing of fasteners is not shown or specified, submit shop drawings showing proposed fasteners, and method of installation.
  - 2. Fasteners for louvers, louver frames, and wire guards shall be of stainless steel or aluminum.
- C. Inorganic Zinc Primer: MPI No. 19.



## 2.2 EXTERIOR WALL LOUVERS

- A. General:
  - 1. Provide fixed type louvers of size and design shown.
  - 2. Heads, sills and jamb sections shall have formed caulking slots or be designed to retain caulking. Head sections shall have exterior drip lip, and sill sections an integral water stop.
  - 3. Furnish louvers with sill extension or separate sill as shown.
  - 4. Frame shall be mechanically fastened or welded construction with welds dressed smooth and flush.
- B. Performance Characteristics:
  - 1. Weather louvers shall have a minimum of 53 percent free area and shall pass 305 m/min (1,000 fpm) free area velocity at a pressure drop not exceeding .05 kPA (0.20 inch w.g.) and carry not more than 0.01 oz./sq.ft.of water per m<sup>2</sup> (square foot) of free area for 15 minutes when tested per AMCA Standard 500-L.
  - 2. Louvers shall bear AMCA certified rating seals for air performance and water penetration ratings.
- C. Aluminum Louvers:
  - 1. General: Frames, blades, sills and mullions (sliding interlocking type); 2 mm (0.081-inch) thick extruded aluminum. Blades shall be drainable type and have reinforcing bosses.
  - 2. Louvers, fixed: Make frame sizes 13 mm (1/2-inch) smaller than openings. Single louvers frames shall not exceed 1700 mm (66 inches) wide. When openings exceed 1700 mm (66 inches), provide twin louvers separated by mullion members.
  - 3.

## 2.3 CLOSURE ANGLES AND CLOSURE PLATES

- A. Fabricate from 2 mm (0.074-inch) thick stainless steel or aluminum.
- B. Provide continuous closure angles and closure plates on inside head, jambs and sill of exterior wall louvers.
- C. Secure angles and plates to louver frames with screws, and to masonry or concrete with fasteners as specified.

## 2.4 WIRE GUARDS

- A. Provide wire guards on outside of all exterior louvers, except on exhaust air louvers.
- B. Fabricate frames from 2 mm (0.081-inch) thick extruded or sheet aluminum designed to retain wire mesh.
- C. Wire mesh shall be woven from not less than 1.6 mm (0.063-inch) diameter aluminum wire in 13 mm (1/2-inch) square mesh.
- D. Miter corners and join by concealed corner clips or locks extending about 57 mm (2-1/4 inches) into rails and stiles. Equip wire guards over four feet in height with a mid-rail constructed as specified for frame components.
- E. Fasten frames to outside of louvers with aluminum devices designed to allow removal and replacement without damage to the wire guard or the louver.

## 2.5 AIR INTAKE VENTS

- A. Fabricate exterior louvered wall ventilators for fresh air intake for air conditioning units from extruded aluminum, ASTM B221. Form with integral horizontal louvers and frame, with drip extending beyond face of wall and integral water stops.

## 2.6 FINISH

- A. In accordance with NAAMM Metal Finishes Manual: AMP 500-505

- B. Aluminum Louvers: AA-C22A42, chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 0.7 mils thick

## **2.7 PROTECTION**

- A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with a heavy coat of bituminous paint (complete coverage), or by separating the contact surfaces with a performed synthetic rubber tape having pressure sensitive adhesive coating on one side.
- B. Isolate the aluminum from concrete and masonry by coating aluminum with zinc-chromate primer.
- C. Protect finished surfaces from damage during fabrication, erection, and after completion of the work.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION**

- A. Set work accurately, in alignment and where shown. Items shall be plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Furnish setting drawings and instructions for installation of anchors and for the positioning of items having anchors to be built into masonry construction. Provide temporary bracing for such items until masonry is set.
- C. Provide anchoring devices and fasteners as shown and as necessary for securing louvers to building construction as specified.
- D. Generally, set wall louvers in masonry walls during progress of the work. If wall louvers are not delivered to job in time for installation in prepared openings, make provision for later installation. Set in cast-in-place concrete in prepared openings.

### **3.2 CLEANING AND ADJUSTING**

- A. After installation, all exposed prefinished and plated items and all items fabricated from aluminum shall be cleaned as recommended by the manufacturer and protected from damage until completion of the project.

- - - E N D - - -

**SECTION 09 05 16**  
**SUBSURFACE PREPARATION FOR FLOOR FINISHES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

A. This section specifies subsurface preparation requirements for areas to receive the installation of applied and resinous flooring. This section includes removal of existing floor coverings, testing concrete for moisture and pH, remedial floor coating for concrete floor slabs having unsatisfactory moisture or pH conditions, floor leveling and repair as required.

**1.2 RELATED WORK**

- A. Section 07 92 00, JOINT SEALANTS.
- B. Section 09 65 16, RESILIENT SHEET FLOORING
- C. Section 09 65 19, RESILIENT TILE FLOORING
- D. Section 09 67 23.50, RESINOUS TERRAZZO FLOORING (RES-5)

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA and TEST DATA.
- B. Written approval confirming product compatibility with subfloor material manufacturer and the flooring manufacturer
- C. Product Data:
  - 1. Moisture remediation system
  - 2. Underlayment Primer
  - 3. Cementitious Self-Leveling Underlayment
  - 4. Cementitious Trowel-Applied Underlayment (Not suitable for resinous floor finishes)
- D. Test Data:
  - 1. Moisture test and pH results performed by a qualified independent testing agency or warranty holding manufacturer's technical representative.

**1.4 DELIVERY AND STORAGE**

- A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.
- B. Store material to prevent damage or contamination.

**1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):

<b>D638-10</b> (2010)	Test Method for Tensile Properties of Plastics
<b>D4259-88</b> (2012)	Standard Practice for Abrading Concrete to alter the surface profile of the concrete and to remove foreign materials and weak surface laitance.
<b>C109M-12</b> (2012)	Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2-in. or [50-mm] Cube Specimens) Modified Air Cure Only

<b>D7234-12</b> (2012)	Standard Test Method for Pull-Off Adhesion Strength of Coatings on Concrete Using Portable Pull-Off Adhesion Testers.
<b>E96/E96M - 12</b> (2012)	Standard Test Methods for Water Vapor Transmission of Materials
<b>F710-11</b> (2011)	Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring
<b>F1869-11</b> (2011)	Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride
<b>F2170-11</b> (2011)	Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes

**PART 2 - PRODUCTS**

**2.1 MOISTURE REMEDIATION COATING**

- A. System Descriptions:
  - 1. High-solids, epoxy system designed to suppress excess moisture in concrete prior to an overlayment. For use under resinous products, VCT, tile and carpet where issues caused by moisture vapor are a concern.
- B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up.
- C. System Components: Verify specific requirements as systems vary by manufacturer. Verify build up layers and installation method. Verify compatibility with substrate. Use manufacturer's standard components, compatible with each other and as follows:
  - 1. Liquid applied coating:
    - a. Resin: epoxy.
    - b. Formulation Description: Multiple component high solids.
    - c. Application: Per manufacturer's written installation requirements.
    - d. Thickness: minimum 10 mils
- D. Material Vapor Permeance: Must achieve <.1 perm in accordance with ASTM E96.
- E. Maximum RH requirement: 100% testing in accordance with ASTM F2170.

Property	Test	Value
Tensile Strength	ASTM D638	4,400 psi
Volatile Organic Compound Limits (V.O.C.)	SCAMD Rule 1113	25 grams per liter
Permeance	ASTM E96	0.1 perms
Tensile Modulus	ASTM D638	1.9X10 <sup>5</sup> psi
Percent Elongation	ASTM D638	12%
Cure Rate	Per manufactures Data	4 hours Tack free with 24hr recoat window
Bond Strength	ASTM D7234	100% bond to concrete failure

**2.2 CEMENTITIOUS SELF-LEVELING UNDERLAYMENT**

A. System Descriptions:

1. High performance self-leveling underlayment resurfacer. Single component, self-leveling, cementitious material designed for easy application as an underlayment for all types of flooring materials. It is used for substrate repair and leveling.

B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up. Gypsum-based products are unacceptable.

C. System Characteristics:

1. Wearing Surface: smooth
2. Thickness: Per architectural drawings, ranging from feathered edge to 1", per application. Applications greater than 1" require additional 3/8" aggregate to mix or as recommended by manufacturer.

D. Underlayment must be calcium aluminate cement-based, containing portland cement. Gypsum-based products are unacceptable.

E. Compressive Strength: Minimum 4100 psi in 28 days in accordance with ASTM C109M

F. Flexural Strength: Minimum 1000 psi in 28 days in accordance with ASTM 348

G. Dry Time: Underlayment shall receive the application of moisture insensitive tile in 6 hours, floor coverings in 16 hours, and resinous flooring in 3-7 days.

H. Primer: compatible and as recommended by manufacturer for use over intended substrate

I. System Components: Manufacturer's standard components that are compatible with each other and as follows:

1. Primer:
  - a. Resin: copolymer
  - b. Formulation Description: single component ready to use.
  - c. Application Method: Squeegee and medium nap roller.  
All puddles must be removed, and material must be allowed to dry, 1-2 hours at 70F/21C.
  - d. Number of Coats: (1) one.
2. Grout Resurfacing Base:

- a. Formulation Description: Single component, cementitious self-leveling high early, high strength grout.
- b. Application Method: colloidal mix pump, cam rake, spike roll.
  - 1) Thickness of Coats: Per architectural scope, 1" lifts.
  - 2) Number of Coats: More than one if needed.
- c. Aggregates: for applications greater than linch, require additional 3/8" aggregate to mix.

Property	Test	Value
Compressive Strength	ASTM C109	2,200 psi @ 24 hrs 3,000 psi @ 7 days
Initial set time	ASTM C191	30-45 min.
Final Set time		1 to 1.5 hours
Bond Strength	ASTM D7234	100% bond to concrete failure

**2.3 CEMENTITIOUS TROWEL-APPLIED UNDERLAYMENT (NOT SUITABLE FOR RESINOUS FLOOR FINISHES)**

- A. Underlayment must be calcium aluminate cement-based, containing portland cement. Gypsum-based products are unacceptable.
- B. Compressive Strength: Minimum 4000 psi in 28 days
- C. Trowel-applied underlayment shall not contain silica quartz (sand).
- D. Dry Time: Underlayment shall receive the application of floor covering in 15-20 minutes.

**PART 3 - EXECUTION**

**3.1 ENVIRONMENTAL REQUIREMENTS**

- A. Maintain ambient temperature of work areas at not less than 16 degree C (60 degrees F), without interruption, for not less than 24 hours before testing and not less than three days after testing.
- B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation.
- C. Do not install materials when the temperatures of the substrate or materials are not within 60-85 degrees F/ 16-30 degrees C.

**3.2 SURFACE PREPARATION**

- A. Existing concrete slabs with existing floor coverings:
  - 1. Conduct visual observation of existing floor covering for adhesion, water damage, alkaline deposits, and other defects.
  - 2. Remove existing floor covering and adhesives. Comply with local, state and federal regulations and the RFCI Recommended Work Practices for Removal of Resilient Floor Coverings, as applicable to the floor covering being removed.
- B. Concrete shall meet the requirements of ASTM F710 and be sound, solid, clean, and free of all oil, grease, dirt, curing compounds, and any substance that might act as a bond-breaker before application. As required prepare slab by mechanical methods. No chemicals or solvents should be used.
- C. General: Prepare and clean substrates according to flooring manufacturer's written instructions for substrate indicated.
- D. Prepare concrete substrates per ASTM D4259 as follows:
  - 1. Dry abrasive blasting.
  - 2. Wet abrasive blasting.
  - 3. Vacuum-assisted abrasive blasting.

4. Centrifugal-shot abrasive blasting.
5. Comply with manufacturer's written instructions.
- E. Repair damaged and deteriorated concrete according to flooring manufacturer's written recommendations.
- F. Verify that concrete substrates are dry.
- G. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with application only after substrates have maximum moisture-vapor-emission rate of per flooring manufactures formal and project specific written recommendation.
- H. Perform in situ probe test, ASTM F2170. Proceed with application only after substrates do not exceed a maximum potential equilibrium relative humidity per flooring manufactures formal and project specific written recommendation.
- I. Provide a written report showing test placement and results.
- J. Prepare joints in accordance with material manufacturer's instructions.
- K. Alkalinity: Measure surface pH in accordance with procedures provided in ASTM F710 or as outlined by qualified testing agency or flooring manufacturer's technical representative.
- L. Tolerances: Subsurface shall meet the flatness and levelness tolerance specified on drawings or recommended by the floor finish manufacturer. Tolerance shall also not to exceed 1/4" deviation in 10'. As required, install underlayment to achieve required tolerance.
- M. Other Subsurface: For all other subsurface conditions, such as wood or metal, contact the floor finish or underlayment manufacturer, as appropriate, for proper preparation practices.

### **3.3 MOISTURE REMEDIATION COATING:**

- A. Where results of relative humidity testing (ASTM F2170) exceed the requirements of the specified flooring manufacturer, apply remedial coating as specified to correct excessive moisture condition.
- B. Prior to remedial floor coating installation mechanically prepare the concrete surface to provide a concrete surface profile in accordance with ASTM 4259.
- C. Mix and apply moisture remediation coating in accordance with manufacturer's instructions.

### **3.4 CEMENTITIOUS UNDERLAYMENT:**

- A. Install cementitious self-leveling underlayment as required to correct surface defects, floor flatness or levelness corrections to meet the tolerance requirements indicated; address non-moving cracks or joints, provide a smooth surface for the installation of floor covering, or meet elevation requirements indicated.
- B. Mix and apply in accordance with manufacturer's instructions.

### **3.5 PROTECTION**

- A. Prior to the installation of the finish flooring, the surface of the underlayment should be protected from abuse by other trades by the use of plywood, Masonite, or other suitable protection course

### **3.6 FIELD QUALITY CONTROL**

- A. Where specified, field sampling of products must be conducted by a qualified, independent testing facility.

- - - E N D - - -

**SECTION 09 22 16**  
**NON-STRUCTURAL METAL FRAMING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies steel studs wall systems, ceiling or soffit suspended or furred framing, wall furring, fasteners, and accessories for the screw attachment of gypsum board.

**1.2 RELATED WORK**

- A. Load bearing framing: Section 05 40 00, COLD-FORMED METAL FRAMING.
- B. Support for wall mounted items: Section 05 50 00, METAL FABRICATIONS.
- C. Ceiling suspension systems for acoustical tile or panels and lay in gypsum board panels: Section 09 51 00, ACOUSTICAL CEILINGS; Section 09 29 00, GYPSUM BOARD.

**1.3 TERMINOLOGY**

- A. Description of terms shall be in accordance with ASTM C754, ASTM C11, ASTM C841 and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, or bar joists. In interstitial spaces with walk-on floors the underside of the walk-on floor is the underside of structure overhead.
- C. Thickness of steel specified is the minimum bare (uncoated) steel thickness.

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Studs, runners and accessories.
  - 2. Hanger inserts.
  - 3. Channels (Rolled steel).
  - 4. Furring channels.
  - 5. Screws, clips and other fasteners.
- C. Shop Drawings:
  - 1. Typical ceiling suspension system.
  - 2. Typical metal stud and furring construction system including details around openings and corner details.
  - 3. Typical fire rated assembly showing details of construction same as that used in fire rating test.
- D. Test Results: Fire rating test designation, each fire rating required for each assembly.

**1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE**

In accordance with the requirements of ASTM C754.

**1.6 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society For Testing And Materials (ASTM)
  - A641-09.....Zinc-Coated (Galvanized) Carbon Steel Wire
  - C11-10.....Terminology Relating to Gypsum and Related Building Materials and Systems



C635-07.....	Manufacture, Performance, and Testing of Metal Suspension System for Acoustical Tile and Lay-in Panel Ceilings
C636-08.....	Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels
C645-09.....	Non-Structural Steel Framing Members
C754-11.....	Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products
C841-03(R2008).....	Installation of Interior Lathing and Furring
C954-10.....	Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness
E580-11.....	Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Moderate Seismic Restraint.

**PART 2 - PRODUCTS**

**2.1 PROTECTIVE COATING**

- A. Galvanize steel studs, runners (track) and furring channels with coating designation of G-60 minimum, per ASTM 123.

**2.2 STEEL STUDS AND RUNNERS (TRACK)**

- A. ASTM C645, modified for thickness specified and sizes as shown.
  - 1. Use ASTM A525 steel, 0.8 mm (0.0329-inch) thick bare metal (33 mil).
  - 2. Runners same thickness as studs.
- B. Provide not less than two cutouts in web of each stud, approximately 300 mm (12 inches) from each end, and intermediate cutouts on approximately 600 mm (24-inch) centers.
- C. Doubled studs for openings and studs for supporting concrete backer-board.
- D. Studs 3600 mm (12 feet) or less in length shall be in one piece.

**2.3 FURRING CHANNELS**

- A. Rigid furring channels (hat shape): ASTM C645.
- B. Resilient furring channels:
  - 1. Not less than 0.45 mm (0.0179-inch) thick bare metal.
  - 2. Semi-hat shape, only one flange for anchorage with channel web leg slotted on anchorage side, channel web leg on other side stiffens fastener surface but shall not contact anchorage surface other channel leg is attached to.
- C. "Z" Furring Channels:
  - 1. Not less than 0.45 mm (0.0179-inch)-thick bare metal, with 32 mm (1-1/4 inch) and 19 mm (3/4-inch) flanges.
  - 2. Web furring depth to suit thickness of insulation with slotted perforations.
- D. Rolled Steel Channels: ASTM C754, cold rolled; or, ASTM C841, cold rolled.

**2.4 FASTENERS, CLIPS, AND OTHER METAL ACCESSORIES**

- A. ASTM C754, except as otherwise specified.
- B. For fire rated construction: Type and size same as used in fire rating test.
- C. Fasteners for steel studs thicker than 0.84 mm (0.033-inch) thick. Use ASTM C954 steel drill screws of size and type recommended by the manufacturer of the material being fastened.

- D. Clips: ASTM C841 (paragraph 6.11), manufacturer's standard items. Clips used in lieu of tie wire shall have holding power equivalent to that provided by the tie wire for the specific application.
- E. Concrete ceiling hanger inserts (anchorage for hanger wire and hanger straps): Steel, zinc-coated (galvanized), manufacturers standard items, designed to support twice the hanger loads imposed and the type of hanger used.
- F. Tie Wire and Hanger Wire:
  - 1. ASTM A641, soft temper, Class 1 coating.
  - 2. Gage (diameter) as specified in ASTM C754 or ASTM C841.
- G. Attachments for Wall Furring: Manufacturers standard items fabricated from zinc-coated (galvanized) steel sheet.
- H. Power Actuated Fasteners: Type and size as recommended by the manufacturer of the material being fastened.

### **2.5 SUSPENDED CEILING SYSTEM FOR GYPSUM BOARD (OPTION)**

- A. Conform to ASTM C635, heavy duty, with not less than 35 mm (1-3/8 inch) wide knurled capped flange face designed for screw attachment of gypsum board.
- B. Wall track channel with 35 mm (1-3/8 inch) wide flange.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION CRITERIA**

- A. Where fire rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, the construction shall be same as that used in fire rating test.
- B. Construction requirements for fire rated assemblies and materials shall be as shown and specified, the provisions of the Scope paragraph (1.2) of ASTM C754 and ASTM C841 regarding details of construction shall not apply.

### **3.2 INSTALLING STUDS**

- A. Install studs in accordance with ASTM C754, except as otherwise shown or specified.
- B. Space studs not more than 610 mm (24 inches) on center.
- C. Cut studs 6 mm to 9 mm (1/4 to 3/8-inch) less than floor to underside of structure overhead when extended to underside of structure overhead.
- D. Where studs are shown to terminate above suspended ceilings, provide bracing as shown or extend studs to underside of structure overhead.
- E. Extend studs to underside of structure overhead for fire, rated partitions, smoke partitions, shafts, and sound rated partitions and insulated exterior wall furring.
- F. Openings:
  - 1. Frame jambs of openings in stud partitions and furring with two studs placed back to back or as shown.
  - 2. Fasten back to back studs together with 9 mm (3/8-inch) long Type S pan head screws at not less than 600 mm (two feet) on center, staggered along webs.
  - 3. Studs fastened flange to flange shall have splice plates on both sides approximately 50 X 75 mm (2 by 3 inches) screwed to each stud with two screws in each stud. Locate splice plates at 600 mm (24 inches) on center between runner tracks.

- G. Fastening Studs:
  - 1. Fasten studs located adjacent to partition intersections, corners and studs at jambs of openings to flange of runner tracks with two screws through each end of each stud and flange of runner.
  - 2. Do not fasten studs to top runner track when studs extend to underside of structure overhead.
- H. Form building seismic or expansion joints with double studs back to back spaced 75 mm (three inches) apart plus the width of the seismic or expansion joint.
- I. Form control joint, with double studs spaced 13 mm (1/2-inch) apart.

### **3.3 INSTALLING WALL FURRING FOR FINISH APPLIED TO ONE SIDE ONLY**

- A. In accordance with ASTM C754, or ASTM C841 except as otherwise specified or shown.
- B. Wall furring-Stud System:
  - 1. Framed with 63 mm (2-1/2 inch) or narrower studs, 600 mm (24 inches) on center.
  - 2. Brace as specified in ASTM C754 for Wall Furring-Stud System or brace with sections or runners or studs placed horizontally at not less than three foot vertical intervals on side without finish.
  - 3. Securely fasten braces to each stud with two Type S pan head screws at each bearing.
- C. Direct attachment to masonry; rigid channels or "Z" channels:
  - 1. Install rigid (hat section) furring channels at 600 mm (24 inches) on center, horizontally or vertically.
  - 2. Install "Z" furring channels vertically spaced not more than 600 mm (24 inches) on center.
  - 3. At corners where rigid furring channels are positioned horizontally, provide mitered joints in furring channels.
  - 4. Ends of spliced furring channels shall be nested not less than 200 mm (8 inches).
  - 5. Fasten furring channels to walls with power-actuated drive pins or hardened steel concrete nails. Where channels are spliced, provide two fasteners in each flange.
  - 6. Locate furring channels at interior and exterior corners in accordance with wall finish material manufacturers printed erection instructions. Locate "Z" channels within 100 mm (4 inches) of corner.
- D. Installing Wall Furring-Bracket System: Space furring channels not more than 400 mm (16 inches) on center.

### **3.4 INSTALLING SUPPORTS REQUIRED BY OTHER TRADES**

- A. Provide for attachment and support of electrical outlets, plumbing, laboratory or heating fixtures, recessed type plumbing fixture accessories, access panel frames, wall bumpers, toilet stall partitions, urinal screens, chalkboards, tackboards, casework, handrail brackets, recessed fire extinguisher cabinets and other items like door operators supported by stud construction.
- B. Provide additional studs where required. Install metal backing plates, or special metal shapes as required, securely fastened to metal studs.

### **3.6 INSTALLING FURRED AND SUSPENDED CEILINGS OR SOFFITS**

- A. Install furred and suspended ceilings or soffits in accordance with ASTM C754 or ASTM C841 except as otherwise specified or shown for screw attached gypsum board ceilings and for plaster ceilings or soffits.
  - 1. Space framing at 400 mm (16-inch) centers for metal lath anchorage.
  - 2. Space framing at 600 mm (24-inch) centers for gypsum board anchorage.
- B. New exposed concrete slabs:
  - 1. Use metal inserts required for attachment and support of hangers or hanger wires with tied wire loops for embedding in concrete.

2. Furnish for installation under Division 3, CONCRETE.
3. Suspended ceilings under concrete rib construction shall have runner channels at right angles to ribs and be supported from ribs with hangers at ends and at 1200 mm (48-inch) maximum intervals along channels. Stagger hangers at alternate channels.
- C. Where bar joists or beams are more than 1200 mm (48 inches) apart, provide intermediate hangers so that spacing between supports does not exceed 1200 mm (48 inches). Use clips, bolts, or wire ties for direct attachment to steel framing.
- D. Steel decking without concrete topping:
  1. Do not fasten to steel decking 0.76 mm (0.0299-inch) or thinner.
  2. Toggle bolt to decking 0.9 mm (0.0359-inch) or thicker only where anchorage to steel framing is not possible.
- E. Installing suspended ceiling system for gypsum board (ASTM C635 Option):
  1. Install only for ceilings to receive screw attached gypsum board.
  2. Install in accordance with ASTM C636.
    - a. Install main runners spaced 1200 mm (48 inches) on center.
    - b. Install 1200 mm (four foot) tees not over 600 mm (24 inches) on center; locate for edge support of gypsum board.
    - c. Install wall track channel at perimeter.
- F. Installing Ceiling Bracing System:
  1. Construct bracing of 38 mm (1-1/2 inch) channels for lengths up to 2400 mm (8 feet) and 50 mm (2 inch) channels for lengths over 2400 mm (8 feet) with ends bent to form surfaces for anchorage to carrying channels and over head construction. Lap channels not less than 600 mm (2 feet) at midpoint back to back. Screw or bolt lap together with two fasteners.
  2. Install bracing at an approximate 45 degree angle to carrying channels and structure overhead; secure as specified to structure overhead with two fasteners and to carrying channels with two fasteners or wire ties.
  3. Brace suspended ceiling or soffit framing in seismic areas in accordance with ASTM E580.

### 3.7 TOLERANCES

- A. Fastening surface for application of subsequent materials shall not vary more than 3 mm (1/8-inch) from the layout line.
- B. Plumb and align vertical members within 3 mm (1/8-inch.)
- C. Level or align ceilings within 3 mm (1/8-inch.)

- - - E N D - - -

**SECTION 09 29 00**  
**GYPSUM BOARD**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

A. This section specifies installation and finishing of gypsum board.

**1.2 RELATED WORK**

A. Installation of steel framing members for walls, partitions, furring, soffits, and ceilings: Section 05 40 00, COLD-FORMED METAL FRAMING, and Section 09 22 16, NON-STRUCTURAL METAL FRAMING.

**1.3 TERMINOLOGY**

- A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.
- C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Cornerbead and edge trim.
  - 2. Finishing materials.
  - 3. Laminating adhesive.
  - 4. Gypsum board, each type.
- C. Shop Drawings:
  - 1. Typical gypsum board installation, showing corner details, edge trim details and the like.
  - 2. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.
- D. Fire rating test, each fire rating required for each assembly.

**1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE**

A. In accordance with the requirements of ASTM C840.

**1.6 ENVIRONMENTAL CONDITIONS**

A. In accordance with the requirements of ASTM C840.

**1.7 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing And Materials (ASTM):
  - C11-08.....Terminology Relating to Gypsum and Related Building Materials and Systems
  - C475-02.....Joint Compound and Joint Tape for Finishing Gypsum Board
  - C840-08.....Application and Finishing of Gypsum Board
  - C919-08.....Sealants in Acoustical Applications

- C954-07.....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness
- C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
- C1047-05.....Accessories for Gypsum Wallboard and Gypsum Veneer Base
- C1177-06.....Glass Mat Gypsum Substrate for Use as Sheathing
- C1658-06.....Glass Mat Gypsum Panels
- C1396-06.....Gypsum Board
- E84-08.....Surface Burning Characteristics of Building Materials
- C. Underwriters Laboratories Inc. (UL):  
Latest Edition.....Fire Resistance Directory
- D. Inchcape Testing Services (ITS):  
Latest Editions.....Certification Listings

**PART 2 - PRODUCTS**

**2.1 GYPSUM BOARD**

- A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick, unless shown otherwise. Shall contain a minimum of 20 percent recycled gypsum.
- B. Water Resistant Gypsum Backing Board: ASTM C620, Type X, 16 mm (5/8 inch) thick.
- C. Gypsum cores shall contain maximum percentage of post industrial recycled gypsum content available in the area (a minimum of 95 percent post industrial recycled gypsum content). Paper facings shall contain 100 percent post-consumer recycled paper content.

**2.2 GYPSUM SHEATHING BOARD**

- A. ASTM C1396, Type X, water-resistant core, 16 mm (5/8 inch) thick.
- B. ASTM C1177, Type X.

**2.3 ACCESSORIES**

- A. ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.
- B. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.
- C. Reveals: Aluminum, designed for gypsum board installation, Fry Reglet "Reveal", 5/8" x 5/8", or approved equal.
- D. Control & Expansion Joints: Manufacturer's standard formed metal joints, steel or vinyl, paintable.

**2.4 FASTENERS**

- A. ASTM C1002 and ASTM C840, except as otherwise specified.
- B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).
- C. Select screws of size and type recommended by the manufacturer of the material being fastened.
- D. For fire rated construction, type and size same as used in fire rating test.
- E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

## **2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE**

ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/l.

## **PART 3 - EXECUTION**

### **3.1 GYPSUM BOARD HEIGHTS**

- A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring:
  - 1. Two sides of partitions:
    - a. Fire rated partitions.
    - b. Smoke partitions.
    - d. Full height partitions shown (. . .)
    - e. Corridor partitions.
  - 2. One side of partitions or furring:
    - a. Inside of exterior wall furring or stud construction.
    - b. Room side of room without suspended ceilings.
    - c. Furring for pipes and duct shafts.
  - 3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.
- B. In locations other than those specified, extend gypsum board from floor to heights as follows:
  - 1. Not less than 100 mm (4 inches) above suspended acoustical ceilings.
  - 2. At existing ceilings.

### **3.2 INSTALLING GYPSUM BOARD**

- A. Coordinate installation of gypsum board with other trades and related work.
- B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.
- C. Moisture and Mold-Resistant Assemblies: Provide and install moisture and mold-resistant glass mat gypsum wallboard products with moisture-resistant surfaces complying with ASTM C1658 where shown and in locations which might be subject to moisture exposure during construction.
- D. Use gypsum boards in maximum practical lengths to minimize number of end joints.
- E. Bring gypsum board into contact, but do not force into place.
- F. Ceilings: or single-ply construction, use perpendicular application.
- G. Walls
  - 1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
  - 2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
  - 3. Stagger screws on abutting edges or ends.
  - 4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to minimize number of joints except gypsum board shall be applied vertically over "Z" furring channels.
  - 5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in face layer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.

6. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.
7. Control Joints ASTM C840 and as follows:
  - a. Locate at both side jambs of openings if gypsum board is not "yoked". Use one system throughout.
  - b. Not required for wall lengths less than 9000 mm (30 feet).
  - c. Extend control joints the full height of the wall or length of soffit/ceiling membrane.
- I. Electrical and Telecommunications Boxes: Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.
- J. Accessories:
  1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.
  2. Install in one piece, without the limits of the longest commercially available lengths.
  3. Corner Beads:
    - a. Install at all vertical and horizontal external corners and where shown.
    - b. Use screws only. Do not use crimping tool.
  4. Edge Trim (casings Beads):
    - a. At both sides of expansion and control joints unless shown otherwise.
    - b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
    - c. Where gypsum board surfaces of non-load bearing assemblies abut loadbearing members.
    - d. Where shown.
  5. Reveals
    - a. Install in accordance with manufacturer's instructions and recommendations for installation indicated.
    - b. Install level, square and true to line indicated.

### 3.3 INSTALLING GYPSUM SHEATHING

- A. Install in accordance with ASTM C840, except as otherwise specified or shown.
- B. Use screws of sufficient length to secure sheathing to framing.
- C. Space screws 9 mm (3/8 inch) from ends and edges of sheathing and 200 mm (8 inches) on center. Space screws a maximum of 200 mm (8 inches) on center on intermediate framing members.
- D. Apply 600 mm by 2400 mm (2 foot by 8 foot) sheathing boards horizontally with tongue edge up.
- E. Apply 1200 mm by 2400 mm or 2700 mm (4 ft. by 8 ft. or 9 foot) gypsum sheathing boards vertically with edges over framing.

### 3.4 INSTALLING GYPSUM BOARD

- A. Gypsum Board:
  1. One hour wall with one layer on finish side of wall: Apply face layer of gypsum board vertically. Attach to studs with screws of sufficient length to secure to framing, spaced 300 mm (12 inches) on center in field and along edges.
  3. Where coreboard is covered with face layer of gypsum board, stagger joints of face layer from those in the coreboard base.
- B. Treat joints, corners, and fasteners in face layer as specified for finishing of gypsum board.



- C. Control & Expansion Joints: Space and install as per manufacturer's instructions and recommendations for applications indicated.

### 3.5 FINISHING OF GYPSUM BOARD

- A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 4 finish for all finished areas open to public view.
- B. Before proceeding with installation of finishing materials, assure the following:
  - 1. Gypsum board is fastened and held close to framing or furring.
  - 2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.
- C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings to seal surface of non decorated smoke barrier and fire rated gypsum board construction. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain the integrity of the smoke barrier and fire rated construction. Sanding is not required of non decorated surfaces.

### 3.6 REPAIRS

- A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.
- B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.
- C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.
- D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non decorated surface to provide smoke tight construction fire protection equivalent to the fire rated construction.

- - - E N D - - -

**SECTION 09 30 13**  
**CERAMIC TILE**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

A. This section specifies ceramic tile and tile backer board.

**1.2 RELATED WORK**

A. Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples, for selection by Owner:
  - 1. Base tile, each type, each color, each size.
  - 2. Mosaic floor tile panels, 225 mm by 225 mm (9 inches by 9 inches), each type, color, size and pattern.
  - 3. Wall tile, each color, size and pattern.
  - 4. Trim shapes, bullnose cap and cove including bullnose cap and base pieces at internal and external corners of vertical surfaces, each type, color, and size.
- C. Product Data:
  - 1. Ceramic tile, marked to show each type, size, and shape required.
  - 2. Cementitious backer unit.
  - 3. Dry-set Portland cement mortar and grout.
  - 4. Divider strip.
  - 5. Reinforcing tape.
  - 6. Leveling compound.
  - 7. Latex-Portland cement mortar and grout.
  - 8. Commercial Portland cement grout.
  - 9. Fasteners.
- D. Certification:
  - 1. Master grade, ANSI A137.1.
  - 2. Manufacturer's certificates indicating that the following materials comply with specification requirements:
    - a. Commercial Portland cement grout.
    - b. Cementitious backer unit.
    - c. Dry-set Portland cement mortar and grout.
    - d. Latex-Portland cement mortar and grout.
    - e. Leveling compound.

**1.4 DELIVERY AND STORAGE**

- A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.
- B. Store material to prevent damage or contamination.

**1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
  - A10.20-1988.....Safety Requirements for Ceramic Tile, Terrazzo, and Marble Works
  - A108.1A-1999.....Installation of Ceramic Tile in the Wet-Set Method with Portland Cement Mortar

- A108.1B-1999.....Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with dry-Set or latex-Portland Cement Mortar
- A108.1C-1999.....Contractors Option; Installation of Ceramic Tile in the Wet-Set method with Portland Cement Mortar or Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar
- A108.5-1999.....Installation of Ceramic Tile with Dry-Set Portland Cement Mortar or Latex-Portland Cement Mortar
- A108.10-1999.....Installation of Grout in Tilework
- A108.11-1999.....Interior Installation of Cementitious Backer Units
- A118.1-1999.....Dry-Set Portland Cement Mortar
- A118.4-1999.....Latex-Portland Cement Mortar
- A118.6-1999.....Standard Cement Grouts for Tile Installation
- A118.7-1999.....Polymer Modified Tile Gouts for Tile Installation
- A118.9-1999.....Cementitious Backer Units
- A118.10-1999.....Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone Installation
- A137.1-1988.....Ceramic Tile
- C. American Society For Testing And Materials (ASTM):
  - C627-93(1999).....Evaluating Ceramic Floor Tile Installation Systems Using the Robinson-Type Floor Tester
  - C954-00.....Steel Drill Screws for the Application of Gypsum Board on Metal Plaster Base to Steel Studs from 0.033 in (0.84 mm) to 0.112 in (2.84 mm) in thickness
  - C1002-01.....Steel Self-Piercing Tapping Screws for the Application of Panel Products
  - C1027-99.....Determining "Visible Abrasion Resistance on Glazed Ceramic Tile"
  - C1028-96.....Determining the Static Coefficient of Friction of Ceramic Tile and Other Like Surfaces by the Horizontal Dynamometer Pull Meter Method
- D. Tile Council of America, Inc. (TCA):
  - 2002.....Handbook for Ceramic Tile Installation

**PART 2 - PRODUCTS**

**2.1 TILE**

- A. Comply with ANSI A137.1, Standard Grade, except as modified:
  - 1. Inspection procedures listed under the Appendix of ANSI A137.1.
  - 2. Abrasion Resistance Classification:
    - a. Tested in accordance with values listed in Table 1, ASTM C 1027.
    - b. Class V, 12000 revolutions for floors in Corridors, Kitchens, Storage including Refrigerated Rooms
    - c. Class IV, 6000 revolutions for remaining areas.
  - 3. Slip Resistant Tile for Floors:
    - a. Coefficient of friction, when tested in accordance with ASTM C1028, required for level of performance:
      - 1) Not less than 0.7 (wet condition) for bathing areas.
      - 2) Not less than 0.6, except 0.8 on ramps as stated above, for wet and dry conditions for other areas.
  - 4. Mosaic tile may be mounted or joined together by a resinous bonding material along tile edges.

5. Factory Blending: For tile with color variations, within the ranges selected during sample submittals blend tile in the factory and package so tile units taken from one package show the same range in colors as those taken from other packages and match approved samples.
- B. Unglazed Ceramic Mosaic Tile: Nominal 6 mm (1/4 inch) thick with cushion edges.
- C. Trim Shapes:
  1. Conform to applicable requirements of adjoining floor and wall tile.
  2. Use trim shapes sizes conforming to size of adjoining field wall tile unless detailed or specified otherwise in Section 09050, INTERIOR/ EXTERIOR FINISHES, MATERIALS AND FINISH SCHEDULES.
  3. Internal and External Corners:
    - a. Square internal and external corner joints are not acceptable.
    - b. External corners including edges: Use bullnose shapes.
    - c. Internal corners: Use cove shapes.
    - d. Base to floor internal corners: Use special shapes providing integral cove vertical and horizontal joint.
    - e. Base to floor external corners: Use special shapes providing bullnose vertical edge with integral cove horizontal joint. Use stop at bottom of openings having bullnose return to wall.
    - f. Wall top edge internal corners: Use special shapes providing integral cove vertical joint with bullnose top edge.
    - g. Wall top edge external corners: Use special shapes providing bullnose vertical and horizontal joint edge.
    - h. For unglazed ceramic mosaic and glazed wall tile installed in Portland cement mortar setting bed, use cove and bullnose shapes as applicable. When ceramic mosaic wall and base tile is required, use C Series cove and bullnose shapes.
    - i. For unglazed ceramic mosaic and glazed wall tile installed in dry-set Portland cement mortar, latex-Portland cement mortar, and organic adhesive (thin set methods), use cove and surface bullnose shapes as applicable.
    - j. Provide cove and bullnose shapes required to complete tile work.

## 2.2 CEMENTITIOUS BACKER UNITS

- A. Use in all areas with ceramic wall tile.
- B. ANSI A118.9.
- C. Use Cementitious backer units in maximum available lengths.
- D. Backer unit meet or exceed the following additional physical properties:

<u>Property</u>	<u>Test Method</u>	<u>Value</u>
Water absorption	ASTM C948	Less than 20 percent by weight

## 2.3 JOINT MATERIALS FOR CEMENTITIOUS BACKER UNITS

- A. Reinforcing Tape: Vinyl coated woven glass fiber mesh tape, open weave, 50 mm (2 inches) wide. Tape with pressure sensitive adhesive backing will not be permitted.
- B. Tape Embedding Material: Latex-Portland cement mortar complying with ANSI A118.4.
- C. Joint material, including reinforcing tape, and tape embedding material, shall be as specifically recommended by the backer unit manufacturer.

## 2.4 FASTENERS

- A. Screws for Cementitious Backer Units.
  1. Standard screws for gypsum board are not acceptable.

2. Minimum 11 mm (7/16 inch) diameter head, corrosion resistant coated, with washers.
  3. ASTM C954 for steel 1 mm (0.033 inch) thick.
- B. Washers: Galvanized steel, 13 mm (1/2 inch) minimum diameter.

## **2.5 GLASS MAT WATER RESISTANT GYPSUM BACKER BOARD**

- A. Confirm to ASTM C1178/C1178M, Optional System for Cementitious Backer Units.

## **2.6 SETTING MATERIALS OR BOND COATS**

- A. Conform to TCA Handbook for Ceramic Tile Installation.
- B. Portland Cement Mortar: ANSI A108.1.
- C. Latex-Portland Cement Mortar: ANSI A118.4.
1. For wall applications, provide non-sagging, latex-Portland cement mortar complying with ANSI A118.4.
  2. Prepackaged Dry-Mortar Mix: Factory-prepared mixture of Portland cement; dry, redispersible, ethylene vinyl acetate additive; and other ingredients to which only water needs to be added at Project site.
- D. Dry-Set Portland Cement Mortar: ANSI A118.1. For wall applications, provide non-sagging, latex-Portland cement mortar complying with ANSI A118.4.
- E. Organic Adhesives: ANSI A136.1, Type 1.

## **2.7 GROUTING MATERIALS**

- A. Coloring Pigments:
1. Pure mineral pigments, limeproof and nonfading, complying with ASTM C979.
  2. Add coloring pigments to grout by the manufacturer.
  3. Job colored grout is not acceptable.
  4. Use is required in Commercial Portland Cement Grout, Dry-Set Grout, and Latex-Portland Cement Grout.
- B. White Portland Cement Grout:
1. ANSI A118.6.
  2. Use one part white Portland cement to one part white sand passing a number 30 screen.
  3. Color additive not permitted.
- C. Commercial Portland Cement Grout: ANSI A118.6 color as specified.
- D. Dry-Set Grout: ANSI A118.6 color as specified.
- E. Latex-Portland Cement Grout: ANSI A118.6 color as specified.
1. Unsanded grout mixture for joints 3.2 mm (1/8 inch) and narrower.
  2. Sanded grout mixture for joints 3.2 mm (1/8 inch) and wider.

## **2.8 PATCHING AND LEVELING COMPOUND**

- A. Portland cement base, polymer-modified, self-leveling compound, manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.
- B. Shall have minimum following physical properties:
1. Compressive strength - 25 MPa (3500 psig) per ASTM C109/C109M.
  2. Flexural strength - 7 MPa (1000 psig) per ASTM C348 (28 day value).
- C. Capable of being applied in layers up to 38 mm (1-1/2 inches) thick without fillers and up to 100 mm (four inches) thick with fillers, being brought to a feather edge, and being trowelled to a smooth finish.
- D. Primers, fillers, and reinforcement as required by manufacturer for application and substrate condition.
- E. Ready for use in 48 hours after application.

## **2.9 WATER**

- A. Clean, potable and free from salts and other injurious elements to mortar and grout materials.

## **2.10 CLEANING COMPOUNDS**

- A. Specifically designed for cleaning masonry and concrete and which will not prevent bond of subsequent tile setting materials including patching and leveling compounds and elastomeric waterproofing membrane and coat.
- B. Materials containing acid or caustic material not acceptable.

## **2.11 POLYETHYLENE SHEET**

- A. Polyethylene sheet conforming to ASTM D4397.
- B. Nominal thickness: 0.15 mm (six mils).
- C. Use sheet width to minimize joints.

## **PART 3 - EXECUTION**

### **3.1 ENVIRONMENTAL REQUIREMENTS**

- A. Maintain ambient temperature of work areas at not less than 16 degree C (60 degrees F), without interruption, for not less than 24 hours before installation and not less than three days after installation.
- B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation and ANSI Specifications for installation.
- C. Do not install tile when the temperature is above 38 degrees C (100 degrees F).
- D. Do not install materials when the temperature of the substrate is below 16 degrees C (60 degrees F).
- E. Do not allow temperature to fall below 10 degrees C (50 degrees F) after fourth day of completion of tile work.

### **3.2 ALLOWABLE TOLERANCE**

- A. Variation in plane of sub-floor, including concrete fills leveling compounds and mortar beds:
  - 1. Not more than 1 in 500 (1/4 inch in 10 feet) from required elevation where Portland cement mortar setting bed is used.
  - 2. Not more than 1 in 1000 (1/8 inch in 10 feet) where dry-set Portland cement, and latex-Portland cement mortar setting beds and chemical-resistant bond coats are used.
- B. Variation in Plane of Wall Surfaces:
  - 1. Not more than 1 in 400 (1/4 inch in eight feet) from required plane where Portland cement mortar setting bed is used.
  - 2. Not more than 1 in 800 (1/8 inch in eight feet) where dry-set or latex-Portland cement mortar or organic adhesive setting materials is used.

### **3.3 SURFACE PREPARATION**

- A. Cleaning New Concrete:
  - 1. Chip out loose material, clean off all oil, grease dirt, adhesives, curing compounds, and other deterrents to bonding by mechanical method, or by using products specifically designed for cleaning concrete and masonry.
  - 2. Use self-contained power blast cleaning systems to remove curing compounds and steel trowel finish from concrete slabs where ceramic tile will be installed directly on concrete surface with thin-set materials.

3. Steam cleaning or the use of acids and solvents for cleaning will not be permitted.
- B. Patching and Leveling:
  1. Mix and apply patching and leveling compound in accordance with manufacturer's instructions.
  2. Fill holes and cracks and align concrete floors that are out of required plane with patching and leveling compound.
    - a. Thickness of compound as required to bring finish tile system to elevation shown.
    - b. Float finish.
    - c. At substrate expansion, isolation, and other moving joints, allow joint of same width to continue through underlayment.
  3. Apply patching and leveling compound to concrete and masonry wall surfaces that are out of required plane.
  4. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.

#### **3.4 CEMENTITIOUS BACKER UNITS**

- A. Remove polyethylene wrapping from cementitious backer units and separate to allow for air circulation. Allow moisture content of backer units to dry down to a maximum of 35 percent before applying joint treatment and tile.
- B. Install in accordance with ANSI A108.11 except as specified otherwise.
- C. Install units horizontally or vertically to minimize joints with end joints over framing members. Units with rounded edges; face rounded edge away from studs to form a V joint for joint treatment.
- D. Secure cementitious backer units to each framing member with screws spaced not more than 200 mm (eight inches) on center and not closer than 13 mm (1/2 inch) from the edge of the backer unit or as recommended by backer unit manufacturer. Install screws so that the screw heads are flush with the surface of the backer unit.
- E. Where backer unit joins shower pans or waterproofing, lap backer unit over turned up waterproof system. Install fasteners only through top one-inch of turned up waterproof systems.
- F. Do not install joint treatment for seven days after installation of cementitious backer unit.
- G. Joint Treatment:
  1. Fill horizontal and vertical joints and corners with latex-Portland cement mortar. Apply fiberglass tape over joints and corners and embed with same mortar.
  2. Leave 6 mm (1/4 inch) space for sealant at lips of tubs, sinks, or other plumbing receptors.

#### **3.5 CERAMIC TILE - GENERAL**

- A. Comply with ANSI A108 series of tile installation standards in "Specifications for Installation of Ceramic Tile" applicable to methods of installation.
- B. Comply with TCA Installation Guidelines
- C. Installing Mortar Beds for Floors:
  1. Install mortar bed to not damage cleavage or waterproof membrane; 32 mm (1-1/2 inch) minimum thickness.
  2. Install floor mortar bed reinforcing centered in mortar fill.
  3. Screed finish to level plane or slope to drains where shown, float finish.
  4. For thin set systems cure mortar bed not less than seven days. Do not use curing compounds or coatings.
  5. For tile set with Portland cement paste over plastic mortar bed coordinate to set tile before mortar bed sets.

D. Setting Beds or Bond Coats:

1. Where recessed or depressed floor slabs are filled with Portland cement mortar bed, set ceramic mosaic floor tile in either Portland cement paste over plastic mortar bed or latex-Portland cement mortar over cured mortar bed except as specified otherwise, ANSI A108-1C, TCA System F121-02 or F111-02.
2. Set wall tile installed over concrete or masonry in dry-set Portland cement mortar, or latex-Portland cement mortar, ANSI 108.1B. and TCA System W211-02, W221-02 or W222-02.
3. Set wall tile installed over concrete backer board in latex-Portland cement mortar, ANSI A108.1B.
4. Set wall tile installed over Portland cement mortar bed on metal lath base in Portland cement paste over plastic mortar bed, or dry-set Portland cement mortar or latex-Portland cement mortar over a cured mortar bed, ANSI A108.1C, TCA System W231-02, W241-02.
5. Set trim shapes in same material specified for setting adjoining tile.

E. Workmanship:

1. Lay out tile work so that no tile less than one-half full size is used. Make all cuts on the outer edge of the field.
2. Set tile firmly in place with finish surfaces in true planes. Align tile flush with adjacent tile unless shown otherwise.
3. Form intersections and returns accurately.
4. Cut and drill tile neatly without marring surface.
5. Cut edges of tile abutting penetrations, finish, or built-in items:
  - a. Fit tile closely around electrical outlets, piping, fixtures and fittings, so that plates, escutcheons, collars and flanges will overlap cut edge of tile.
  - b. Seal tile joints water tight as specified in Section 07920, SEALANTS AND CAULKING, around electrical outlets, piping fixtures and fittings before cover plates and escutcheons are set in place.
6. Completed work shall be free from hollow sounding areas and loose, cracked or defective tile.
7. Remove and reset tiles that are out of plane or misaligned.
8. Floors:
  - a. Extend floor tile beneath casework and equipment, except those units mounted in wall recesses.
  - b. In areas where floor drains occur, slope to drains where shown.
  - c. Shove and vibrate tiles over 200 mm (8 inches) square to achieve full support of bond coat.
  - d. Where edges of tile abut a different floor material use edge protection profiles of roll formed stainless steel to create a clean transition to adjacent materials.
9. Walls:
  - a. Cover walls and partitions, including pilasters, furred areas, and freestanding columns from floor to ceiling, or from floor to nominal wainscot heights shown with tile.
  - b. Finish reveals of openings with tile, except where other finish materials are shown or specified.
  - c. Finish wall surfaces behind and at sides of casework and equipment, except those units mounted in wall recesses, with same tile as scheduled for room proper.
10. Joints:
  - a. Keep all joints in line, straight, level, perpendicular and of even width unless shown otherwise.
  - b. Make joints 2 mm (1/16 inch) wide for glazed wall tile and mosaic tile work.



**3.6 CERAMIC TILE INSTALLED WITH PORTLAND CEMENT MORTAR**

- A. Mortar Mixes For Floor, Wall And Base Tile (including Showers): ANSI A108.1.except specified otherwise.
- B. Installing Wall and Base Tile: ANSI A108.1, except specified otherwise.
- C. Installing Floor Tile: ANSI A108.1, except as specified otherwise. Slope mortar beds to floor drains a minimum of 1 in 100 (1/8 inch per foot).

**3.7 THIN SET CERAMIC TILE INSTALLED WITH DRY-SET PORTLAND CEMENT AND LATEX-PORTLAND CEMENT MORTAR**

- A. Installation of Tile: ANSI A108.5, except as specified otherwise.
- B. Slope tile work to drains not less than 1 in 100 (1/8 inch per foot).

**3.8 GROUTING**

- A. Grout Type and Location:
  - 1. Grout for glazed wall and base tile, paver tile and unglazed mosaic tile Portland cement grout, latex-Portland cement grout, dry-set grout, or commercial Portland cement grout.
- B. Workmanship:
  - 1. Install and cure grout in accordance with the applicable standard.
  - 2. Portland Cement grout: ANSI A108.10.
  - 3. Dry-set grout: ANSI A108.5.

**3.9 CLEANING**

- A. Thoroughly sponge and wash tile. Polish glazed surfaces with clean dry cloths.
- B. Methods and materials used shall not damage or impair appearance of tile surfaces.
- C. The use of acid or acid cleaners on glazed tile surfaces is prohibited.
- D. Clean tile grouted with epoxy, furan and commercial Portland cement grout and tile set in elastomeric bond coat as recommended by the manufacturer of the grout and bond coat.

**3.10 PROTECTION**

- A. Keep traffic off tile floor, until grout and setting material is firmly set and cured.
- B. Where traffic occurs over tile floor, cover tile floor with not less than 9 mm (3/8 inch) thick plywood, wood particle board, or hardboard securely taped in place. Do not remove protective cover until time for final inspection. Clean tile of any tape, adhesive and stains.

**3.11 TESTING FINISH FLOOR**

- A. Test floors in accordance with ASTM C627

- - - E N D - - -

**SECTION 09 51 00**  
**ACOUSTICAL CEILINGS**

**PART 1- GENERAL**

**1.1 DESCRIPTION**

- A. Metal ceiling suspension system for acoustical ceilings.
- B. Acoustical units.

**1.2 RELATED WORK**

- A. Access doors in adhesive applied tile: Section 08 31 13, ACCESS DOORS AND FRAMES.
- B. Section 09 51 10 -SNAP-IN METAL PANEL CEILING SYSTEM
- C. Gypsum Board for Ceilings: Section 09 29 00, GYPSUM BOARD.
- D. Sprinkler System: Section 21 13 13, WET-PIPE SPRINKLER SYSTEMS.
- E. Air Outlets and Inlets: Division 23, HEATING, VENTILATING, AND AIR CONDITIONING (HVAC).
- F. Interior Lighting: Section 26 51 00, INTERIOR LIGHTING.

**1.3 SUBMITTAL**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples: Acoustical units, each type, with label indicating conformance to specification requirements.
- C. Manufacturer's Literature and Data:
  - 1. Ceiling suspension system, each type, showing complete details of installation.
  - 2. Acoustical units, each type
- C. Manufacturer's Certificates: Acoustical units, each type, in accordance with specification requirements.
- D. Shop Drawings: Ceiling plan

**1.4 DEFINITIONS**

- A. Standard definitions as defined in ASTM C634.
- B. Terminology as defined in ASTM E1264.

**1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A641/A641M-09.....Zinc-coated (Galvanized) Carbon Steel Wire
  - A653/A653M-11.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-coated (Galvannealed) by the Hot-Dip Process
  - C423-09.....Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
  - C634-11.....Standard Terminology Relating to Environmental Acoustics
  - C635-13.....Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings
  - C636-13.....Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels
  - E84-13.....Surface Burning Characteristics of Building Materials
  - E119-12.....Fire Tests of Building Construction and Materials

- E413-10.....Classification for Rating Sound Insulation.  
E580-11.....Application of Ceiling Suspension Systems for  
Acoustical Tile and Lay-in Panels in Areas  
Requiring Seismic Restraint  
E1264-08e1.....Classification for Acoustical Ceiling Products  
C. International Organization for Standardization (ISO)  
ISO 14644-1.....Classification of Air Cleanliness

## **PART 2- PRODUCTS**

### **2.1 METAL SUSPENSION SYSTEM - ACOUSTICAL CEILING**

- A. ASTM C635, heavy-duty system, except as otherwise specified.  
1. Ceiling suspension system members may be fabricated from either of the following unless specified otherwise.  
a. Galvanized cold-rolled steel, bonderized.  
2. Use same construction for cross runners as main runners. Use of lighter-duty sections for cross runners is not acceptable.  
B. Exposed grid suspension system for support of lay-in panels:  
1. Exposed grid width not less than 22 mm (7/8 inch) with not less than 8 mm (5/16 inch) panel bearing surface.  
2. Fabricate wall molding and other special molding from the same material with same exposed width and finish as the exposed grid members.  
3. On exposed metal surfaces apply baked-on enamel flat texture finish in color to match adjacent acoustical units, unless indicated otherwise.

### **2.2 PERIMETER SEAL**

- A. Vinyl, polyethylene or polyurethane open cell sponge material having density of 1.3 plus or minus 10 percent, compression set less than 10 percent with pressure sensitive adhesive coating on one side.  
B. Thickness as required to fill voids between back of wall molding and finish wall.  
C. Not less than 9 mm (3/8 inch) wide strip.

### **2.3 WIRE**

- A. ASTM A641.  
B. For wire hangers: Minimum diameter 2.68 mm (0.1055 inch).  
C. For bracing wires: Minimum diameter 3.43 mm (0.1350 inch).

### **2.4 ANCHORS AND INSERTS**

- A. Use anchors or inserts to support twice the loads imposed by hangers attached thereto.  
B. Hanger Inserts:  
1. Fabricate inserts from steel, zinc-coated (galvanized after fabrication).  
2. Nailing type option for wood forms:  
a. Upper portion designed for anchorage in concrete and positioning lower portion below surface of concrete approximately 25 mm (one inch).  
b. Lower portion provided with not less than 8 mm (5/16 inch) hole to permit attachment of hangers.  
3. Flush ceiling insert type:  
a. Designed to provide a shell covered opening over a wire loop to permit attachment of hangers and keep concrete out of insert recess.  
b. Insert opening inside shell approximately 16 mm (5/8 inch) wide by 9 mm (3/8 inch) high over top of wire.

c. Wire 5 mm (3/16 inch) diameter with length to provide positive hooked anchorage in concrete.

C. Clips:

1. Galvanized steel.
2. Designed to clamp to steel beam or bar joists, or secure framing member together.
3. Designed to rigidly secure framing members together.
4. Designed to sustain twice the loads imposed by hangers or items supported.

D. Tile Splines: ASTM C635.

**2.5 CARRYING CHANNELS FOR SECONDARY FRAMING**

- A. Fabricate from cold-rolled or hot-rolled steel, black asphaltic paint finish, free of rust.
- B. Weighing not less than the following, per 300 m (per thousand linear feet):

Size mm	Size Inches	Cold-rolled		Hot-rolled	
		Kg	Pound	Kg	Pound
38	1 1/2	215.4	475	508	1120
50	2	267.6	590	571.5	1260

**2.6 ACOUSTICAL UNITS**

A. General:

1. Ceiling Tile shall meet minimum 37% bio-based content in accordance with USDA Bio-Preferred Product requirements.
2. ASTM E1264, weighing 3.6 kg/m<sup>2</sup> (3/4 psf) minimum for mineral fiber panels or tile.
3. Class A Flame Spread: ASTM 84
4. Minimum NRC (Noise Reduction Coefficient): 0.55 unless specified otherwise: ASTM C423.
5. Minimum CAC (Ceiling Attenuation Class): 40-44 range unless specified otherwise: ASTM E413.
6. Manufacturers standard finish, minimum Light Reflectance (LR) coefficient of 0.75 on the exposed surfaces.
7. Lay-in panels: Sizes as shown, with square edges.

**2.7 ACCESS IDENTIFICATION**

A. Markers:

1. Use colored markers with pressure sensitive adhesive on one side.
2. Make colored markers of paper or plastic, 6 to 9 mm (1/4 to 3/8 inch) in diameter.

B. Use markers of the same diameter throughout building.

C. Color Code: Use following color markers for service identification:

- Color.....Service
- Red.....Sprinkler System: Valves and Controls
- Green.....Domestic Water: Valves and Controls
- Yellow.....Chilled Water and Heating Water
- Orange.....Ductwork: Fire Dampers
- Blue.....Ductwork: Dampers and Controls
- Black.....Gas: Laboratory, Medical, Air and Vacuum

### **PART 3 EXECUTION**

#### **3.1 CEILING TREATMENT**

- A. Treatment of ceilings shall include sides and soffits of ceiling beams, furred work 600 mm (24 inches) wide and over, and vertical surfaces at changes in ceiling heights unless otherwise shown. Install acoustic tiles after wet finishes have been installed and solvents have cured.
- B. Lay out acoustical units symmetrically about center lines of each room or space unless shown otherwise on reflected ceiling plan.
- C. Moldings:
  - 1. Install metal wall molding at perimeter of room, column, or edge at vertical surfaces.
  - 2. Install special shaped molding at changes in ceiling heights and at other breaks in ceiling construction to support acoustical units and to conceal their edges.
- D. Perimeter Seal:
  - 1. Install perimeter seal between vertical leg of wall molding and finish wall, partition, and other vertical surfaces.
  - 2. Install perimeter seal to finish flush with exposed faces of horizontal legs of wall molding.
- 1. Total assembly, consisting of the ceiling suspension system, acoustical units, penetrations, structural components and floor or roof construction above, shall have a 1 hour fire rating based on tests conducted in conformance with ASTM E119.
- 2. Provide concealed fire protection around penetrations in ceilings for electric and mechanical work, and other penetrations as required to maintain the integrity of the fire-rated assembly.
- 3. Install fire rated ceiling systems to conform to tested assembly.

#### **3.2 CEILING SUSPENSION SYSTEM INSTALLATION**

- A. General:
  - 1. Install metal suspension system for acoustical tile and lay-in panels in accordance with ASTM C636, except as specified otherwise.
  - 2. Use direct or indirect hung suspension system or combination thereof as defined in ASTM C635.
  - 3. Support a maximum area of 1.48 m<sup>2</sup> (16 sf) of ceiling per hanger.
  - 4. Prevent deflection in excess of 1/360 of span of cross runner and main runner.
  - 5. Provide extra hangers, minimum of one hanger at each corner of each item of mechanical, electrical and miscellaneous equipment supported by ceiling suspension system not having separate support or hangers.
  - 6. Provide not less than 100 mm (4 inch) clearance from the exposed face of the acoustical units to the underside of ducts, pipe, conduit, secondary suspension channels, concrete beams or joists; and steel beam or bar joist unless furred system is shown,
  - 7. Use main runners not less than 1200 mm (48 inches) in length.
  - 8. Install hanger wires vertically. Angled wires are not acceptable except for seismic restraint bracing wires.
- B. Anchorage to Structure:
  - 1. Concrete:
    - a. Install hanger inserts and wire loops required for support of hanger and bracing wire in concrete forms before concrete is placed. Install hanger wires with looped ends through steel deck if steel deck does not have attachment device.
    - b. Use eye pins or threaded studs with screw-on eyes in existing or already placed concrete structures to support hanger and bracing wire. Install in sides of concrete beams or joists at mid height.
  - 2. Steel:

- a. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels for attachment of hanger wires.
    - (1) Size and space carrying channels to insure that the maximum deflection specified will not be exceeded.
    - (2) Attach hangers to steel carrying channels, spaced four feet on center, unless area supported or deflection exceeds the amount specified.
  - b. Attach carrying channels to the bottom flange of steel beams spaced not 1200 mm (4 feet) on center before fire proofing is installed. Weld or use steel clips to attach to beam to develop full strength of carrying channel.
  - c. Attach hangers to bottom chord of bar joists or to carrying channels installed between the bar joists when hanger spacing prevents anchorage to joist. Rest carrying channels on top of the bottom chord of the bar joists, and securely wire tie or clip to joist.
- B. Direct Hung Suspension System:
1. As illustrated in ASTM C635.
  2. Support main runners by hanger wires attached directly to the structure overhead.
  3. Maximum spacing of hangers, 1200 mm (4 feet) on centers unless interference occurs by mechanical systems. Use indirect hung suspension system where not possible to maintain hanger spacing.
- C. Indirect Hung Suspension System:
1. As illustrated in ASTM C635.
  2. Space carrying channels for indirect hung suspension system not more than 1200 mm (4 feet) on center. Space hangers for carrying channels not more than 2400 mm (8 feet) on center or for carrying channels less than 1200 mm (4 feet) on center so as to insure that specified requirements are not exceeded.
  3. Support main runners by specially designed clips attached to carrying channels.
- D. Seismic Ceiling Bracing System:
1. Construct system in accordance with ASTM E580.
  2. Connect bracing wires to structure above as specified for anchorage to structure and to main runner or carrying channels of suspended ceiling at bottom.

### 3.3 ACOUSTICAL UNIT INSTALLATION

- A. Cut acoustic units for perimeter borders and penetrations to fit tight against penetration for joint not concealed by molding.
- B. Install lay-in acoustic panels in exposed grid with not less than 6 mm (1/4 inch) bearing at edges on supports.
  1. Install tile to lay level and in full contact with exposed grid.
  2. Replace cracked, broken, stained, dirty, or tile not cut for minimum bearing.
- C. Tile in concealed grid upward access suspension system:
  1. Install acoustical tile with joints close, straight and true to line, and with exposed surfaces level and flush at joints.
  2. Make corners and arises full, and without worn or broken places.
  3. Locate acoustical units providing access as specified under Article, ACCESS.
- D. Markers:
  1. Install markers of color code specified to identify the various concealed piping, mechanical, and plumbing systems.
  2. Attach colored markers to exposed grid on opposite sides of the units providing access.

3. Attach marker on exposed ceiling surface of upward access acoustical unit.

**3.5 CLEAN-UP AND COMPLETION**

- A. Replace damaged, discolored, dirty, cracked and broken acoustical units.
- B. Leave finished work free from defects.

- - - E N D - - -

**SECTION 09 54 23**  
**LINEAR METAL CEILINGS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Section includes suspended metal grid ceiling system including trim, linear, formed metal ceiling panels, mechanically mounted on a ceiling suspension system and accessories including closures, trim, edge molding and all other items required to provide complete installation.

**1.2 RELATED WORK**

- A. Access Doors: Section 08 31 13, ACCESS DOORS AND FRAMES.  
B. Acoustical Ceilings: Section 09 51 00, ACOUSTICAL CEILINGS.  
C. Sprinkler System: Section 21 13 13, WET-PIPE SPRINKLER SYSTEMS.  
D. Air Outlets and Inlets: Division 23, HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)  
E. Interior Lighting: Section 26 51 00, INTERIOR LIGHTING.

**1.3 QUALITY CONTROL**

- A. Qualifications:
1. Approval required of products or service of proposed manufacturer, suppliers and installers, and shall be based upon submission by Contractor of certification that:
    - a. Manufacturer regularly and presently, manufactures and installs linear metal ceiling systems and related accessories as one of its principal products and has a record of successful in-service performance.
    - b. Accessories required for linear metal ceiling systems shall be manufacturer's standard or other systems compatible with linear metal ceiling system manufacturer's material. Items shall be of materials and construction that shall provide desired functional service.
  2. Installer: Approved in writing by manufacturer.
- B. Coordination of Work: Coordinate layout and installation of linear metal ceiling units and suspension system components with other work supported by, or penetrating through, ceilings, including light fixtures, HVAC equipment, fire-suppression system components (if any), and partition system (if any):
1. Sprinkler heads and light fixtures: Shall typically penetrate center of a panel width.
  2. HVAC Air Outlets and Inlets: Shall be planned to occur within center of panel systems or provide for equal distance on each side parallel to length of panels

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Product Data:
1. Manufacturer's standard details and fabrication methods.
  2. Data on finishing, hardware, components, and accessories.
  3. Recommendations for maintenance and cleaning of finish surfaces.
- C. Shop Drawings:
1. Submit complete composite fabrication, and installation shop drawings including associated components.
  2. Identify panel sections, baffles, edge trim, lighting trim, air diffuser sections and trim, sprinkler head locations and trim, other component parts, not included in manufacturer's product data, by name



- and material and showing design, construction, installation, and anchorage.
3. Layout and installation details, including relation to adjacent work such as walls and bulkheads.
  4. Composite reflected ceiling plans, at 1:50 (1/4 inch) scale, showing location of all accessories, mechanical and electrical components. \_  
Indicate following:
    - a. Joint pattern.
    - b. Ceiling suspension members.
    - c. Method of attaching hangers to building structure.
    - d. Ceiling-mounted items including light fixtures, air outlets and inlets, speakers, sprinkler heads, and access panels. Special moldings at walls, column penetrations, and other junctures with adjoining construction.
  5. Detail sections of typical composite members, at wall surfaces, mechanical diffusers and grilles, sprinkler heads, and light fixtures.
  6. Provisions for expansion and contraction.
  7. Anchors and reinforcements.
- D. Samples:
1. Samples: For prefinished items exposed to view, provide samples of manufacturer's full standard color and texture range for selection by Owner.
  2. Submit pairs of samples of each selected color and finish on 300 mm (12 inch) long sections of extrusions or formed shapes for following:
    - a. Linear metal panel.
    - b. Each exposed molding and trim sections.
    - c. Suspension system members.
    - d. Filler strips.
    - e. Insulation.
    - f. End cap.
  3. Integrally Colored Anodized or Prefinished Aluminum:
    - a. Sheet not less than 200 mm by 250 mm (eight inches by ten inches).
- E. Certificates:
1. Stating that linear metal ceiling system material has been given specified thickness of anodizing or organic coating finish.
  2. Indicating manufacturer's and installer's meet qualifications as specified.
  3. Submit list of equivalent size installations which have had satisfactory operation.

#### 1.5 DELIVERY, STORAGE AND HANDLING

- A. Materials: Deliver to site in manufacturer's original unopened containers with brand name and type clearly marked.
- B. Materials: Carefully handle and store in dry, watertight enclosures.
- C. Immediately before installation, linear metal ceiling units shall be stored for not less than 48 hours at same temperature and relative humidity as space where they will be installed to assure temperature and moisture conditions in accordance with manufacturer's recommendations.

#### 1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referred to in text by basic designation only.
- B. American Architectural Manufacturers Association (AAMA):  
2605-11.....High Performance Organic Coatings on  
Architectural Extrusions and Panels.
- C. American Society for Testing and Materials (ASTM):  
A641/641M-09.....Zinc-coated (Galvanized) Carbon Steel Wire.

- A653/A653M-10.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by Hot-Dip Process.
  - B209/B209M-07.....Aluminum and Aluminum-Alloy Sheet and Plate.
  - C635-07.....Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-In Panel Ceilings.
  - C636-08.....Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-In Panels.
  - E90-09.....Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions.
  - E580-10.....Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Seismic Restraint.
- D. National Association of Architectural Metal Manufacturers (NAAMM):  
Metal Finishes Manual (2006)

**1.7 ENVIRONMENTAL REQUIREMENTS**

- A. Uniform temperature of not less than 16 °C, (60 °F) nor more than 27 °C, (80 °F) and a relative humidity of not more than 70 percent shall be maintained for a period of 48 hours before, during, and for 48 hours after installation of linear metal ceiling units. After above period, room temperature shall not fall below 13 °C (55 °F).

**1.8 SCHEDULING**

- A. Interior finish work such as gypsum board finishing, painting, concrete and terrazzo work shall be complete and dry before installation. Mechanical, electrical, and other work above ceiling line shall be completed and heating, ventilating, and air conditioning systems shall be installed and operating in order to maintain temperature and humidity requirements.

**1.9 WARRANTY**

- A. Submit written warranty, in accordance with FAR clause 52.246-21, Warranty of Construction requirements except that warranty period shall be extended to two (2) years.

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

- A. Linear Metal Ceiling System, General:
  - 1. Sheet Metal Characteristics: Form metal panels from sheet metal free from surface blemishes where exposed to view in finished unit. Do not use materials whose exposed surfaces exhibit pitting, seam marks, roller marks, stains, discolorations, or other imperfections.
  - 2. Fabrication: Die-form linear metal panels into units standard with manufacturer and finished as specified herein.
  - 3. Sound-Absorptive Pads: Width and length to fill completely between carriers, joined at center of a panel, and to provide an STC rating of min. 35 in accordance with ASTM E90. Refer to Section 07 21 13, THERMAL INSULATION for acoustical insulation sound absorptive pad type and thickness to be used based on STC ratings.
- B. Accessories: Stabilizer bars, clips, splices, hold down clips and others as required for complete installation.
- C. Linear Metal Panels:
  - 1. General: Formed to snap on and be securely retained on carriers without separate fasteners.

2. Aluminum Panels: ASTM B209/B209m, roll-formed sheet, alloy 3005-H26, complying with following requirements:
  - a. Minimum Nominal Thickness: 1.0 mm (0.040 inch).
3. Noise Reduction Coefficient: NRC 0.85.
- D. Suspension Systems, General:
  1. Standard for Metal Suspension Systems: Provide manufacturer's standard types, structural classifications, and finishes indicated that comply with ASTM C635 requirements.
  2. Anchors: Type as recommended by manufacturer. Size for five times design load indicated in ASTM C635, Table 1, Direct Hung, unless otherwise indicated.
- E. Wire for Carriers, Hangers, and Ties: ASTM A641/A641m, Class 1, zinc coating, soft temper.
  1. Gage: Minimum 12 gage. Shall support a minimum of 1330 N, (300 pounds ultimate vertical load without failure of supporting material or attachment.
- F. Hanger Rods: Mild steel, zinc coated, or protected with rust-inhibitive paint.
- G. Flat Hangers: Mild steel, zinc coated, or protected with rust-inhibitive paint.
- H. Angle Hangers: Angles with legs not less than 22 mm (7/8 inch) wide, formed with 0.82 mm (0.0365 inch) galvanized steel sheet complying with ASTM A653/A653m, Coating Designation G90, with bolted connections and 7.6 mm (5/16 inch) diameter bolts.
- I. Edge Moldings and Trim: Manufacturer's standard molding for edges and penetrations of ceiling.
- J. Carriers: Comply with ASTM A653/A653m, cold-rolled, electro-galvanized, 0.375 mm (0.0209 inch) (25 gage) minimum nominal thickness steel.
- K. Miscellaneous Components and Materials:
  1. Access Doors: Refer to Section 08 31 13, ACCESS DOORS AND FRAMES for requirements. Access doors, required for use in linear metal ceiling system, shall match adjacent ceiling panel units and shall be designed and equipped with suitable framing and fastenings for removal and replacement without damage. Provide locking device for this type access door as used in general access doors.
- L. Access Identification: Refer to Section 09 91 00, PAINTING for requirements of identification markers for use, with various mechanical systems above ceiling, under this section.

## **2.2 FINISHES**

- A. Comply with NAAMM "Metal Finishes Manual".
- B. Protect mechanical finishes on exposed surfaces from damage by application of strippable, temporary protective covering before shipment.
- C. Appearance of Finished Work: Variations in appearance of abutting or adjacent ceiling units not acceptable. Noticeable variations in same piece not acceptable.
- D. Aluminum Finishes:
  1. Class II, Clear, Mirror-Anodized Finish: AA-M21C12A212. Anodic Coating: protective and decorative, clear film; coating thickness: .0052 mm (0.2 mil minimum).
- E. Touch-up Paint For Concealed Items: Manufacturer's standard.

## **PART 3 - EXECUTION**

### **3.1 INSPECTION**

- A. Ceiling Areas: Conform with details, dimensions and tolerances shown on approved linear metal ceiling system composite reflected ceiling plan shop drawings.

- B. Conditions which may adversely affect linear metal ceiling system installation shall be brought to Contractors attention, for repair, prior to commencement of linear metal ceiling system installation. Do not start ceiling installation until affected area has been repaired to Installer's satisfaction.
- C. Where linear metal ceiling system is installed adjacent to masonry, washdown of adjacent masonry shall be completed prior to erection of ceiling system to prevent damage to material finish by cleaning materials.

### 3.2 PREPARATION

- A. Measure each ceiling area and establish layout of linear metal panel units to balance border widths at opposite edges of each ceiling. Avoid using units less than half wide at borders.

### 3.3 INSTALLATION

- A. Standard for Installation of Ceiling Suspension Systems: Comply with ASTM C636 and ASTM E580 as applicable to linear metal panel ceiling suspension system.
- B. Suspend ceiling hangers from building structural members and as follows:
  - 1. Install hangers plumb, free from contact with insulation or other objects within ceiling plenum that are not part of supporting structural or ceiling suspension system. Splay hangers where required to avoid obstructions and offset resulting horizontal forces by bracing, counter splaying, or other equally effective means.
  - 2. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with location of hangers at spacings required to support standard suspension system members, install supplemental suspension members and hangers in form of trapezes or equivalent devices.
  - 3. Secure hangers to structure, including intermediate framing members, by attaching to inserts, eye screws, or other devices that are secure and appropriate for structure to which hangers are attached as well as for type of hanger involved, and in a manner that will not cause them to deteriorate or fail because of age, corrosion, and elevated temperatures.
  - 4. Space hangers not more than 1200 mm (48 inches) on center along each member supported directly from hangers, unless otherwise shown.
- C. Install edge moldings at edge of each linear metal ceiling area and at locations where edge of units would otherwise be exposed after completion of Work. Level moldings with ceiling suspension system to level tolerance of 3 mm (1/8 inch) in 3600 mm (12 feet).
  - 1. Masonry and Concrete: Fasten with machine screws into lead-shield-type anchors drilled into construction.
  - 2. Hollow Masonry or Stud Construction: Fasten with toggle bolts or similar self-expanding screw anchors.
- D. Ceiling Access Doors:
  - 1. Ceiling access doors shall be located directly under items which require access.
- E. Scribe and cut metal panel units for accurate fit at borders and at interruptions and penetrations by other work through ceilings. Stiffen edges of cut units as required to eliminate evidence of buckling or variations in flatness exceeding referenced standards for stretcher-leveled metal sheet.
- F. Align joints in adjacent courses to form uniform, straight joints parallel to room axis in both directions, unless otherwise-shown.
- G. Install panels with butt joints using internal concealed panel splices and in joint configurations shown in reflected ceiling plan.
- H. Install acoustical insulation blankets at right angle to panels so that they do not hang unsupported.

**3.4 CLEANING**

- A. Following installation, dirty or discolored surfaces of linear metal ceiling units shall be cleaned, in accordance with manufacturer's written recommendations, and left free from defects. Units that are damaged or improperly installed shall be removed and new units provided as directed.

**3.5 PROTECTION**

- A. Protect linear metal ceiling systems from damage until final inspection and acceptance.

- - - END - - -

**SECTION 09 65 13  
RESILIENT BASE AND ACCESSORIES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the installation of rubber base.

**1.2 RELATED WORK**

- A. Integral base with sheet flooring: Section 09 65 16, RESILIENT SHEET FLOORING.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Description of each product.
  - 2. Base material manufacturer's recommendations for adhesives.
  - 3. Application and installation instructions.
  - 4. Adhesive: Literature indicating each type.
- C. Samples: Provide samples of manufacturer's full standard color and texture range for selection by Owner, 150 mm (6 inches) long, each type and color.

**1.4 DELIVERY**

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Materials from containers, which have been distorted, damaged or opened prior to installation, will be rejected.

**1.5 STORAGE**

- A. Store materials in weather tight and dry storage facility.
- B. Protect material from damage by handling and construction operations before, during, and after installation.

**1.6 APPLICABLE PUBLICATIONS**

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):  
F1861-08.....Resilient Wall Base
- C. Federal Specifications (Fed. Spec.):  
RR-T-650E.....Treads, Metallic and Non-Metallic, Nonskid

**PART 2 - PRODUCTS**

**2.1 GENERAL**

- A. Use only products by the same manufacturer and from the same production run.

**2.2 RESILIENT BASE**

- A. ASTM F1861, 3 mm (1/8 inch) thick, 100 mm (4 inches) high, Thermoplastics, Group 2-layered. Style B-cove.
- B. Where carpet occurs, use Style A-straight.
- C. Use only one type of base throughout.

## **2.7 ADHESIVES**

- A. Use products recommended by the material manufacturer for the conditions of use.
- B. Use low-VOC adhesive during installation. Water based adhesive with low VOC is preferred over solvent based adhesive.

## **PART 3 - EXECUTION**

### **3.1 PROJECT CONDITIONS**

- A. Maintain temperature of materials above 21° C (70 °F), for 48 hours before installation.
- B. Maintain temperature of rooms where work occurs, between 21° C and 27° C (70°F and 80°F) for at least 48 hours, before, during, and after installation.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.

### **3.2 INSTALLATION REQUIREMENTS**

- A. The respective manufacturer's instructions for application and installation will be considered for use when approved by the COR.
- B. Submit proposed installation deviation from this specification to the COR indicating the differences in the method of installation.
- C. The COR reserves the right to have test portions of material installation removed to check for non-uniform adhesion and spotty adhesive coverage.

### **3.3 PREPARATION**

- A. Examine surfaces on which material is to be installed.
- B. Do not use adhesive for filling.
- D. Clean substrate area of oil, grease, dust, paint, and deleterious substances.
- E. Substrate area dry and cured. Perform manufacturer's recommended bond and moisture test.

### **3.4 BASE INSTALLATION**

- A. Location:
  - 1. Unless otherwise specified or shown, where base is scheduled, install base over toe space of base of casework, lockers, laboratory, pharmacy furniture island cabinets and where other equipment occurs.
  - 2. Extend base scheduled for room into adjacent closet, alcoves, and around columns.
- B. Application:
  - 1. Apply adhesive uniformly with no bare spots.
  - 2. Set base with joints aligned and butted to touch for entire height.
  - 3. Before starting installation, layout base material to provide the minimum number of joints with no strip less than 600 mm (24 inches) length.
    - a. Short pieces to save material will not be permitted.
    - b. Locate joints as remote from corners as the material lengths or the wall configuration will permit.
- C. Form corners and end stops as follows:
  - 1. Score back of outside corner.
  - 2. Score face of inside corner and notch cove.
- D. Roll base for complete adhesion.

**3.7 CLEANING AND PROTECTION**

- A. Clean all exposed surfaces of base and adjoining areas of adhesive spatter before it sets.
- B. Keep traffic off resilient material for at least 72 hours after installation.
- C. Where protective materials are removed and immediately prior to acceptance, replace damaged materials and re-clean resilient materials. Damaged materials are defined as having cuts, gouges, scrapes or tears and not fully adhered.

- - - E N D - - -



**SECTION 09 65 16**  
**RESILIENT SHEET FLOORING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This Section specifies the installation of sheet flooring with backing and integral cove base.
- B. Grades of resilient sheet vinyl floor covering without backing having vinyl plastic wearlayer with backing.
- C. Installation of sheet flooring including following:
  - 1. Heat welded seams.
  - 2. Integral cove base: Installed at intersection of floor and vertical surfaces.

**1.2 RELATED WORK**

- A. Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES
- B. Concrete floors: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- C. Resilient base over base of lockers, equipment and casework: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

**1.3 QUALITY CONTROL-QUALIFICATIONS:**

- A. The Contracting Officer shall approve products or service of proposed manufacturer, suppliers, and installers, and the Contractor shall submit certification that:
  - 1. Heat welded seaming is manufacturer's prescribed method of installation.
  - 2. Installer is approved by manufacturer of materials and has technical qualifications, experience, trained personnel, and facilities to install specified items.
  - 3. Manufacturer's product submitted has been in satisfactory operation, on three installations similar and equivalent in size to this project for three years. Submit list of installations.
- B. The sheet vinyl floor coverings shall meet fire performance characteristics as determined by testing products, per ASTM test method, indicated below by Underwriters Laboratories, Inc. (UL) or another recognized testing and inspecting agency acceptable to authorities having jurisdiction.
  - 1. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E648.
  - 2. Smoke Density: Less than 450 per ASTM E662.
- C. The floor covering manufacturer shall certify that products supplied for installation comply with local regulations controlling use of volatile organic compounds (VOC's).

**1.4 SUBMITTALS**

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, submit following:
- B. Manufacturer's Literature and Data:
  - 1. Description of resilient material and accessories to be provided.
  - 2. Resilient material manufacturer's recommendations for adhesives, weld rods, sealants, and underlayment.
  - 3. Application and installation instructions.
  - 4. Adhesive, underlayment and primer, each type.
- C. Samples:
  - 1. Samples for Initial Selection: Provide samples of manufacturer's full standard color and texture range for selection by Owner.

2. Confirmation Samples: Sheet material, 38 mm by 300 mm (1-1/2 inch by 12 inch) for each type, pattern and color.
3. Cap strip and fillet strip, 300 mm (12 inches) for integral base.
4. Shop Drawings and Certificates: Layout of joints showing patterns where joints are expressed, and type and location of obscure type joints. Indicate orientation of directional patterns.
5. Certificates: Quality Control Certificate Submittals and lists specified in paragraph, QUALIFICATIONS.
6. Edge strips: 150 mm (6 inches) long each type.

**1.5 PROJECT CONDITIONS**

- A. Maintain temperature of floor materials and room, where work occurs, above 18 ° C (65 °F) and below 38 ° C (100 °F) for 48 hours before, during and for 48 hours after installation. After above period, room temperature shall not fall below 13 ° C (55 °F).
- B. Construction in or near areas to receive flooring work shall be complete, dry and cured. Do not install resilient flooring over slabs until they have been cured and are sufficiently dry to achieve a bond with adhesive. Follow flooring manufacturer's recommendations for bond and moisture testing.
- C. Building shall be permanently enclosed. Schedule construction so that floor receives no construction traffic when completed.

**1.6 DELIVERY, STORAGE AND HANDLING**

- A. Deliver materials to site in original sealed packages or containers; labeled for identification with manufacturer's name and brand.
- B. Deliver sheet flooring full width roll, completely enclosed in factory wrap, clearly marked with the manufacturer's number, type and color, production run number and manufacture date.
- C. Store materials in weathertight and dry storage facility. Protect from damage due to handling, weather, and construction operations before, during and after installation. Store sheet flooring on end with ambient temperatures maintained as recommended by manufacturer.
- D. Store sheet flooring on end.
- E. Move sheet vinyl floor coverings and installation accessories into spaces where they will be installed at least 48 hours in advance of installation.

**1.7 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society For Testing Materials (ASTM):
  - E648-10.....Critical Radiant Flux of Floor-Covering Systems Using a Radiant Energy Source.
  - E662-12.....Specific Optical Density of Smoke Generated by Solid Materials.
  - F710-08.....Practice for Preparing Concrete Floors and Other Monolithic Floors to Receive Resilient Flooring.
  - F1303-04(2009).....Sheet Vinyl Floor Covering with Backing.
  - F1869-10.....Moisture Vapor Emission Rate of Concrete Subfloor using Anhydrous Calcium Chloride
  - F1913-04(2010).....Sheet Vinyl Flooring without Backing
  - F2170-09.....Determining Relative Humidity in Concrete Floor Slabs using In-situ Probes
- C. Resilient Floor Covering Institute (RFCI):
  - Recommended Work Practices for Removal of Resilient Floor Coverings.

## **1.8 SCHEDULING**

- A. Interior finish work such as drywall finishing, concrete, terrazzo, ceiling work, and painting work shall be complete and dry before installation. Mechanical, electrical, and other work above ceiling line shall be completed. Heating, ventilating, and air conditioning systems shall be installed and operating in order to maintain temperature and humidity requirements.

## **1.9 WARRANTY:**

- A. Submit written warranty, in accordance with FAR clause 52.246-21, Warranty of Construction requirements except that warranty period shall be extended to include two (2) years.

## **PART 2 - PRODUCTS**

### **2.1 SHEET VINYL FLOOR COVERINGS**

- A. Sheet Vinyl Floor Coverings: Smooth face, minimum thickness nominal 2 mm (0.08 inch). Sheet flooring shall conform to ASTM F1913 and material requirements specified in ASTM F1303, Type II, Grade 1, backing classification not applicable. Foam backed sheet flooring is not acceptable.
- B. Size: Provide maximum size sheet vinyl material produced by manufacturer to provide minimum number of joints. Minimum size width acceptable - 1200 mm (48 inches).
- C. Each color and pattern of sheet flooring shall be of same production run.

### **2.2 WELDING ROD:**

- A. Product of floor covering manufacturer in color shall match field color of sheet vinyl covering.

### **2.3 APPLICATION MATERIALS AND ACCESSORIES**

- A. Floor and Base Adhesive: Type recommended by sheet flooring material manufacturer for conditions of use.
- B. Mastic Underlayment (for concrete floors): Provide products with latex or polyvinyl acetate resins in mix. Condition to be corrected shall determine type of underlayment selected for use.
- C. Base Accessories:
  - 1. Fillet Strip: 19 mm (3/4 inch) radius fillet strip compatible with resilient sheet material.
  - 2. Cap Strip: Extruded flanged zero edge vinyl reducer strip approximately 25 mm (one inch) exposed height with 13 mm (1/2 inch) flange.

### **2.4 SHEET FLOORING**

- A. ASTM F1303, Type II, Grade 1, except for backing requirements. Foam backed sheet flooring is not acceptable.
- B. Minimum nominal thickness 2 mm (0.08 inch); 1800 mm (6 ft) minimum width.
- C. Critical Radiant Flux: 0.45 watts per sq.cm or more, Class I, per ASTM E648.
- D. Smoke density: less than 450 per ASTM E662.
- E. Color and pattern of sheet flooring of the same production run.

### **2.5 ADHESIVES**

Water resistant type recommended by the sheet flooring manufacturer for the conditions of use. VOC not to exceed 50g/L

## **2.6 BASE CAP STRIP AND COVE STRIP**

- A. Extruded vinyl compatible with the sheet flooring.
- B. Cap strip "J" shape with feathered edge flange approximately 25 mm (one inch) wide; top designed to receive sheet flooring with 13 mm (1/2 inch) flange lapping top of flooring
- C. Cove strip 70 mm (2-3/4 inch) radius.

## **2.7 LEVELING COMPOUND (FOR CONCRETE FLOORS)**

- A. Provide cementitious products with latex or polyvinyl acetate resins in the mix.

## **2.8 PRIMER (FOR CONCRETE SUBFLOORS)**

- A. As recommended by the adhesive or sheet flooring manufacturer.

## **2.9 EDGE STRIPS**

- A. Extruded aluminum, mill finish, mechanically cleaned.
- B. 28 mm (1-1/8 inch) wide, 6 mm (1/4 inch) thick, bevel one edge to 3 mm (1/8 inch) thick.
- C. Drill and counter sink edge strips for flat head screws. Space holes near ends and approximately 225 mm (9 inches) on center in between.

## **2.10 SEALANT**

- A. As specified in Section 07 92 00, JOINT SEALANTS.
- B. Compatible with sheet flooring.

## **PART 3 - EXECUTION**

### **3.1 PROJECT CONDITIONS**

- A. Maintain temperature of sheet flooring above 36 °C (65 °F), for 48 hours before installation.
- B. Maintain temperature of rooms where sheet flooring work occurs above 36 °C (65 °F), for 48 hours, before installation and during installation.
- C. After installation, maintain temperature at or above 36 °C (65 °F.)
- D. Building is permanently enclosed.
- E. Wet construction in or near areas to receive sheet flooring is complete, dry and cured.

### **3.2 SUBFLOOR PREPARATION**

- A. Concrete Subfloors: Verify that concrete slabs comply with ASTM F710.
  - 1. Installer shall examine surfaces on which resilient sheet flooring is to be installed, and shall advise Contractor, in writing, of areas which are unacceptable for installation of flooring material. Installer shall advise Contractor which methods are to be used to correct conditions that will impair proper installation. Installation shall not proceed until unsatisfactory conditions have been corrected.
  - 2. Slab substrates dry, free of curing compounds, sealers, hardeners, and other materials which would interfere with bonding of adhesive. Determine adhesion and dryness characteristics by performing bond and moisture tests recommended by Resilient Floor Covering Institute recommendations in manual RFCI-MRP.
- B. Broom or vacuum clean substrates to be covered by sheet vinyl floor coverings immediately before installation. Following cleaning, examine substrates to determine if there is visually any evidence of moisture, alkaline salts, carbonation, or dust.

- C. Primer: If recommended by flooring manufacturer, prior to application of adhesive, apply concrete slab primer in accordance with manufacturer's directions.
- D. Correct conditions that will impair proper installation, including trowel marks, pits, dents, protrusions, cracks or joints.
- E. Fill cracks, joints, depressions, and other irregularities in concrete with leveling compound.
  - 1. Do not use adhesive for filling or leveling purposes.
  - 2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
  - 3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joint lines.
- F. Clean floor of oil, paint, dust and deleterious substances. Leave floor dry and cured free of residue from existing curing or cleaning agents.
- G. Moisture Testing: Perform moisture and pH test as recommended by the flooring and adhesive manufacturers. Perform test locations starting on the deepest part of the concrete structure. Proceed with installation only after concrete substrates meet or exceed the manufacturer's requirements. In the absence of specific guidance from the flooring or adhesive manufacturer the following requirements are to be met:
  - 1. Perform moisture vapor emission tests in accordance with ASTM F1869. Proceed with installation only after substrates have a maximum moisture-vapor-emission rate of 1.36 kg of water/92.9 sq. m (3lb of water/1000 sq. ft.) in 24 hours.
  - 2. Perform concrete internal relative humidity testing using situ probes in accordance with ASTM F2170. Proceed with installation only after concrete reaches maximum 75 percent relative humidity level measurement.

### 3.3 INSTALLATION OF FLOORING

- A. Install work in strict compliance with manufacturer's instructions and approved layout drawings.
- B. Maintain uniformity of sheet vinyl floor covering direction and avoid cross seams.
- C. Arrange for a minimum number of seams and place them in inconspicuous and low traffic areas, but in no case less than 150 mm (6 inches) away from parallel joints in flooring substrates.
- D. Match edges of resilient floor coverings for color shading and pattern at seams.
- E. Where resilient sheet flooring abuts other flooring material floors shall finish level.
- F. Extend sheet vinyl floor coverings into toe spaces, door reveals, closets, and similar openings.
- G. Inform the COR of conflicts between this section and the manufacturer's instructions or recommendations for auxiliary materials, or installation methods, before proceeding.
- H. Install sheet in full coverage adhesives.
  - 1. Air pockets or loose edges will not be accepted.
  - 2. Trim sheet materials to touch in the length of intersection at pipes and vertical projections; seal joints at pipe with waterproof cement or sealant.
- I. Keep joints to a minimum; avoid small filler pieces or strips.
- J. Follow manufacturer's recommendations for seams at butt joints. Do not leave any open joints that would be readily visible from a standing position.
- K. Follow manufacturer's recommendations regarding pattern match, if applicable.
- L. Installation of Edge Strips:
  - 1. Locate edge strips under center lines of doors unless otherwise indicated.

2. Set aluminum strips in adhesive, anchor with lead anchors and stainless steel Phillips screws.

M. Integral Cove Base Installation:

1. Set preformed fillet strip to receive base.
2. Install the base with adhesive, terminate exposed edge with the cap strip.
3. Form internal and external corners to the geometric shape generated by the cove at either straight or radius corners.
4. Solvent weld joints as specified for the flooring. Seal cap strip to wall with an adhesive type sealant.
5. Unless otherwise specified or shown where sheet flooring is scheduled, provide integral base at intersection of floor and vertical surfaces. Provide sheet flooring and base scheduled for room on floors and walls under and behind areas where casework, laboratory and pharmacy furniture and other equipment occurs, except where mounted in wall recesses.

**3.4 INSTALLATION OF INTEGRAL COVERED BASE**

- A. Set preformed cove to receive base. Install base material with adhesive and terminate exposed edge with cap strip. Integral base shall be 150 mm (6 inches) high.
- B. Internal and external corners shall be formed to geometric shape generated by cove at either square or radius corners.

**3.5 WELDING**

- A. Heat weld all joints of flooring and base using equipment and procedures recommended by flooring manufacturer.
- B. Welding shall consist of routing joint, inserting a welding rod into routed space, and terminally fusing into a homogeneous joint.
- C. Upon completion of welding, surface across joint shall finish flush, free from voids, and recessed or raised areas.
- D. Fusion of Material: Joint shall be fused a minimum of 65 percent through thickness of material, and after welding shall meet specified characteristics for flooring.

**3.6 CLEANING**

- A. Clean small adhesive marks during application of sheet flooring and base before adhesive sets, excessive adhesive smearing will not be accepted.
- B. Remove visible adhesive and other surface blemishes using methods and cleaner recommended by floor covering manufacturers.
- C. Clean and polish materials per flooring manufacturer's written recommendations.
- D. Vacuum floor thoroughly.
- E. Do not wash floor until after period recommended by floor covering manufacturer and then prepare in accordance with manufacturer's recommendations.
- F. Upon completion, COR shall inspect floor and base to ascertain that work was done in accordance with manufacturer's printed instructions.
- G. Perform initial maintenance according to flooring manufacturer's written recommendations.

**3.7 PROTECTION:**

- A. Protect installed flooring as recommended by flooring manufacturer against damage from rolling loads, other trades, or placement of fixtures and furnishings.
- B. Keep traffic off sheet flooring for 24 hours after installation.
- C. Where construction traffic is anticipated, cover sheet flooring with reinforced kraft paper properly secured and maintained until removal is authorized by the COR.

- D. Where protective materials are removed and immediately prior to acceptance, repair any damage, re-clean sheet flooring, lightly re-apply polish and buff floor.

- - - E N D - - -

**SECTION 09 65 19**  
**RESILIENT TILE FLOORING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the installation of vinyl composition tile flooring and accessories.

**1.2 RELATED WORK**

- A. Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES  
B. Resilient Base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.  
B. Manufacturer's Literature and Data:  
1. Description of each product.  
2. Resilient material manufacturers recommendations for adhesives, underlayment, primers and polish.  
3. Application and installation instructions.  
C. Samples:  
1. Samples for Initial Selection: Provide samples of manufacturer's full standard color and texture range for selection by Owner.  
2. Tile: 300 mm by 300 mm (12 inches by 12 inches) for each type, pattern and color.  
3. Edge Strips: 150 mm (6 inches) long, each type.  
4. Feature Strips: 150 mm (6 inches) long.  
D. Test Reports:  
1. Abrasion resistance: Depth of wear for each tile type and color and volume loss of tile, certified by independent laboratory.  
2. Tested per ASTM F510.

**1.4 DELIVERY**

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.  
B. Materials from containers which have been distorted, damaged or opened prior to installation will be rejected.

**1.5 STORAGE**

- A. Store materials in weathertight and dry storage facility.  
B. Protect from damage from handling, water, and temperature.

**1.6 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.  
B. American Society for Testing and Materials (ASTM):  
D4078-02 (2008).....Water Emulsion Floor Finish  
E648-10.....Critical Radiant Flux of Floor Covering Systems Using a Radiant Energy Source  
E662-09.....Specific Optical Density of Smoke Generated by Solid Materials  
E1155-96 (R2008).....Determining Floor Flatness and Floor Levelness Numbers



- F510-93 (R 2008).....Resistance to Abrasion of Resilient Floor Coverings Using an Abrader with a Grit Feed Method
- F710-08.....Preparing Concrete Floors to Receive Resilient Flooring
- F1066-04 (R2010).....Vinyl Composition Floor Tile
- F1344-10.....Rubber Floor Tile
- F1700-04 (R2010).....Solid Vinyl Floor Tile
- C. Resilient Floor Covering Institute (RFCI):
  - IP #2.....Installation Practice for Vinyl Composition Tile (VCT)
- D. Federal Specifications (Fed. Spec.):
  - SS-T-312.....Tile Floor: Asphalt, Rubber, Vinyl and Vinyl Composition

**PART 2 - PRODUCTS**

**2.1 GENERAL**

- A. Furnish product type, materials of the same production run and meeting following criteria.
- B. Use adhesives, underlayment, primers and polish recommended by the floor resilient material manufacturer.
- C. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E 648.
- D. Smoke density: Less than 450 per ASTM E662.

**2.2 VINYL COMPOSITION TILE**

- A. ASTM F1066, Composition 1, Class 2 (through pattern), 300 mm (12 inches) square, 3 mm (1/8 inch) thick.
- B. Color and pattern uniformly distributed throughout thickness.

**2.3 LUXURY VINYL TILE**

- A. Manufacturer: Centiva; or approved equal. Installation shall be on the square in accordance with the latest Centiva Installation Guidelines.
- B. Adhesive:
  - a. CENTI 2001 Wet Set, CENTI 6000 SP (Special Purpose). Coverage: 125 sq. ft. /gal.
  - b. CENTI 2000 EP (epoxy). Coverage:130-150 sq. ft. /gal. Coverage will vary depending on floor type.
- C. Products
  - 1. Event Series X-2775, Wood Plank, 3308 Ash, NG, Straight Edge, 4"x36"
  - 2. Event Series X-2795, Wood Plank, GW29 Antique Cimarron, Straight Edge, 4"x36"

**2.4 ADHESIVES**

- A. Comply with applicable regulations regarding toxic and hazardous materials Green Seal (GS-36) for commercial adhesive.
- B. Use low-VOC adhesive during installation. Water based is preferred over solvent based adhesives.

**2.5 PRIMER (FOR CONCRETE SUBFLOORS)**

As recommended by the adhesive and tile manufacturer.

**2.6 LEVELING COMPOUND (FOR CONCRETE FLOORS)**

- A. Provide cementitious products with latex or polyvinyl acetate resins in the mix.

- B. Determine the type of underlayment selected for use by the condition to be corrected.

## **2.7 POLISH AND CLEANERS**

- A. Cleaners RFCI CL-1.
- B. Polish: ASTM D4078.

## **2.8 TRANSITION STRIPS**

- A. Johnsonite, Wheeled Traffic Transition, 3/8" to 1/8", W 1-1/2"; or approved equal
- B. Bevel from maximum thickness to minimum thickness for flush joint unless shown otherwise.
- C. Allow for up to 6 colors.

## **PART 3 - EXECUTION**

### **3.1 PROJECT CONDITIONS**

- A. Maintain temperature of materials a minimum of 22 °C (70 °F,) for 48 hours before installation.
- B. Maintain temperature of rooms where work occurs between 21 °C and 27 °C (70 °F and 80 °F), for at least 48 hours, before, during and after installation.
- C. Do not install flooring until building is permanently enclosed and wet construction in or near areas to receive tile materials is complete, dry and cured.

### **3.2 SUBFLOOR PREPARATION**

- A. Verify that concrete slabs comply with ASTM F710. At existing slabs, determine levelness by F-number method in accordance with ASTM E1155. Overall value shall not exceed as follows:  
FF30/FL20
- B. Correct conditions which will impair proper installation.
- C. Fill cracks, joints and other irregularities in concrete with leveling compound:
  - 1. Do not use adhesive for filling or leveling purposes.
  - 2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
  - 3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joints.
- D. Clean floor of oil, paint, dust, and deleterious substances: Leave floor dry and cured free of residue from existing curing or cleaning agents.
- E. Concrete Subfloor Testing:  
Determine Adhesion and dryness of the floor by bond and moisture tests as recommended by RFCI manual MRP.
- F. Perform additional subfloor preparation to obtain satisfactory adherence of flooring if subfloor test patches allows easy removal of tile.
- G. Prime the concrete subfloor if the primer will seal slab conditions that would inhibit bonding, or if priming is recommended by the tile or adhesive manufacturers.

### **3.3 INSTALLATION**

- A. Install in accordance with manufacturer's instructions for application and installation unless specified otherwise.
- B. Mix tile from at least two containers. An apparent line either of shades or pattern variance will not be accepted.
- C. Tile Layout:

1. If layout is not shown on drawings, lay tile symmetrically about center of room or space with joints aligned.
2. No tile shall be less than 150 mm (6 inches) and of equal width at walls.
3. Place tile pattern in the same direction; do not alternate tiles.
- D. Trim tiles to touch for the length of intersections at pipes and vertical projections, seal joints at pipes with waterproof cement.
- E. Application:
  1. Apply adhesive uniformly with no bare spots.
    - a. Conform to RFC1-TM-6 for joint tightness and for corner intersection unless layout pattern shows random corner intersection.
    - b. More than 5 percent of the joints not touching will not be accepted.
  2. Roll tile floor with a minimum 45 kg (100 pound) roller. No exceptions.
  3. The COR may have test tiles removed to check for non-uniform adhesion, spotty adhesive coverage, and ease of removal. Install new tile for broken removed tile.
- F. Installation of Edge Strips:
  1. Locate edge strips under center line of doors unless otherwise shown.
  2. Set resilient edge strips in adhesive. Anchor metal edge strips with anchors and screws specified.
  3. Where tile edge is exposed, butt edge strip to touch along tile edge.
  4. Where thin set ceramic tile abuts resilient tile, set edge strip against floor file and against the ceramic tile edge.

### 3.4 CLEANING AND PROTECTION

- A. Clean adhesive marks on exposed surfaces during the application of resilient materials before the adhesive sets. Exposed adhesive is not acceptable.
- B. Keep traffic off resilient material for a minimum 72 hours after installation.
- C. Clean and polish materials in the following order:
  1. For the first two weeks sweep and damp mopped only.
  2. After two weeks, scrub resilient materials with a minimum amount of water and a mild detergent. Leave surface clean and free of detergent residue.
  3. Apply polish to the floors in accordance with the polish manufacturer's instructions.
- D. When construction traffic occurs over tile, cover resilient materials with reinforced kraft paper properly secured and maintained until removal is directed by COR. At entrances and where wheeled vehicles or carts are used, cover tile with plywood, hardboard, or particle board over paper, secured and maintained until removal is directed by COR.
- E. When protective materials are removed and immediately prior to acceptance, replace any damage tile, re-clean resilient materials, lightly re-apply polish and buff floors.

### 3.6 LOCATION

- A. Unless otherwise specified or shown, install tile flooring, on floor under areas where casework, laboratory and pharmacy furniture and other equipment occurs, except where mounted in wall recesses.
- B. Extend tile flooring for room into adjacent closets and alcoves.

- - - E N D - - -

**SECTION 09 67 23.50**  
**RESINOUS TERRAZZO FLOORING (RES-5)**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies resinous terrazzo flooring systems, including terrazzo representation of the VA Seal in the building entry.
- B. Resinous (Epoxy Terrazzo) Flooring Systems:
  - 1. Thin set: Polyacrylate Matrix Terrazzo.

**1.2 RELATED WORK**

- A. Concrete and Moisture Vapor Barrier: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- B. Substrate Preparation for Floor Finishes: Section 09 05 16.
- C. Base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Description of each product to be provided.
  - 2. Application and installation instructions.
  - 3. Maintenance Instructions: Submit manufacturer's written instructions for recommended maintenance practices.
- C. Qualification Data: For Installer.
- D. Samples:
  - 1. Samples for Initial Selection: Provide samples of manufacturer's full standard color and texture range for selection by Owner.
  - 2. Samples for verification: For each (color and texture) resinous flooring system required, 6 inches (152 mm) square, applied to a rigid backing by installer for this project.
  - 3. Sample showing construction from substrate to finish surface in thickness specified and color and texture of finished surfaces. Finished flooring must match the approved samples in color and texture.
  - 4. Accessories: (6 inches) 152 mm long sample of exposed strip item.
- F. Shop Drawings: Include plans, sections, component details, and attachment to other trades. Indicate layout of the following:
  - 1. Patterns, including VA logo.
  - 2. Edge configurations
  - 3. Divider strips.
  - 4. Control-joint strips.
  - 5. Accessory strips.
- G. Certifications and Approvals:
  - 1. Manufacturer's certification of material and substrata compliance with specification.
  - 2. Manufacturer's approval of installer.
  - 3. Contractor's certificate of compliance with Quality Assurance requirements.
- H. Warranty: As specified in this section.

**1.4 QUALITY ASSURANCE**

- A. Manufacture Certificate: Manufacture shall certify that a particular resinous flooring system has been in use for a minimum of five years.

- B. Installer Qualifications: Engage an experienced installer (applicator) who is experienced in applying resinous flooring systems similar in material, design, and extent to those indicated for this project for a minimum period of 5 years, whose work has resulted in applications with a record of successful in-service performance, and who is acceptable to resinous flooring manufacturer.
1. Engage an installer who is certified in writing by resinous flooring manufacturer as qualified to apply resinous flooring systems indicated.
  2. Contractor shall have completed at least 10 projects of similar size and complexity. Include list of at least 5 projects. List must include owner (purchaser); address of installation, contact information at installation project site; and date of installation.
  3. Installer's Personnel: Employ persons trained for application of specified product
- C. Source Limitations:
1. Obtain primary resinous flooring materials including primers, resins, hardening agents, grouting coats and finish or sealing coats from a single manufacturer.
  2. Provide secondary materials, including marble chips, strips, patching and fill material, joint sealant, and repair material of type and from source recommended by manufacturer of primary materials.
  3. Obtain marble chips color, grade, type, and variety of granular materials from one source with resources to provide materials of consistent quality in appearance and physical properties.
  4. Material furnished shall meet NTMA Specifications.
- D. NTMA Standards: Comply with NTMA's "Terrazzo Specification and Design Guide" and written recommendations for terrazzo type indicated unless more stringent requirements are specified.
- E. Mockups: Apply mockups to verify selections made under sample submittals and to demonstrate aesthetic effects and establish quality standards for materials and execution.
1. Apply full-thickness mockups on 48 inch (1200 mm) square floor area selected by VA COR.
  2. Approved mockups may become part of the completed work if undisturbed at time of Substantial Completion.
  3. Sign off from VA COR on texture must be complete before installation of flooring system.
- F. Pre-Installation Conference:
1. Convene a meeting not less than thirty days prior to starting work.
  2. Attendance:
    - a. Contractor
    - b. VA COR
    - c. Manufacturer and Installer's Representative
  3. Review the following:
    - a. Environmental requirements
      - 1) Air and surface temperature
      - 2) Relative humidity
      - 3) Ventilation
      - 4) Dust and contaminants
    - b. Protection of surfaces not scheduled to be coated
    - c. Inspect and discuss condition of substrate and other preparatory work performed
    - d. Review and verify availability of material; installer's personnel, equipment needed

- e. Design and patterns and edge conditions.
  - f. Performance of the coating with chemicals anticipated in the area receiving the resinous flooring system
  - g. Application and repair
  - h. Field quality control
  - i. Cleaning
  - j. Protection of coating systems
  - k. One-year inspection and maintenance
  - l. Coordination with other work
- G. Manufacturer's Field Services: Manufacturer's representative shall provide technical assistance and guidance for surface preparation and application of coating systems.
- H. Contractor Job Site Log: Contractor shall document daily; the work accomplished environmental conditions and any other condition event significant to the long-term performance of the terrazzo installation. The Contractor shall maintain these records for one year after Substantial Completion.

#### **1.5 MATERIAL PACKAGING DELIVERY AND STORAGE**

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Protect materials from damage and contamination in storage or delivery, including moisture, heat, cold, direct sunlight, etc.
- C. Maintain temperature of storage area between 60 and 80 degrees F (15 and 26 degrees C).
- D. Keep containers sealed until ready for use.
- E. Do not use materials beyond manufacturer's shelf life limits.

#### **1.6 PROJECT CONDITIONS**

- A. Environmental Limitations: Comply with resinous flooring manufacturer's written instructions for substrate temperature, ambient temperature, moisture, ventilation, and other conditions affecting resinous flooring applications.
  - 1. Maintain material and substrate temperature between 65 and 85 degrees F (18 and 30 degrees C) during resinous flooring application and for not less than 24 hours after application.
  - 2. Concrete substrate shall be properly cured per referenced section 03 30 00, CAST-IN-PLACE CONCRETE. Standard cure time a minimum of 30 days. A vapor barrier must be present for concrete subfloors on or below grade.
    - a. Resinous flooring applications where moisture testing resulting in readings exceeding limits as defined in this specification under part 3, section 3.4, paragraph B, shall employ a multiple component 15 mil thick system designed to suppress excess moisture in concrete.
    - b. Application at a minimum thickness of 15 mils, over properly prepared concrete substrate as defined in section 3.4.
    - c. Moisture suppression system must meet the design standards as follows:

Property	Test	Value
Tensile Strength	ASTM D638	4,400 psi
Volatile Organic Compound Limits (V.O.C.)	EPA & LEED	25 grams per liter
Permeance	ASTM E96 @ 16mils/ 0.4mm on concrete	0.1 perms
Tensile Modulus	ASTM D638	1.9X10 <sup>5</sup> psi
Percent Elongation	ASTM D638	12%
Cure Rate	Per manufactures Data	4 hours Tack free with 24hr recoat window
Bond Strength	ASTM D7234	100% bond to concrete failure

**1.7 WARRANTY**

- A. Work subject to the terms of the Article "Warranty of Construction" FAR clause 52.246-21.
- B. Warranty: Manufacture shall furnish a single, written warranty covering the full assembly (including substrata) for both material and workmanship for a extended period of (3) full years from date of installation, or provide a joint and several warranty signed on a single document by manufacturer and applicator jointly and severally warranting the materials and workmanship for a period of (3) full years from date of installation. A sample warranty letter must be included with bid package or bid may be disqualified.

**1.8 APPLICABLE PUBLICATIONS**

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. ASTM Standard C722-04 (2012), "Standard Specification for Chemical-Resistant Monolithic Floor Surfacing," ASTM International, West Conshohocken, PA, 2006, DOI: 10.1520/C0722-04R12, [www.astm.org](http://www.astm.org).  
 1. Specification covers the requirements for aggregate-filled, resin-based, monolithic surfacings for use over concrete.
- C. American Society for Testing and Materials (ASTM):  
 C307 (2012).....Tensile Strength of Chemical-Resistant Mortar, Grouts, and Monolithic Surfacing  
 C531 (2012).....Linear Shrinkage and Coefficient of Thermal Expansion of Chemical-Resistant Mortars, Grouts, Monolithic Surfacing, and Polymer Concretes  
 C579 (2012).....Compressive Strength of Chemical-Resistant Mortars, Grouts, Monolithic Surfacing, and Polymer Concretes  
 C580 (2012).....Flexural Strength and Modulus of Elasticity of Chemical-Resistant Mortars, Grouts, Monolithic Surfacing, and Polymer Concretes  
 D638 (2010).....Tensile Properties of Plastics

- D1308 (2007).....Effect of Household Chemicals on Clear and Pigmented Organic Finishes
- D2240 (2010).....Rubber Property–Durometer Hardness
- D2794 (2010).....Resistance of Organic Coatings to the Effects of Rapid Deformation Impact
  
- D4060(2010).....Abrasion Resistance of Organic Coatings by the Taber Abraser
- D4259 (2012).....Abrading Concrete to alter the surface profile of the concrete and to remove foreign materials and weak surface laitance
- D7234 (2012).....Pull-Off Adhesion Strength of Coatings on Concrete Using Portable Pull-Off Adhesion Testers
- E96/E96M (2012).....Water Vapor Transmission of Materials
- F1679.....Variable Incidence Tribometer for determining the slip resistance
- F1869 (2011).....Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride
- F2170 (2011).....Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes

**PART 2 - PRODUCTS**

**2.1 SYSTEM DESCRIPTION FOR RESINOUS (EPOXY TERRAZZO) FLOORING**

- A. System Descriptions:
  - 1. Monolithic, multi-layer, trowel applied multi-component epoxy or urethane composition terrazzo, UV stable and breathable where required.
- B. Systems shall meet or exceed all applicable NTMA and TTMAC standards.
- C. System Components: Verify specific requirements as systems vary by manufacturer. Verify compatibility with substrate. Use manufacturer's standard components, compatible with each other and as follows:
  - 1. Bond Coat (Primer): Verify inclusion of primer in manufacturer's system. Some systems are self-priming.
    - a. Resin: Epoxy.
    - b. Formulation Description: 100 percent solids.
    - c. Binder: Formulated to meet physical properties of MIL-D-3134F.
    - d. Application Method: Apply by spray, brush, or roller.
      - 1) Thickness of coats: Verify thickness as systems vary by manufacturer; approximate range from 5 to 6 mils (0.13 to 0.15 mm) to 150 to 250 square feet per gallon (52.76 to 87.93 square meters per liter).
- 2. Body Coat:
  - a. Resin: Epoxy or Urethane.
  - b. Formulation Description: 100 percent solids.
  - c. Application Method: Varies by manufacturer; hand or power troweled.
    - 1) Trowel application:
      - a) Thickness of coat: Verify thickness as systems vary by manufacturer; approximate range from 3/16 inch or 1/4 inch or 3/8 inch (4.76 to either 6.35 mm or 9.5 mm).
      - b) Number of coats: One.



- d. Aggregates: Verify amount per thickness as systems vary by manufacturer:
  - 1) Marble (#1 size maximum), glass, or granite chips or, colored resilient aggregates, acrylic, or other approved materials.
- 3. Grout Coat:
  - a. Resin: Epoxy.
  - b. Formulation Description: 100 percent solids.
  - c. Application Method: Varies by manufacturer. Apply by red rubber squeegee or spring-steel trowel.
    - 1) Apply to rough ground mortar coat to completely fill all voids.
    - 2) Thickness of coat: Verify thickness as systems vary by manufacturer; approximate range from a minimum of 8 to 10 mils (0.2 to 0.25 mm) to a maximum of 400 to 500 square feet per gallon (140.65 to 175.81 square meters per liter).
- 4. Seal Coat/Top Coat:
  - a. Resin: Single- or multi-component Urethane.
  - b. Formulation Description: 100% solids. It shall have a pH factor between 7 and 10 and shall be a penetrating type specially prepared for use on terrazzo. It shall not discolor or amber the terrazzo and shall produce a slip resistant surface. Flash point of sealer shall be a minimum of 80 degrees F (26 degrees C) when tested in accordance with [ASTM D 56](#).
  - c. Application Method: Varies by manufacturer. Apply using notched squeegee and backroll or using a lambs wool applicator.
    - 1) Apply to fine ground mortar coat to completely fill all voids.
    - 2) Thickness of coat: Verify thickness as systems vary by manufacturer; approximate range from a minimum of 4 to 5 mils (0.1 to 0.13 mm) to a maximum of 500 to 750 square feet per gallon (175.81 to 263.74 square meters per liter).
    - 3) Number of coats: One.
  - d. Aggregates: Verify inclusion of slip-retardant aggregates in seal coat/top coat.
  - e. Textured Top Coat: Slip Resistant in accordance with UL 410.
- D. System Characteristics:
  - 1. Color and Pattern: As selected
  - 2. Overall System Thickness: Verify thickness as systems vary by manufacturer; approximate range from a minimum of 3/16 inch (4.76 mm) to a maximum of either 1/4 inch or 3/8 inch (6.35 mm or 9.5 mm).
  - 3. Finish: Standard anti-slip resistant to meet or exceed 0.06 dry; 0.08 wet.
- E. Physical Properties:
  - 1. Conform to ASTM C722, Type A, Epoxy resin, and quartz aggregate.
  - 2. Resilient Urethane Terrazzo products physical properties
  - 3. Other physical properties of seamless troweled (quartz epoxy) resinous flooring system in addition to C722 when tested to be as follows:

Test	Property	Value
ASTM C-109	Compressive Strength	4000 PSI
ASTM C-307	Tensile Strength	800 PSI
ASTM D-2240	Hardness Shore D	85/65
ASTM C-413	Water Absorption	< 0.5%
ASTM C-531	Thermal Coefficient of Linear Expansion	4.7 x 10 <sup>-8</sup>
ASTM C-579	Compressive Strength	6000 PSI

Test	Property	Value
ASTM C-580	Flexural	2000 to 4500 psi
ASTM D-638	Tensile Strength	3000 psi
ASTM D-790	Flexural Modulus	500000 psi
ASTM D-2240 Shore D	Surface Hardness	80-90
ASTM D-4060, CS-17	Abrasive Resistance	0<0.1 gm max weight loss
ASTM F-1679	Co-efficient of Friction	Dry - 0.81 Wet - 0.56
Bond Strength	ASTM D7234	100% bond to concrete failure

- F. Chemical Resistance in accordance ASTM D1308 - 02(2007) "Standard Test Method for Effect of Household Chemicals on Clear and Pigmented Organic Finishes". ASTM International, West Conshohocken, PA, 2006, DOI: 10.1520/D1308-02R07, www.astm.org. No effect to the following exposures:
1. Acetic acid (5%)
  2. Ammonium hydroxide (10%)
  3. Citric Acid (50%)
  4. Fatty Acid
  5. Motor Oil, 20W
  6. Hydrochloric acid (20%)
  7. Sodium Chloride
  8. Sodium Hypochlorite (10%)
  9. Sodium Hydroxide (30%)
  10. Sulfuric acid (25%)
  11. Urine, Feces
  12. Hydrogen peroxide (10%)

**2.2 SUPPLEMENTAL MATERIALS**

- A. Waterproofing Membrane: Type recommended or produced by manufacturer of resinous (epoxy terrazzo) flooring for type of service and conditions as indicated.
- B. Crack Isolation Membrane: Type recommended or produced by manufacturer of resinous floor coating.
- C Strips:
  1. Dividing strips "L" shaped as manufactured for use with resinous (Epoxy Terrazzo) flooring system.
    - a. White alloy zinc, gauge to match existing.
  2. Control Joint double "L" shaped strips as manufactured for use with resinous flooring system. Position strips back to back.
- E. Patching and Fill Material: Resinous product of or approved by resinous manufacturer for application indicated.
- F. Joint Sealant: Type recommended or produced by manufacturer for type of service or joint conditioned indicated.

**PART 3 - EXECUTION**

**3.1 INSPECTION**

- A. Examine the areas and conditions where resinous (epoxy terrazzo) flooring system is to be installed with the VA COR.
- B. Moisture Vapor Emission Testing: Perform moisture vapor transmission testing in accordance with ASTM F1869 to determine the MVER of the substrate prior to commencement of the work.

1. MVT threshold for resinous (terrazzo) flooring shall not exceed 3 lbs/1000 square feet in a 24 hour period.
2. When MVT emission exceeds this limit, apply manufacturer's recommended vapor control primer or other corrective measures as recommended by manufacturer prior to application of flooring or membrane systems.
3. Perform additional substrata preparation as recommended by resinous flooring manufacturer's technical representative to obtain satisfactory results of moisture vapor transmission testing prior to commencement of the work.
4. Provide a written report showing test placement and results.

### **3.2 PROJECT CONDITIONS**

- A. Maintain temperature of rooms (air and surface) where work occurs, between 70 and 90 degrees F (21 and 32 degrees C) for at least 48 hours, before, during, and 24 hours after installation. Maintain temperature at least 70 degrees F (21 degrees C) thereafter.
- B. Maintain relative humidity less than 85 percent.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.
- D. Maintain proper ventilation of the area during application and curing time period.
  1. Comply with infection control measures of the VA Medical Center.

### **3.3 INSTALLATION REQUIREMENTS**

- A. The manufacturer's instructions for application and installation shall be reviewed with the VA COR for the resinous (terrazzo) flooring system.
- B. Substrata shall be approved by manufacture technical representative.

### **3.4 PREPARATION**

- A. General: Prepare and clean substrates according to resinous flooring manufacturer's written instructions for substrate indicated. Provide clean, dry, and neutral Ph substrate for resinous flooring application.
- B. Concrete Substrates: Provide sound concrete surfaces free of laitance, glaze, efflorescence, curing compounds, form-release agents, dust, dirt, grease, oil, and other contaminants incompatible with resinous flooring.
  1. Mechanically prepare substrates as follows:
    - a. Shot-blast surfaces with an apparatus that abrades the concrete surface, contains the dispensed shot within the apparatus, and recirculates the shot by vacuum pickup.
    - b. Comply with ASTM D4259 requirements, unless manufacturer's written instructions are more stringent.
  2. Repair damaged and deteriorated concrete according to resinous flooring manufacturer's written recommendations.
  3. Verify that concrete substrates are dry.
    - a. Perform in situ probe test, ASTM F 2170. Proceed with application only after substrates do not exceed a maximum potential equilibrium relative humidity of 85 percent.
    - b. Perform maximum moisture-vapor-emission test, ASTM F 1869. Proceed with application only after substrates has obtained satisfactory results. If needed perform additional moisture tests until substrates pass testing.
  4. Verify that concrete substrates have neutral Ph and that resinous flooring will adhere to them. Perform tests recommended by

- manufacturer. Proceed with application only after substrates pass testing.
- C. Resinous Materials: Mix components and prepare materials according to resinous flooring manufacturer's written instructions.
  - D. Use patching and fill material to fill holes and depressions in substrates according to manufacturer's written instructions.
  - E. Treat control joints and other nonmoving substrate cracks to prevent cracks from reflecting through resinous flooring according to manufacturer's written recommendations. Allowances should be included for flooring manufacturer recommended joint fill material, and concrete crack treatment.

### 3.5 APPLICATION

- A. General: Apply each component of resinous (epoxy terrazzo) flooring system according to manufacturer's directions to produce a uniform monolithic flooring surface of thickness indicated.
  - 1. Verify that the substrate (dryness, pH level, etc.) is acceptable by the manufacturer's technical representative.
  - 2. Use manufacturer recommended cleaning products.
- B. Prepare substrata for resinous (terrazzo) flooring system:
  - 1. Apply waterproof membrane as recommended by resinous flooring manufacturer at all vertical junctures and the entire flooring substrata. Embed fabric reinforcement into waterproof membrane liquid. Overlap all seams a minimum of 2 inches (51 mm).
  - 2. Apply crack isolation membrane as recommended by resinous flooring manufacturer.
  - 3. Apply substrata smoothing/patching underlayment as recommended by resinous flooring manufacturer.
- C. Flooring System: Per manufacturer's written instructions. Based on the porosity of the substrata additional coats may be required:
  - 1. Primer (Bond) Coat.
  - 2. Strips: Set divider and control strips as indicated on plans. Strips shall be set in a full bed of epoxy adhesive and allowed to cure before proceeding with the work.
  - 3. Body Coat: Apply body coat (including aggregate) evenly over the primer (bond) coat to the desired thickness.
  - 4. Power grind to expose aggregate.
  - 5. Grout Coat.
  - 6. Progressively fine grind and polish floor. Cleanse terrazzo with potable water and rinse. Remove excess rinse water and apply grout using identical Portland cement, color pigments as used in topping, ensuring to fill all voids. Cure Grout as recommended by manufacturer.
    - a. Grout may be left on terrazzo until all heavy and messy work in project is completed.
    - b. Fine grind until all grout is removed from surface.
    - c. Upon completion, terrazzo flooring shall display a minimum of 70% of marble chips aggregate.
  - 7. Cleaning: Wash all surfaces with a neutral cleaner. Rinse with clean water and allow surface to dry
  - 8. Seal Coat (Top Coat). Apply sealing coats of type recommended by manufacturer to produce finish matching approved samples.
- D. Artwork: Provide a representation of the VA Seal in location shown and in matching colors. VA will provide original artwork for installers information and use.

**3.6 TOLERANCE**

- A. From line of plane: Maximum 1/8 inch (3.18 mm) in total distance of flooring.

**3.7 CURING, PROTECTION AND CLEANING**

- A. Cure resinous terrazzo flooring in compliance with manufacturer's directions (during the application process), taking care to prevent contamination during stages of application and prior to completion of curing process.
- B. Close area of application for a minimum of 24 hours.
- C. Protect resinous (epoxy terrazzo) flooring materials from damage and wear during construction operation.
  - 1. Cover flooring with wax paper or Kraft paper.
  - 2. Cover paper with 1/4 inch (6.35 mm) thick hardboard, plywood, or particle board where area is in foot or vehicle traffic pattern, rolling or fixed scaffolding and overhead work occurs.
- D. Remove temporary covering and clean resinous (Epoxy Terrazzo) flooring just prior to final inspection. Use cleaning materials and procedures recommended by resinous (Epoxy Terrazzo) flooring manufacturer.

- - - E N D - - -

**SECTION 09 68 00**  
**CARPETING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Section specifies carpet, edge strips, and other items required for complete installation.

**1.2 RELATED WORK**

- A. Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES
- B. Resilient wall base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

**1.3 QUALITY ASSURANCE**

- A. Carpet installed by mechanics certified by the Floor Covering Installation Board.
- B. Certify and label the carpet that it has been tested and meets criteria of CRI IAQ Carpet Testing Program for indoor air quality.

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Product Data:
  - 1. Manufacturer's catalog data and printed documentation stating physical characteristics, durability, resistance to fading and flame resistance characteristics for each type of carpet material and installation accessory.
  - 2. Manufacturer's printed installation instructions for the carpet, including preparation of installation substrate, seaming techniques and recommended adhesives and tapes.
  - 3. Manufacturer's certificate verifying carpet containing recycled materials include percentage of recycled materials as specified.
- C. Samples:
  - 1. Samples: Provide samples of manufacturer's full standard color and texture range for selection by Owner.
  - 2. Carpet: "Production Quality" samples 300 x 300 mm (12 x 12 inches) of carpets, showing quality, pattern and color; for selection by Owner.
  - 3. Floor Edge Strip (Molding): 150 mm (6 inches) long of each color and type specified.
  - 4. Base Edge Strip (Molding): 150 mm (6 inches) long of each color specified.
- D. Shop Drawings: Installers layout plan showing seams and cuts for sheet carpet and carpet module.
- E. Maintenance Data: Carpet manufacturer's maintenance instructions describing recommended type of cleaning equipment and material, spotting and cleaning methods and cleaning cycles.

**1.5 DELIVERY AND STORAGE**

- A. Deliver carpet in manufacturer's original wrappings and packages clearly labeled with manufacturer's name, brand, name, size, dye lot number and related information.
- B. Deliver adhesives in containers clearly labeled with manufacturer's name, brand name, number, installation instructions, safety instructions and flash points.
- C. Store in a clean, dry, well ventilated area, protected from damage and soiling. Maintain storage space at a temperature above 16 degrees C (60 degrees F) for 2 days prior to installation.

**1.6 ENVIRONMENTAL REQUIREMENTS**

- A. Areas in which carpeting is to be installed shall be maintained at a temperature above 16 degrees C (60 degrees F) for 2 days before installation, during installation and for 2 days after installation. A minimum temperature of 13 degrees C (55 degrees F) shall be maintained thereafter for the duration of the contract. Traffic or movement of furniture or equipment in carpeted area shall not be permitted for 24 hours after installation. Other work which would damage the carpet shall be completed prior to installation of carpet.

**1.7 WARRANTY**

- A. Carpet and installation subject to terms of "Warranty of Construction" FAR clause 52.246-21, except that warranty period is extended to two years.

**1.8 APPLICABLE PUBLICATIONS**

- A. Publication listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):  
ANSI/NSF 140-10.....Sustainable Carpet Assessment Standard
- C. American Association of Textile Chemists and Colorists (AATCC):  
AATCC 16-04.....Colorfastness to Light  
AATCC 129-10.....Colorfastness to Ozone in the Atmosphere under High Humidities  
AATCC 134-11.....Electric Static Propensity of Carpets  
AATCC 165-08.....Colorfastness to Crocking: Textile Floor Conerings-AATCC Crockmeter Method
- D. American Society for Testing and Materials (ASTM):  
ASTM D1335-05.....Tuft Bind of Pile Yarn Floor Coverings  
ASTM D3278-96 (R2004)...Flash Point of Liquids by Small Scale Closed-Cup Apparatus  
ASTM D5116-10.....Determinations of Organic Emissions from Indoor Materials/Products  
ASTM D5252-05.....Operation of the Hexapod Tumble Drum Tester  
ASTM D5417-05.....Operation of the Vettermann Drum Tester  
ASTM E648-10.....Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source
- E. The Carpet and Rug Institute (CRI):  
CRI 104-11.....Installation of Commercial Carpet

**PART 2 - PRODUCTS**

**2.1 CARPET**

- A. Basis of Design:
  - a. Carpet Tile (CPT): Shaw Carpet Prairie 59525 (allow for up to 5 colors) and Shaw Carpet Veil 59594, or approved equal.
  - b. Specialty Carpet Tile (SCPT): Collins & Aikman "Powerbond"
- B. Physical Characteristics:
  - 1. Carpet free of visual blemishes, streaks, poorly dyed areas, fuzzing of pile yarn, spots or stains and other physical and manufacturing defects.
  - 2. Manufacturers standard construction commercial carpet: Modular tile; 660 mm (24 inches) square tile.
  - 3. Provide static control to permanently control static build upto less than 2.0 kV when tested at 20 percent relative humidity and 21 degrees C (70 degrees F) in accordance with AATCC 134.

4. Backing materials: Manufacturer's unitary backing designed for glue-down installation using recovered materials.
  8. Appearance Retention Rating (ARR): Carpet shall be tested and have the minimum 3.5-4.0 Severe ARR when tested in accordance with either the ASTM D 5252 (Hexapod) or ASTM D 5417 (Vettermann) test methods using the number of cycles for short and long term tests as specified.
  9. Tuft Bind: Minimum force of 40 N (10 lb) required to pull a tuft or loop free from carpet backing. Test per ASTM D1335.
  10. Colorfastness to Crocking: Dry and wet crocking and water bleed, comply with AATCC 165 Color Transference Chart for colors, minimum class 4 rating.
  11. Colorfastness to Ozone: Comply with AATCC 129, minimum rating of 4 on the AATCC color transfer chart.
  12. Delamination Strength: Minimum of 440 N/m (2.5 lb/inch) between secondary backing.
  13. Flammability and Critical Radiant Flux Requirements:
    - a. Test Carpet in accordance with ASTM E 648.
    - b. Class I: Not less than 0.45 watts per square centimeter.
    - c. Class II: Not less than 0.22 watts per square centimeter.
    - d. Carpet in corridors, exits and Medical Facilities: Class I.
  14. Density: Average Pile Yarn Density (APYD):
    - a. Corridors, lobbies, entrances, common areas or multipurpose rooms, open offices, waiting areas and dining areas: Minimum APYD 6000.
    - b. Other areas: Minimum APYD 4000.
  15. VOC Limits: Use carpet and carpet adhesive that comply with the following limits for VOC content when tested according to ASTM D 5116:
    - a. Carpet, Total VOCs: 0.5 mg/sq.m x hr.
    - b. Carpet, 4-PC (4-Phenylcyclohexene): 0.05 mg/sq.m x hr.
    - c. Carpet, Formaldehyde: 0.05 mg/sq.m x hr.
    - d. Carpet, Styrene: 0.4 mg/sq.m x hr.
    - e. Adhesive, Total VOCs: 10.00 mg/sq.m x hr.
    - f. Adhesive, Formaldehyde: 0.05 mg/sq.m x hr.
    - g. Adhesive, 2-Ethyl-1-Hexanol: 3.00 mg/sq.m x hr.
- B. Shall meet platinum level of ANSI/NSF 140.
- C. Color, Texture, and Pattern: As selected by Owner.

## **2.2 CONCRETE PRIMER**

- A. Waterproof, resistant to cleaning solutions, steam and water, nonflammable, complies with air-quality standards as specified. Adhesives flashpoint minimum 60 degrees C (140 degrees F), complies with ASTM D 3278.

## **2.4 EDGE STRIPS (MOLDING)**

- A. Vinyl Edge Strip:
  1. Beveled floor flange minimum 50 mm (2 inches) wide.
  2. Beveled surface to finish flush with carpet for tight joint and other side to floor finish.
  3. Color as selected.

## **PART 3 - EXECUTION**

### **3.1 SURFACE PREPARATION**

- A. Examine surfaces on which carpeting is to be installed.
- B. Clean floor of oil, waxy films, paint, dust and deleterious substances that prevent adhesion, leave floor dry and cured, free of residue from curing or cleaning agents and existing carpet materials.



- C. Correct conditions which will impair proper installation, including trowel marks, pits, dents, protrusions, cracks or joints.
- D. Fill cracks, joints depressions, and other irregularities in concrete with leveling compound.
  - 1. Do not use adhesive for filling or leveling purposes.
  - 2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
  - 3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joint lines.
- E. Test new concrete subfloor prior to adhesive application for moisture and surface alkalinity per CRI 104 Section 6.3.1 or per ASTM E1907.

### **3.2 CARPET INSTALLTION**

- A. Do not install carpet until work of other trades including painting is complete and dry.
- B. Follow carpet manufacturer's recommendations for matching pattern and texture directions.
- C. Cut openings in carpet where required for installing equipment, pipes, outlets, and penetrations.
  - 1. Bind or seal cut edge of sheet carpet and replace flanges or plates.
  - 2. Use additional adhesive to secure carpets around pipes and other vertical projections.
- D. Carpet Modules:
  - 1. Install per CRI 104, Section 13, Adhesive Application.
  - 2. Lay carpet modules with pile in same direction.
  - 3. Install carpet modules so that cleaning methods and solutions do not cause dislocation of modules.
  - 4. Lay carpet modules uniformly to provide tight flush joints free from movement when subject to traffic.

### **3.3 EDGE STRIPS INSTALLATION**

- A. Install edge strips over exposed carpet edges adjacent to uncarpeted finish flooring.
- B. Anchor metal strips to floor with suitable fasteners. Apply adhesive to edge strips, insert carpet into lip and press it down over carpet.
- C. Anchor vinyl edge strip to floor with adhesive apply adhesive to edge strip and insert carpet into lip and press lip down over carpet.

### **3.4 PROTECTION AND CLEANING**

- A. Remove waste, fasteners and other cuttings from carpet floors.
- B. Vacuum carpet and provide suitable protection. Do not use polyethylene film.
- C. Do not permit traffic on carpeted surfaces for at least 48 hours after installation. Protect the carpet in accordance with CRI 104.
- D. Do not move furniture or equipment on unprotected carpeted surfaces.
- E. Just before final acceptance of work, remove protection and vacuum carpet clean.

- - - E N D - - -

**SECTION 09 72 16**  
**VINYL-COATED FABRIC WALL COVERINGS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

Section specifies vinyl coated fabric wallcovering and installation.

**1.2 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples: Provide samples of manufacturer's full standard color and texture range for selection by Owner. Allow for 4 colors throughout project, except as indicated otherwise.
- C. Manufacturer's Certificates:
  - 1. Compliance with CFFA W-101D.
  - 2. Wallcovering manufacturer's approval of adhesive.
- D. Manufacturer's Literature and Data:
  - 1. Primer and adhesive.
  - 2. Installation instructions.
  - 3. Maintenance instructions, including recommended materials and methods for maintaining wallcovering with precautions in use of cleaning material.

**1.3 QUALITY ASSURANCE**

- A. Finish one complete space with each type (color and pattern) of wallcovering showing specified colors and patterns.
- B. Use approved sample spaces as a standard for work throughout the project.

**1.4 DELIVERY, STORAGE AND HANDLING**

- A. Deliver in original unopened containers bearing the manufacturer's name, brand name, and product designation.
- B. Store in accordance with manufacturer's instructions.
- C. Handle to prevent damage to material.

**1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. Chemical Fabrics and Film Association, Inc., (CFFA):  
2575-96(R2011).....Vinyl Coated Fabric Wallcovering
- C. American Society for Testing and Materials (ASTM)  
G21-09.....Determining Resistance of Synthetic Polymeric  
Materials to Fungi

**PART 2 - PRODUCTS**

**2.1 VINYL COATED FABRIC WALLCOVERING**

- A. Comply with CFFA-2575.
- B. Fungi Resistance: ASTM G21, rating of 0.
- C. Factory-applied clear delustered polyvinyl-fluoride (PVF) coating:
  - 1. Minimum 0.0125 mm (1/2 mil) thickness.
  - 2. Do not include PVF coating weight in minimum total weight.
  - 3. Fire hazard classification with PVF coating: Class A unless specified otherwise.

- E. Type II, 21.0 oz. (Medium Duty).
- F. Manufacturer: National Wallcovering, Tower T2-HA-17; or approved equal.

## **2.2 ADHESIVE**

- A. Use only water-based adhesive having volatile organic compounds not more than 50 g/l.
- B. Vermin and mildew resistant.

## **2.3 EDGE GUARDS OR TRIM**

- A. "J" shape with groove to receive the wallcovering.
- B. Concealed edge feathered, not less than 19 mm (3/4 inch) wide.
- C. Designed for adhesive attachment.
- D. Use Vinyl.

## **PART 3 - EXECUTION**

### **3.1 JOB CONDITIONS**

- A. Temperatures:
  - 1. Do not perform work until surfaces and materials have been maintained at minimum of 60 °F. for three days before work begins.
  - 2. Maintain minimum temperatures of 60 °F. until adhesives are dried or cured.
- B. Lighting:
  - 1. Do not proceed unless a minimum lighting level of 15 candlepower per square foot occurs.
  - 2. Measure light level at mid-height of wall.
- C. Ventilation:
  - 1. Provide uniform continuous ventilation in space.
  - 2. Ventilate for a time for not less than complete drying or curing of adhesive.
- D. Protect other surfaces from damage which may be caused by this work.
- E. Remove waste from building daily.

### **3.2 SURFACE CONDITION**

- A. Inspect surfaces to receive wallcoverings to assure that:
  - 1. Patches and repairs are completed.
  - 2. Surface are clean, smooth and prime painted.
- B. Do not proceed until discovered defects have been corrected by other trades and surfaces are ready to receive wallcovering.
- C. Carefully remove electrical outlet and switch plates, mechanical diffusers, escutcheons, registers, surface hardware, fittings and fastenings, prior to starting work.
- D. Carefully store items for reinstallation.
- E. Install Edge Guard or Trim:
  - 1. Locate where shown or specified.
  - 2. Run edge guards from top of base to ceiling or wainscot cap in continuous length.
  - 3. Run wainscot cap trim level unless shown otherwise.
  - 4. Install as specified by manufacturer of edge guard or trim, in adhesive.
  - 5. Smooth adhesive edge. Do not leave adhesive exposed to view.
  - 6. Leave ready to receive wallcovering.

### **3.3 APPLICATION OF ADHESIVE**

- A. Mix and apply adhesives in accordance with manufacturer's directions.
- B. Prevent adhesive from getting on face of wallcovering.
- C. Apply adhesive to wallcovering back.

### 3.4 WALLCOVERING INSTALLATION

- A. Use wallcovering of same batch or run in an area. Use fabric rolls in consecutive numerical sequence of manufacture.
- B. Install material completely adhered, smooth, clean, without wrinkles, air pockets, gaps or overlaps.
- C. Extend wallcovering continuous behind non-built-in casework and other items which are close to but not bolted to or touching the walls.
- D. Install wallcovering before installation of resilient base. Extend wallcovering not more than 6 mm (1/4 inch) below top of resilient base.
- E. Install panels consecutively in order in which they are cut from the roll including filling spaces above or below windows, doors, or similar penetrations.
- F. Do not install horizontal seams.
- G. Except on match patterns, hang fabric by reversing alternate strips, except as recommended by the manufacturer.
- H. Cutting:
  - 1. Cut on a work table with a straight edge.
  - 2. Joints or seams that are not cut clean are unacceptable.
  - 3. Trim additional selvage to achieve a color and pattern match at seams. Overlapped seams are not allowed.
  - 4. Do not double cut seams on wall unless specified.
  - 5. If double cutting on the wall is necessary, place a three inch strip of Type I wallcovering under pasted edge.
    - a. Do not cut into wall surface.
    - b. After cutting, remove strip and excess adhesive from seam before proceeding to next seam.
    - c. Smooth down seam in adhesive for tight bond and joint.
- I. Trim strip-matched patterns, which are not factory pre-trimmed.
- J. Inside Corners:
  - 1. Wrap wallcovering around corner.
  - 2. Do not seam within 50 mm (2 inches) of inside corners.
  - 3. Double cut seam.
- K. Outside Corners:
  - 1. Wrap wallcovering around corner.
  - 2. Do not seam within 150 mm (6 inches) of outside corners.
  - 3. Double cut seam.

### 3.5 PATCHING

- A. Replace surface damaged wallcovering in a space as specified for new work:
  - 1. Replace full height of surface.
  - 2. Replace from break in plane to break in plane when same batch or run is not used. Double cut seams.
  - 3. Adjoining differential colors from separate batches or runs are not acceptable.
- B. Correct loose or raised seams with adhesives to lay flat with tight bonded joint as specified for new work.

### 3.6 CLEANING AND INSTALLING TEMPORARY REMOVED ITEMS

- A. Remove adhesive from wallcovering as work proceeds.
- B. Remove adhesives where spilled, splashed or splattered on wallcoverings or adjacent surfaces in a manner not to damage surface from which it is removed.
- C. Reinstall previously removed electrical outlet and switch plates, mechanical diffusers, escutcheons, registers, surface hardware, fittings and fastenings.

- - - E N D - - -

**SECTION 09 91 00**  
**PAINTING**

**PART 1-GENERAL**

**1.1 DESCRIPTION**

- A. Section specifies field painting.
- B. Section specifies prime coats, which may be applied in shop under other sections.
- C. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.

**1.2 RELATED WORK**

- A. Shop prime painting of steel and ferrous metals: Divisions 5, 8, 10, 11, 12, 13, 14, 15 and 16 sections.
- B. Contractor option: Prefinished flush doors with transparent finishes: Section, 08 14 00 WOOD DOORS.
- C. Asphalt and concrete pavement marking: Section 32 17 23 PAVEMENT MARKINGS

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, Shop Drawings, Product Data, and Samples
- B. Manufacturer's Literature and Data:  
Before work is started, or sample panels are prepared, submit manufacturer's literature, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.
- C. Selection Samples: Provide samples of manufacturer's full standard color and texture range for selection by Owner.
- D. Sample Panels:
  - 1. After painters' materials have been approved and before work is started submit sample panels showing each type of finish and color specified.
  - 2. Panels to show color: Composition board, 100 by 250 by 3 mm (4 inch by 10 inch by 1/8 inch).
  - 3. Attach labels to panel stating the following:
    - a. Federal Specification Number or manufacturers name and product number of paints used.
    - b. Product type and color.
    - c. Name of project.
  - 4. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.
- E. Sample of identity markers if used.
- F. Manufacturers' Certificates indicating compliance with specified requirements:
  - 1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.
  - 2. High temperature aluminum paint.
  - 3. Epoxy coating.
  - 4. Intumescent clear coating or fire retardant paint.
  - 5. Plastic floor coating.

**1.4 DELIVERY AND STORAGE**

- A. Deliver materials to site in manufacturer's sealed container marked to show following:
  - 1. Name of manufacturer.
  - 2. Product type.
  - 3. Batch number.
  - 4. Instructions for use.
  - 5. Safety precautions.
- B. In addition to manufacturer's label, provide a label legibly printed as following:
  - 1. Federal Specification Number, where applicable, and name of material.
  - 2. Surface upon which material is to be applied.
  - 3. If paint or other coating, state coat types; prime, body or finish.
- C. Maintain space for storage, and handling of painting materials and equipment in a neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.
- D. Store materials at site at least 24 hours before using, at a temperature between 18 and 30 degrees C (65 and 85 degrees F).

**1.5 MOCK-UP PANEL**

- A. Before starting application of water paint mixtures, apply paint as specified to an area, not to exceed 9 m<sup>2</sup> (100 ft<sup>2</sup>), selected by COR.
- B. Finish and texture approved by COR will be used as a standard of quality for remainder of work.

**1.6 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. American Conference Of Governmental Industrial Hygienists (ACGIH):
  - ACGIH TLV-BKLT-1992.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)
  - ACGIH TLV-DOC.....Documentation of Threshold Limit Values and Biological Exposure Indices, (Sixth Edition)
- C. American National Standards Institute (ANSI):
  - A13.1-96.....Scheme for the Identification of Piping Systems
- D. American Society for Testing and Materials (ASTM):
  - D260-86.....Boiled Linseed Oil
- E. Commercial Item Description (CID):
  - A-A-1555.....Water Paint, Powder (Cementitious, White and Colors) (WPC) (cancelled)
- F. Federal Specifications (Fed Spec):
  - TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For Waterproofing Concrete and Masonry Walls) (CEP)
- G. Master Painters Institute (MPI):
  - No. 1-04.....Aluminum Paint (AP)
  - No. 4-04.....Interior/ Exterior Latex Block Filler
  - No. 18-04.....Organic Zinc Rich Primer
  - No. 22-04.....Aluminum Paint, High Heat (up to 590° - 1100F) (HR)
  - No. 31-04.....Polyurethane, Moisture Cured, Clear Gloss (PV)
  - No. 36-04.....Knot Sealer
  - No. 45-04.....Interior Primer Sealer
  - No. 46-04.....Interior Enamel Undercoat
  - No. 47-04.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5 (AK)
  - No. 50-04.....Interior Latex Primer Sealer
  - No. 51-04.....Interior Alkyd, Eggshell, MPI Gloss Level 3

- No. 52-04.....Interior Latex, MPI Gloss Level 3 (LE)
  - No. 53-04.....Interior Latex, Flat, MPI Gloss Level 1 (LE)
  - No. 71-04.....Polyurethane, Moisture Cured, Clear, Flat (PV)
  - No. 79-04.....Marine Alkyd Metal Primer
  - No. 94-04.....Exterior Alkyd, Semi-Gloss (EO)
  - No. 135-04.....Non-Cementitious Galvanized Primer
  - No. 140-02.....Interior High Performance Latex, MPI Gloss Level 4
- H. Steel Structures Painting Council (SSPC):
- SSPC SP 1-00.....Solvent Cleaning
  - SSPC SP 2-00.....Hand Tool Cleaning
  - SSPC SP 3-00.....Power Tool Cleaning

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

- A. Plastic Tape:
  - 1. Pigmented vinyl plastic film in colors as selected.
  - 2. Pressure sensitive adhesive back.
  - 3. Widths as shown.
- B. Identity markers options:
  - 1. Pressure sensitive vinyl markers.
  - 2. Snap-on coil plastic markers.
- C. Aluminum Paint (AP): MPI 1.
- D. Interior/Exterior Latex Block Filler: MPI 4.
- E. Organic Zinc rich Coating (HR): MPI 22.
- F. High Heat Resistant Coating (HR): MPI 22.
- G. Knot Sealer: MPI 36.
- H. Interior Primer Sealer: MPI 45.
- I. Interior Enamel Undercoat: MPI 47.
- J. Interior Alkyd, Semi-Gloss (AK): MPI 47.
- K. Interior Latex Primer Sealer: MPI 50.
- L. Interior Alkyd, Eggshell: MPI 51
- M. Interior Latex, MPI Gloss Level 3 (LE): MPI 52.
- N. Interior Latex, Flat, MPI Gloss Level 1 (LE): MPI 53.
- O. Marine Alkyd Metal primer: MPI 79.
- P. Interior Wood Stain, Semi-Transparent (WS): MPI 90.
- Q. Exterior Alkyd, Semi-Gloss (EO): MPI 94.
- R. Waterborne Galvanized Primer: MPI 134.
- S. Non-Cementitious Galvanized Primer: MPI 135.
- T. Interior High Performance Latex, MPI Gloss Level 4: MPI 140.

**2.2 PAINT PROPERTIES**

- A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.
- B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

**2.3 REGULATORY REQUIREMENTS**

- A. Paint materials shall conform to the restrictions of the local Environmental and Toxic Control jurisdiction.
  - 1. Volatile Organic Compounds (VOC): VOC content of paint materials shall not exceed local, state or district requirements.
  - 2. Lead-Base Paint:
    - a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.

- b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
- c. For lead-paint removal, see Section 02090, LEAD PAINT REMOVAL.
- 3. Asbestos: Materials shall not contain asbestos.
- 4. Chromate, Cadmium, Mercury, and Silica: Materials shall not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
- 5. Human Carcinogens: Materials shall not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
- 6. Comply with the Regional Ozone Transport Commission (OTC) regulations regarding Volatile Organic Content (VOC).

### **PART 3 - EXECUTION**

#### **3.1 JOB CONDITIONS**

- A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.
  - 1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
  - 2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each days work.
- B. Atmospheric and Surface Conditions:
  - 1. Do not apply coating when air or substrate conditions are:
    - a. Less than 3 degrees C (5 degrees F) above dew point.
    - b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the Contracting Officer and the product manufacturer. Under no circumstances shall application conditions exceed manufacturer recommendations.
  - 2. Maintain interior temperatures until paint dries hard.
  - 3. Do no exterior painting when it is windy and dusty.
  - 4. Do not paint in direct sunlight or on surfaces that the sun will soon warm.
    - 5. Apply only on clean, dry and frost free surfaces.
  - 5. Varnishing:
    - a. Apply in clean areas and in still air.
    - b. Before varnishing vacuum and dust area.
    - c. Immediately before varnishing wipe down surfaces with a tack rag.

#### **3.2 SURFACE PREPARATION**

- A. Method of surface preparation is optional, provided results of finish painting produce solid even color and texture specified with no overlays.
- B. General:
  - 1. Remove prefinished items not to be painted such as lighting fixtures, escutcheon plates, hardware, trim, and similar items for reinstallation after paint is dried.
  - 2. Remove items for reinstallation and complete painting of such items and adjacent areas when item or adjacent surface is not accessible or finish is different.
  - 3. See other sections of specifications for specified surface conditions and prime coat.
  - 4. Clean surfaces for painting with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry.



C. Ferrous Metals:

1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning). Exception: where high temperature aluminum paint is used, prepare surface in accordance with paint manufacturer's instructions.
3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
  - a. This includes flat head countersunk screws used for permanent anchors.
  - b. Do not fill screws of item intended for removal such as glazing beads.
4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.

D. Zinc-Coated (Galvanized) Metal, Aluminum, Copper and Copper Alloys  
Surfaces Specified Painted:

1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Spot coat abraded and damaged areas of zinc-coating which expose base metal on hot-dip zinc-coated items with MPI 18 (Organic Zinc Rich Coating). Prime or spot prime with MPI 134 (Waterborne Galvanized Primer) or MPI 135 (Non-Cementitious Galvanized Primer) depending on finish coat compatibility.

E. Gypsum Board:

1. Remove efflorescence, loose and chalking plaster or finishing materials.
2. Remove dust, dirt, and other deterrents to paint adhesion.
3. Fill holes, cracks, and other depressions with CID-A-A-1272A [Plaster, Gypsum (Spackling Compound) finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

**3.3 PAINT PREPARATION**

- A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
- B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
- C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
- D. Mix two component and two part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.
- E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

**3.4 APPLICATION**

- A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.

- B. Unless otherwise specified, apply paint in three coats; prime, body, and finish. When two coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.
- C. Apply each coat evenly and cover substrate completely.
- D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by COR.
- E. Finish surfaces to show solid even color, free from runs, lumps, brushmarks, laps, holidays, or other defects.
- F. Apply by brush, roller or spray, except as otherwise specified.
- G. Do not paint in closed position operable items such as access doors and panels and similar items.

### 3.5 PRIME PAINTING

- A. After surface preparation prime surfaces before application of body and finish coats, except as otherwise specified.
- B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.
- C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.
- D. Metals except boilers, incinerator stacks, and engine exhaust pipes:
  - 1. Steel and iron: MPI 79 (Marine Alkyd Metal Primer).
  - 2. Zinc-coated steel and iron: MPI 134 (Waterborne Galvanized Primer) MPI 135 (Non-Cementitious Galvanized Primer).
  - 3. Aluminum scheduled to be painted: MPI 95 (Fast Drying Metal Primer).
  - 4. Asphalt coated metal: MPI 1 (Aluminum Paint (AP)).
  - 5. Metal over 94 degrees C. (200 degrees F), Boilers, Incinerator Stacks, and Engine Exhaust Pipes: MPI 22 (High Heat Resistant Coating (HR)).
- E. Gypsum Board:
  - 1. Surfaces scheduled to have MPI 53 (Interior Latex, Flat) or MPI 52 (Interior Latex, MPI Gloss Level 3 (LE)) finish: Use.
  - 2. Primer: MPI 50 (Interior Latex Primer Sealer) except use MPI 45 (Interior Primer Sealer) in shower and bathrooms.
- F. Concrete Masonry Units except glazed or integrally colored and decorative units:
  - 1. MPI 4 (Block Filler) on interior surfaces.
  - 2. Prime exterior surface as specified for exterior finishes.
  - 3. MPI 140 (Interior High Performance Latex, MPI Gloss level 4 (LL)) as scheduled.

### 3.6 EXTERIOR FINISHES

- A. Steel and Ferrous Metal:
  - 1. Two coats of MPI 94 (Exterior Alkyd, Semi-Gloss (EO)) on exposed surfaces, except on surfaces over 94 degrees C (200 degrees F).
  - 2. One coat of MPI 22 (High Heat Resistant Coating (HR)) on surfaces over 94 degrees C (200 degrees F).
- B. Concrete Masonry Units Concrete:
  - 1. Use two coats of MPI 140 High Performance Latex, MPI Gloss Level 4, unless specified otherwise.

### 3.7 INTERIOR FINISHES

- A. Metal Work:
  - 1. Apply to exposed surfaces.
  - 2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
  - 3. Ferrous Metal, Galvanized Metal, and Other Metals Scheduled:

- a. Apply two coats of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) unless specified otherwise.
- b. Ferrous Metal over 94 degrees K (200 degrees F): Boilers, Incinerator Stacks, and Engine Exhaust Pipes: One coat MPI 22 (High Heat Resistant Coating (HR)).
- B. Gypsum Board:
  - 1. Two coats of MPI 53 Interior Latex, Flat on ceiling.
  - 2. Two coats of MPI 52 (Interior Latex, MPI Gloss Level 3 (LE) on walls).
  - 3. Walls identified on finish schedule to receive PTS-1 paint finish; two coats of "Scuff Guard by Wolf Gordon" or approved equal.
- C. Masonry and Concrete Walls:
  - 1. Over MPI 4 (Interior/Exterior Latex Block Filler) on CMU surfaces.
  - 2. Two coats of MPI 140 (Interior High Performance Latex MPI Gloss level 4).

**3.8 PAINT COLOR**

- A. Color and gloss of finish coats as selected by Owner.
- B. For additional requirements regarding color see Articles, REFINISHING EXISTING PAINTED SURFACE and MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE.
- C. Coat Colors:
  - 1. Color of priming coat: Lighter than body coat.
  - 2. Color of body coat: Lighter than finish coat.
  - 3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.
- D. Painting, Caulking, Closures, and Fillers Adjacent to Casework:
  - 1. Paint to match color of casework where casework has a paint finish.

**3.9 MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE**

- A. Field painting of mechanical and electrical consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.
- B. In spaces not scheduled to be finish painted, paint as specified under paragraph H, colors.
- C. Paint various systems specified in Divisions 2, 15, and 16.
- D. Paint after tests have been completed.
- E. Omit prime coat from factory prime-coated items.
- F. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more.
- G. Omit field painting of items specified in paragraph, Building and Structural WORK NOT PAINTED.
- H. Color:
  - 1. Color and finish shall be as selected by Owner from manufacturer's standard color and finish options.
  - 2. Paint colors as selected except for following:
    - a. White ..... Insulation coverings on breeching and uptake inside boiler house, drums and drum-heads, oil heaters, condensate tanks and condensate piping.
    - b. Gray: ..... Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces), and water and sewage treatment equipment and sewage ejection equipment.
    - c. Aluminum Color: Ferrous metal on outside of boilers and in connection with boiler settings including supporting doors and door frames and fuel oil burning equipment, and steam generation system

- (bare piping, fittings, hangers, supports, valves, traps and miscellaneous iron work in contact with pipe).
- d. Federal Safety Red: Exposed fire protection piping hydrants, post indicators, electrical conduits containing fire alarm control wiring, and fire alarm equipment.
  - e. Federal Safety Orange: .Entire lengths of electrical conduits containing feeders 600 volts or more.
  - f. Color to match brickwork sheet metal covering on breeching outside of exterior wall of boiler house.
- I. Apply paint systems on properly prepared and primed surface as follows:
- 1. Exterior Locations:
    - a. Apply two coats of MPI 94 (Exterior Alkyd, Semi-gloss (EO)) to the following ferrous metal items:  
Vent and exhaust pipes with temperatures under 94 degrees C (200 degrees F), bollards, fire hydrants, post indicators, yard hydrants, exposed piping and similar items.
    - b. Apply two coats of MPI 11 (Exterior Latex, Semi Gloss (AE)) to the following metal items:  
Galvanized and zinc-copper alloy metal.
    - c. Apply one coat of MPI 22 (High Heat Resistant Coating (HR)), 650 degrees C (1200 degrees F) to, boiler stacks.
  - 2. Interior Locations:
    - a. Apply two coats of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) to following items:
      - 1) Metal under 94 degrees C (200 degrees F) of items such as bare piping, fittings, hangers and supports.
      - 2) Equipment and systems such as hinged covers and frames for control cabinets and boxes, cast-iron radiators, electric conduits and panel boards.
      - 3) Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.
    - b. Apply one coat of MPI 50 (Interior Latex Primer Sealer) and one coat of MPI 53 (Interior Latex, Flat, MPI Gloss Level 1 (LE)) on finish of insulation on boiler breeching and uptakes inside boiler house, drums, drumheads, oil heaters, feed water heaters, tanks and piping.
  - 3. Other exposed locations:
    - a. Cloth jackets of insulation of ducts and pipes in connection with plumbing, air conditioning, ventilating refrigeration and heating systems: One coat of MPI 50 (Interior Latex Primer Sealer) and one coat of MPI 10 (Exterior Latex, Flat (AE)).

### **3.10 BUILDING AND STRUCTURAL WORK FIELD PAINTING**

- A. Painting and finishing of interior and exterior work except as specified under paragraph 3.11 B.
  - 1. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
  - 2. Painting of ferrous metal and galvanized metal.
  - 3. Identity painting and safety painting.
- B. Building and Structural Work not Painted:
  - 1. Prefinished items:
    - a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.
    - b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.
  - 2. Finished surfaces:
    - a. Hardware except ferrous metal.
    - b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.

- c. Signs, fixtures, and other similar items integrally finished.
- 3. Concealed surfaces:
  - a. Inside duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, above ceilings, attics, except as otherwise specified.
  - b. Inside walls or other spaces behind access doors or panels.
  - c. Surfaces concealed behind permanently installed casework and equipment.
- 4. Moving and operating parts:
  - a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices.
- 5. Labels:
  - a. Code required label, such as Underwriters Laboratories Inc., Inchcape Testing Services, Inc., or Factory Mutual Research Corporation.
  - b. Identification plates, instruction plates, performance rating, and nomenclature.
- 6. Gaskets.
- 7. Concrete curbs, gutters, pavements, retaining walls, exterior exposed foundations walls and interior walls in pipe basements.
- 8. Integrally colored split face and sooth face concrete masonry units.
- 9. Structural steel encased in concrete, masonry, or other enclosure.
- 10. Ceilings, walls, columns in interstitial spaces.

**3.11 IDENTITY PAINTING SCHEDULE**

- A. Identify designated service in accordance with ANSI A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels.
  - 1. Legend may be identified using 2.1 G options or by stencil applications.
  - 2. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories such as valves, regulators, strainers and cleanouts a minimum of 12 000 mm (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.
  - 3. Locate Legends clearly visible from operating position.
  - 4. Use arrow to indicate direction of flow.
  - 5. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert working pressure shown on drawings where asterisk appears for High, Medium, and Low Pressure designations as follows:
    - a. High Pressure - 414 kPa (60 psig) and above.
    - b. Medium Pressure - 104 to 413 kPa (15 to 59 psig).
    - c. Low Pressure - 103 kPa (14 psig) and below.
    - d. Add Fuel oil grade numbers.
  - 6. Legend name in full or in abbreviated form as follows:

PIPING	COLOR OF EXPOSED PIPING	COLOR OF BACKGROUND	COLOR OF LETTERS	LEGEND BBREVIATIONS
Blow-off		Yellow	Black	Blow-off
Boiler Feedwater		Yellow	Black	Blr Feed
A/C Condenser Water Supply		Green	White	A/C Cond Wtr Sup
A/C Condenser Water Return		Green	White	A/C Cond Wtr Ret
Chilled Water Supply		Green	White	Ch. Wtr Sup
Chilled Water Return		Green	White	Ch. Wtr Ret
Shop Compressed Air		Yellow	Black	Shop Air
Air-Instrument Controls		Green	White	Air-Inst Cont
Drain Line		Green	White	Drain

VA Project 549-130 Renovate and Expand Ambulatory Care & Lab  
 Sam Rayburn Memorial Veterans Center, Bonham, Texas  
 100% ISSUED FOR CONSTRUCTION

Emergency Shower		Green	White	Emg Shower
High Pressure Steam		Yellow	Black	H.P. _____*
High Pressure Condensate Return		Yellow	Black	H.P. Ret _____*
Medium Pressure Steam		Yellow	Black	M. P. Stm _____*
Medium Pressure Condensate Return		Yellow	Black	M.P. Ret _____*
Low Pressure Steam		Yellow	Black	L.P. Stm _____*
Low Pressure Condensate Return		Yellow	Black	L.P. Ret _____*
High Temperature Water Supply		Yellow	Black	H. Temp Wtr Sup
High Temperature Water Return		Yellow	Black	H. Temp Wtr Ret
Hot Water Heating Supply		Yellow	Black	H. W. Htg Sup
Hot Water Heating Return		Yellow	Black	H. W. Htg Ret
Gravity Condensate Return		Yellow	Black	Gravity Cond Ret
Pumped Condensate Return		Yellow	Black	Pumped Cond Ret
Vacuum Condensate Return		Yellow	Black	Vac Cond Ret
Fuel Oil - Grade		Green	White	Fuel Oil-Grade ____*
Boiler Water Sampling		Yellow	Black	Sample
Chemical Feed		Yellow	Black	Chem Feed
Continuous Blow-Down		Yellow	Black	Cont. B D
Pumped Condensate		Black		Pump Cond
Pump Recirculating		Yellow	Black	Pump-Recirc.
Vent Line		Yellow	Black	Vent
Alkali		Yellow	Black	Alk
Bleach		Yellow	Black	Bleach
Detergent		Yellow	Black	Det
Liquid Supply		Yellow	Black	Liq Sup
Reuse Water		Yellow	Black	Reuse Wtr
Cold Water (Domestic)	White	Green	White	C.W. Dom
Hot Water (Domestic)				
Supply	White	Yellow	Black	H.W. Dom
Return	White	Yellow	Black	H.W. Dom Ret
Tempered Water	White	Yellow	Black	Temp. Wtr
Ice Water				
Supply	White	Green	White	Ice Wtr
Return	White	Green	White	Ice Wtr Ret
Reagent Grade Water		Green	White	RG
Reverse Osmosis		Green	White	RO
Sanitary Waste		Green	White	San Waste
Sanitary Vent		Green	White	San Vent
Storm Drainage		Green	White	St Drain
Pump Drainage		Green	White	Pump Disch
Chemical Resistant Pipe				
Waste		Yellow	Black	Acid Waste
Vent		Yellow	Black	Acid Vent
Atmospheric Vent		Green	White	ATV
Silver Recovery		Green	White	Silver Rec
Oral Evacuation		Green	White	Oral Evac
Fuel Gas		Yellow	Black	Gas
Fire Protection Water				
Sprinkler		Red	White	Auto Spr
Standpipe		Red	White	Stand
Sprinkler		Red	White	Drain

7. Electrical Conduits containing feeders over 600 volts, paint legends using 50 mm (2 inch) high black numbers and letters, showing the voltage class rating. Provide legends where conduits pass through walls and floors and at maximum 6100 mm (20 foot) intervals in between. Use labels with yellow background with black border and words Danger High Voltage Class,.

8. See Sections for methods of identification, legends, and abbreviations of the following:

- a. Conduits containing high voltage feeders over 600 volts: Section  
16111, CONDUIT SYSTEMS.

**3.12 PROTECTION CLEAN UP, AND TOUCH-UP**

- A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
- B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
- C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

**APPENDIX**

Coordinate the following abbreviations used in SECTION 09 91 00 ,  
PAINTING, with other Sections. Use the same abbreviation and terms  
consistently.

Paint or coating Abbreviation

Acrylic Emulsion AE (MPI 10 - flat/MPI 11 - semigloss/MPI 119 - gloss)

Alkyd Flat Ak (MPI 49)

Alkyd Gloss Enamel G (MPI 48)

Alkyd Semigloss Enamel SG (MPI 47)

Aluminum Paint AP (MPI 1)

Cementitious Paint CEP (TT-P-1411)

Exterior Latex EL(MPI 10 / 11 / 119)

Exterior Oil EO (MPI 9 - gloss/MPI 8 - flat/MPI 94 - semigloss)

Epoxy Coating EC (MPI 77 - walls, floors/MPI 108 - CMU, concrete)

Fire Retardant Paint FR (MPI 67)

Fire Retardant Coating (Clear) FC (MPI 66, intumescent type)

Floor Enamel FE (MPI 27 - gloss/MPI 59 - eggshell)

Heat Resistant Paint HR (MPI 22)

Latex Emulsion LE (MPI 53, flat/MPI 52, eggshell/MPI 54, semigloss/MPI  
114, gloss Level 6

Latex Flat LF (MPI 138)

Latex Gloss LG (MPI 114)

Latex Semigloss SG (MPI 141)

Latex Low Luster LL (MPI 139)

Plastic Floor Coating PL

Polyurethane Varnish PV (MPI 31 - gloss/MPI 71 - flat)

Rubber Paint RF (CID-A-A-3120 - Paint for Swimming Pools (RF)).

Water Paint, Cement WPC (CID-A-A-1555 - Water Paint, Powder).

Verify abbreviations used in the following coating sections:

Section 09815, HIGH-BUILD GLAZED COATINGS GC

Section 09836, MULTI-COLOR COATING MC

- - - E N D - - -



**SECTION 09 96 59**  
**HIGH-BUILD GLAZED COATINGS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies a special coating (SC) system designed to provide on interior masonry or other surfaces a glazed tile like finish.

**1.2 RELATED WORK:**

- A. Location, color and texture (Class): Refer to Drawings

**1.3 SUBMITTALS**

- A. Submittals are being provided under separate cover and include:
1. Selection Samples: Provide samples of manufacturer's full standard color and texture range for selection by Owner.
  2. Samples:
    - a. Material samples, 150 mm (six inches) square, showing the number of coats of each coating material on each substrate to which the material is to be applied. Apply coating to the samples in a setback procedure, leaving exposed a portion of the substrate and subsequent portions of each coat.
    - b. Color samples, minimum 75 mm (three inches) by 125 mm (five inches) of each color and texture (Class) specified.
  3. Certificates:
    - a. Certifying that the coating complies with requirements of this specification, including resistance to abrasion and resistance to perspiration.
    - b. Certifying that the coating supplied is the same, with manufacturing tolerances, as the coating tested.
  4. Manufacturer's Literature and Data:

Literature and data describing the coating material to be furnished. Printed application for instructions for each substrate.
  5. Test Reports: Reports of tests certifying compliance with requirement specified.

**1.4 ENVIRONMENTAL REQUIREMENTS**

Apply coating only when surface and air ambient temperature is above 10<sup>0</sup>C (50 degrees F) and maintained for a period of not less than 48 hours after applications, except as otherwise required by the coating manufacturer.

**1.5 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. The Master Painters Institute (MPI):  
Approved Product List - 2010

**PART 2 - PRODUCTS**

**2.1 GLAZED COATING**

- A. In existing occupied buildings, use Water Based Epoxy, MPI No. 115.

**PART 3 - EXECUTION**

**3.1 PREPARATION OF SURFACES**

- A. Patch surfaces as required for receiving glazed coating. Fill masonry block and make surfaces smooth and free of voids and pinholes. Assure surfaces are clean, dry, well cured, sound and free of ridges and depressions.
- B. Previous Coatings: Remove flaking, scaling or unsound coatings. Sand sound previous coatings to remain, with medium sand paper to eliminate gloss and provide tooth.
- C. Remove or protect items not requiring coating.

**3.2 APPLICATION**

- A. Finish Film Thickness: Apply materials at not less than the manufacturer's recommended spreading rate.
- B. On previously coated surfaces, apply one base coat and one finish coat.
- C. On bare concrete block and cast in place concrete apply two base coats and one finish coat.
- D. On bare gypsum board apply one primer coat, one base coat and one finish coat.
- E. In rooms or spaces shown or specified to have glazed coating, apply the glazed coating to surfaces behind casework and equipment, except behind those items built into wall recesses.
- F. Make edges of glazed coatings sharp and clean without overlapping adjoining other materials or colors.

**3.3 CLEANING AND PROTECTION**

- A. During progress of the work and upon completion, promptly clean adjacent surfaces and materials of spills, spatters, drips, and stains from glazed coatings application. Remove glazed coatings by proper methods exercising care to prevent damage to finished surfaces and materials.
- B. Protect work of other trades against damage resulting from glazed coatings work.
- C. Touch up damaged coating surfaces before final acceptance.

- - - E N D - - -

**SECTION 10 21 13  
TOILET COMPARTMENTS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies solid polyethylene toilet partitions and urinal screens.

**1.2 RELATED WORK**

- A. Grab bars and toilet tissue holders: Section 10 28 00, TOILET, BATH, AND LAUNDRY ACCESSORIES.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples of HDPE material showing manufacturer's full standard color range for selection. Allow for one color throughout project.
- C. Manufacturer's Literature and Data: Specified items indicating all hardware and fittings, material, finish, and latching.
- D. Shop Drawings: Construction details at 1/2 scale, showing installation details, anchoring and leveling devices.
- E. Manufacturer's certificate, attesting that zinc-coatings conform to specified requirements.

**1.4 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):  
FF-B-575C.....Bolt, Hexagon and Square
- C. Code of Federal Regulations (CFR):  
40 CFR 247.....Comprehensive Procurement Guidelines for  
Products Containing Recovered Materials
- D. Commercial Item Descriptions (CID):  
A-A-1925.....Shield, Expansion (Nail Anchors)  
A-A-60003.....Partitions, Toilet, Complete

**PART 2 - PRODUCTS**

**2.1 TOILET PARTITIONS:**

- A. HDPE solid polyethylene: water resistant; graffiti resistant; non-absorbent; contain a minimum 30 percent post consumer recycled plastic; Class C flame spread rating.
- B. Manufacturer: Bradley "Bradmar", "No-Site European Styling"; or approved equal.
- C. Conform to Fed. CID A-A-60003, except as modified herein.
- D. Fabricate to dimensions shown or specified.
- E. Toilet Enclosures:
  - 1. Type 1, Style A (Floor supported)
  - 2. Reinforce panels shown to receive toilet tissue holders or grab bars.
  - 3. Upper pivots and lower hinges adjustable to hold doors open 30 degrees.
  - 4. Latching devices and hinges for handicap compartments shall comply with ADA requirements.
  - 5. Keeper:

- a. U-slot to engage bar of throw latch.
- b. Combined with rubber bumper stop.
- 6. Wheelchair Toilets:
  - a. Upper pivots and lower hinges to hold out swinging doors in closed position.
  - b. Provide U-type doors pulls, approximately 100 mm (four inches) long on pull side.
- E. Urinal Screens:
  - 1. Type III, Style E (wall hung).
    - a. With integral flanges and continuous, full height wall anchor plate.
    - b. Option: Full height U-Type bracket.
    - c. Wall anchor plate drilled for 4 anchors on both sides of screen.
  - 2. Screen 600 mm (24 inches) wide and 1060 mm (42 inches high).

## **2.2 FASTENERS**

- A. Partition Fasteners: CID A-A-60003.
- B. Use expansion bolts, CID A-A-60003, for anchoring to solid masonry or concrete.
- C. Use toggle bolts, CID A-A-60003, for anchoring to hollow masonry or stud framed walls.
- D. Use steel bolts FS-B-575, for anchoring pilasters to overhead steel supports.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION**

- A. General:
  - 1. Install in rigid manner, straight, plumb and with all horizontal lines level.
  - 2. Conceal evidence of drilling, cutting and fitting in finish work.
  - 3. Use hex-bolts for through-bolting.
  - 4. Adjust hardware and leave in freely working order.
  - 5. Clean finished surfaces and leave free of imperfections.
- B. Panels and Pilasters:
  - 1. Support panels, except urinal screens, and pilaster abutting building walls near top and bottom by stirrup supports secured to partitions with through-bolts.
  - 2. Secure stirrups to walls with two suitable anchoring devices for each stirrup.
  - 3. Secure panels to faces of pilaster near top and bottom with stirrup supports, through-bolted to panels and machine screwed to each pilaster.
  - 4. Secure edges of panels to edges of pilasters near top and bottom with "U" shaped brackets.
- C. Urinal Screens:
  - 1. Anchor urinal screen flange to walls with minimum of four bolts both side of panel.
  - 2. Space anchors at top and bottom and equally in between.

- - - E N D - - -

**SECTION 10 21 23**  
**CUBICLE CURTAIN TRACKS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

A. This section specifies cubicle curtain track (C.C.T.)

**1.2 RELATED WORK**

A. Steel shapes for suspending track assembly: Section 05 50 00, METAL FABRICATIONS and Section 09 51 00, ACOUSTICAL CEILINGS.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:  
One 300 mm (12 inch) long piece of cubicle curtain track with carrier access and end stop.
- C. Shop Drawings: Showing layout of tracks and method of anchorage.
- D. Manufacturer's Literature and Data:  
Cubicle curtain track.

**1.4 DELIVERY, STORAGE AND HANDLING**

- A. Deliver material in original package marked to identify the contents, brand name, and the name of the manufacturer or supplier.
- B. Store in dry and protected location. Store so as to not bend or warp the tracks.
- C. Do not open packages until contents are needed for installation, unless verification inspection is required.

**1.5 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):  
B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes.  
B456-03(R2009).....Electrodeposited Coatings for Copper Plus Nickel Plus Chromium and Nickel Plus Chromium
- C. The National Association of Architectural Metal Manufacturers (NAAMM):  
AMP 500 Series.....Metal Finishes Manual

**PART 2 - PRODUCTS**

**2.1 CUBICLE CURTAIN TRACKS**

- A. Surface Mounted :
  - 1. Channel Tracks (Surface Mounted Type): Extruded aluminum, ASTM B221, alloy 6063, temper T5 or T6, channel shaped, with smooth inside raceway for curtain carriers.
- B. Curtain Carriers: Nylon or delrin carriers, with either nylon or delrin wheels on metal, delrin, or nylon axles. Equip each carrier with either stainless steel, chromium plated brass or steel hooks with swivel, or nickel chromium plated brass or stainless steel bead chain and hook assembly, or delrin carriers may have moulded on delrin hooks. Hook for bead chain may be the same material and finish as the bead chain or may be chromium plated steel. Provide 2.2 carriers for every 300 mm

(onefoot) of each section of each track length, plus one additional carrier.

- C. End Stop Connectors, Ceiling Flanges and Other Accessories: Fabricate from the same material with the same finish as the tracks or from nylon.
- D. Hangers and Fittings: Fabricate from the same material with the same finish as the tracks. Hangers may be round or square for channel tracks and round for tubular tracks. Design fittings to be compatible with design of tracks and to safely transmit the track load to the hangers.
- E. At end of each section of track, make provision for insertion and removal of carriers. Design to prevent accidental removal of carrier. Any operating mechanism shall be removable with common tools.

### **2.3 FASTENERS**

- A. Exposed Fasteners, Screws and Bolts: Stainless steel or chromium/nickel plated brass.
- B. Concealed Fasteners, Screws and Bolts: Hot-dip galvanized (except in high moisture areas use stainless steel).
- C. Metal Clips: Anchor curtain tracks to exposed grid of lay-in acoustical tile ceilings, with concealed metal (butterfly) type or two piece snap locking type ceiling clip of high strength spring steel. When it is not possible to install the metal ceiling clip, the cubicle curtain track may be screwed to the ceiling grid.

### **2.4 FINISHES**

- A. Aluminum: Finish numbers for aluminum specified are in accordance with The Aluminum Association's Designation System. AA-C22A31 finish

### **2.5 FABRICATION**

- A. Weld and grind smooth joints of fabricated components.
- B. Form tracks and bends of lengths that will produce the minimum number of joints. Make track sections up to 4800 mm (16 feet) without joints. Form corner bend on a 300 mm (12 inch) radius.
- C. Provide steel anchor plates, supports, and anchors for securing components to building construction.
- D. Form flat surface without distortion.
- E. Shop assemble components and package complete with anchors and fittings.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION**

- A. Install tracks after finish painting and ceiling finishing operations are complete.
- B. Install track level and hangers plumb and securely anchor to the ceiling to form a rigid installation.
- C. Anchor surface mounted curtain tracks directly to exposed grid of lay-in acoustical tile ceilings with suitable fasteners, spaced approximately 600 mm (24 inches) on center.
- D. Anchor surface mounted curtain tracks to concrete, plaster and gypsum board ceilings with a minimum of 3 mm (1/8-inch) diameter fastenings or concealed clips spaced not more than 900 mm (three feet) on center.
- E. Install suspended track seven feet, three inches above the finished floor, with hangers spaced no more than four feet on center. At ceiling line, provide flange fittings secured to hangers with set screws. Secure track to walls with flanged fittings and to hangers with special fittings.
- F. Securely fasten end stop caps to prevent their being forced out by the striking weight of carriers.

- G. Remove damaged or defective components and replace with new components or repair to the original condition.

**3.2 ACCEPTANCE**

- A. Track shall be installed neat, rigid, plumb, level and true, and securely anchored to the overhead construction.
- B. Carrier units shall operate smoothly and easily over the full range of travel.

- - - E N D - - -

**SECTION 10 26 00**  
**WALL AND DOOR PROTECTION**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies wall guards (crash rails or bumper guards), handrail/wall guard combinations and corner guards.

**1.2 RELATED WORK**

- B. Armor plates and kick plates not specified in this section: Section 08 71 00, DOOR HARDWARE.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.  
B. Samples: Provide samples of manufacturer's full standard color and texture range for selection by owner.  
C. Shop Drawings: Show design and installation details.  
D. Manufacturer's Literature and Data:  
1. Handrail/Wall Guard Combinations.  
2. Wall Guards.  
3. Corner Guards.  
E. Test Report: Showing that resilient material complies with specified fire and safety code requirements.

**1.4 DELIVERY AND STORAGE**

- A. Deliver materials to the site in original sealed packages or containers marked with the name and brand, or trademark of the manufacturer.  
B. Protect from damage from handling and construction operations before, during and after installation.  
C. Store in a dry environment of approximately 21° C (70 degrees F) for at least 48 hours prior to installation.

**1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.  
B. American Society for Testing and Materials (ASTM):  
A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip  
B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes  
D256-06.....Impact Resistance of Plastics  
D635-06.....Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastics in a Horizontal Position  
E84-09.....Surface Burning Characteristics of Building Materials  
C. The National Association of Architectural Metal Manufacturers (NAAMM):  
AMP 500-06.....Metal Finishes Manual  
D. Society of American Automotive Engineers (SAE):  
J 1545-05.....Instrumental Color Difference Measurement for Exterior Finishes.  
E. Underwriters Laboratories Inc. (UL):  
Annual Issue.....Building Materials Directory



**PART 2 - PRODUCTS**

**2.1 SCHEDULE**

- A. Wall Protection: Acrovyn 4000 or approved equal with the following:
  - 1. Rigid Sheet, .040" thick
  - 2. Texture: Suede 4'X8' Sheet
- B. Crash Rail: Acrovyn 4000 BCR-80N H8" with continuous aluminum retainer; or approved equal.
- C. Chair Rail: Acrovyn 4000 BG-30N, H2 ¾" with continuous aluminum retainer; or approved equal.
- D. Handrail: Acrovyn 4000 HRB-20N, H5 5/8", quick lock brackets, with continuous aluminum retainer; or approved equal
- E. Corner Guards: Acrovyn 4000 SSM-20N, W2", snaps onto retainer, includes end caps continuous aluminum retainer; or approved equal.

**PART 3 - INSTALLATION**

**3.1 RESILIENT CORNER GUARDS**

- A. Install corner guards on walls in accordance with manufacturer's instructions.

**3.2 RESILIENT HANDRAIL WALL GUARD COMBINATIONS AND RESILIENT WALL GUARDS**

- A. Secure guards to walls with brackets and fasteners in accordance with manufacturer's details and instructions.

- - - E N D - - -

**SECTION 10 28 00**  
**TOILET, BATH, AND LAUNDRY ACCESSORIES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies manufactured items used in toilet rooms.
- B. This section also specifies custom fabricated items used in toilets and related spaces.

**1.2 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
  - 1. Each product specified.
  - 2. Paper towel dispenser and combination dispenser and disposal units.
  - 3. Metal framed mirrors, showing shelf where required, fillers, and design and installation of units when installed on ceramic tile wainscots and offset surfaces.
  - 5. Grab bars, showing design and each different type of anchorage.
  - 6. Show material and finish, size of members, and details of construction, installation and anchorage of mop racks.
- C. Samples:
  - 1. One of each type of accessory specified.
  - 2. After approval, samples may be used in the work.
- D. Manufacturer's Literature and Data:
  - 1. All accessories specified.
  - 2. Show type of material, gages or metal thickness in inches, finishes, and when required, capacity of accessories.
- E. Manufacturer's Certificates:
  - 1. Attesting that soap dispensers are fabricated of material that will not be affected by liquid soap or aseptic detergents, PhisoHex and solutions containing hexachlorophene.

**1.3 QUALITY ASSURANCE**

- A. Each product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.
- B. Each accessory type shall be the same and be made by the same manufacturer.
- C. Each accessory shall be assembled to the greatest extent possible before delivery to the site.
- D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

**1.4 PACKAGING AND DELIVERY**

- A. Pack accessories individually to protect finish.
- B. Deliver accessories to the project only when installation work in rooms is ready to receive them.
- C. Deliver inserts and rough-in frames to site at appropriate time for building-in.
- D. Deliver products to site in sealed packages of containers; labeled for identification with manufacturer's name, brand, and contents.

**1.5 STORAGE**

- A. Store products in weathertight and dry storage facility.

- B. Protect from damage from handling, weather and construction operations before, during and after installation in accordance with manufacturer's instructions.

**1.6 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip.
  - A176-99(R2009).....Stainless and Heat-Resisting Chromium Steel Plate, Sheet, and Strip
  - A269-10.....Seamless and Welded Austenitic Stainless Steel Tubing for General Service
  - A312/A312M-09.....Seamless and Welded Austenitic Stainless Steel Pipes
  - A653/A653M-10.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
  - B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
  - B456-03(R2009).....Electrodeposited Coatings of Copper Plus Nickel Plus Chromium and Nickel Plus Chromium
  - C1036-06.....Flat Glass
  - C1048-04.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated and Uncoated Glass
  - D635-10.....Rate of Burning and/or Extent and Time of Burning of Self Supporting Plastics in a Horizontal Position
  - F446-85(R2009).....Consumer Safety Specification for Grab Bars and Accessories Installed in the Bathing Area.
  - D3453-07.....Flexible Cellular Materials - Urethane for Furniture and Automotive Cushioning, Bedding, and Similar Applications
  - D3690-02(R2009).....Vinyl-Coated and Urethane-Coated Upholstery Fabrics
- C. The National Association of Architectural Metal Manufacturers (NAAMM):
  - AMP 500 Series.....Metal Finishes Manual
- D. American Welding Society (AWS):
  - D10.4-86 (R2000).....Welding Austenitic Chromium-Nickel Stainless Steel Piping and Tubing
- E. Federal Specifications (Fed. Specs.):
  - A-A-3002.....Mirrors, Glass
  - FF-S-107C (2).....Screw, Tapping and Drive
  - FF-S-107C.....Screw, Tapping and Drive.
  - WW-P-541E(1).....Plumbing Fixtures (Accessories, Land Use) Detail Specification

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

- A. Aluminum: ASTM B221, alloy 6063-T5 and alloy 6463-T5.
- B. Stainless Steel:
  - 1. Plate or sheet: ASTM A167, Type 302, 304, or 304L, except ASTM A176 where Type 430 is specified, 0.0299-inch thick unless otherwise specified.
  - 2. Tube: ASTM A269, Alloy Type 302, 304, or 304L.

- C. Stainless Steel Tubing: ASTM A269, Grade 304 or 304L, seamless or welded.
- D. Stainless Steel Pipe: ASTM A312; Grade TP 304 or TP 304L.
- E. Steel Sheet: ASTM A653, zinc-coated (galvanized) coating designation G90.
- F. Glass:
  - 1. ASTM C1036, Type 1, Class 1, Quality q2, for mirrors, and for mirror doors in medicine cabinets.
  - 2. ASTM C1036, Type 1 Class 1 Quality q3, for shelves in medicine cabinets.
  - 3. ASTM C1048, Kind FT, Condition A, Type 1, Class 1 (use in Mental Health and Behavior Nursing Unit Psychiatric Patient Areas and Security Examination Rooms where mirrors and glass are specified).
- G. Foam Rubber: ASTM D3453, Grade BD, Type 2.
- H. Vinyl Covering: ASTM D3690, Vinyl coated fabric, Class A.
- I. Plywood: PS1, Grade CD.

## 2.2 FASTENERS

- A. Exposed Fasteners: Stainless steel or chromium plated brass, finish to match adjacent surface.
- B. Concealed Fasteners: Steel, hot-dip galvanized (except in high moisture areas such as showers or bath tubs use stainless steel).
- C. Toggle Bolts: For use in hollow masonry or frame construction.
- D. Hex bolts: For through bolting on thin panels.
- E. Expansion Shields: Lead or plastic as recommended by accessory manufacturer for component and substrate for use in solid masonry or concrete.
- F. Screws:
  - 1. ASME B18.6.4.
  - 2. Fed Spec. FF-S-107, Stainless steel Type A.
- G. Adhesive: As recommended by manufacturer for products to be joined.

## 2.3 FINISH

- A. In accordance with NAAMM AMP 500 series.
- B. AA-M32, Mechanical finish, medium satin.
  - 1. Chromium Plating: ASTM B456, satin or bright as specified, Service Condition No. SC2.
  - 2. Stainless Steel: NAAMM AMP 503, finish number 4.
  - 3. Ferrous Metal:
    - a. Shop Prime: Clean, pretreat and apply one coat of primer and bake.
    - b. Finish: Over primer apply two coats of alkyd or phenolic resin enamel, and bake.
  - 4. Nylon Coated Steel: Nylon coating powder formulated for a fluidized bonding process to steel to provide a hard smooth, medium gloss finish, not less than 0.3 mm (0.012-inch) thick, rated as self-extinguishing when tested in accordance with ASTM D635.

## 2.4 FABRICATION - GENERAL

- A. Welding, AWS D10.4.
- B. Grind dress, and finish welded joints to match finish of adjacent surface.
- C. Form exposed surfaces from one sheet of stock, free of joints.
- D. Provide steel anchors and components required for secure installation.
- E. Form flat surfaces without distortion. Keep exposed surfaces free from scratches and dents. Reinforce doors to prevent warp or twist.
- F. Isolate aluminum from dissimilar metals and from contact with building materials as required to prevent electrolysis and corrosion.
- G. Hot-dip galvanized steel, except stainless steel, anchors and fastening devices.

- H. Shop assemble accessories and package with all components, anchors, fittings, fasteners and keys.
- I. Key items alike.
- J. Provide templates and rough-in measurements as required.
- K. Round and deburr edges of sheets to remove sharp edges.

## 2.5 TOILET ACCESSORIES

- A. Baby Changing Station: Koala Bear Kare Baby Changing Station, or approved equal.
- B. Framed Mirrors: Bobrick B165 Series wall-mounted mirror with bright stainless steel channel frame; or approved equal
- C. Custom Unframed Mirrors: Full width of vanity or wall-hung sink. Height 48" with brushed stainless frame and tempered mirror glass.
- D. Utility Shelves:
  - 1. Bradley Model 790, surface mounted, fold-down, or approved equal. Provide in each toilet stall and at each urinal.
  - 2. Bradley B-295, 24", surface-mounted stainless steel shelf; or approved equal. Provide in open areas of rest rooms and in single accessible restrooms. Provide length required where shown in HAC rooms.
- E. Coat Hook: Bobrick Model B-212 (Coat hook w/ bumper, 4 Mounting screws); or approved equal. Brushed stainless finish. Provide one in each toilet stall.
- F. Grab Bars: Bradley Model 832, brushed stainless; or approved equal. Tubing type 304, 1-1/4" O.D. 18 gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish.
- G. Swing-Up Grab Bars: Bradley Model 8370-101, or approved equal. Tubing type 304, 1-1/4" O.D. 18 gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Concealed mechanism to hold bar in upright position. Install on open side of all urinals and ADA stalls.
- H. Paper Cup Dispenser. Stainless steel. Pull-type water cup dispenser. Self-adjusting. Gravity fed. Wall mounted. To hold 3.0 to 5.0 oz., flat bottom Dixie cups. 17 1/2 " H 3 5/8" Diameter.
- I. Sink Scald Protection. Handi-Shield brand Plumberex Specialty Products, Inc., or approved equal consisting of all of the listed components and/or features. Isolators shall be ADA compliant and IAPMO/UPC approved, soft and pliant, smooth vinyl coated surface insulated with closed cell foam 1/4" thick. Interior closed cell foam shall be tested to ASTM-E-84 (Fire rated not to exceed a flame spread rating of "10" and smoke density "0"). Surfaces shall have non-abrasive, non-absorbent, easy to one piece U/V inhibited surface to prevent discolorations, with no hard protrusions and with antimicrobial coating. Color: White. Isolators shall be attached to piping with dual fastening system of length 1" \*Velcro fastening strip and non-metallic, tamper resistant, self locking, heavy duty US government approved clips, and have a continuous weep seam to provide for air circulation and drainage leakage and condensate. The stop valve cover shall offer easy access to valve handle for service.
- J. Feminine Product Dispenser Bobrick B-3500C free napkin/tampon dispenser, or approved equal.
- K. Mop and Broom Holder: Bobrick Model B-223 x 24.
- L. Soap Dispensers: Where shown, OFCI.
- M. Toilet Paper Dispenser: Where shown, OFCI.

### **PART 3 - EXECUTION**

#### **3.1 PREPARATION**

- A. Before starting work notify Resident Engineer in writing of any conflicts detrimental to installation or operation of units.
- B. Verify with the Resident Engineer the exact location of accessories.

#### **3.2 INSTALLATION**

- A. Set work accurately, in alignment and where shown. Items shall be plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Toggle bolt to steel anchorage plates in frame partitions or hollow masonry.
- C. Install accessories in accordance with the manufacturer's printed instructions and ASTM F446.
- D. Install accessories plumb and level and securely anchor to substrate.
- E. Install accessories in a manner that will permit the accessory to function as designed and allow for servicing as required without hampering or hindering the performance of other devices.
- F. Position and install dispensers, and other devices in countertops, clear of drawers, permitting ample clearance below countertop between devices, and ready access for maintenance as needed.
- G. Align mirrors, dispensers and other accessories even and level, when installed in battery.
- H. Install accessories to prevent striking by other moving, items or interference with accessibility.
- I. Install wall mirrors in Mental Health and Behavioral Units with tamper resistant screws that are flush mounted so that they will not support a rope or material for hanging.

#### **3.3 CLEANING**

- A. After installation, clean as recommended by the manufacturer and protect from damage until completion of the project.

- - - E N D - - -

**SECTION 10 44 13**  
**FIRE EXTINGUISHER CABINETS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section covers recessed fire extinguisher cabinets.

**1.2 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data: Fire extinguisher cabinet including installation instruction and rough opening required.
- C. Samples: Provide samples of manufacturer's full standard color and texture range for selection by owner.

**1.3 APPLICATION PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Testing and Materials (ASTM):  
D4802-10.....Poly (Methyl Methacrylate) Acrylic Plastic Sheet

**PART 2 - PRODUCTS**

**2.1 FIRE EXTINGUISHER CABINET**

- A. Recessed type with flat trim of size and design shown.

**2.2 FABRICATION**

- A. Form body of cabinet from 0.9 mm (0.0359 inch) thick sheet steel.
- B. Fabricate door and trim from 1.2 mm (0.0478 inch) thick sheet steel with all face joints fully welded and ground smooth.
  - 1. Glaze doors with 6 mm (1/4 inch) thick ASTM D4802, clear acrylic sheet, Category B-1, Finish 1.
  - 2. Design doors to open 180 degrees.
  - 3. Provide continuous hinge, pull handle, and adjustable roller catch.

**2.3 FINISH**

- A. Finish interior of cabinet body with baked-on semigloss white enamel.
- B. Finish door, frame with manufacturer's standard baked-on prime coat suitable for field painting.

**PART 3 - EXECUTION**

- A. Install fire extinguisher cabinets in prepared openings and secure in accordance with manufacturer's instructions.
- B. Install cabinet so that bottom of cabinet is 975 mm (39 inches) above finished floor.

- - - E N D - - -

**SECTION 10 55 00**  
**METAL LOCKERS**

**PART I - GENERAL**

**1.1 DESCRIPTION**

A. This Section includes prefinished metal lockers.

**1.2 RELATED WORK**

A. Locker bases: Section 06 10 00, ROUGH CARPENTRY

**1.3 SUBMITTALS**

- A. Product Data: Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for each type of metal locker.
- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.
  - 1. Show base, sloping tops, filler panels, trim and other accessories.
  - 2. Include locker identification system.
- C. Manufacturer's standard color chart for color selection by Owner.

**1.4 QUALITY ASSURANCE**

A. Installer Qualifications: An authorized representative of metal locker manufacturer for installation and maintenance of units required.

**1.5 DELIVERY, STORAGE AND HANDLING**

- A. Do not deliver metal lockers until spaces to receive them are clean, dry, and ready for metal locker installation.
- B. Deliver keys to Owner by registered mail or overnight package service.

**1.6 PROJECT CONDITIONS**

- A. Field Measurements: Verify the following by field measurements before fabrication and indicate measurements on Shop Drawings:
  - 1. Concealed framing, blocking, and reinforcements that support metal lockers before they are enclosed.
  - 2. Recessed openings.
  - 3. Established Dimensions: Where field measurements cannot be made without delaying the Work, establish recessed opening dimensions and proceed with fabricating metal lockers without field measurements. Coordinate wall and floor construction to ensure that actual recessed opening dimensions correspond to established dimensions.

**1.7 WARRANTY**

- A. Manufacturer's standard form in which manufacturer agrees to repair or replace components of metal lockers that fail in materials or workmanship, excluding finish, within specified warranty period. Failures include, but are not limited to, the following:
  - 1. Structural failures.
  - 2. Faulty operation of latches and other door hardware.
- B. Warranty Period for All-Welded Metal Lockers: 10 years from date of Substantial Completion.

**1.8 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):



- B18.2.2-87(R2005).....Square and Hex  
Nuts
- C. American Society for Testing and Materials (ASTM):
- A123-02.....Zinc (Hot-Dip  
Galvanized) Coatings on Iron and Steel Products
- A167-99(R2004).....Stainless and  
Heat-Resisting Chromium-Nickel Steel Plate,  
Sheet and Strip
- A653/A653M-07.....Steel Sheet, Zinc  
Coated (Galvanized) or Zinc-Iron Alloy Coated  
(Galvannealed) by the Hot-Dip Process
- B221-06.....Aluminum and  
Aluminum-Alloy Extruded Bars, Rods, Wire,  
Shapes, and Tubes
- F593-02.....Stainless Steel  
Bolts, Hex Cap Screws, and Studs
- F1667-05.....Driven Fasteners:  
Nails, Spikes and Staples
- D. American Welding Society (AWS):
- D1.1-04.....Structural Welding  
Code Steel
- E. National Association of Architectural Metal Manufacturers (NAAMM)  
AMP 500-505-1988.....Metal Finishes  
Manual
- F. Structural Steel Painting Council (SSPC):
- SP 1-05.....No. 1, Solvent  
Cleaning
- SP 2-05.....No. 2, Hand Tool  
Cleaning
- SP 3-05.....No. 3, Power Tool  
Cleaning

## PART 2 - PRODUCTS

### 2.1 MATERIALS, GENERAL

- A. Cold-Rolled Steel Sheet: ASTM A 1008, Commercial Steel (CS) Type B, suitable for exposed applications.
- B. Fasteners: Zinc- or nickel-plated steel, slotless-type exposed bolt heads, and self-locking nuts or lock washers for nuts on moving parts.
- C. Anchors: Select material, type, size, and finish required for secure anchorage to each substrate. Provide nonferrous-metal or hot-dip galvanized anchors and inserts on inside face of exterior walls for corrosion resistance.

### 2.2 METAL LOCKERS

- A. Basis-of-Design Product: Republic Heavy-Duty Ventilated Lockers; or equal
- B. Fabricate welded in units.
- C. Door frames: 16 ga steel formed into 1'' wide face channel shapes with a continuous vertical door strike, integral with the frame on both sides of the door opening.
- D. Doors: 14 gauge cold rolled sheet steel. Formations shall consist of a full channel shape on the lock side of adequate depth to fully conceal the lock bar, channel formation on the hinge side and right angle formations across the top and bottom. Doors shall have diamond shaped perforations to provide free airflow while leaving sufficient metal for rigidity and strength.
- E. Latching: One-piece, pre-lubricated spring steel latch, contained within lock bar . Provide rattle-free operation.

- F. Handles: Non-protruding 14 gauge lifting trigger and slide plate. Provide with lock hasp.
- G. Hinges: 2'' high, 5-knuckle, full loop, tight pin style, securely welded to frame and double riveted to the inside of the door flange.
- H. Body: Fabricate from 16 gauge cold rolled sheet steel and form in combination with the 16 gauge upright to provide a one-piece, welded, uniform structure.
- I. Number Plates: Polished aluminum number plate with black numerals not less than 1/2" high. Attach with rivets to the lower surface within the recessed handle pocket.
- J. Finish: manufacturer's standard baked-polymer thermosetting powder finish. Comply with resin manufacturer's written instructions for application, baking, and minimum dry film thickness.
- K. Accessible Lockers: Provide at least one ADA compliant accessible locker in each locker area.

### **PART 3 - EXECUTION**

#### **3.1 INSTALLATION**

- A. General: Install level, plumb, and true; shim as required, using concealed shims.
- B. Anchor locker runs at ends and at intervals recommended by manufacturer, but not more than 910 mm o.c. Install anchors through backup reinforcing plates, channels, or blocking as required to prevent metal distortion, using concealed fasteners.
- C. Anchor single rows of metal lockers to walls near top and bottom of lockers.
- D. Anchor back-to-back metal lockers to floor.
- E. Connect groups of all-welded metal lockers together with standard fasteners, with no exposed fasteners on face frames.
- F. Equipment and Accessories: Fit exposed connections of trim, fillers, and closures accurately together to form tight, hairline joints, with concealed fasteners and splice plates.

#### **3.2 ADJUST AND CLEAN**

- A. Clean, lubricate, and adjust hardware. Adjust doors and latches to operate easily without binding. Verify that integral locking devices operate properly.
- B. Protect metal lockers from damage, abuse, dust, dirt, stain, or paint. Do not permit metal locker use during construction.
- C. Touch up marred finishes, or replace metal lockers that cannot be restored to factory-finished appearance. Use only materials and procedures recommended or furnished by metal locker manufacturer.

- - - E N D - -

**SECTION 10 55 10  
EVIDENCE LOCKERS**

**PART I - GENERAL**

**1.1 DESCRIPTION**

A. This Section includes prefinished metal evidence lockers.

**1.2 RELATED WORK**

A. Locker bases: Section 06 10 00, ROUGH CARPENTRY

**1.3 SUBMITTALS**

- A. Product Data: Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for each type of metal locker.
- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.
  - 1. Show base, sloping tops, filler panels, trim and other accessories.
  - 2. Include locker identification system.

**1.4 QUALITY ASSURANCE**

A. Installer Qualifications: As approved by locker manufacturer.

**1.5 DELIVERY, STORAGE AND HANDLING**

A. Do not deliver evidence lockers until spaces to receive them are clean, dry, and ready for installation.

**1.6 WARRANTY**

- A. Manufacturer's standard form in which manufacturer agrees to repair or replace components of unit that fail in materials or workmanship, excluding finish, within specified warranty period. Failures include, but are not limited to, the following:
  - 1. Structural failures.
  - 2. Faulty operation of latches and other door hardware.
- B. Warranty Period for All-Welded Metal Lockers: 10 years from date of Substantial Completion.

**1.7 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):
  - B18.2.2-87(R2005).....Square and Hex Nuts
- C. American Society for Testing and Materials (ASTM):
  - A123-02.....Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
  - A167-99(R2004).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip
  - A653/A653M-07.....Steel Sheet, Zinc Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvanized) by the Hot-Dip Process
  - F593-02.....Stainless Steel Bolts, Hex Cap Screws, and Studs
  - F1667-05.....Driven Fasteners: Nails, Spikes and Staples
- D. American Welding Society (AWS):

- D1.1-04.....Structural Welding  
Code Steel
- E. National Association of Architectural Metal Manufacturers (NAAMM)  
AMP 500-505-1988.....Metal Finishes  
Manual
- F. Structural Steel Painting Council (SSPC):
- SP 1-05.....No. 1, Solvent  
Cleaning
- SP 2-05.....No. 2, Hand Tool  
Cleaning
- SP 3-05.....No. 3, Power Tool  
Cleaning

**PART 2 - PRODUCTS**

**2.1 MATERIALS, GENERAL**

- A. Cold-Rolled Steel Sheet: ASTM A 1008, Commercial Steel (CS) Type B, suitable for exposed applications.
- B. Fasteners: Zinc- or nickel-plated steel, slotless-type exposed bolt heads, and self-locking nuts or lock washers for nuts on moving parts.
- C. Anchors: Select material, type, size, and finish required for secure anchorage to each substrate. Provide nonferrous-metal or hot-dip galvanized anchors and inserts on inside face of exterior walls for corrosion resistance.

**2.2 METAL LOCKERS**

- A. Basis-of-Design Product: Neo-Bits Model ILC Dover - 08AA Evidence Locker; or equal with the following:
- a. Number of Compartments: 8
  - b. Material of Construction: Cold Rolled Steel
  - c. Pass-through design
  - d. Overall Width 36"
  - e. Overall Depth 24"
  - f. Overall Height 82"
  - g. Finish: Powder Coat
  - h. Color: Manufacturer's standard
  - i. Lock Type: Keyless

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

- A. General: Install unit level, plumb, and true; shim as required, using concealed shims.
- B. Install in accordance with manufacturer's instructions and recommendations for installation indicated.
- F. Equipment and Accessories: Fit exposed connections of trim, fillers, and closures accurately together to form tight, hairline joints, with concealed fasteners and splice plates.

**3.2 ADJUST AND CLEAN**

- A. Clean, lubricate, and adjust hardware. Adjust doors and latches to operate easily without binding. Verify that integral locking devices operate properly.
- B. Protect unit from damage, abuse, dust, dirt, stain, or paint. Do not permit locker use during construction.
- C. Touch up marred finishes, or replace metal lockers that cannot be restored to factory-finished appearance. Use only materials and procedures recommended or furnished by metal locker manufacturer.

- - - E N D - -

**SECTION 10 75 00**  
**FLAGPOLES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Fixed high dimensional, ground set, uniform conical taper, seamless tube flag pole.

**1.2 RELATED WORK**

- A. Excavation and backfill: Section 31 20 00, EARTH MOVING.
- B. Concrete for ground set flagpole: Section 03 30 00, CAST-IN-PLACE CONCRETE.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Flagpole, including base and finial ball, showing construction and installation.
- C. Manufacturer's Literature and Data: Flagpole

**1.4 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A167-99 (R2009).....Stainless and Heat-resisting Chromium-Nickel Steel Plate, Sheet and Strip
  - B209-07.....Aluminum and Aluminum Alloy-Sheet and Plate
  - B241/B241M-10.....Aluminum and Aluminum-Alloy Seamless Pipe and Seamless Extruded Tube

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

- A. Aluminum, Extruded: ASTM B241, alloy 6063 - T6.
- B. Aluminum, Plate and Sheet: ASTM B209, alloy 1100.
- C. Stainless Steel: ASTM A167, Class 302 or 304.

**2.2 FABRICATION**

- A. Fabricate flagpole of seamless extruded aluminum tube, uniform conical taper of approximately 1 in 70 (one inch in every 6 feet). Taper shall not exceed 50 percent of outside diameter of pole. When flagpoles are shipped in more than one section, provide self-aligning sleeves for field joint.
- B. Base: Aluminum plate or stainless steel, of stock design similar to that shown.
- C. Finial Ball: 2 mm (0.0747 inch) thick spun aluminum sphere, with seams of ball welded flush and watertight. Mount ball on threaded rod to fit truck. Diameter of ball shall be approximately same as pole butt diameter.
- D. Truck: Equip pole with extra heavy, revolving, non-fouling, ball bearing type truck with cast aluminum body. Fit truck with two cast aluminum, nylon bushed sheaves on stainless steel axles.
- E. Halyards: Two sets of 9 mm (3/8-inch) diameter, nylon braided rope having not less than two bronze swivel snaps for each halyard.

- F. Cleats: Two aluminum cleats of 230 mm (nine inch) minimum length. Secure cleats to pole with two 9 mm (3/8-inch) flat head aluminum machine screws.

### **2.3 FINISH**

- A. Finish exposed surfaces of flagpoles.
- B. Flagpole shaft: Satin brushed aluminum, then heavily waxed.
- C. Finial ball: Gold anodized aluminum, then heavily waxed.
- D. Base and cleats: Finish to match flagpole.
- E. Stainless Steel (base): As recommended by flagpole manufacturer.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION**

- A. Set flagpoles in concrete base. Provide galvanized, corrugated steel sleeve or tube of length shown welded to steel base plates for installation in concrete.
- B. Wrap top of sleeve with two layers of asphalt felt for distance of 600 mm (2 feet) down.
- C. Fill space between pole and metal sleeve to within two inches of top with fine dry sand and fill balance of space with waterproof compound as shown.

### **3.2 LIGHTNING ROD**

Weld lightning ground rod of 19 mm (3/4-inch) diameter galvanized steel to base plate at bottom of sleeve or tube, and to steel support plate at grade.

- - - E N D - - -

**SECTION 12 30 20**  
**WOOD CASEWORK**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies plastic laminate casework and solid surface tops and open shelving millwork as indicated, including related components and accessories required to form integral units. Wood casework items shown on the drawings, but not specified below shall be included as part of the work under this section, and applicable portions of the specification shall apply to these items. Each like item of casework shall be of the same design and by one manufacturer.

**1.2 RELATED WORK**

- A. Lavatories and Plumbing in Casework: Section 22 40 00, PLUMBING FIXTURES.
- B. Vinyl Base: Section 09 65 13 RESILIENT BASE AND ACCESSORIES.

**1.3 MANUFACTURER'S QUALIFICATIONS**

- A. The fabrication of casework shall be by a manufacturer who produces casework similar to the casework specified and shown.

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Sinks, trim and fittings
  - 2. Locks for doors and drawers, pulls, hinges, glides
  - 3. Adhesive cements
  - 4. Panel products and solid surface products
  - 5. Plastic Laminate
- C. Samples: Plastic laminate and solid surface, 150 mm (six inch) square, of manufacturer's full standard color and texture range for selection by owner.
- D. Shop Drawings (1/2 full size):
  - 1. All casework, showing details of construction, including materials, hardware and accessories.
  - 2. Cabinets and counters showing faucets in connection with sink bowls, and electrical fixtures and receptacles which are mounted on cabinets and counters.
  - 3. Fastenings and method of installation.
- E. Mock-Up: Where required for special casework and where four or more similar units are involved, submit a mock-up of a typical unit for approval by COR.

**1.5 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A167-99 (R2004).....Stainless and Heat-Resisting chromium-Nickel Steel Plate, Sheet and Strip
  - A1008-04.....Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy
  - C1036-01.....Flat Glass

- C. National Particleboard Association (NPA):  
A208.1-93.....Wood Particleboard
- D. U.S. Department of Commerce Product Standards (Prod. Std):  
PS1-95.....Construction And Industrial Plywood
- E. Hardwood, Plywood and Veneer Association (HPVA):  
HP.1-93.....Hardwood and Decorative Plywood
- F. Architectural Woodwork Institute (AWI):  
Architectural Woodwork Quality Standards, Guide Specifications Quality  
Certification Program - 1999
- G. American Society of Mechanical Engineers (ASME):  
A112.18.1M-00.....Plumbing Fixture Fittings
- H. National Electrical Manufacturers Association (NEMA):  
LD3-00.....High Pressure Decorative Laminates  
LD3.1-95.....Performance, Application Fabrication and  
Installations of High-Pressure Decorative  
Laminates

**PART 2 - PRODUCTS**

**2.1 PLASTIC LAMINATE:**

- A. NEMA LD-3.
- B. Exposed decorative surfaces, both sides of cabinet doors, and for items having plastic laminate finish. General purpose Type HGL.
- C. Cabinet Interiors Including Shelving: Both of following options to comply with NEMA, CL20 as a minimum.
  - 1. Plastic laminate clad plywood or particle board.
  - 2. Resin impregnated decorative paper thermally fused to particle board.
- D. Backing sheet on bottom of plastic laminate covered wood tops. Backer Type BKL.
- E. Post Forming Fabrication, Decorative Surface: Post forming Type HGP.
- F. Chemical Resistant Surfaces (Tops in Pathology Laboratory)
  - 1. Flat Components: Type GP-HGP.
  - 2. Post forming: Type PF-HGP.
  - 3. Resistance to reagents:
    - a. Test with five 0.25 mil drops remaining on surface for 16 hours followed by washing off with tap water, then cleaned with liquid soap and water, dried with soft cotton cloth and then cleaned with naphtha.
    - b. No change in color, surface texture, and original protectability remaining from test results of following reagents:

98% Acetic Acid	Butyl Alcohol	Acetone
90% Formic Acid--	Benzine	Chloroform
28% Ammonium Hydroxide	Xylene	Carbon Tetrachloride
Zinc Chloride (Sat.)	Toluene	Cresol
Sodium Carbonate (Sat.)	Gasoline	Ether
Calcium Hypochlorite (Sat.)	Kerosene	Cottonseed Oil
Sodium Chloride (Sat.)	Mineral Oil	40% Formaldehyde
Methyl Alcohol	Ethyl Acetate	Trichlorethylene
Ethyl Alcohol	Amyl Acetate	Monchlorobenzine



- c. Superficial effects only: Slight color change, spot, or residue only with original protectability remaining from test results of following reagents:

77% Sulfuric Acid	37% Hydrochloric Acid	85% Phenol
33% Sulfuric Acid	20% Nitric Acid	Furfural
85% Phosphoric Acid	30% Nitric Acid	Dioxane

4. Minimum height of impact resistance: 300 mm (12 inches).

## **2.2 PLYWOOD, SOFTWOOD**

- A. Prod. Std. PS1, five ply construction from 13 mm to 28 mm (1/2 inch to 1-1/8 inch) thickness, and seven ply for 31 mm (1-1/4 inch) thickness.

## **2.3 PARTICLEBOARD**

- A. ANSI A208.1, Type 1, Grade 1-M-3, 3/4" thick. Moisture resistant particle board in Grade Type 2-M-2 or 2-M-3 shall be used in tops with sinks.

## **2.4 PLUMBING FIXTURES**

- A. ASME 112.18M, except die-cast zinc-alloy material is not acceptable.

## **2.5 GLASS: ASTM C1036**

- A. For Doors: Type I, Class 1, Quality q4.

## **2.6 SHEET STEEL**

- A. ASTM A1008.

## **2.7 STAINLESS STEEL**

- A. ASTM A167, with No. 4 finish.

## **2.8 HARDWARE**

- A. Where pin tumbler locks are specified, disc tumbler lock "Duo A", with brass working parts and case, as manufactured by the Illinois Lock Company will be an acceptable substitute. Locks for each type casework, shall be keyed differently and shall be master-keyed for each type service, such as Nurses, Psychiatric, Administration. Provide two keys for each lock. Exposed hardware, except as otherwise specified, shall be satin finished chromium plated brass or nickel plated brass.
- B. Marking of Locks and Keys:
1. The name of the manufacturer, or trademark by which manufacturer can readily be identified, legibly marked on each lock.
  2. The key change number marked on the exposed face of lock, and also stamped on each key.
  3. Key change numbers shall provide sufficient information for replacement of the key by the manufacturer.
- C. Hinged Doors:
1. Doors 900 mm (36 inches) and more in height shall have three hinges and doors less than 900 mm (36 inches) in height shall have two hinges. Each door shall close against two rubber bumpers.
  2. Hinges: Fabricate hinges with minimum 2 mm (0.072 inch) thick chromium plated steel leaves, and with minimum 3.5 mm (0.139 inch) diameter stainless steel pin. Hinges shall be five knuckle design with 63 mm (2-1/2 inch) high leaves and hospital type tips.

3. Fasteners: Provide full thread wood screws to fasten hinge leaves to door and cabinet frame. Finish screws to match finish of hinges.
- D. Door Catches:
  1. Friction or Magnetic type, fabricated with metal housing.
  2. Provide one catch for cabinet doors 1200 mm (48 inches) high and under, and two for doors over 1200 mm (48 inches) high.
- E. Locks:
  1. Cylinder type pin tumbler.
  2. Equip doors and drawers where shown with locks.
- F. Drawer and Door Pulls:

Doors and drawers shall have flush pulls, fabricated of either chromium plated brass, chromium plated steel, stainless steel, or anodized aluminum.
- G. Drawer Slides:
  1. Full extension steel slides with nylon ball-bearing rollers.
  2. Slides shall have positive stop.
  3. Equip drawers with rubber bumpers.
- H. Sliding Doors:
  1. Each door shall be supported by two ball bearing bronze or nylon rollers, or sheaves riding on a stainless steel track at top or bottom, and shall be restrained by a nylon or stainless steel guide at the opposite end.
  2. Plastic guides are not acceptable.
  3. Each door shall have rubber silencers set near top and bottom of each jamb.
- I. Shelf Standards (Except For Fixed Shelves):

Bright zinc-plated steel for recessed mounting with screws, 16 mm (5/8 inch) wide by 5 mm (3/16 inch) high providing 13 mm (1/2 inch) adjustment, complete with shelf supports.

## 2.9 FABRICATION

- A. Casework shall be of the flush overlay design and, except as otherwise specified, be of premium grade construction and of component thickness in conformance with AWI Quality Standards.
- B. Fabricate casework of plastic laminated covered plywood or particleboard:
  1. Glazed doors shall have 5 mm (3/16 inch) thick glass, set in glazing compound.
  2. Sliding doors shall have stops to prohibit bypass and be removable without use of tools.
- C. Electrical fixtures, receptacles, wiring and junction boxes required for fixtures and receptacles:
  1. Factory installed in casework.
  2. For electrical lighting fixtures, see drawings.
  3. For electric receptacles and lighting fixtures installed below or adjacent to wall cabinets or above counter tops, see electrical sections or specifications.
  4. Install wiring in built-in raceways and terminate at junction box mounted on rear of cabinet and counter.
  5. For final hook-up at junction box see electrical sections of specifications.
- D. Tops:
  1. Tops, splashbacks and reagent type shelves shall be plastic laminate factory glued to either a plywood (PS1), or particleboard (ANSI A208.1) core.
  2. Tops shall be 3/4 inch thick.
  3. Splashbacks and reagent type shelves shall be finished 19 mm (3/4 inch) thick and be secured to tops with concealed metal fastenings and with contact surfaces set in waterproof adhesive.

4. Provide cut-outs for plumbing trim where shown.
  5. Cover exposed edges of tops, splashbacks and reagent type shelves with plastic laminate.
- E. Solid-surfacing-material Tops:
1. Quality Standard: Comply with AWI Section 400 requirements for tops.
  2. Quality Standard: Comply with WIC Section 17E.
  3. Grade: Premium.
  4. Solid-surfacing-material thickness: 3/4 inch.
  5. Colors, Patterns, and Finishes: Provide materials and products that result in colors of solid-surfacing material comply with the following requirements:
    - a. Match color, patten, and finish as indicated in Section 09050.
  6. Fabricate tops in one piece with shop-applied backsplashes and edges, unless otherwise indicated. Comply with solid-surfacing-material manufacturer's written recommendations for adhesives, sealers, fabrication, and finishing.
  7. Install integral sink bowls in tops in shop.
  8. Drill holes in tops for plumbing fittings and soap dispensers in shop.
- F. Edge Banding: Edge banding for casework doors and drawer fronts shall be PVC vinyl and shall be 0.125 inch thick. Material width shall be same thickness as panel it is applied to. Color and pattern shall match exposed door and drawer front laminate pattern and color.
- G. Grommets: Provide plastic grommets, 2" diameter, at location shown on drawings.
- H. Sink bowls:
1. 18 gage stainless steel, of size and design shown on plumbing drawings.
  2. All interior corners of bowls shall be formed to manufacturer's standard radii.
  3. Sinks shall have rims with flanged edges overlapping tops to provide tight joints.
  4. Secure sink bowls with concealed fastenings.
  5. For service lines from service fixtures, see other sections of specifications.

### **PART 3 - EXECUTION**

#### **3.1 INSTALLATION**

- A. Set casework in place; level, plumb and accurately scribe and secure to walls, and/or floors.
- B. The installation shall be complete including all trim and hardware. Leave the casework clean and free from defects.
- C. Apply sealant at junction between wall and backsplash.

#### **3.2 FASTENINGS**

- A. Fastenings for securing casework to adjoining construction shall be as detailed on the drawings or approved shop drawings.
- B. See section 05 50 00, METAL FABRICATIONS for reinforcement of walls and partitions for casework anchorage.

- - - E N D - - -